

承 认 书

SPECIFICATION APPROVAL SHEET

客 户 :
CUSTOMER _____

客 户 料 号 :
CUS PART NO _____

版次:
REV X1

品 名 / 规格 : 2.4~2.5/5.15~7.15GHz
SPECIFICATION WIFI-2 Antenna L=420mm(Ø1.13+MHF)

单重:
weight _____

供 方 料 号 :
SUP PART NO SLEingB248620420

日 期 :
DATE 2024.09.09

厂 商 核 准 :
SUP APPROVED

核准 APPROVED	结构审核 Structure audit	RF审核 RF CHECKED	品保审核 QA CHECKED	承办 DESIGNED
<i>70M</i>	<i>H24</i>	<i>70M</i>	<i>LSY</i>	<i>X24</i>

客 户 核 准 :
CUS APPROVED

核准 APPROVED	审核 CHECKED	品保审核 QA CHECKED	承办 DESIGNED

东莞市森岭智能科技有限公司

DONGGUAN CITY SLEing INTEL-TECH CO., LTD

中国广东省东莞市松山湖工业东路24号现代企业加速器6栋402

Room 402, No. 6 Plant, Accelerator of Modern Enterprise, No. 24 Industry
East Road Songshanlake District, Donguan City, Guangdong

Tel: +86-076989208968

Fax: +86-0769-89208969

www.sleing.com

正本由承办单位保存

[illegible]




承认书项目表 (Spec Item)

序号 (NO.)	项目 (Project)	备注 (Remark)	页码 (Page)
1	承认书封面 (Spec Cover)		1
2	变更记录 (MODIFICATION RECORD SHEET)		2
3	承认书项目表 (Spec Item)		3
4	工程成品图 (Drawing)		4
5	电性测试报告 (Test Reports)		5
6	天线组装图 (Antenna assembly diagram)		6
7	S参数测试 (S Parameter Test)		7~8
8	测试设备 (Test Setup)		9
9	测试效率 (Test Efficiency)		10


Give clear indication of:

1. The contents of the acknowledgement shall be arranged in order according to the items in the check sheet.
2. The number of copies of the acceptance letter shall be printed according to the customer's requirements, and the SGS report shall be stamped with the engineering seal.
3. All materials shall be confirmed by the customer. Any material/process/changes that may affect product quality and environmental quality must be re-sent to the customer for confirmation before import.
4. SGS report is valid for one year.
5. According to the contents attached to the actual acknowledgement, check the check form: "Yes" is provided, "no" is provided according to customer requirements.


REV.	CONTENT	DATE
X1	First Sample	2024.09.09

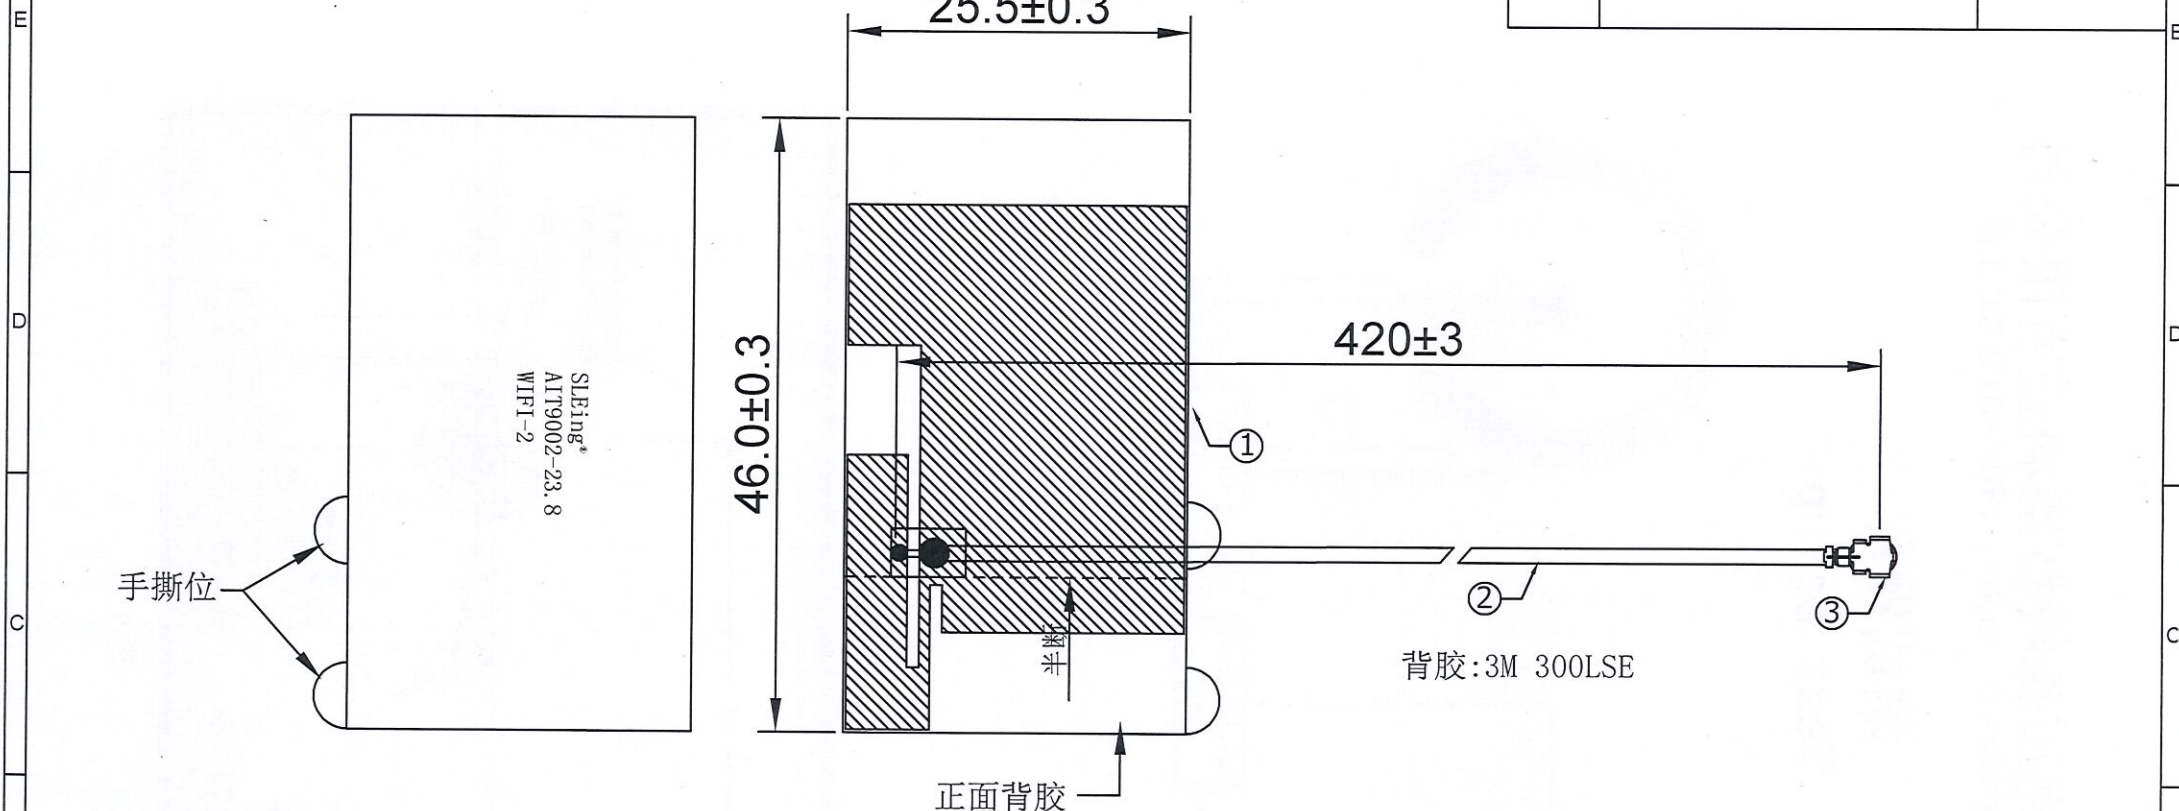


Specification:
Frequency Rang:2.4~2.5/5.15~7.15GHz(带机测试)
Return Loss:-10dB or less
VSWR:1.92 Max



50pcs/Bundle
Packing:100pcs/bag



外箱须贴ROHS标签与物料标签各1PCS

SLEing® 森岭 东莞市森岭智能科技有限公司 DONGGUAN SLEing INTEL-TECH CO.,LTD			CUSTOMER						
			PART NO						
			TITLE		WIFI-2 ANTENNA				
			S.L P/NO		SLEingB248620420				
		TOLERANCE UNLESS OTHERWISE SPECIFIED		SIZE	DRAWN	CHECKED	APPROVED		
UNIT:mm		ANGLES ±0.5°		X. ±0.3		A4			
SHEET: 1/1		0.XX ±0.05		XX. ±0.5					
SCALE: 1/1				XXX. ±2.0					
4		3		2		1			

A4		DRAWN		CHECKED		APPROVED	
X2000		H20		Jong			
8		7		6		5	



东莞市森岭智能科技有限公司

DONGGUAN SLEing INTEL-TECH CO.,LTD


电性测试报告

Test Reports

Electrical Properties	
Frequency	2.4~2.5/5.15~7.15GHz(带机测试)
Impedance	50 Ohm Nominal
V.S.W.R	≤ 1.92
Return Loss	-10 dB Max
Radiation	Omni-directional
Gain (Peak)	2 $\pm$ 0.5 dBi
Polarization	Linear, Vertical
Admitted Power	2 W
Connector	MHF
Physical Properties	
Antenna Material	FPCB
Cable Type	Φ 1.13mm Black
Operating Temp.	-40~+85 °C
Storage Temp.	-5~+30 °C

天线组装图

Antenna Profile
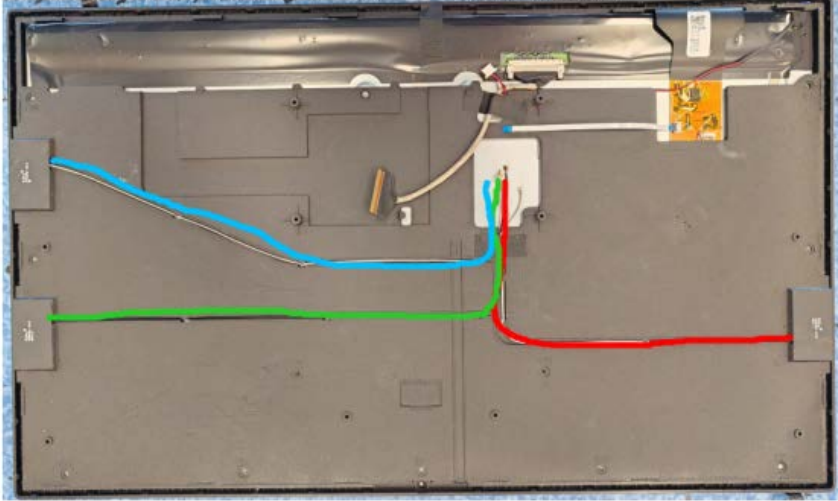
<i>Device</i>	5、天线走线 天线走线具体如图所示。将天线固定好，装上主板，将天线端子扣在端口上 WiFi_1 天线如图中红线所示，天线线长 325mm，直径 1.13mm，1 代端子 (白色同轴线) WiFi_2 天线如图中绿线所示，天线线长 420mm，直径 1.13mm，1 代端子 (黑色同轴线)。 BT 天线如图中蓝线所示，天线线长 390mm，直径 1.13mm，1 代端子 (灰色同轴线)。 
<i>Antenna</i>	3、粘贴 WiFi_2 天线 粘贴 WiFi_2 天线细节如下图所示。将 WiFi_2 天线顶部及左右侧分别与支架的顶部及左右侧对齐，最后将天线由上往下依次粘贴即可。注意：天线粘贴时，天线不能粘偏、歪斜、起翘。 


S 参数测试

S Parameter Test

Agilent E5071C Network Analyzer



WIFI 驻波 Antenna (NO. 1)

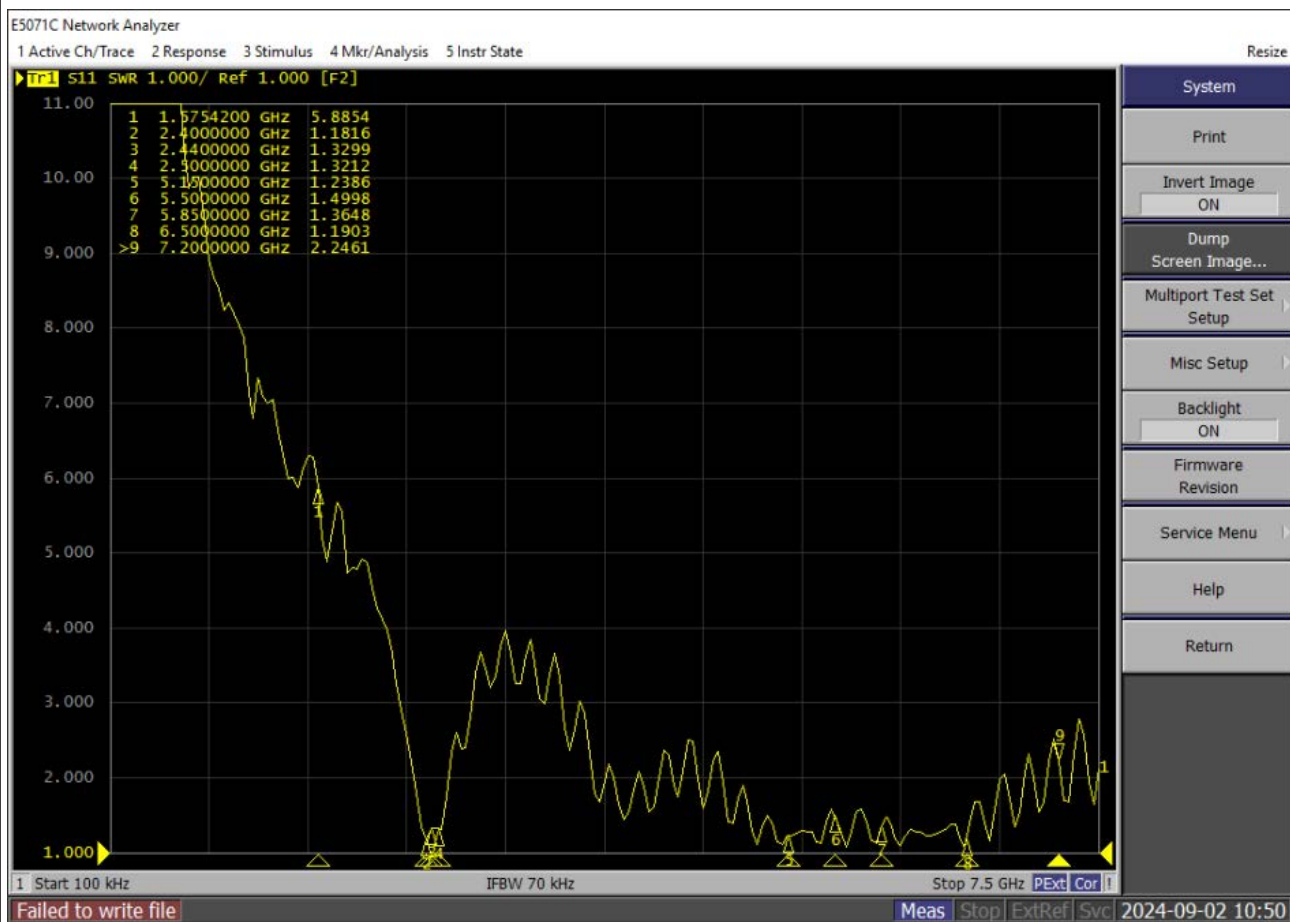


S 参数测试

S Parameter Test



Agilent E5071C Network Analyzer



WIFI 回波损耗 Antenna (NO.1)

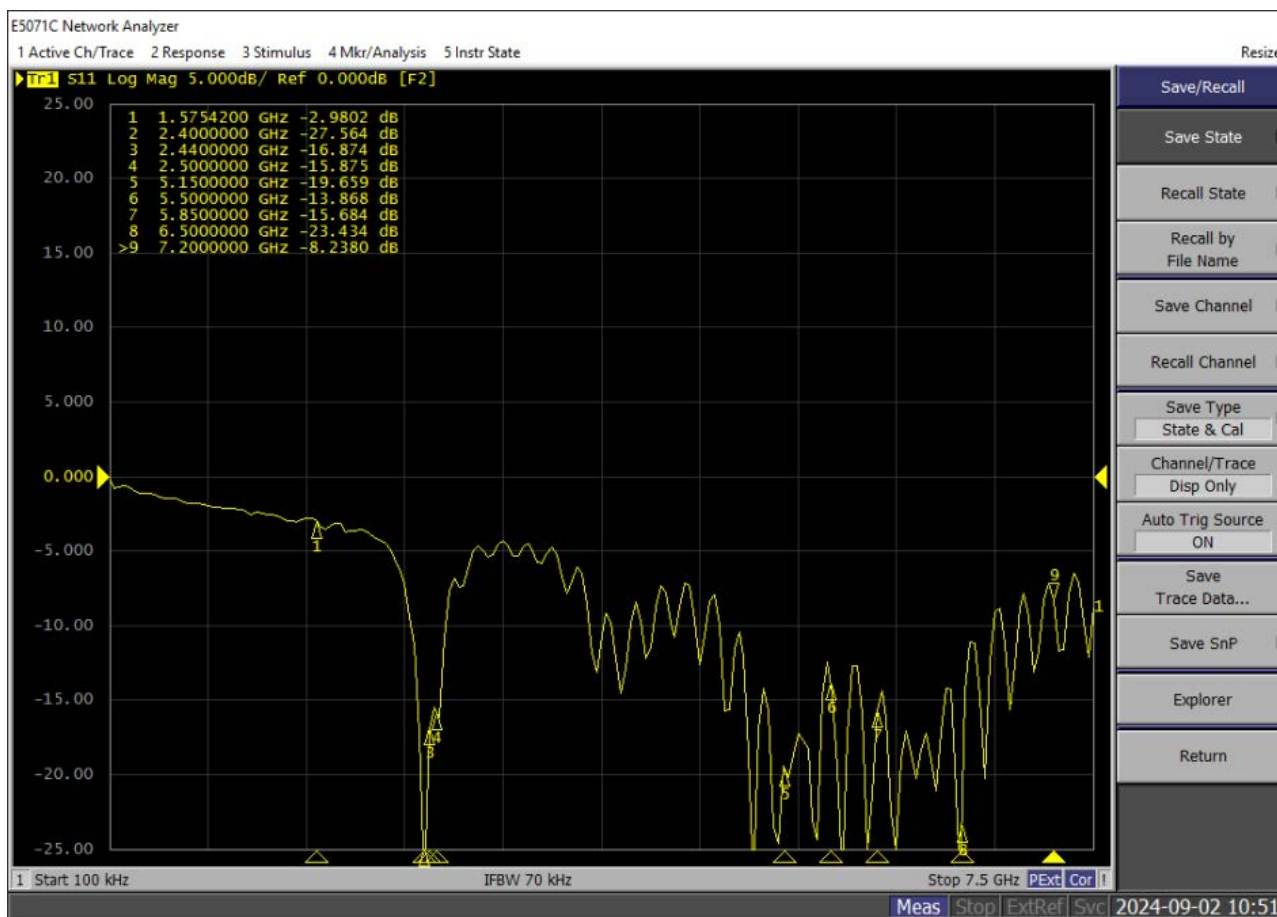

测试设备 Test Setup

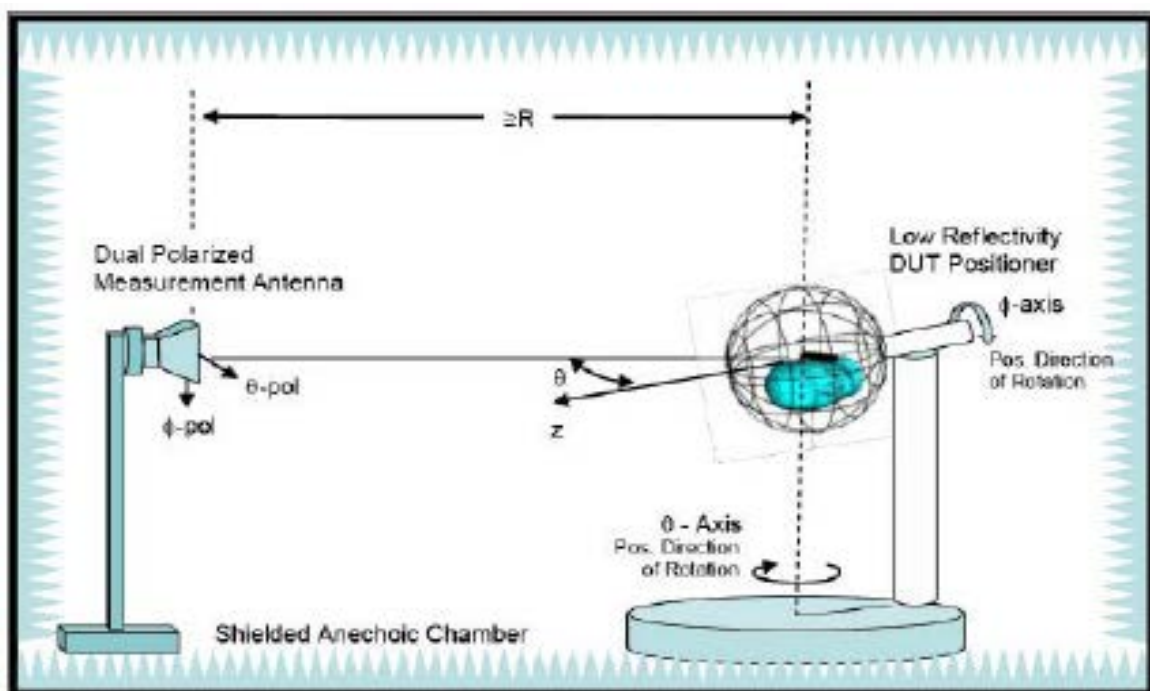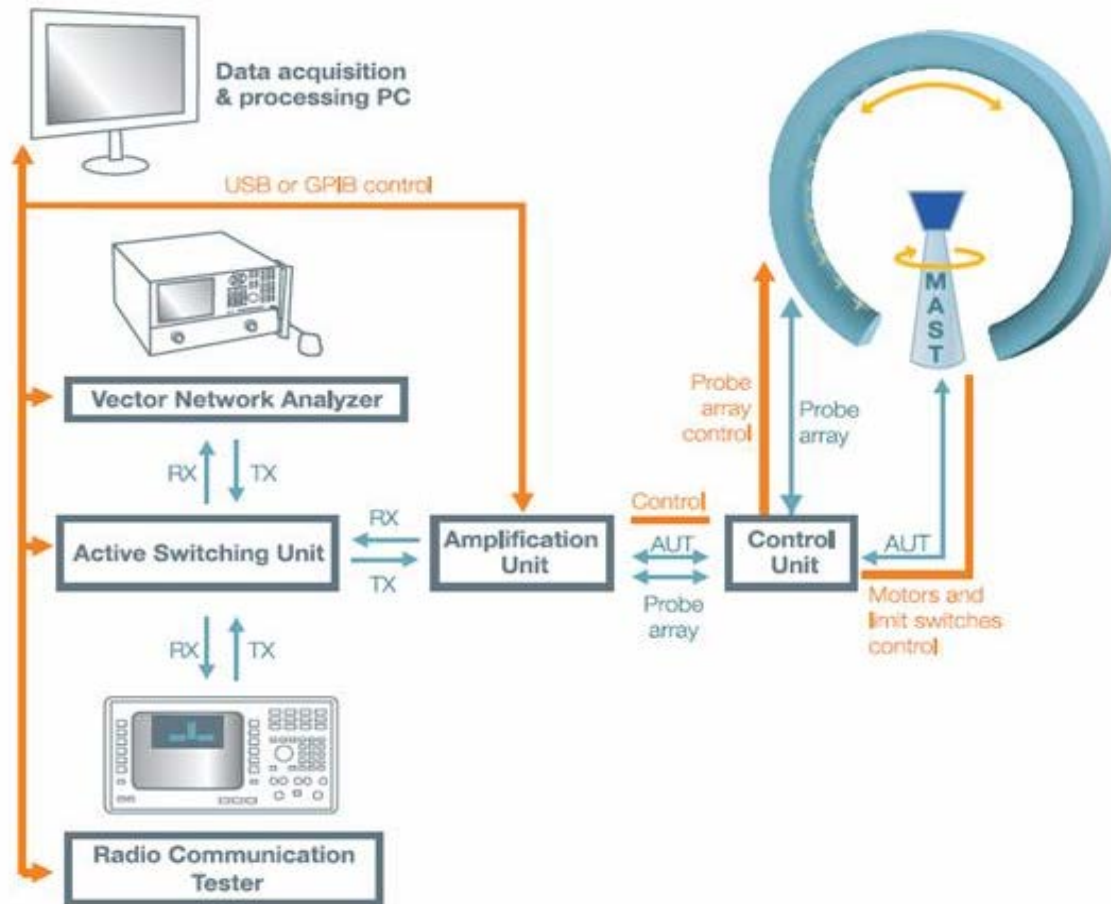

测试效率

Test Efficiency

