


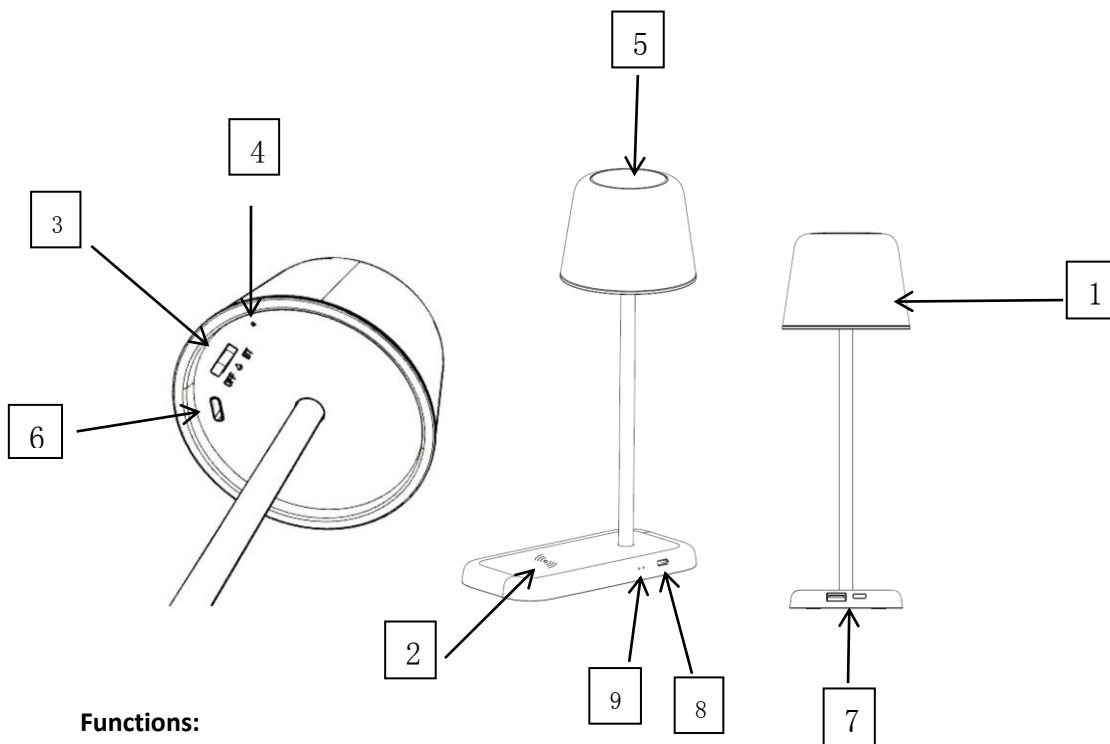

Functions:

1. Lamp&Bluetooth speaker
2. Wireless charge pad
3. Switch button (OFF -  - BT)
4. Lamp&Speaker LED indicators and Microphone
5. Lamp touch area
6. Lamp&Speaker charge Type-C input port
7. USB A&Type-C outputs
8. Wireless charge Type-C input.
9. Wireless charger LED indicator

Tech Specifications:

● Lamp&Speaker:

Pairing name: Shine Speaker

Bluetooth version: 5.4

Battery: 1200mAh

Lamp&Speaker Charging time : about 2.5 hours .

Playing time in max volume of Speaker: about 5 hours with lamp off.

● Wireless Charger:

Wireless charger input: 5V 3A; 9V 2.22A,

Wireless charger output: 5W/7.5W/10W/15W.

USB A&C outputs: Total 5V/1A Max.

How to use lamp and speaker:

(Be sure to fully charge the speaker before using for the first time)

1.Charge the speaker lamp

- Plug the Type-C connector of the included charging cable into the charging port on the lamp&speaker (6). Plug the large connector into a USB power source,such as a DC 5V USB wall adapter (not included).
- *The charging LED indicator (4) will turn RED while charging and turn OFF when fully charged.*

1. Use lamp:

The Re-chargeable lamp has 3 main lighting modes: Cool White Light & Warm Light & Natural Light.

Turn on on the light switch. (slid the button to the “” mark position)

Short touch the top of the lamp to turn on the light.

Short touch the top of the lamp again to switch between 3 light modes.

Touch and hold the top of the lamp to adjust the brightness.

WARNING: AVOID EYE CONTACT WITH THE LIGHT. THE LIGHT SOURCE OF THIS LUMINAIRE IS NOT REPLACEABLE; WHEN THE LIGHT SOURCE REACHES ITS END OF LIFE THE WHOLE LUMINAIRE SHALL BE REPLACED.

2.Bluetooth Setup:

Slid the power button (3) to the”BT”mark position to turn on the speaker ,working LED indicator (4) will flash BLUE when in pairing mode.

- Turn on the Bluetooth function on mobile device, Select“ Shine Speaker”pairing name.
- LED will turn solid BLUE if successfully paired, the LED will flash in BLUE slowly when playing.
- Speaker will automatically pair if the mobile device has been paired before.
- Slid the button to the front positions to power off the speaker.
- If disconnect Bluetooth after 5 mins, the speaker Bluetooth will auto shut off.

Please adjust the speaker volume and adjust the tracks by your Phone directly.

There is a microphone in the speaker, you can pick up the call from your Phone when there is a call.

How to use wireless charger:

- Connect the provided Type-C USB to USB-A cable to the Type-C USB input port (8), then connect the USB end of the cable to a USB power adapter..
USB adapter must also support 5V 3A; 9V 2.22A.
To achieve better performance, quick-charge power adapter is recommended. (15W at least, not included).
- Place the wireless charging supported mobile phone on the wireless charging surface (2), please align the position,the led (9) LED will glow RED when Phone is charging.
- Once fully charged remove the device.

Note: When wireless charging, if the Led indicator flash BLUE the device is either NOT a wireless charging device or there is an object between the the device and charging surface interfering with the charging process.

Charging mobile phones and other electronic devices by the wireless charge base USB outputs:

Note: The wireless charge base without battery , before use the side USB A&C USB outputs(7) to charge external devices, you need to plug in the input(8) USB cable

- Insert Type-C connector of the USB cable to the charging port (8) and the other USB A connector to a adapter, make sure there is power input.
- Connect another charging cable to your mobile phone/device using the appropriate connector.
- Connect the USB part of the cable into either USB outputs (7) ports.
- Remove the cable from your mobile device when it is fully charged.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.

