


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	40%
Test Engineer	Mars Lin	Configurations	2.4G + 5G

Horizontal

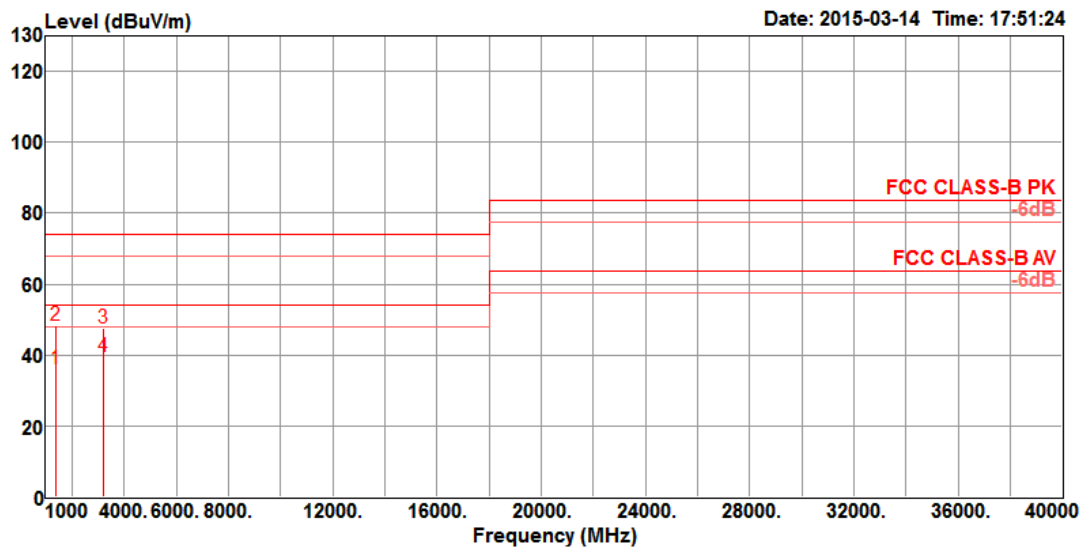

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1363.97	35.93	54.00	-18.07	40.70	3.29	25.10	33.16	102	217 Average	HORIZONTAL
2	1364.59	48.25	74.00	-25.75	53.02	3.29	25.10	33.16	102	217 Peak	HORIZONTAL
3	3215.84	47.53	74.00	-26.47	46.93	5.18	28.64	33.22	121	218 Peak	HORIZONTAL
4	3215.93	39.66	54.00	-14.34	39.06	5.18	28.64	33.22	121	218 Average	HORIZONTAL

Vertical

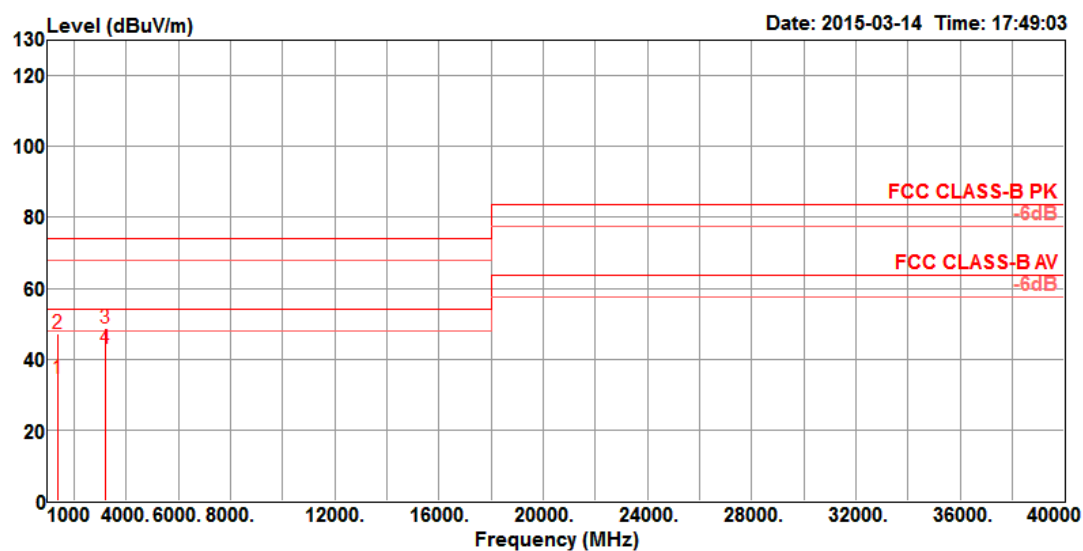

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1362.06	34.38	54.00	-19.62	39.11	3.29	25.14	33.16	100	46 Average	VERTICAL
2	1362.12	47.05	74.00	-26.95	51.78	3.29	25.14	33.16	100	46 Peak	VERTICAL
3	3216.00	48.71	74.00	-25.29	48.10	5.18	28.65	33.22	103	199 Peak	VERTICAL
4	3216.04	43.00	54.00	-11.00	42.39	5.18	28.65	33.22	103	199 Average	VERTICAL