

TEST REPORT

APPLICANT : RISO KAGAKU CORPORATION

ADDRESS : R&D Center, 127-7 Taninosawa, Fukuda, Ami-machi, Inashiki-gun,
Ibaraki-ken 300-1156, Japan

PRODUCTS : RF-Module (RFID Tag-Reader/Writer)

MODEL No. : 050-34901

SERIAL No. : -

FCC ID : RPARFR6

TEST STANDARD : CFR 47 FCC Rules and Regulations Part 15 Subpart A and C

TESTING LOCATION : Japan Quality Assurance Organization
Safety & EMC Center
EMC Engineering Department, TSURU EMC Branch
2096, Ohata, Tsuru-shi, Yamanashi-ken 402-0045, Japan

TEST RESULTS : **Passed**

DATE OF TEST : December 12, 2010 – January 24, 2010



VLAC
Lab Accreditation
VLAC-001-4

A handwritten signature in black ink that reads "Shinichi Yokoi".

Shinichi Yokoi
Manager
Japan Quality Assurance Organization
Safety & EMC Center
EMC Engineering Department, TSURU EMC Branch
2096, Ohata, Tsuru-shi, Yamanashi-ken 402-0045, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

Table of Contents

Documentation	Page
1 Test Regulation	3
2 Test Location	3
3 Recognition of Test Laboratory	3
4 Description of the Equipment Under Test	4
5 Test Condition	5-6
6 Preliminary Test and Test-Setup	7-12
7 Equipment Under Test Modification	13
8 Responsible Party	13
9 Deviation from Standard	13
10 Test Results	14-15
11 Summary	16
12 Operating Condition	17
13 Test Configuration	17
14 Equipment Under Test Arrangement (Drawings)	17
Appendix A : Test Data	18-23
Appendix B : Test Arrangement (Photographs)	24-25
Appendix C : Test Instruments	26-28

Definitions for Abbreviation and Symbols Used In This Test Report

“EUT” means Equipment Under the Test.

“AE” means Associated Equipment.

“N/A” means that Not Applicable.

“N/T” means that Not Tested.

☒-indicates that the listed condition, standard or equipment is applicable for this report.

☐-indicates that the listed condition, standard or equipment is not applicable for this report.

Documentation

1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 15 Subpart A and C

Test procedure : ANSI C63.4-2003

2 Test Location

Japan Quality Assurance Organization
Safety & EMC Center
EMC Engineering Department, TSURU EMC Branch
2096, Ohata, Tsuru-shi, Yamanashi-ken 402-0045, JAPAN

This report is including the data that were measured in subcontracted laboratory as follows.

Japan Quality Assurance Organization
Safety & EMC Center
EMC Engineering Department, Testing section
1-21-25, Kinuta, Setagaya-ku, Tokyo 157-8573, JAPAN
NVLAP Lab Code:200189-0 (Effective through : June 30, 2011)
VLAC Code: VLAC-001-1 (Effective through : March 30, 2012)

3 Recognition of Test Laboratory

Japan Quality Assurance Organization, Safety & EMC Center EMC Engineering Department, TSURU EMC Branch is recognized under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is accredited by the following bodies .

VLAC Code: VLAC-001-4 (Effective through : March 30, 2012)
NVLAP Lab Code:200192-0 (Effective through : June 30, 2011)
BSMI Recognition Number:
SL2-IN-E-6004, SL2-IS-E-6004, SL2-A1-E-6004 (Effective through : September 14, 2013)

VCCI Registration Number:
R-004, R-824, R-828, C-003, C-005, C-859, C-860, C-864, C-3085, G-175, G-176, G-177
T-1420, T-1421, T-1422, T-1423, T-1424, T-1425 (Effective through : March 30, 2012)
FCC Registration Number : 444763 (Effective through : March 30, 2012)
IC Registration Number : 2079D-1, 2079D-2, 2079D-3 (Effective through : December 16, 2012)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Effective through : February 22, 2013)

4 Description of the Equipment Under Test

- | | | | |
|----|---|---|--|
| 1 | Manufacturer | : | RISO KAGAKU CORPORATION
R&D Center, 127-7 Taninosawa, Fukuda, Ami-machi, Inashiki-gun,
Ibaraki-ken 300-1156, Japan |
| 2 | Products | : | RF-Module (RFID Tag-Reader/Writer) |
| 3 | Model No. | : | 050-34901 |
| 4 | Serial No. | : | - |
| 5 | Product Type | : | Prototype |
| 6 | Date of Manufacture | : | - |
| 7 | Power Rating | : | 5.0VDC
* The EUT was operated with the DC Power Supply.
(Input: 120VAC 60Hz, Output: 5.0VDC) |
| 8 | EUT Grounding | : | None |
| 9 | Received Date of EUT | : | December 10, 2010 |
| 10 | EUT Authorization | : | Certification |
| 11 | EUT Highest Frequency
Used/Generated | : | 13.56MHz(Section 15.225)
Operation within the band 13.110 - 14.010 MHz |
| 12 | Modulation | : | ASK(10%) |
| 13 | Antenna type | : | Fixed using |
| 14 | Temperature Range | : | 0 ~ 40 degree |

5 Test Condition

5.1 AC Powerline Conducted Emission

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)					
Test Site	<input type="checkbox"/> OS-1	<input type="checkbox"/> OS-2	<input type="checkbox"/> AC-1	<input checked="" type="checkbox"/> SR-A	<input type="checkbox"/> SR-B	<input type="checkbox"/> SR-C
Test Receiver	<input type="checkbox"/> R-3	<input type="checkbox"/> R-4	<input checked="" type="checkbox"/> R-5			
Cable	<input type="checkbox"/> CB-3	<input checked="" type="checkbox"/> CB-4	<input type="checkbox"/> CB-5			
Network (for EUT)	<input type="checkbox"/> L-1	<input checked="" type="checkbox"/> L-2	<input type="checkbox"/> L-3	<input type="checkbox"/> L-4	<input type="checkbox"/> L-5	<input type="checkbox"/> L-6
	<input type="checkbox"/> L-7	<input type="checkbox"/> L-8	<input type="checkbox"/> L-9	<input type="checkbox"/> L-10	<input type="checkbox"/> L-11	<input type="checkbox"/> L-12
	<input type="checkbox"/> L-13					
Network (for AE)	<input type="checkbox"/> L-1	<input type="checkbox"/> L-2	<input type="checkbox"/> L-3	<input type="checkbox"/> L-4	<input type="checkbox"/> L-5	<input type="checkbox"/> L-6
	<input type="checkbox"/> L-7	<input type="checkbox"/> L-8	<input type="checkbox"/> L-9			
Pulse Limiter	<input type="checkbox"/> PL-3	<input type="checkbox"/> PL-4	<input checked="" type="checkbox"/> PL-5			
Termination	<input type="checkbox"/> TM-1	<input type="checkbox"/> TM-2				

5.2 Radiated Emission

5.2.1 Radiated Emission 0.009 MHz - 30 MHz

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)					
Test Site	<input type="checkbox"/> OS-1	<input type="checkbox"/> OS-2	<input checked="" type="checkbox"/> AC-1			
Test Receiver	<input type="checkbox"/> R-4	<input checked="" type="checkbox"/> R-5	<input type="checkbox"/> S-1			
Cable	<input type="checkbox"/> CN-1	<input type="checkbox"/> CN-2	<input type="checkbox"/> CN-3			
Antenna	<input type="checkbox"/> AB-1	<input type="checkbox"/> AB-2	<input type="checkbox"/> AB-3	<input type="checkbox"/> AD-1	<input type="checkbox"/> AD-2	<input type="checkbox"/> AD-3
	<input type="checkbox"/> AL-1	<input type="checkbox"/> AL-2	<input type="checkbox"/> AL-3	<input type="checkbox"/> AL-4	<input type="checkbox"/> AL-5	<input type="checkbox"/> AD-4
	<input checked="" type="checkbox"/> AL-0					

5.2.2 Radiated Emission 30 MHz - 1000 MHz

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)					
Test Site	<input type="checkbox"/> OS-1	<input type="checkbox"/> OS-2	<input checked="" type="checkbox"/> AC-1			
Test Receiver	<input type="checkbox"/> R-1	<input type="checkbox"/> R-2	<input checked="" type="checkbox"/> R-6	<input type="checkbox"/> R-5	<input type="checkbox"/> S-1	<input type="checkbox"/> S-4
Cable	<input type="checkbox"/> CN-1	<input type="checkbox"/> CN-2	<input checked="" type="checkbox"/> CN-3			
Antenna	<input type="checkbox"/> AB-1	<input type="checkbox"/> AB-2	<input checked="" type="checkbox"/> AB-3	<input type="checkbox"/> AD-1	<input type="checkbox"/> AD-2	<input type="checkbox"/> AD-3
	<input type="checkbox"/> AL-1	<input type="checkbox"/> AL-2	<input checked="" type="checkbox"/> AL-3	<input type="checkbox"/> AL-4	<input type="checkbox"/> AL-5	<input type="checkbox"/> AD-4

5.2.3 Radiated Emission above 1 GHz

The requirements are ☐-Applicable ☐-Tested ☐-Not tested by applicant request.]
☒-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)
Test Site	<input type="checkbox"/> OS-1 <input type="checkbox"/> OS-2 <input type="checkbox"/> AC-1
Test Receiver	<input type="checkbox"/> R-3 <input type="checkbox"/> R-5 <input type="checkbox"/> S-1 <input type="checkbox"/> S-3 <input type="checkbox"/> S-4 <input type="checkbox"/> S-5
Cable	<input type="checkbox"/> CS-1 <input type="checkbox"/> CS-2
Antenna	<input type="checkbox"/> AL-1 <input type="checkbox"/> AL-2 <input type="checkbox"/> AL-3 <input type="checkbox"/> AL-4 <input type="checkbox"/> AL-5 <input type="checkbox"/> AL-6
Pre-Amplifier	<input type="checkbox"/> PA-1 <input type="checkbox"/> PA-2 <input type="checkbox"/> PA-3 <input type="checkbox"/> PA-5

5.3 Frequency Stability

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)
Test Receiver	<input type="checkbox"/> R-1 <input type="checkbox"/> R-2 <input type="checkbox"/> R-3 <input type="checkbox"/> R-4 <input type="checkbox"/> R-5 <input type="checkbox"/> S-1 <input type="checkbox"/> S-3 <input checked="" type="checkbox"/> 13
Cable	<input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CS-1 <input type="checkbox"/> CS-2 <input type="checkbox"/> CS-3 <input type="checkbox"/> CS-4 <input type="checkbox"/> CS-5 <input checked="" type="checkbox"/> 45
Oven	<input checked="" type="checkbox"/> 76
Frequency Counter	<input checked="" type="checkbox"/> 75
Antenna	<input type="checkbox"/> AB-1 <input type="checkbox"/> AB-2 <input type="checkbox"/> AB-3 <input type="checkbox"/> AD-1 <input type="checkbox"/> AD-2 <input type="checkbox"/> AD-3 <input type="checkbox"/> AL-1 <input type="checkbox"/> AL-2 <input type="checkbox"/> AL-3 <input type="checkbox"/> AL-4 <input type="checkbox"/> AL-5 <input type="checkbox"/> AD-4 <input type="checkbox"/> AL-0

5.4 Occupied Bandwidth

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)
Oven	<input type="checkbox"/> 76
Test Receiver	<input type="checkbox"/> R-1 <input type="checkbox"/> R-2 <input type="checkbox"/> R-3 <input type="checkbox"/> R-4 <input type="checkbox"/> R-5 <input type="checkbox"/> S-1 <input type="checkbox"/> S-3 <input checked="" type="checkbox"/> 13
Cable	<input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CS-1 <input type="checkbox"/> CS-2 <input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input checked="" type="checkbox"/> 45
Pre-Amplifier	<input type="checkbox"/> PA-1 <input type="checkbox"/> PA-2 <input type="checkbox"/> PA-3
Antenna	<input type="checkbox"/> AB-1 <input type="checkbox"/> AB-2 <input type="checkbox"/> AB-3 <input type="checkbox"/> AD-1 <input type="checkbox"/> AD-2 <input type="checkbox"/> AD-3 <input type="checkbox"/> AL-1 <input type="checkbox"/> AL-2 <input type="checkbox"/> AL-3 <input type="checkbox"/> AL-4 <input type="checkbox"/> AL-5 <input type="checkbox"/> AD-4 <input type="checkbox"/> AL-0

6 Preliminary Test and Test Setup

6.1 AC Powerline Conducted Emission

The preliminary conducted disturbance at the mains ports measurements were carried out.


The preliminary conducted disturbance at the mains ports were performed using the spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. This configurations was used for final conducted disturbance at the mains ports measurements.

(referred documentation is No.G34364I in JQA Tsuru)

- Side View -

Vertical
Reference Plane

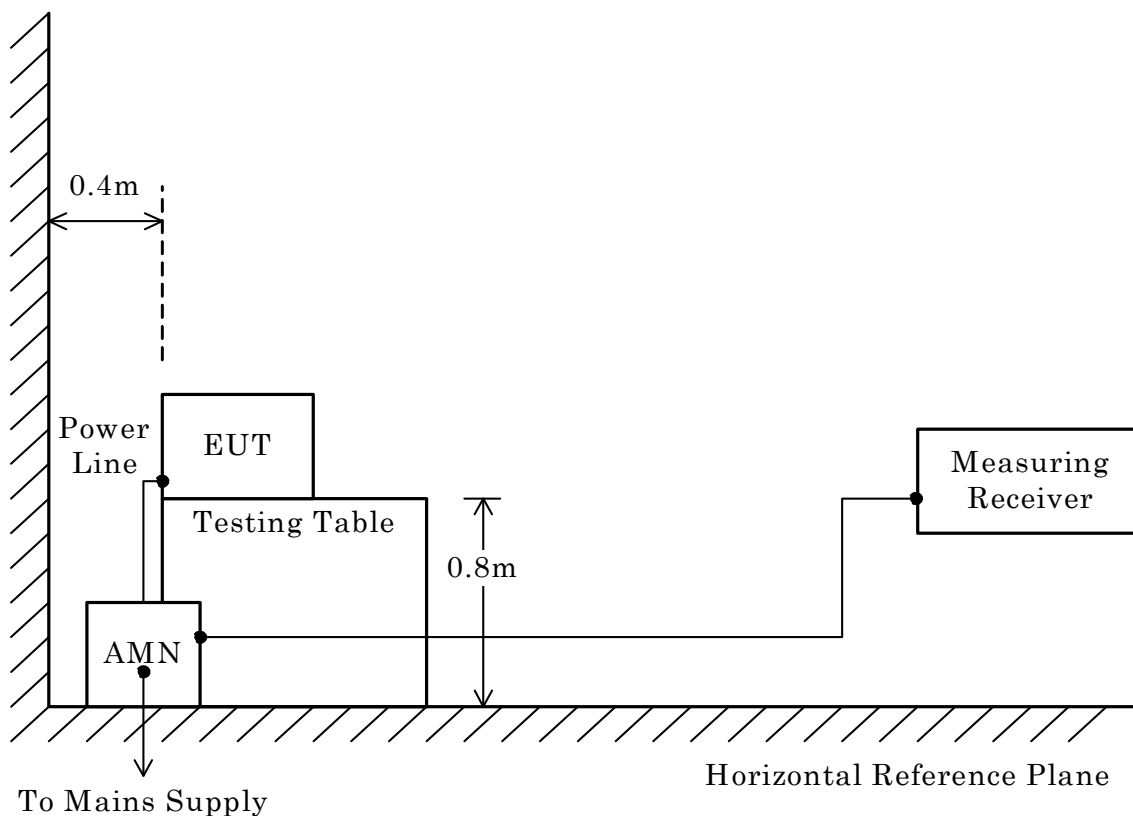

* AMN : Artificial Mains Network

6.2 Radiated Emission

6.2.1 Radiated Emission 0.009 MHz - 30 MHz


The preliminary radiated disturbance measurements were carried out.

The preliminary radiated disturbance measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final radiated disturbance measurements.

(referred documentation is No.G34364I in JQA Tsuru)

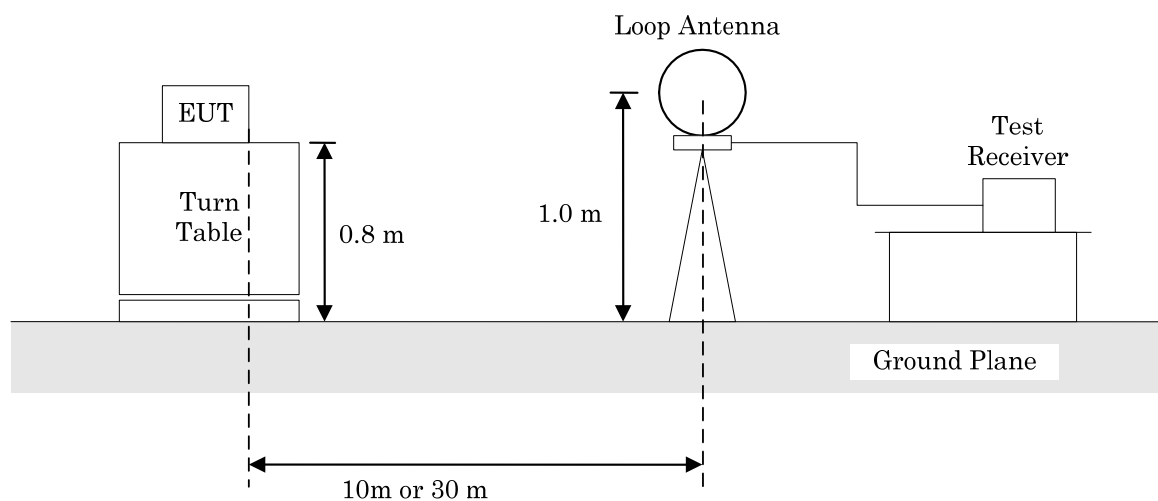

6.2.2 Radiated Emission 30 MHz - 1000 MHz

The preliminary radiated disturbance measurements were carried out.


The preliminary radiated disturbance measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final radiated disturbance measurements.

(referred documentation is No.G34364I in JQA Tsuru)

- Side View -

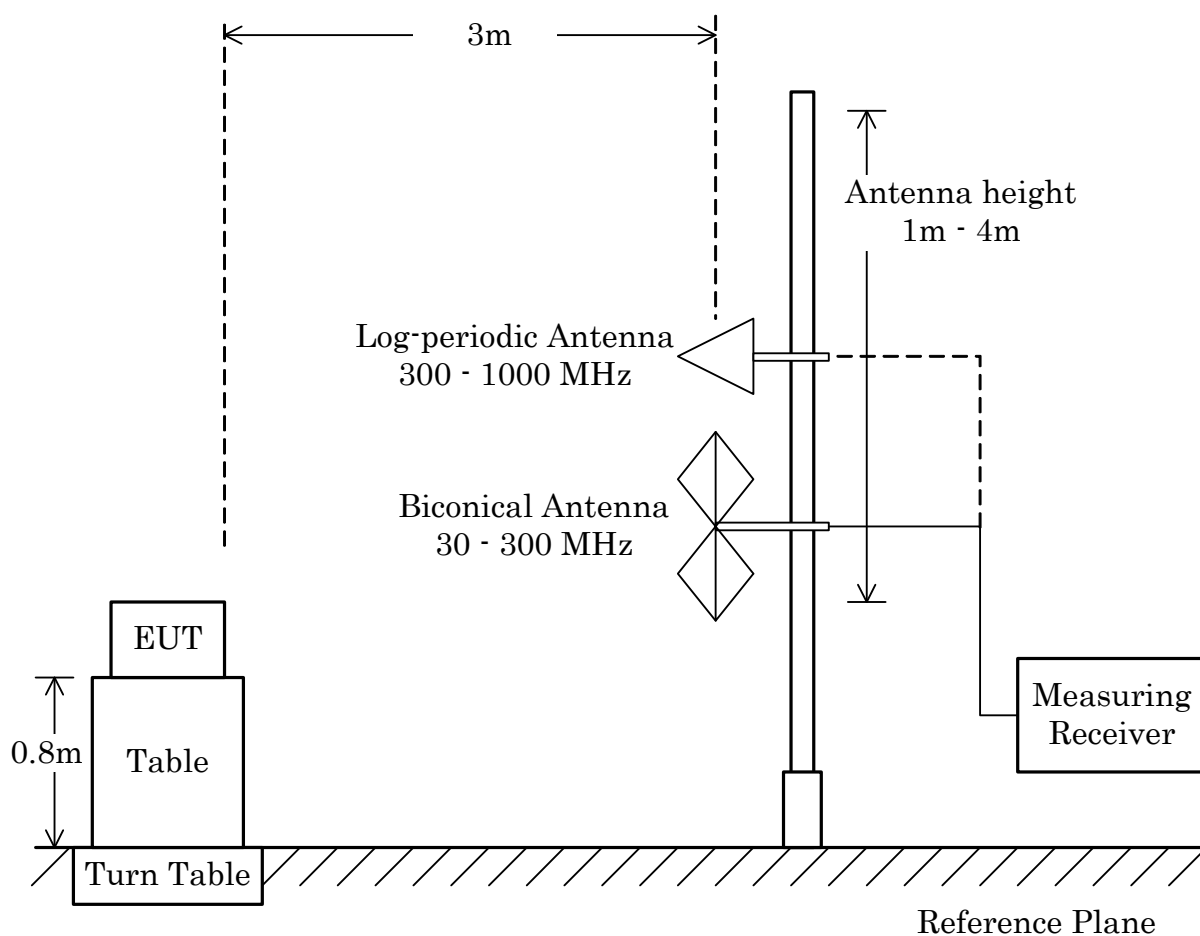

6.2.3 Radiated Emission above 1 GHz

The preliminary radiated disturbance measurements were carried out.


The preliminary radiated disturbance measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final radiated disturbance measurements.

(referred documentation is No.G34364I in JQA Tsuru)

- Side View -

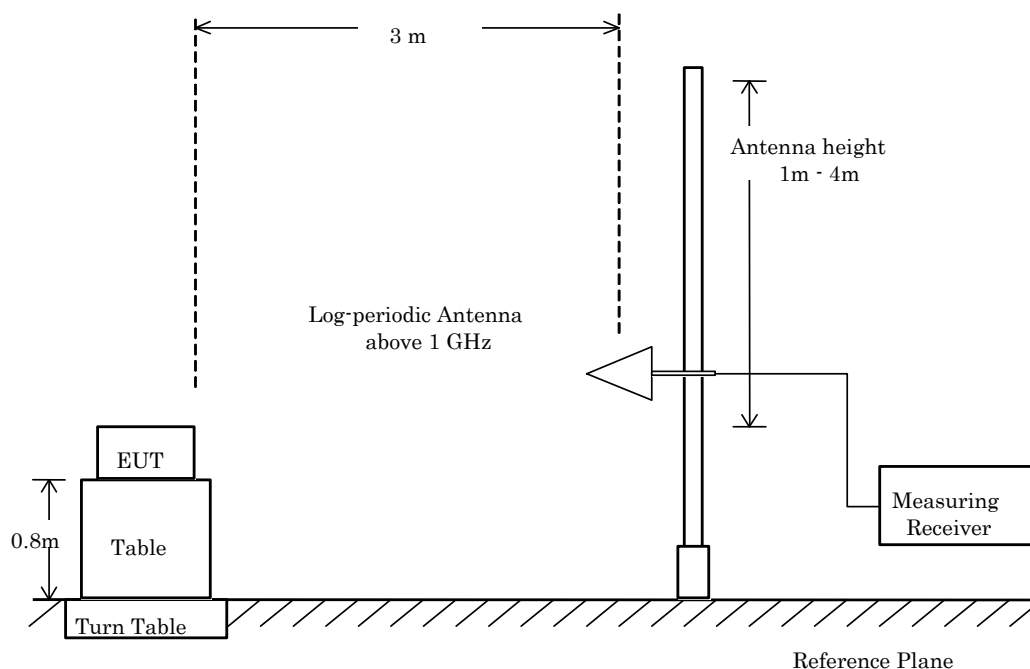


6.3 Frequency Stability

The frequency stability measurements were carried out. By using frequency counter with suitable RF amplifier, the carrier frequency of the transmitter under test was measured with a temperature variation of -20°C to $+50^{\circ}\text{C}$ at the normal supply voltage, and if required, with a variation in the primary voltage from 85% to 115% the rated supply voltage at the temperature of $+20^{\circ}\text{C}$.

These measurements were carried out after allow sufficient time (approximately 1 hour) for the temperature of the chamber to stabilize.


(referred documentation is No.G34366L in JQA Testing section)

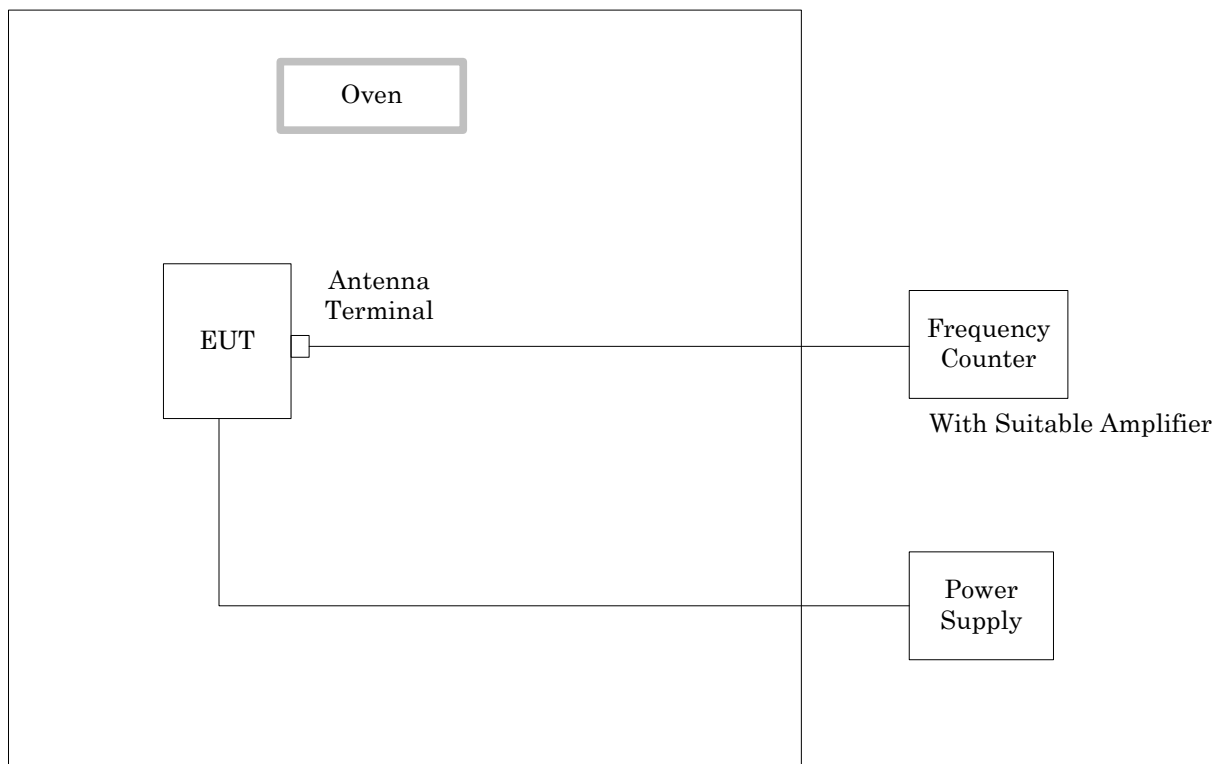

6.4 Occupied Bandwidth

According to description of ANSI C63.4-2003 sec.13.1.7, the occupied bandwidth measurements were carried out. By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the emission were made under the transmitting modes of the EUT.

The resolution bandwidth of spectrum analyzer was set to the value specified in sec.13.1.7.
(referred documentation is No.G34366K in JQA Testing section)

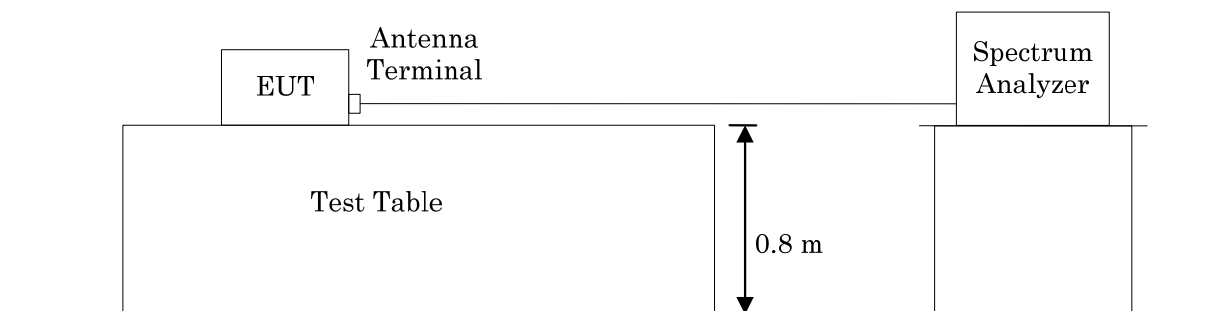

7 Equipment Under Test Modification

- ☒ - No modifications were conducted by JQA to achieve compliance to the limitations.
☐ - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory: Not Applicable

8 Responsible Party**Responsible Party of Test Item (Product)**

Responsible Party :

Contact Person :

Signatory

9 Deviation from Standard

- ☒ - No deviations from the standard described in clause 1.
☐ - The following deviations were employed from the standard described in clause 1.

10 Test Results

10.1 AC Powerline Conducted Emission

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Min. Limit Margin (QP) 18.2 dB at 20.15 MHz

Min. Limit Margin (AVE) N/A dB at N/A MHz

Max. Limit Exceeding N/A dB at N/A MHz

Uncertainty of measurement results ± 2.6 dB(2σ)

Remarks : _____

10.2 Radiated Emissions (Section 15.225(a)(b)(c))

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Min. Limit Margin 68.5 dB at 13.560 MHz

Max. Limit Exceeding N/A dB at N/A MHz

Uncertainty of measurement results ± 1.9 dB(2σ)

Remarks : _____

10.3 Radiated Emissions (Section 15.225(d))

The requirements are ☒-Applicable [☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Min. Limit Margin 9.2 dB at 60.4 MHz

Max. Limit Exceeding N/A dB at N/A MHz

Uncertainty of measurement results

<input checked="" type="checkbox"/> - 3 meters	0.009-30 MHz	<u>± 1.9</u> dB(2σ)
	30- 300 MHz	<u>± 4.5</u> dB(2σ)
	300-1000 MHz	<u>± 4.6</u> dB(2σ)
	1 - 18 GHz	<u>± 3.7</u> dB(2σ)

Remarks : _____

10.4 Frequency Stability (Section 15.225(e))

The requirements are ☒-Applicable [☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Remarks : _____

10.5 Occupied Bandwidth

The requirements are ☒-Applicable [☒-Tested ☐-Not tested by applicant request.]
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Remarks : _____

11 Summary

General Remarks :

The EUT was tested according to the requirements of CFR 47 FCC Rules and Regulations Part 15. under the test configuration, as shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Test Results :

The “as received” sample;

- ☒-fulfill the test requirements of the regulation mentioned on clause 1.
- ☐- doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:



Takashi Koyama
Assistant Manager
TSURU EMC Branch
EMC Engineering Department

Tested by:



Shinichi Yokoi
Deputy Manager
TSURU EMC Branch
EMC Engineering Department

12 Operating Condition

Power Supply Voltage : 120VAC 60Hz

* The EUT was operated with DC Power Supply.(Output: 5.0Vdc)

Operation Mode

Transmitting : The Test have been carried out under continuous transmission/Reception Mode.

* The transceiver is used in combination with permanently co-located transmitter continuously transmitting, and it start to TX/RX at the time of the power is on simultaneously. Therefore this requirement could not be measured under RX or Standby mode.

13 Test Configuration

The equipment under test consists of :

Sign	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	RF-Module (RFID Tag Reader/Writer)	RISO KAGAKU CORPORATION	050-34901	-	RPARFR6


The auxiliary equipment used for testing :

Sign	Item	Manufacturer	Model No.	Serial No.	FCC ID
B	RFID Checker	RISO KAGAKU CORPORATION	-	-	N/A
C	DC Power Supply	KENWOOD	PA18-3A	-	N/A
D	Battery Box	-	-	-	N/A

Type of Cable:

No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	Controller Cable	None	No	No	No	1.1
2	DC Cable	None	No	No	No	2.5
3	AC Cable	None	No	No	No	1.8
4	Ground Cable	None	No	No	No	2.4
5	DC Cable	None	No	No	No	0.6

14 Equipment Under Test Arrangement (Drawings)

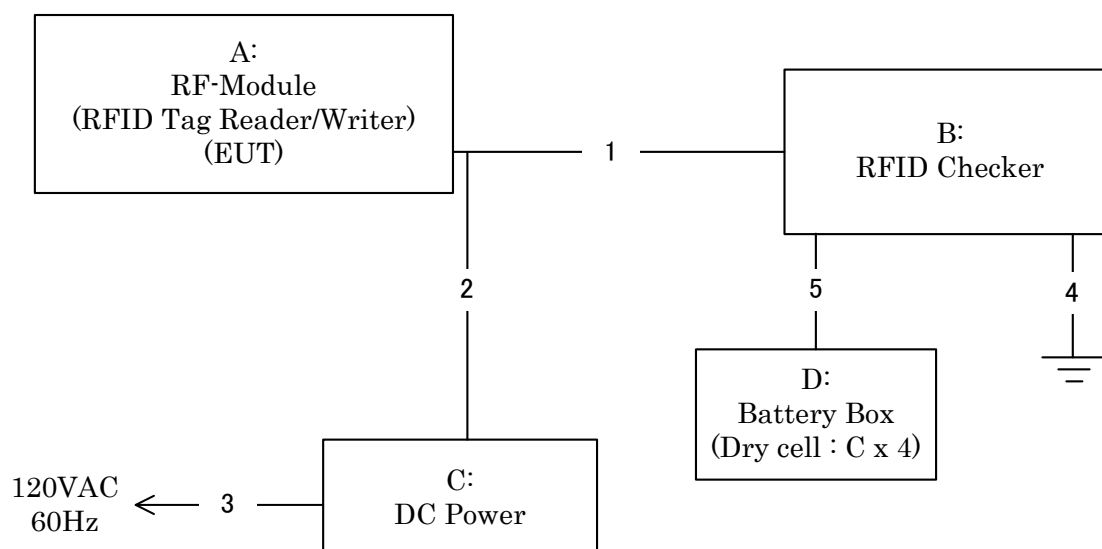


Appendix A: Test Data

A.1 AC Powerline Conducted Emission

Date : December 12, 2010

Temp : 21.2°C Humi : 34.5% Atom : 960hPa

Frequency (MHz)	AMN Factor (dB)	Meter Reading (dBμV)				Limits (dBμV)		Max. Emission Level (dBμV)		Margin (dB)	
		V-A Q.P	V-A AVE	V-B Q.P	V-B AVE	Q.P	AVE	Q.P	AVE	Q.P	AVE
0.15	10.2	<	10.0	-	<	10.0	-	66.0	56.0	<	20.2
0.20	10.1	<	10.0	-	<	10.0	-	63.6	53.6	<	20.1
0.50	10.0	<	10.0	-	<	10.0	-	56.0	46.0	<	20.0
3.00	10.0	<	10.0	-	<	10.0	-	56.0	46.0	<	20.0
5.00	10.1	<	10.0	-	<	10.0	-	56.0	46.0	<	20.1
10.00	10.2	<	10.0	-	<	10.0	-	60.0	50.0	<	20.2
13.56	10.3	24.8	-	24.5	-	60.0	50.0	35.1	-	24.9	-
20.15	10.4	30.1	-	31.4	-	60.0	50.0	41.8	-	18.2	-
27.12	10.5	13.3	-	15.0	-	60.0	50.0	25.5	-	34.5	-

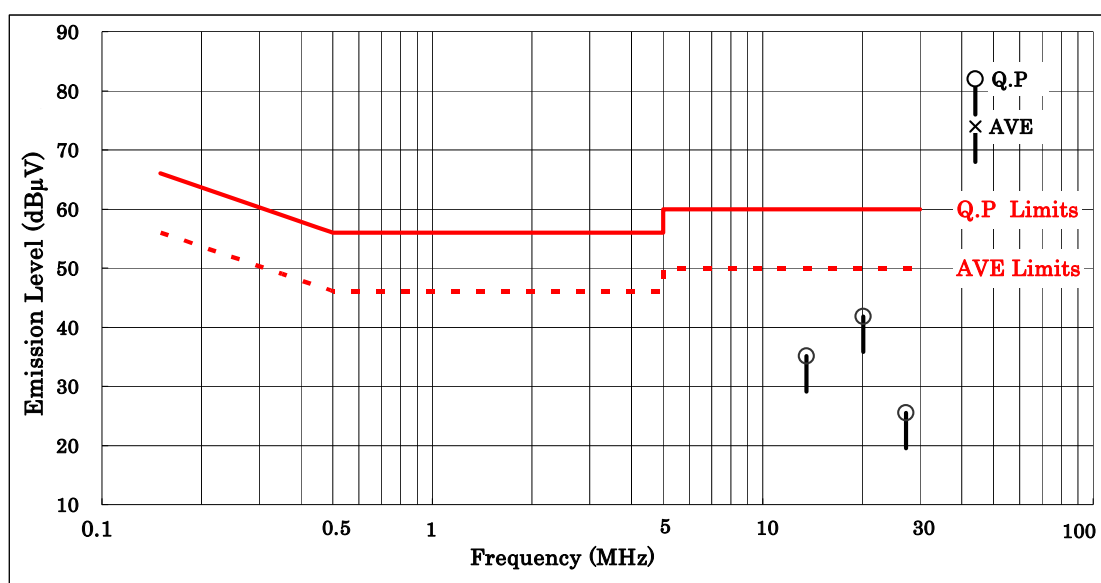

- Notes:
- 1) The testing location : Shielded Room A
 - 2) The spectrum was checked from 0.15 MHz to 30 MHz
 - 3) AMN(Artificial Mains Network) factor includes the cable loss.
 - 4) V-A : One end & Ground V-B : The other end & Ground
 - 5) Q.P : Quasi-Peak Detector AVE : Average Detector
 - 6) The symbol of "<" means "or less".
 - 7) The symbol of ">" means "more than".
 - 8) The symbol of "-" means "Not applicable".
 - 9) A sample calculation was made at 0.15 MHz
 $(\text{AMN Factor}) + (\text{Meter Reading}) = 10.2 + 10.0 = 20.2 \text{ dB}\mu\text{V}$

A.2 Radiated Emissions

A.2.1 Radiated Emission (Section 15.225(a)(b)(c))

Date : January 24, 2011

Temp : 15°C Humi : 35.1% Atom : 953hPa

Frequency	Antenna	Meter Reading/ 10m	Limits/ 30m	Field Strength/ 30m	Margin
(MHz)	Factor (dB)	(dBμV) Q.P	(dBμV) Q.P	(dBμV) Q.P	(dB) Q.P
13.110	-	< 30.0	29.5	< 10.9	> 18.6
13.410	-	< 30.0	40.5	< 10.9	> 29.6
13.553	-	< 30.0	50.5	< 10.9	> 39.6
13.560	-	34.6	84.0	15.5	68.5
13.567	-	< 30.0	50.5	< 10.9	> 39.6
13.710	-	< 30.0	40.5	< 10.9	> 29.6
14.010	-	< 30.0	29.5	< 10.9	> 18.6

Notes: 1) The testing location : Anechoic Chamber No.1 Distance : 10 m

2) Q.P : Quasi-Peak Detector (IF Band width : 9 kHz)

3) The symbol of "<" means "or less".

4) The symbol of ">" means "more than".

5) The symbol of "-" means "Zero", because the used test receiver calculated and displayed in the Meter Reading including the Correction Factor(Antenna and cable loss) directly .

6) The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions. The above Meter Reading was maximum emissions level.

7) Calculation :

For fundamental, the measured field strength was extrapolated to distance 30 meters, using the formula that field strength varies as the inverse distance square (40 dB per decade of distance).

Fundamental(13.560MHz): $49.1 \text{ dB}\mu\text{V/m} - 20\log_{10}((30/10)^2) = 31.5 - 19.1 = 12.4 \text{ dB}\mu\text{V/m}$ at 30 meter;

Limits for 13.553-13.567MHz (§15.225(a)) = $20\log_{10}(15848) = 84.0 \text{ dB}\mu\text{V/m}$

Limits for 13.410-13.553, 13.567-13.710 MHz (§15.225(b)) = $20\log_{10}(334) = 50.5 \text{ dB}\mu\text{V/m}$

Limits for 13.110-13.410, 13.710-14.010MHz (§15.225(c)) = $20\log_{10}(106) = 40.5 \text{ dB}\mu\text{V/m}$


Limits for except for 13.110-14.010MHz(§15.225(d)) = $20\log_{10}(30) = 29.5 \text{ dB}\mu\text{V/m}$

A.2.2 Radiated Emission 0.009 MHz - 30 MHz

Date : December 12, 2010

Temp : 16.8°C Humi : 31.7% Atom : 960hPa

Frequency (MHz)	Antenna Factor (dB)	Meter Reading (dBμV) Q.P	Limits (dBμV) Q.P	Specified Distance (m)	Extrapolated Emission Level	Margin (dB) Q.P
					(dBμV) Q.P	
0.009	-	< 60.0	48.5	300.0	< 0.9	> 47.6
0.01	-	< 60.0	47.6	300.0	< 0.9	> 46.7
0.02	-	< 60.0	41.6	300.0	< 0.9	> 40.7
0.03	-	< 60.0	38.1	300.0	< 0.9	> 37.1
0.05	-	< 60.0	33.6	300.0	< 0.9	> 32.7
0.07	-	< 60.0	30.7	300.0	< 0.9	> 29.8
0.10	-	< 60.0	27.6	300.0	< 0.9	> 26.7
0.20	-	< 60.0	21.6	300.0	< 0.9	> 20.7
0.30	-	< 60.0	18.1	300.0	< 0.9	> 17.1
0.50	-	< 30.0	33.6	30.0	< 10.9	> 22.7
1.00	-	< 30.0	27.6	30.0	< 10.9	> 16.7
2.00	-	< 30.0	29.5	30.0	< 10.9	> 18.6
3.00	-	< 30.0	29.5	30.0	< 10.9	> 18.6
5.00	-	< 30.0	29.5	30.0	< 10.9	> 18.6
10.00	-	< 30.0	29.5	30.0	< 10.9	> 18.6
27.12	-	< 30.0	29.5	30.0	< 10.9	> 18.6
30.00	-	< 30.0	29.5	30.0	< 10.9	> 18.6

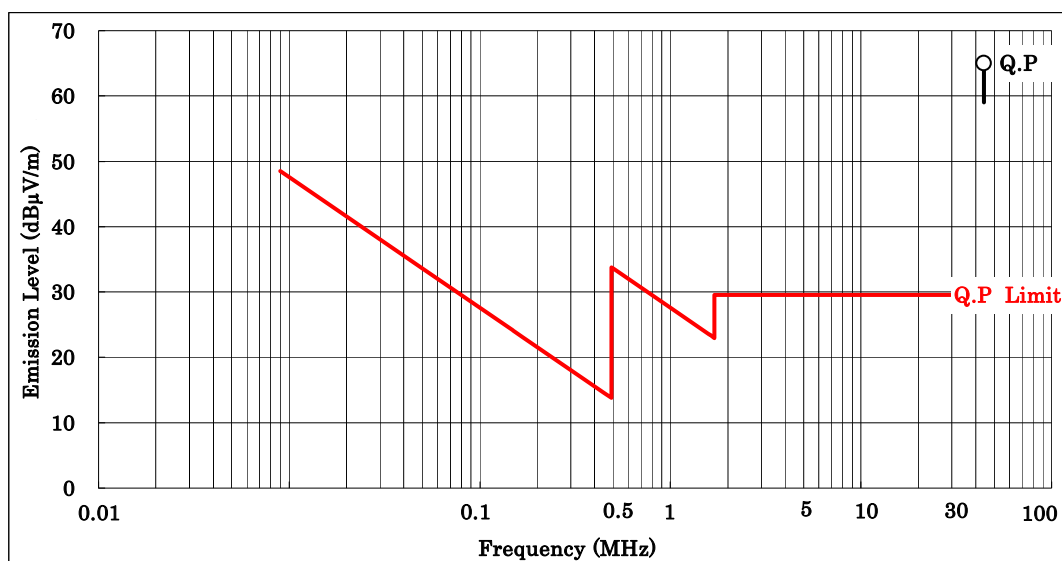


- Notes:
- 1) The testing location : Anechoic Chamber No.1 Distance : 10 m
 - 2) The symbol of "<" means "or less".
 - 3) The symbol of ">" means "more than".
 - 4) The symbol of "-" means "Zero", because the used test receiver calculated and displayed in the Meter Reading including the Correction Factor(Antenna and cable loss) directly
 - 5) A sample calculation was made at 0.009 MHz
 $60 \text{ dB}\mu\text{V/m (at 10m distance)} \Rightarrow 60 - 20\log_{10}((300/10)^2) = 0.9 \text{ dB}\mu\text{V/m (at 300m distance)}$
 - 6) Setting of measuring instrument :
 Quasi-Peak Detector, IF Bandwidth: 9 kHz or 200Hz (9 kHz - 90 kHz, 110-490kHz)
 Average Detector, IF Bandwidth: 9 kHz or 200Hz (except for 9 kHz - 90 kHz, 110-490kHz)
 - 7) The spectrum was checked from 0.009 MHz to 30 MHz.

A.2.2 Radiated Emission 30 MHz - 1000 MHz

Date : September 11, 2009

Temp : 23.1°C Humi : 58.6% Atom : 960hPa

Frequency (MHz)	Antenna Factor (dB/m)	Meter Reading (dBμV)		Limits (dBμV) Q.P	Emission Level (dBμV/m)		Margin (dB)	
		Hori.	Vert.		Hori.	Vert.	Hori.	Vert.
40.7	14.6	7.4	15.5	40.0	22.0	30.1	18.0	9.9
60.5	8.6	12.6	16.6	40.0	21.2	25.2	18.8	14.8
67.8	7.3	8.8	20.4	40.0	16.1	27.7	23.9	12.3
80.6	6.9	5.8	13.4	40.0	12.7	20.3	27.3	19.7
94.9	9.6	7.1	15.1	43.5	16.7	24.7	26.8	18.8
100.8	10.9	4.4	11.9	43.5	15.3	22.8	28.2	20.7
120.9	14.0	< -2.0	0.3	43.5	< 12.0	14.3	> 31.5	29.2
149.2	15.9	0.2	3.1	43.5	16.1	19.0	27.4	24.5
181.4	17.3	< -2.0	3.5	43.5	< 15.3	20.8	> 28.2	22.7
300.0	21.1	< -2.0	< -2.0	46.0	< 19.1	< 19.1	> 26.9	> 26.9
500.0	20.1	< -2.0	< -2.0	46.0	< 18.1	< 18.1	> 27.9	> 27.9
700.0	23.4	< -2.0	< -2.0	46.0	< 21.4	< 21.4	> 24.6	> 24.6
1000.0	26.8	< -2.0	< -2.0	54.0	< 24.8	< 24.8	> 29.2	> 29.2

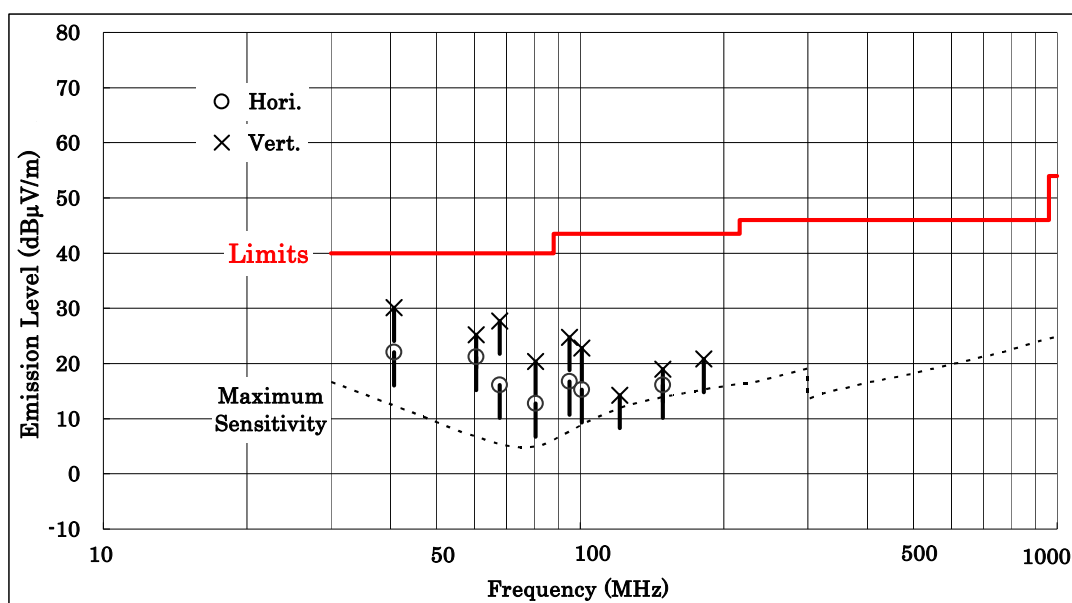

- Notes: 1) The testing location : Anechoic Chamber No.1 Distance : 3 m
 2) The spectrum was checked from 30 MHz to 1000 MHz.
 3) Antenna factor includes the cable loss.
 4) Hori. : Horizontal polarization Vert. : Vertical polarization
 5) Q.P: Quasi-Peak Detector
 6) The symbol of "<" means "or less", ">" means "more than".
 7) A sample calculation was made at 40.7 MHz
 (Antenna Factor) + (Meter Reading) = 14.6 + 15.5 = 30.1 dBμV

A.2.3 Radiated Emission above 1 GHz

-Not applicable-

A.3 Frequency Stability

Testing Date : December 13, 2010

Ambient Temperature : 25 (°C), Humidity : 45(%)

Operating Frequency:13.56MHz

Temperature (°C)	Primary Supply Voltage (V)	Frequency (MHz)			
		0 minute later	2 minutes later	5 minutes later	10 minutes later
-20	102	13.55974010	13.55976461	13.55976741	13.55977177
	120	13.55973493	13.55975980	13.55977123	13.55976897
	138	13.55974935	13.55976330	13.55977120	13.55977119
20	102	13.55982798	13.55982618	13.55982561	13.55982545
	120	13.55983020	13.55982712	13.55982549	13.55982529
	138	13.55982785	13.55982608	13.55982541	13.55982555
50	102	13.55981809	13.55982021	13.55982047	13.55982051
	120	13.55981817	13.55981993	13.55982046	13.55982062
	138	13.55981550	13.55981919	13.55982029	13.55982028


Specified Limit +/-0.01%

Temperature (°C)	Primary Supply Voltage (V)	Frequency with time elapse (%)			
		0 minute later	2 minutes later	5 minutes later	10 minutes later
-20	102	-0.0019167	-0.0017359	-0.0017153	-0.0016831
	120	-0.0019548	-0.0017714	-0.0016871	-0.0017038
	138	-0.0018485	-0.0017456	-0.0016873	-0.0016874
20	102	-0.0012686	-0.0012819	-0.0012861	-0.0012872
	120	-0.0012522	-0.0012749	-0.0012869	-0.0012884
	138	-0.0012695	-0.0012826	-0.0012875	-0.0012865
50	102	-0.0013415	-0.0013265	-0.0013240	-0.0013237
	120	-0.0013409	-0.0013279	-0.0013240	-0.0013229
	138	-0.0013606	-0.0013334	-0.0013253	-0.0013254

A.4 Occupied Bandwidth

Testing Date : December 13, 2010

Ambient Temperature : 25 (°C), Humidity : 45(%)

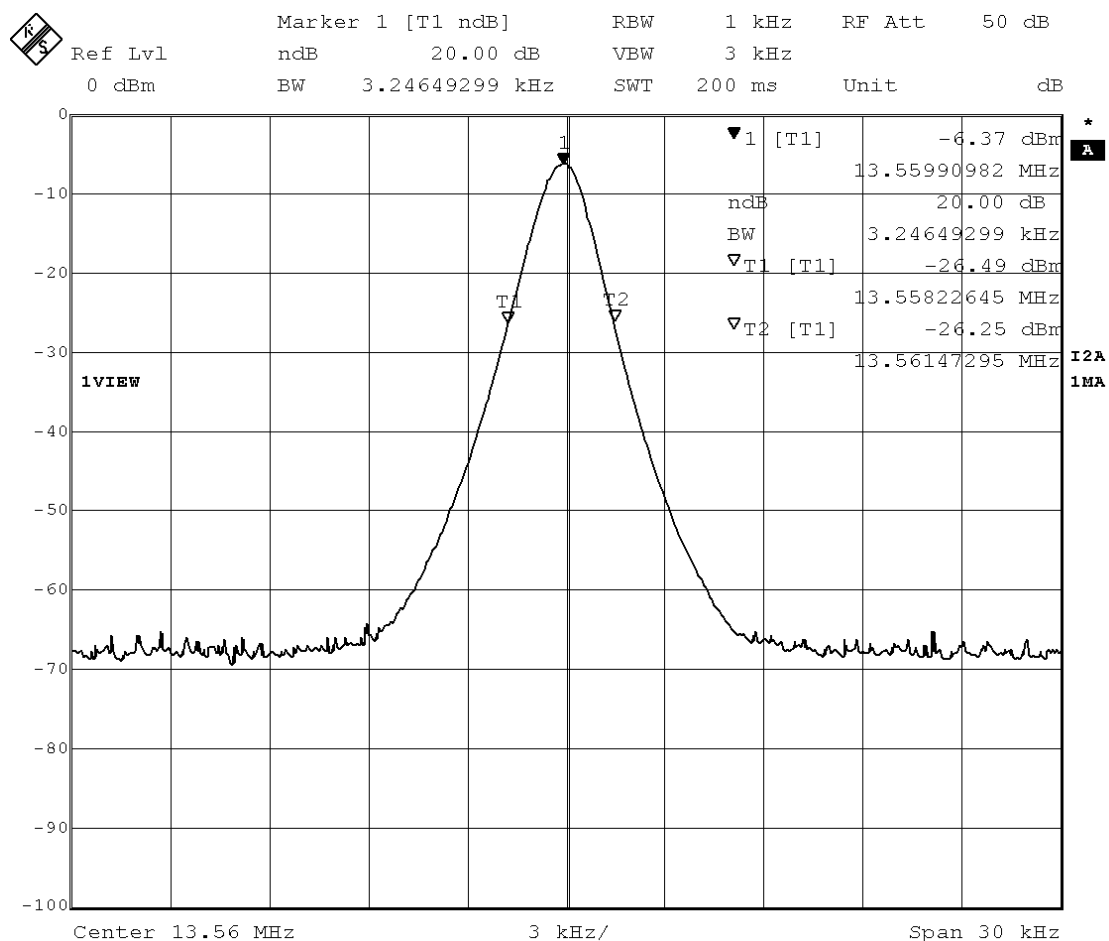


Appendix B : Test Arrangement (Photographs)**B.1 AC Powerline Conducted Emission**

- Front View -




- Side View -

* The EUT was rotated all axis(X-axis, Y- axis, Z-axis), this photograph present configuration with maximum emission.

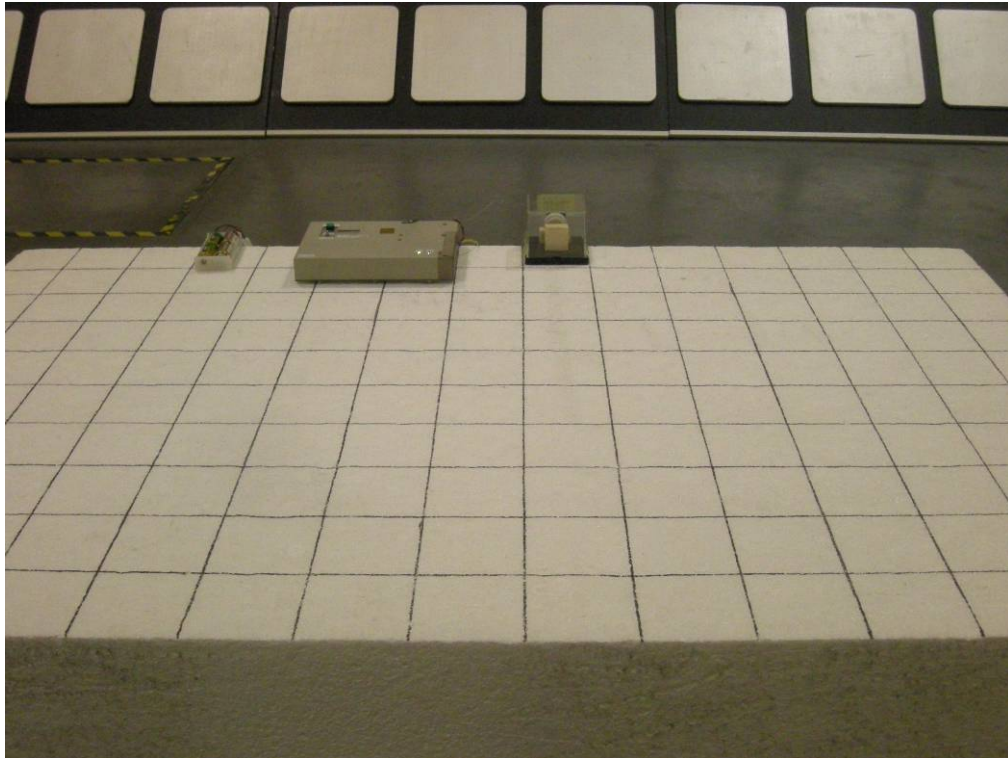B.2 Radiated Emissions

- Front View -

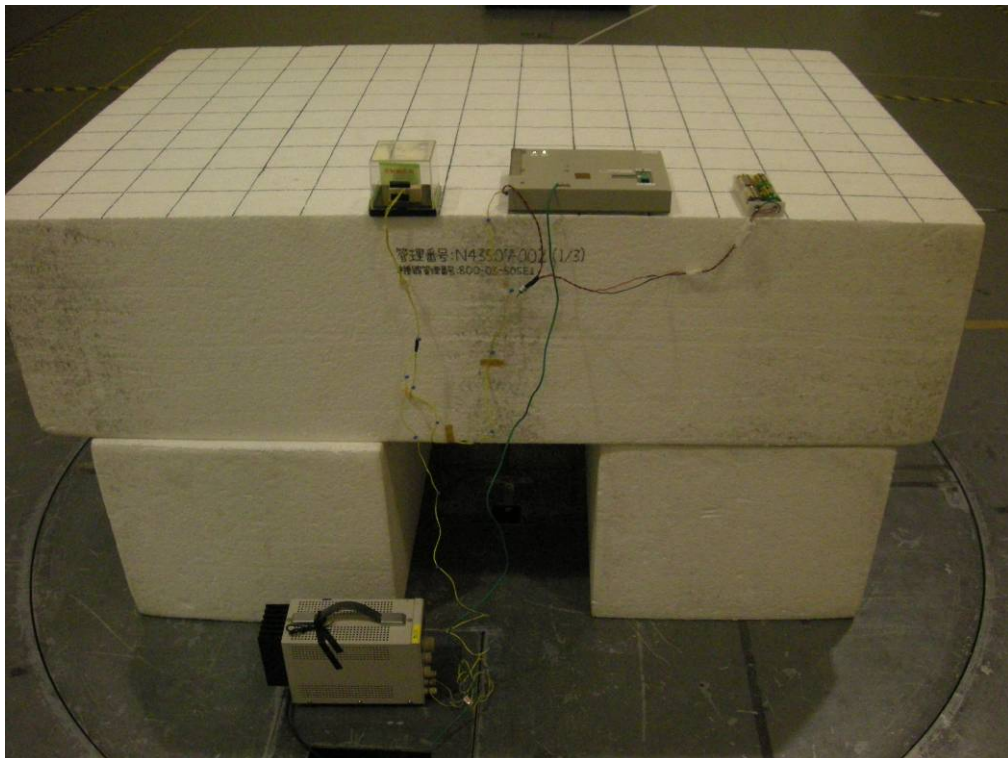

- Rear View -

* The EUT was rotated all axis(X-axis, Y- axis, Z-axis), this photograph present configuration with maximum emission.

Appendix C: Test Instruments

Sign	Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
OS-1	Open Site	-	Toshiba	-	2010/5	1 Year
OS-2	Open Site	-	Toshiba	-	2010/5	1 Year
AC-1	Anechoic Chamber (L)	-	TDK	-	2010/5	1 Year
AC-2	Anechoic Chamber (S)	-	TDK	-	2010/11	1 Year
SR-A	Shielded Room	-	TDK	-	-	-
SR-B	Shielded Room	-	TDK	-	-	-
SR-C	Shielded Room	-	TDK	-	-	-
TR-1	Tested Room	-	-	-	-	-
R-1	Test Receiver	ESVS10	Rohde & Schwarz	849231/004	2010/3	1 Year
R-2	Test Receiver	ESVS10	Rohde & Schwarz	843744/018	2010/6	1 Year
R-3	Test Receiver	ESI7	Rohde & Schwarz	100059/007	2010/10	1 Year
R-4	Test Receiver	ESHS30	Rohde & Schwarz	842053/001	2010/2	1 Year
R-5	Test Receiver	ESCS30	Rohde & Schwarz	100203	2010/5	1 Year
R-6	Test Receiver	ESU40	Rohde & Schwarz	100214	2010/11	1 Year
S-3	Spectrum Analyzer	U3751	Advantest	160100139	2010/3	1 Year
S-4	Spectrum Analyzer	8563E	Hewlett Packard	3221A00201	2010/4	1 Year
S-5	Spectrum Analyzer	U3751	Advantest	170500170	2010/6	1 Year
CB-3	RF Cable	3D-2W	Fujikura	-	2010/5	1 Year
CB-4	RF Cable	3D-2W	Fujikura	-	2010/5	1 Year
CB-5	RF Cable	3D-2W	Fujikura	-	2010/5	1 Year
CN-1	RF Cable	20D/5D-2W	Fujikura	-	2010/8	1 Year
CN-2	RF Cable	20D/5D-2W	Fujikura	-	2010/10	1 Year
CN-3	RF Cable	20D/5D-2W	Fujikura	-	2010/9	1 Year
CS-1	RF Cable	SUCOFLEX 104P	Huber+Suhner	27290/4P	2010/11	1 Year
CS-2	RF Cable	SUCOFLEX 104P	Huber+Suhner	27289/4P	2010/11	1 Year
CS-3	RF Cable	SUCOFLEX 104P	Huber+Suhner	37027/4P	2010/3	1 Year
CS-4	RF Cable	SUCOFLEX 104P	Huber+Suhner	37028/4P	2010/3	1 Year
L-1	AMN	KNW-407	Kyoritsu Corp.	8-833-5	2010/9	1 Year
L-2	AMN	KNW-407	Kyoritsu Corp.	8-680-14	2010/9	1 Year
L-3	AMN	KNW-407	Kyoritsu Corp.	8-757-1	2010/6	1 Year
L-4	AMN	KNW-242	Kyoritsu Corp.	8-755-1	2010/6	1 Year
L-5	AMN	KNW-242C	Kyoritsu Corp.	8-837-14	2010/6	1 Year
L-6	AMN	KNW-243C	Kyoritsu Corp.	8-692-5	2010/9	1 Year
L-7	AMN	KNW-243C	Kyoritsu Corp.	8-831-3	2010/6	1 Year
L-9	AMN	KNW-244C	Kyoritsu Corp.	8-1373-3	2010/8	1 Year
L-10	ISN	FCC-TLISN-T2-02	FCC	20234	2010/11	1 Year
L-11	ISN	FCC-TLISN-T4-02	FCC	20235	2010/11	1 Year
L-12	High Impedance Probe	KNW-410	Kyoritsu Corp.	8-876-3	2010/8	1 Year
L-13	Artificial Hand	K-9003	Kyoritsu Corp.	7-1639-4	2010/10	1 Year
L-14	Hi-pass Filter	KFL-009D	Kyoritsu Corp.	8-1996-8	2010/7	1 Year
L-15	ISN	F-070306-1057-1	FCC	20591	2010/7	1 Year
L-16	RF Current Probe	KCT-2504	Kyoritsu Corp	8S-3061-5	2010/5	1 Year
PL-3	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	2010/10	1 Year
PL-4	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	2010/2	1 Year
PL-5	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	2010/5	1 Year
TM-1	50ohm Termination	BNC-P-1.5	TDC	-	2010/3	1 Year
TM-2	50ohm Termination	-	Y&R	-	2010/3	1 Year
AL-0	Loop Antenna	HFH2-Z2	Rohde & Schwarz	879284/14	2010/4	1 Year
AT-1	Triple Loop Antenna	HXYZ9170	Schwarzbeck	9170-138	2010/7	1 Year
AT-3	Bilog Antenna	CBL6111D	Teseq GmbH	27075	2010/8	1 Year
AB-1	Biconical Antenna	BBA9106	Schwarzbeck	91031741	2010/8	1 Year
AB-2	Biconical Antenna	BBA9106	Schwarzbeck	91032349	2010/10	1 Year
AB-3	Biconical Antenna	BBA9106	Schwarzbeck	VHA11905516	2010/9	1 Year
AL-1	Log-Periodic Antenna	UHALP9108-A	Schwarzbeck	0678	2010/8	1 Year
AL-2	Log-Periodic Antenna	UHALP9108-A	Schwarzbeck	0679	2010/10	1 Year
AL-3	Log-Periodic Antenna	UHALP9108-A	Schwarzbeck	0278	2010/9	1 Year
AL-4	Log-Periodic Antenna	USLP9143	Schwarzbeck	140	2010/6	1 Year

Sign	Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
AL-5	Log-Periodic Antenna	94612-1	Eaton	97062301	2010/4	1 Year
AL-6	Log-Periodic Antenna	ESLP9145	Schwarzbeck	9145-216	2010/3	1 Year
AH-1	Horn Antenna	91888-2	EATON	563	2010/5	1 Year
AH-2	Horn Antenna	91889-2	EATON	569	2010/5	1 Year
AH-3	Horn Antenna	94613-1	EATON	575	2010/5	1 Year
AH-4	Horn Antenna	91891-2	EATON	583	2010/5	1 Year
AH-5	Horn Antenna	12-12	Scientific Atlanta	741	2010/5	1 Year
AH-12	Horn Antenna	3177	ETS LINDGREN	00051800	2010/7	1 Year
AD-1	Dipole Antenna	KBA-511A	Kyoritsu Corp.	0-195-5	2010/8	1 Year
AD-2	Dipole Antenna	KBA-511A	Kyoritsu Corp.	0-228-13	2010/8	1 Year
AD-3	Dipole Antenna	KBA-611	Kyoritsu Corp.	0-196-8	2010/8	1 Year
AD-4	Dipole Antenna	KBA-611	Kyoritsu Corp.	0-230-6	2010/8	1 Year
CL-1	Absorbing Clamp	MDS21	Rohde & Schwarz	894245/002	2010/5	1 Year
PA-1	Pre-Amplifier	WJ-6811-513	Watkins Johnson	0288	2010/3	1 Year
PA-2	Pre-Amplifier	WJ-6682-824	Watkins Johnson	0052	2010/3	1 Year
PA-3	Pre-Amplifier	WJ-6870-506	Watkins Johnson	0018	2010/3	1 Year
PA-5	Pre-Amplifier	AMF-4D-005080-18-13P	MITEQ, INC.	1218917	2010/11	1 Year
RN-1	Reference Impedance Network	4151	NF ELECTRONIC INSTRUMENTS	3168114151011	2010/5	1 Year
RN-2	Reference Impedance Network	ES4153	NF ELECTRONIC INSTRUMENTS	9099436	2010/10	1 Year
HF-1	Harmonic/Flicker Analyzer	KHA3000	KIKUSUI ELECTRONICS CORPORATION	NB001642	2010/4	1 Year
2-1	ESD Tester	ESD3000	EMC PARTNER	092	2010/5	1 Year
2-2	ESD Tester	ESD3000	EMC PARTNER	428	2010/6	1 Year
3-1	Signal Generator	SMT 02	Rohde & Schwarz	838616/021	2010/3	1 Year
3-2	Signal Generator	83732B	Hewlett Packard	US37101411	2010/10	1 Year
3-3	Function Generator	1941	NF	328730	2010/10	1 Year
3-4	RF Power Amplifier	150W1000M1	Amplifier Research	0328963	2010/11	1 Year
3-5	RF Power Amplifier	500A100M1	Amplifier Research	19671	2010/11	1 Year
3-6	RF Power Amplifier	200W1000M2A	Amplifier Research	19572	2010/5	1 Year
3-7	RF Power Amplifier	60S1G3M1	Amplifier Research	0325545	2010/11	1 Year
3-8	Biconical Antenna	3109	EMCO	9607-3014	2010/11	1 Year
3-10	Log-Periodic Antenna	3144	EMCO	9701-1032	2010/5	1 Year
3-11	Log-Periodic Antenna	AT5080	Amplifier Research	322092	2010/11	1 Year
3-12	Horn Antenna	AT4002A	Amplifier Research	0325039	2010/5	1 Year
3-13	Field Monitor	FM2000	Amplifier Research	19166	-	1 Year
3-14	Field Monitor	FM5004	Amplifier Research	25843	-	1 Year
3-15	Field Probe	FP2000	Amplifier Research	18767	2010/5	1 Year
3-16	Field Probe	FP2000	Amplifier Research	22646	2010/8	1 Year
3-18	Field Probe	FP6001	Amplifier Research	303557	2010/10	1 Year
3-19	Power Meter	4421	Bird	2919	2010/7	1 Year
3-20	Power Head	4022	Bird	6147	2010/7	1 Year
3-21	Power Meter	PM2002	Amplifier Research	25774	2010/7	1 Year
3-22	Power Head	PH2000	Amplifier Research	26413	2010/7	1 Year
3-23	Power Head	PH2000	Amplifier Research	26414	2010/7	1 Year
3-24	Dual Coupler	DC2600	Amplifier Research	19734	2010/7	1 Year
3-25	Dual Coupler	DC6080	Amplifier Research	302555	2010/7	1 Year
3-26	Dual Coupler	DC7144	Amplifier Research	26463	2010/7	1 Year
3-27	Signal Generator	SML 03	Rohde & Schwarz	103413	2010/9	1 Year
3-29	Power Meter	NRT	Rohde & Schwarz	103116	2010/10	1 Year
3-30	Power Head	NRT-Z44	Rohde & Schwarz	102682	2010/10	1 Year
3-31	Field Probe	EP 600	Narda S.T.S.	301WX90609	2010/1	1 Year
3-32	Field Probe	EP 601	Narda S.T.S.	301WX00125	2010/7	1 Year
3-33	Signal Generator	SMB100A	Rohde & Schwarz	103740	2010/6	1 Year
4-1	Immunity Tester	TRA2000	EMC PARTNER	659	2010/7	1 Year
4-2	EFT/B Generator	PEFT-Junior	HAEFELY	083818-13	2010/5	1 Year

Sign	Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
4-3	EFT/B Generator	FNS-AXII B50	Noise Laboratory	FNS0620431	2010/5	1 Year
4-4	Coupling Clamp	IP4	HAEFELY	-	2010/5	1 Year
4-5	Coupling Clamp	15-00001A	Noise Laboratory	-	2010/5	1 Year
5-1	Surge Tester	PSURGE4.1	HAEFELY	083665-08	2010/11	1 Year
5-2	Coupling Filter	FP-SURGE 100M	HAEFELY	149163	2010/11	1 Year
5-3	Coupling Network	IP6.2	HAEFELY	083811-10	2010/11	1 Year
5-4	Decoupling Network	DEC1A	HAEFELY	083793-08	2010/11	1 Year
5-5	Pruefpistole	AP 300	HAEFELY	081 438	2010/11	1 Year
6-1	Signal Generator	PSG1000B	W.K. Electronics	000234	2010/6	1 Year
6-2	RF Power Amplifier	75A250	Amplifier Research	19502	2010/8	1 Year
6-3	RF Power Amplifier	75A250	Amplifier Research	26255	2010/8	1 Year
6-4	6dB Attenuator	8343-060	Bird	2054	2010/8	1 Year
6-5	6dB Attenuator	65-6-33	Weinschel	LW166	2010/8	1 Year
6-6	CDN	FCC-801-M1-16	FCC	50	2010/5	1 Year
6-7	CDN	FCC-801-M1-25A	FCC	04001	2010/6	1 Year
6-8	CDN	FCC-801-M2-25	FCC	59	2010/5	1 Year
6-9	CDN	FCC-801-M2-25A	FCC	03023	2010/6	1 Year
6-10	CDN	FCC-801-M2-25A	FCC	03024	2010/6	1 Year
6-11	CDN	FCC-801-M3-25	FCC	137	2010/5	1 Year
6-12	CDN	FCC-801-M3-25A	FCC	05021	2010/6	1 Year
6-13	CDN	FCC-801-M3-25A	FCC	99133	2010/6	1 Year
6-14	CDN	FCC-801-M4-25	FCC	21	2010/5	1 Year
6-15	CDN	FCC-801-M4-50	FCC	9806	2010/4	1 Year
6-16	CDN	FCC-801-C1	FCC	79	2010/6	1 Year
6-19	CDN	FCC-801-T8	FCC	9956	2010/6	1 Year
6-20	150-50 Ohms Adaptor	FCC-801-150-50	FCC	638	2010/6	1 Year
6-21	150-50 Ohms Adaptor	FCC-801-150-50	FCC	639	2010/6	1 Year
6-22	EM Clamp	F-203I	FCC	220	2010/8	1 Year
6-23	Decoupling Clamp	F-203I-DCN	FCC	105	-	-
6-24	Bulk Current Injection Clamp	F-120-2	FCC	53	2010/8	1 Year
6-25	CDN	FCC-801-M3-25A	FCC	08008	2010/6	1 Year
8-1	Interference Tester	LFP6.1	HAEFELY	083374-03	2010/3	1 Year
8-2	Magnetic Field Tester	MFG100.1	HAEFELY	080136-06	2010/3	1 Year
8-3	Field Coil	FC-1	ES Factory	001	2010/3	1 Year
8-4	Large Coil	L2X1.6	ES Factory	001	2010/3	1 Year
11-1	Voltage Dip Tester	PLINE1610	HAEFELY	148709	2010/10	1 Year
11-2	3 Phase Extension	PLS1630	HAEFELY	149685	2010/4	1 Year
11-3	External Variac Network	VAR-EXT1000	EMC PARTNER	046	2009/12	1 Year
13	Test Receiver	ESI26	Rohde & Schwarz	100043	Oct. 2010	1 Year
45	RF Cable	S04272B	Suhner	-	May 2010	1 Year
75	Frequency Counter	53131A	Hewlett Packard	3546A11807	May 2010	1 Year
76	Oven	-	Ohnishi	-	-	1 Year