


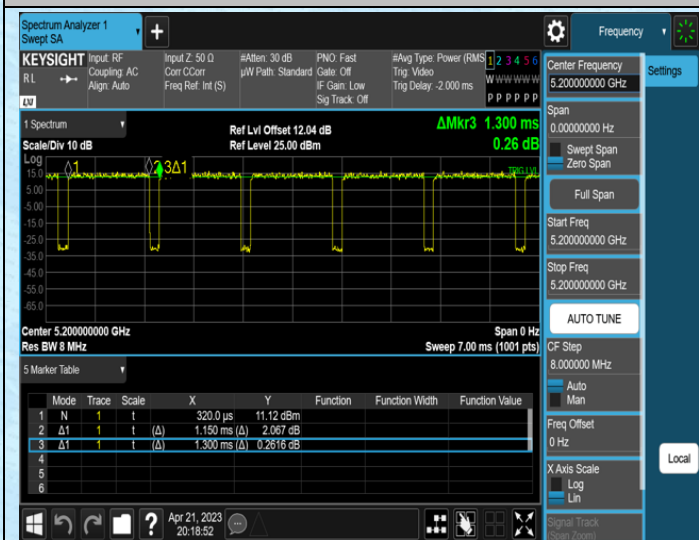
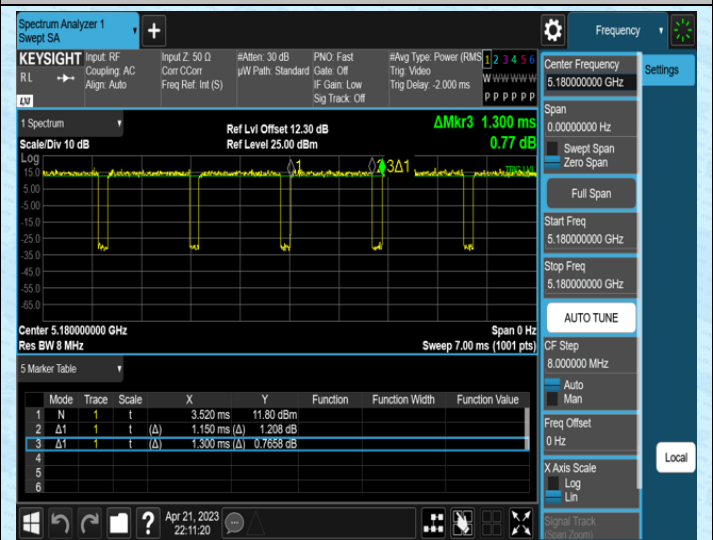
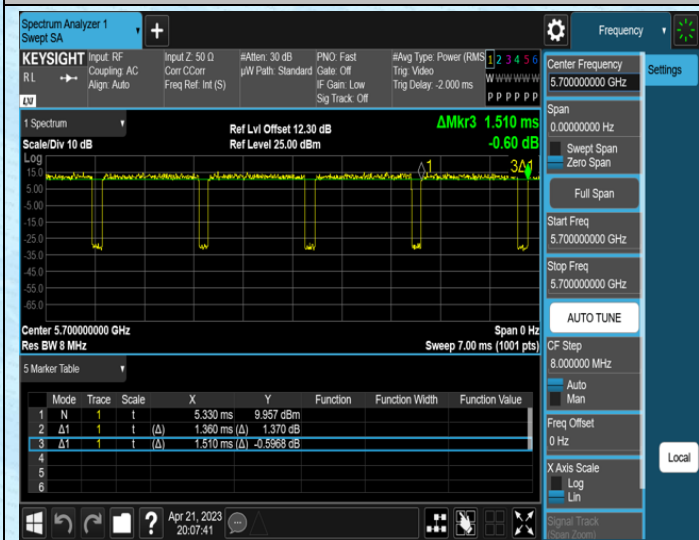


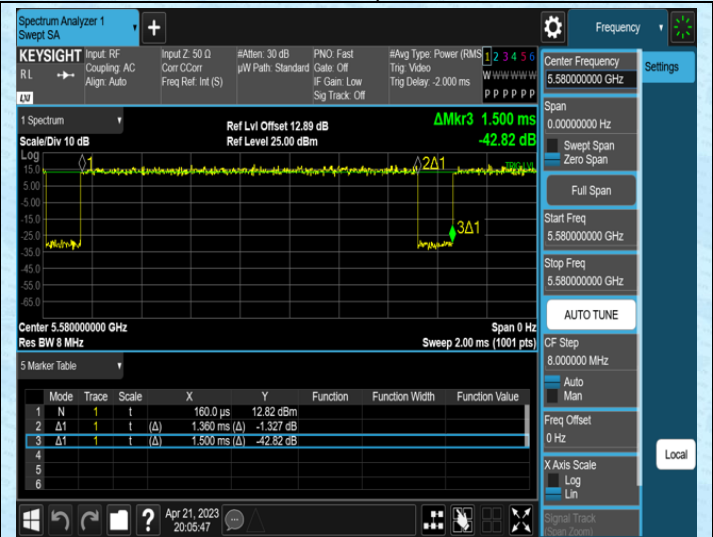


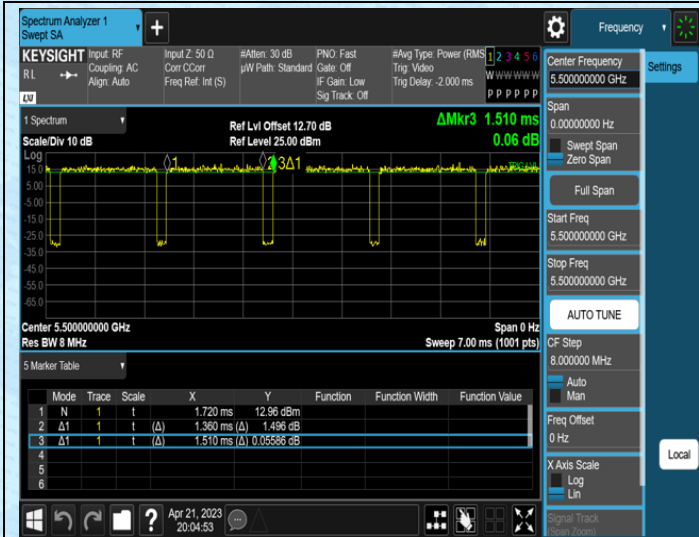


NTNV-11N20SISO-Ant1-5260

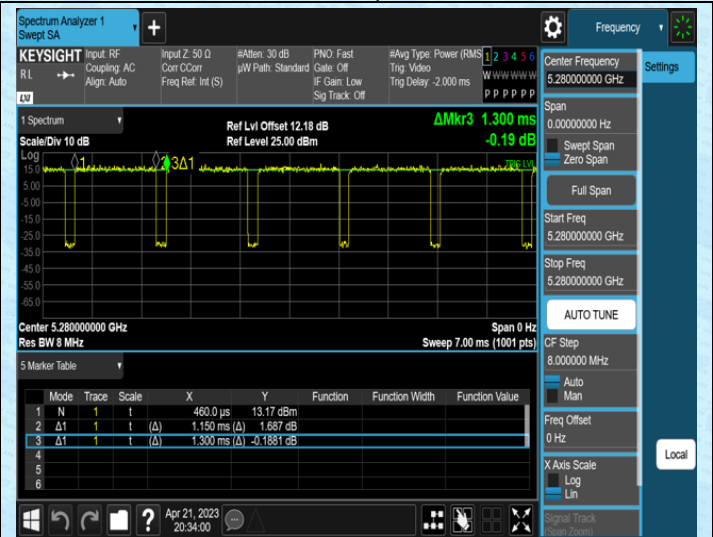

NTNV-11N20SISO-Ant1-5280

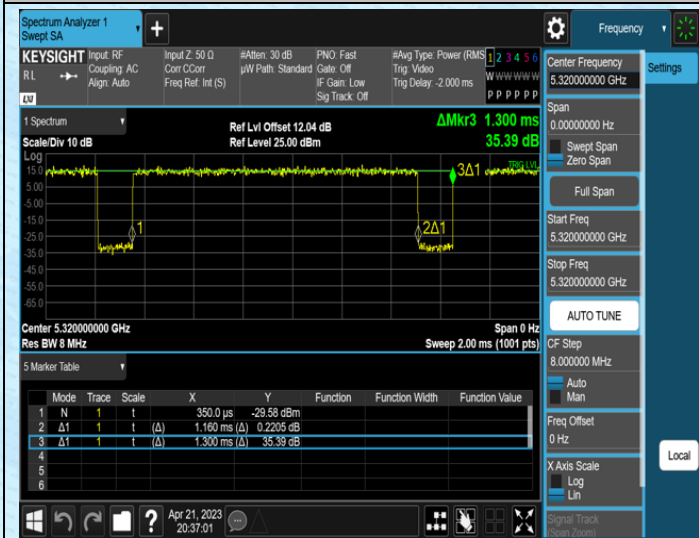

NTNV-11N20SISO-Ant1-5320

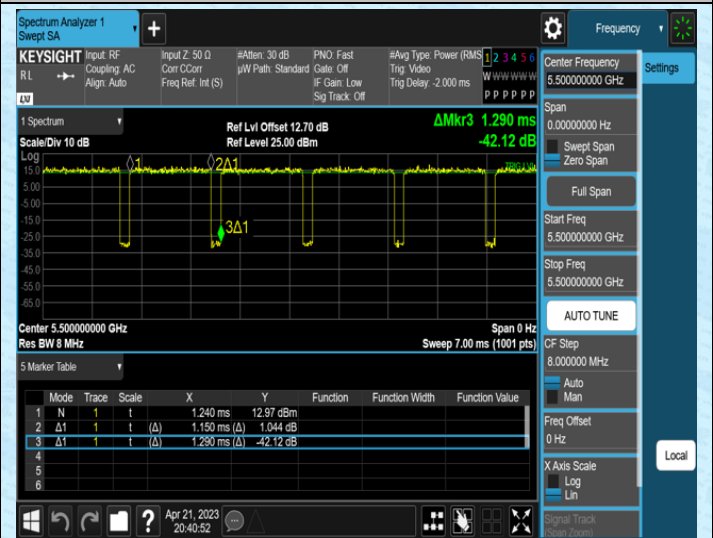

NTNV-11N20SISO-Ant1-5500



NTNV-11N20SISO-Ant1-5580



NTNV-11N20SISO-Ant1-5700



NTNV-11N40SISO-Ant1-5190



NTNV-11N40SISO-Ant1-5230



NTNV-11N40SISO-Ant1-5270



NTNV-11N40SISO-Ant1-5310




NTNV-11N40SISO-Ant1-5510




NTNV-11N40SISO-Ant1-5550




NTNV-11N40SISO-Ant1-5670

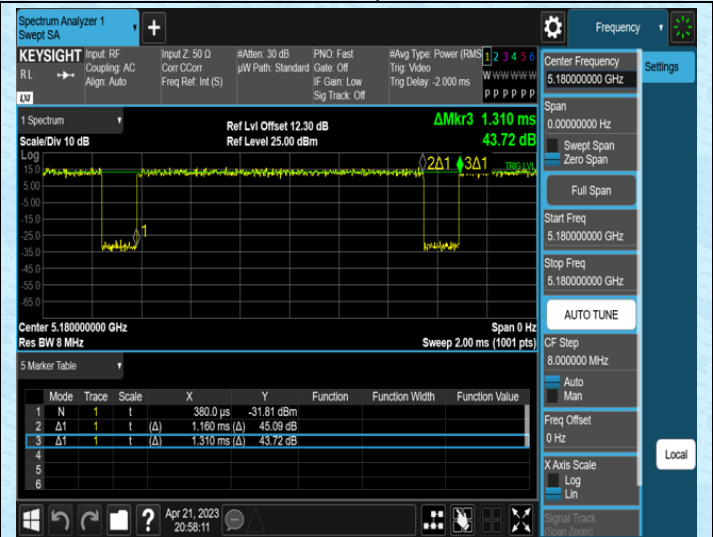


NTNV-11AC20SISO-Ant1-5180

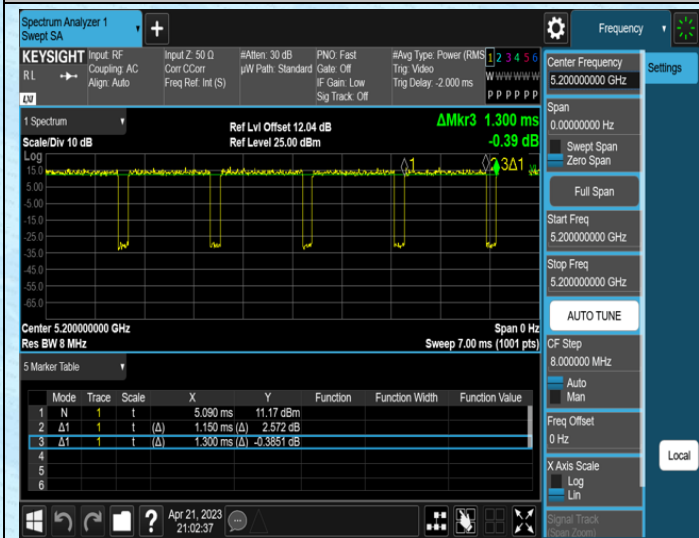


NTNV-11AC20SISO-Ant1-5200

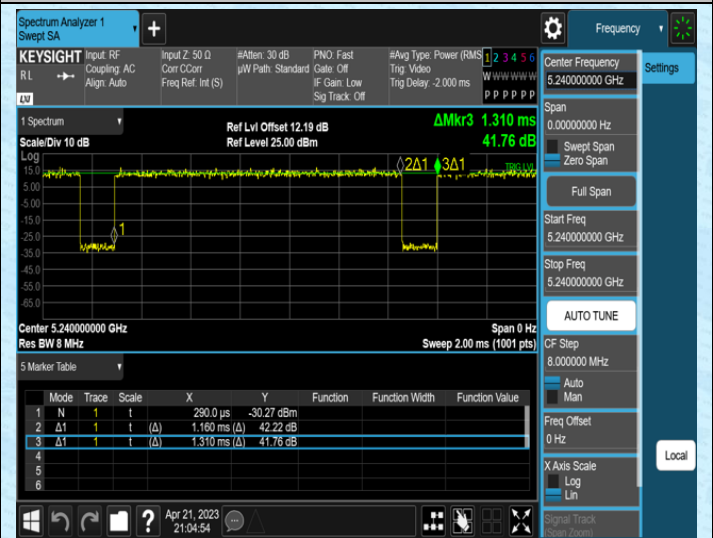


NTNV-11AC20SISO-Ant1-5240

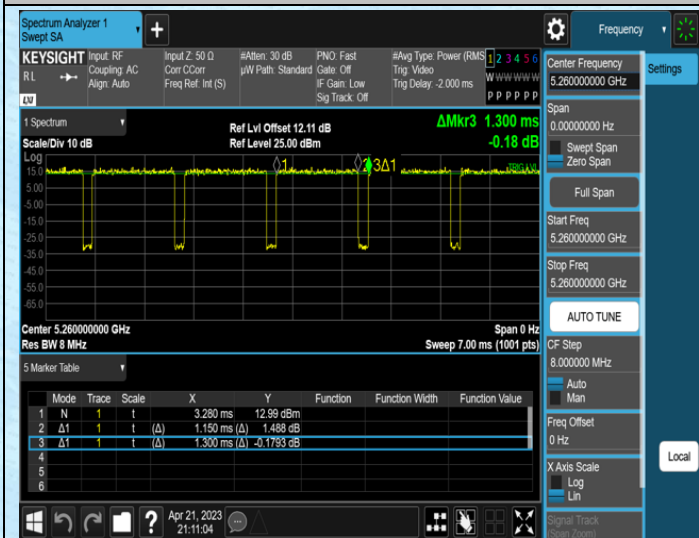


NTNV-11AC20SISO-Ant1-5260

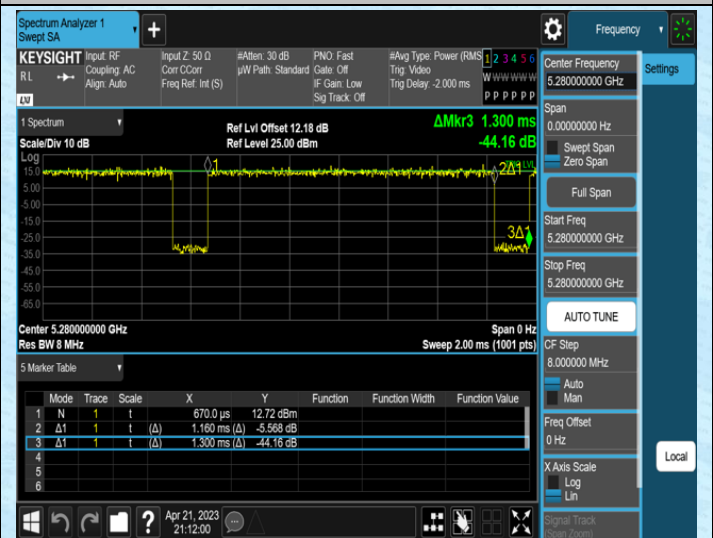


NTNV-11AC20SISO-Ant1-5280

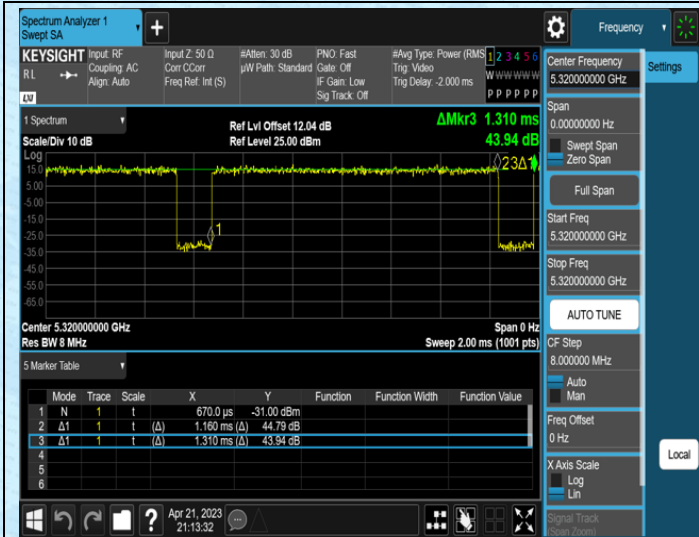

NTNV-11AC20SISO-Ant1-5320

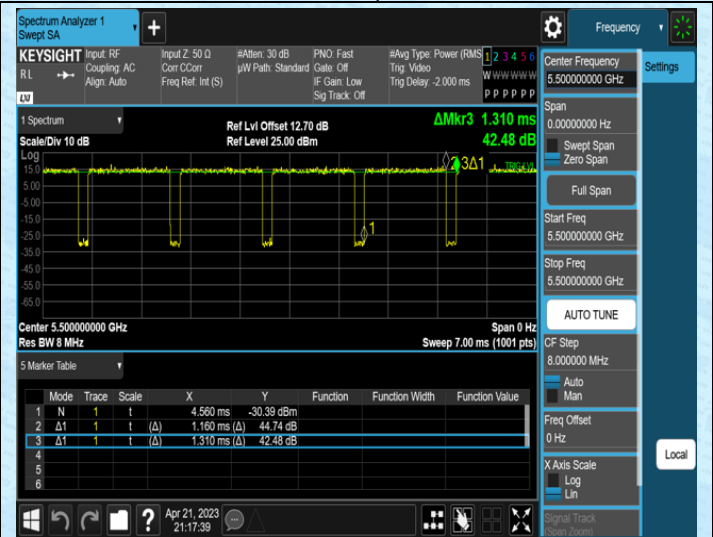

NTNV-11AC20SISO-Ant1-5500

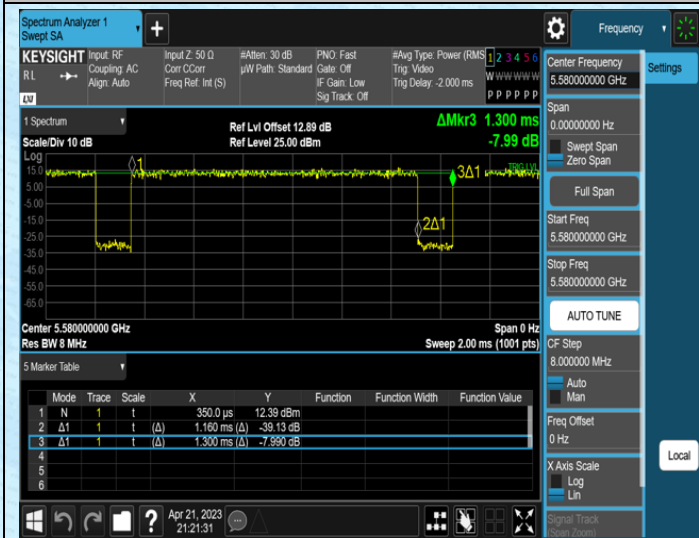

NTNV-11AC20SISO-Ant1-5580



NTNV-11AC20SISO-Ant1-5700



NTNV-11AC40SISO-Ant1-5190



NTNV-11AC40SISO-Ant1-5230



NTNV-11AC40SISO-Ant1-5270



NTNV-11AC40SISO-Ant1-5310




NTNV-11AC40SISO-Ant1-5510




NTNV-11AC40SISO-Ant1-5550



NTNV-11AC40SISO-Ant1-5670

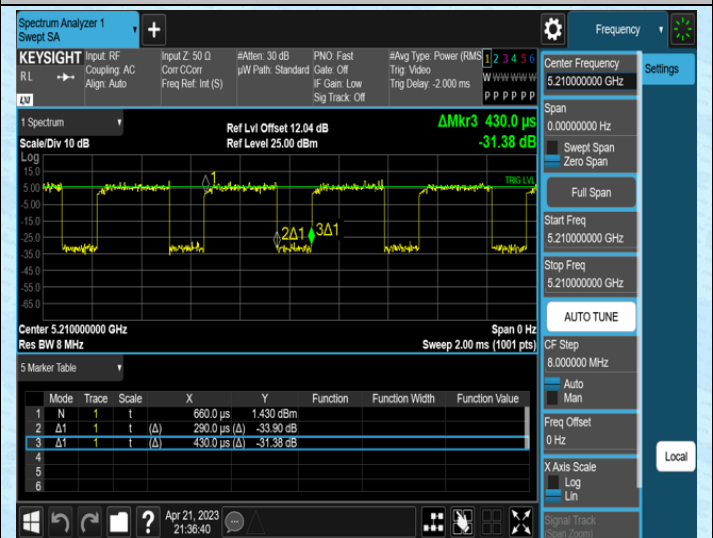


NTNV-11AC80SISO-Ant1-5210

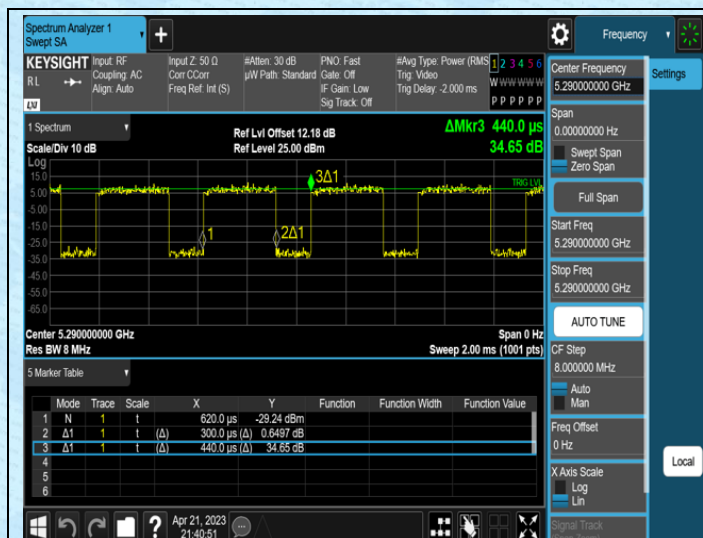

NTNV-11AC80SISO-Ant1-5290



NTNV-11AC80SISO-Ant1-5530

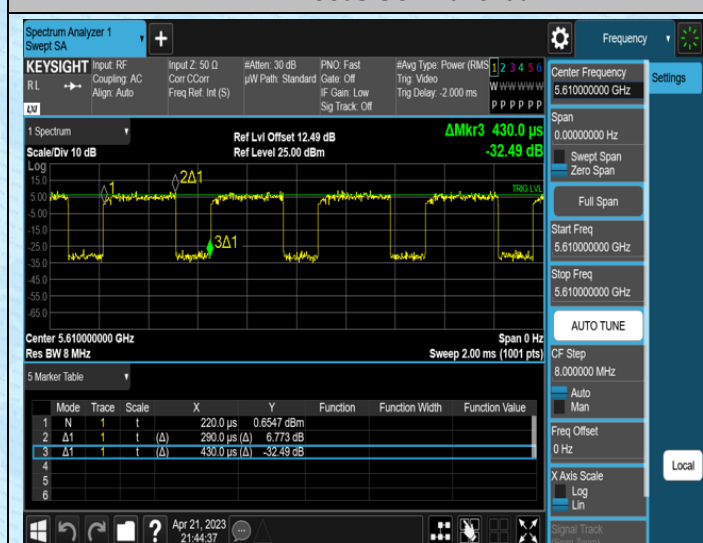

NTNV-11AC80SISO-Ant1-5610

AppendixC: Maximum conducted output power

Test Result Channel Power

Test Mode	Antenna	Frequency [MHz]	Set Power	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	Ant1	5180	6Mbps	11.27	90.67	0.43	11.70	≤23.98	3.01	14.71	---	PASS
11A	Ant1	5200	6Mbps	10.80	90.73	0.42	11.22	≤23.98	3.01	14.23	---	PASS
11A	Ant1	5240	6Mbps	11.34	90.67	0.43	11.77	≤23.98	3.01	14.78	---	PASS
11A	Ant1	5260	6Mbps	12.73	90.73	0.42	13.15	≤23.98	2.43	15.58	≤26.99	PASS
11A	Ant1	5280	6Mbps	13.01	90.07	0.45	13.46	≤23.98	2.43	15.89	≤26.99	PASS
11A	Ant1	5320	6Mbps	12.88	90.73	0.42	13.30	≤23.98	2.43	15.73	≤26.99	PASS
11A	Ant1	5500	6Mbps	10.86	90.07	0.45	11.31	≤23.98	4.09	15.40	≤26.99	PASS
11A	Ant1	5580	6Mbps	10.84	90.67	0.43	11.27	≤23.98	4.09	15.36	≤26.99	PASS
11A	Ant1	5700	6Mbps	8.20	90.07	0.45	8.65	≤23.98	4.09	12.74	≤26.99	PASS
11N20SISO	Ant1	5180	MCS0	10.16	88.46	0.53	10.69	≤23.98	3.01	13.70	---	PASS
11N20SISO	Ant1	5200	MCS0	9.37	88.46	0.53	9.90	≤23.98	3.01	12.91	---	PASS
11N20SISO	Ant1	5240	MCS0	10.05	88.46	0.53	10.58	≤23.98	3.01	13.59	---	PASS
11N20SISO	Ant1	5260	MCS0	10.65	89.15	0.50	11.15	≤23.98	2.43	13.58	≤26.99	PASS
11N20SISO	Ant1	5280	MCS0	11.06	88.46	0.53	11.59	≤23.98	2.43	14.02	≤26.99	PASS
11N20SISO	Ant1	5320	MCS0	11.18	89.23	0.49	11.67	≤23.98	2.43	14.10	≤26.99	PASS
11N20SISO	Ant1	5500	MCS0	10.91	89.15	0.50	11.41	≤23.98	4.09	15.50	≤26.99	PASS
11N20SISO	Ant1	5580	MCS0	11.16	89.15	0.50	11.66	≤23.98	4.09	15.75	≤26.99	PASS
11N20SISO	Ant1	5700	MCS0	8.41	89.15	0.50	8.91	≤23.98	4.09	13.00	≤26.99	PASS
11N40SISO	Ant1	5190	MCS0	9.25	79.17	1.01	10.26	≤23.98	3.01	13.27	---	PASS
11N40SISO	Ant1	5230	MCS0	9.25	80.56	0.94	10.19	≤23.98	3.01	13.20	---	PASS
11N40SISO	Ant1	5270	MCS0	10.33	80.56	0.94	11.27	≤23.98	2.43	13.70	≤26.99	PASS
11N40SISO	Ant1	5310	MCS0	10.80	80.56	0.94	11.74	≤23.98	2.43	14.17	≤26.99	PASS
11N40SISO	Ant1	5510	MCS0	10.52	79.17	1.01	11.53	≤23.98	4.09	15.62	≤26.99	PASS
11N40SISO	Ant1	5550	MCS0	10.01	80.56	0.94	10.95	≤23.98	4.09	15.04	≤26.99	PASS
11N40SISO	Ant1	5670	MCS0	8.31	80.56	0.94	9.25	≤23.98	4.09	13.34	≤26.99	PASS
11AC20SISO	Ant1	5180	MCS0	10.03	88.55	0.53	10.56	≤23.98	3.01	13.57	---	PASS
11AC20SISO	Ant1	5200	MCS0	9.56	88.46	0.53	10.09	≤23.98	3.01	13.10	---	PASS
11AC20SISO	Ant1	5240	MCS0	9.97	88.55	0.53	10.50	≤23.98	3.01	13.51	---	PASS
11AC20SISO	Ant1	5260	MCS0	10.91	88.46	0.53	11.44	≤23.98	2.43	13.87	≤26.99	PASS
11AC20SISO	Ant1	5280	MCS0	11.33	89.23	0.49	11.82	≤23.98	2.43	14.25	≤26.99	PASS
11AC20SISO	Ant1	5320	MCS0	11.35	88.55	0.53	11.88	≤23.98	2.43	14.31	≤26.99	PASS
11AC20SISO	Ant1	5500	MCS0	10.23	88.55	0.53	10.76	≤23.98	4.09	14.85	≤26.99	PASS
11AC20SISO	Ant1	5580	MCS0	10.30	89.23	0.49	10.79	≤23.98	4.09	14.88	≤26.99	PASS
11AC20SISO	Ant1	5700	MCS0	7.62	88.55	0.53	8.15	≤23.98	4.09	12.24	≤26.99	PASS
11AC40SISO	Ant1	5190	MCS0	9.58	80.56	0.94	10.52	≤23.98	3.01	13.53	---	PASS
11AC40SISO	Ant1	5230	MCS0	9.25	80.56	0.94	10.19	≤23.98	3.01	13.20	---	PASS

11AC40SISO	Ant1	5270	MCS0	10.52	80.56	0.94	11.46	≤23.98	2.43	13.89	≤26.99	PASS
11AC40SISO	Ant1	5310	MCS0	10.98	80.56	0.94	11.92	≤23.98	2.43	14.35	≤26.99	PASS
11AC40SISO	Ant1	5510	MCS0	10.57	80.56	0.94	11.51	≤23.98	4.09	15.60	≤26.99	PASS
11AC40SISO	Ant1	5550	MCS0	9.89	79.45	1.00	10.89	≤23.98	4.09	14.98	≤26.99	PASS
11AC40SISO	Ant1	5670	MCS0	8.25	80.56	0.94	9.19	≤23.98	4.09	13.28	≤26.99	PASS
11AC80SISO	Ant1	5210	MCS0	8.80	67.44	1.71	10.51	≤23.98	3.01	13.52	---	PASS
11AC80SISO	Ant1	5290	MCS0	10.29	68.18	1.66	11.95	≤23.98	2.43	14.38	≤26.99	PASS
11AC80SISO	Ant1	5530	MCS0	8.76	67.44	1.71	10.47	≤23.98	4.09	14.56	≤26.99	PASS
11AC80SISO	Ant1	5610	MCS0	7.98	67.44	1.71	9.69	≤23.98	4.09	13.78	≤26.99	PASS

Note: The Duty Cycle Factor is compensated in the graph.

Test Graphs Channel Power

