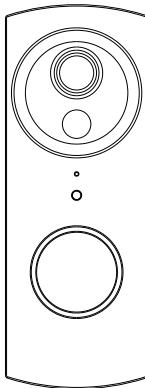









尺寸 : 280x100mm

 <p><b>User's Guide for Battery WiFi Video Doorbell</b></p>	<p><b>Product Overview</b></p> <p>Our doorbell is a Wi-Fi enabled Smart Video Doorbell which helps you to see, hear and speak to anyone at your door from your smartphone or tablet from anywhere. This Video Doorbell supports answering ring calls from mobile App, two-way audio, instant alert, motion detection and live monitoring.</p> <p><b>Product Features</b></p> <ul style="list-style-type: none"> <li>Two 18650 specification batteries work regularly up to 3-6 months</li> <li>FHD Mega pixels collocated with wide-angle lens</li> <li>Support mobile phone remote fast wakeup within 4-7 seconds</li> <li>2.4G Wi-Fi connection</li> <li>High quality two-way communication with noise cancellation</li> <li>Support PIR motion detection, when someone hovers at the door, it will send push alerts to your mobile phone immediately</li> <li>With IR-cut, it can switch automatically and it is clearly visible at both day and night to keep your home and family safe.</li> </ul>	<p><b>Product Specification Sheet</b></p> <table border="1"> <tbody> <tr> <td>Lens</td> <td>DFOV/130° Wide-angle lens (4Glass)</td> </tr> <tr> <td>Infrared LEDs</td> <td>6pcs Infrared LEDs with 5 meters flash distance</td> </tr> <tr> <td>PIR Motion Sensor</td> <td>3 meters PIR distance</td> </tr> <tr> <td>Storage</td> <td>Up to 128GB Micro SD card</td> </tr> <tr> <td>Connectivity</td> <td>802.11b/g/n Wi-Fi@2.4G</td> </tr> <tr> <td>Power consumption</td> <td>Standby 200uA Working 260 mA</td> </tr> <tr> <td>Battery</td> <td>Two 18650 specification batteries</td> </tr> <tr> <td>Wi-Fi distance</td> <td>80 meters (open space without obstacle)15 meters (indoor)</td> </tr> <tr> <td>Limited distance between doorbell and chime indoor</td> <td>20~30 meters</td> </tr> <tr> <td>Video Compression</td> <td>H.264</td> </tr> <tr> <td>Voice Intercom</td> <td>Two-way audio with noise cancellation</td> </tr> <tr> <td>Video resolution</td> <td>1920*1080@15 fps</td> </tr> <tr> <td>Notifications</td> <td>Push Notifications within 5-8 seconds</td> </tr> </tbody> </table>	Lens	DFOV/130° Wide-angle lens (4Glass)	Infrared LEDs	6pcs Infrared LEDs with 5 meters flash distance	PIR Motion Sensor	3 meters PIR distance	Storage	Up to 128GB Micro SD card	Connectivity	802.11b/g/n Wi-Fi@2.4G	Power consumption	Standby 200uA Working 260 mA	Battery	Two 18650 specification batteries	Wi-Fi distance	80 meters (open space without obstacle)15 meters (indoor)	Limited distance between doorbell and chime indoor	20~30 meters	Video Compression	H.264	Voice Intercom	Two-way audio with noise cancellation	Video resolution	1920*1080@15 fps	Notifications	Push Notifications within 5-8 seconds	<table border="1"> <tbody> <tr> <td>Device Wakeup</td> <td>Within 4-7s</td> </tr> <tr> <td>Working Temperature</td> <td>-10~ 55°C</td> </tr> <tr> <td>Storage Temperature</td> <td>-20~ 60°C</td> </tr> </tbody> </table> <p><b>Install your doorbell</b></p> <p>1 A brief introduction of the Doorbell.</p> 	Device Wakeup	Within 4-7s	Working Temperature	-10~ 55°C	Storage Temperature	-20~ 60°C
Lens	DFOV/130° Wide-angle lens (4Glass)																																		
Infrared LEDs	6pcs Infrared LEDs with 5 meters flash distance																																		
PIR Motion Sensor	3 meters PIR distance																																		
Storage	Up to 128GB Micro SD card																																		
Connectivity	802.11b/g/n Wi-Fi@2.4G																																		
Power consumption	Standby 200uA Working 260 mA																																		
Battery	Two 18650 specification batteries																																		
Wi-Fi distance	80 meters (open space without obstacle)15 meters (indoor)																																		
Limited distance between doorbell and chime indoor	20~30 meters																																		
Video Compression	H.264																																		
Voice Intercom	Two-way audio with noise cancellation																																		
Video resolution	1920*1080@15 fps																																		
Notifications	Push Notifications within 5-8 seconds																																		
Device Wakeup	Within 4-7s																																		
Working Temperature	-10~ 55°C																																		
Storage Temperature	-20~ 60°C																																		

 <p><b>Charge LED:</b> Charging in Red; Full in Green.</p> <p><b>Step 1:</b> Open the battery cover.</p> 	<p><b>Step 2:</b> Install 18650 battery and Mirco-SD.</p>  <p><b>Step 3:</b> Drill four holes in your wall, and install the anchors.</p> 	<p><b>Step 4:</b> Fix the doorbell on the wall through fixing screw hole.</p>  <p><b>Step 5:</b> Mount doorbell in the direction of the arrow and lock it by the screws at the bottom.</p>  <p><b>Step 6:</b> Press the Reset button long until you hear the "system reset" prompt from the doorbell speaker.</p>	<p><b>Indoor chime user manual</b></p>  <p><b>Volume settings</b> Press the "volume" button once to trigger one time. There are 4 volume levels you can choose from low to high.</p> <p><b>Change the ring</b></p> <p><b>Step1:</b> Press the "ring" button to choose one you like. The indoor chime offers 38 different kinds of music for options. Each press changes the music.</p> <p><b>Step2:</b> Press the "volume" button for 5 seconds till the music changes.</p> <p><b>Step3:</b> Press the doorbell button to match the indoor chime. Now, the music changed.</p>
---	---	---	--

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.