


11AX20MIMO-Ant10-2462-52Tone-RU40

11AX20MIMO-Ant7-2462-52Tone-RU40



11AX20MIMO-Ant10-2462-106Tone-RU54

11AX20MIMO-Ant7-2462-106Tone-RU54

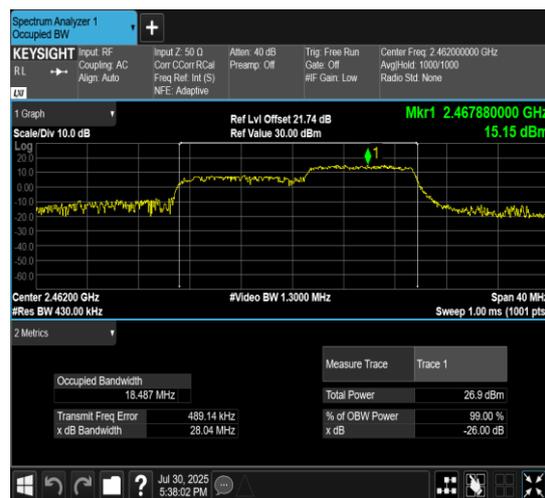



MAXIMUM CONDUCTED OUTPUT POWER


| Test Mode | TX Mod. | RU Config. | Freq. [MHz] | Ant. | Average power [dBm] | Peak power [dBm] | Peak power [mw] | Conducted Power Limit [dBm] | EIRP power [dBm] | EIRP power [mw] | EIRP Limit [dBm] | Verdict | Power Setting |
|-----------|---------|------------|-------------|-------|---------------------|------------------|-----------------|-----------------------------|------------------|-----------------|------------------|---------|---------------|
| 11AX20 | MIMO | 26/0 | 2412 | ANT10 | 16.94 | 23.39 | 218.27 | ≤30.00 | 24.99 | 315.50 | ≤36.00 | PASS | 15.5 |
| | | | | ANT7 | 17.26 | 23.77 | 238.23 | ≤30.00 | 25.37 | 344.35 | ≤36.00 | PASS | 15.5 |
| | | | | Total | 20.11 | 26.59 | 456.50 | ≤30.00 | 28.19 | 659.85 | ≤36.00 | PASS | 15.5 |
| | | 26/4 | 2437 | ANT10 | 17.17 | 23.46 | 221.82 | ≤30.00 | 25.06 | 320.63 | ≤36.00 | PASS | 15.5 |
| | | | | ANT7 | 17.22 | 24.27 | 267.30 | ≤30.00 | 25.87 | 386.37 | ≤36.00 | PASS | 15.5 |
| | | | | Total | 20.21 | 26.89 | 489.12 | ≤30.00 | 28.49 | 706.99 | ≤36.00 | PASS | 15.5 |
| | | 26/8 | 2462 | ANT10 | 18.28 | 24.90 | 309.03 | ≤30.00 | 26.50 | 446.68 | ≤36.00 | PASS | 15.5 |
| | | | | ANT7 | 17.72 | 25.40 | 346.74 | ≤30.00 | 27.00 | 501.19 | ≤36.00 | PASS | 15.5 |
| | | | | Total | 21.02 | 28.17 | 655.77 | ≤30.00 | 29.77 | 947.87 | ≤36.00 | PASS | 15.5 |
| | MIMO | 52/37 | 2412 | ANT10 | 16.85 | 24.66 | 292.42 | ≤30.00 | 26.26 | 422.67 | ≤36.00 | PASS | 15.5 |
| | | | | ANT7 | 17.17 | 25.11 | 324.34 | ≤30.00 | 26.71 | 468.81 | ≤36.00 | PASS | 15.5 |
| | | | | Total | 20.02 | 27.90 | 616.75 | ≤30.00 | 29.50 | 891.48 | ≤36.00 | PASS | 15.5 |
| | | 52/38 | 2437 | ANT10 | 17.45 | 24.78 | 300.61 | ≤30.00 | 26.38 | 434.51 | ≤36.00 | PASS | 15.5 |
| | | | | ANT7 | 17.21 | 25.31 | 339.63 | ≤30.00 | 26.91 | 490.91 | ≤36.00 | PASS | 15.5 |
| | | | | Total | 20.34 | 28.06 | 640.23 | ≤30.00 | 29.66 | 925.42 | ≤36.00 | PASS | 15.5 |
| | | 52/40 | 2462 | ANT10 | 18.12 | 25.96 | 394.46 | ≤30.00 | 27.56 | 570.16 | ≤36.00 | PASS | 15.5 |
| | | | | ANT7 | 17.65 | 25.52 | 356.45 | ≤30.00 | 27.12 | 515.23 | ≤36.00 | PASS | 15.5 |
| | | | | Total | 20.90 | 28.76 | 750.91 | ≤30.00 | 30.36 | 1085.39 | ≤36.00 | PASS | 15.5 |
| | MIMO | 106/53 | 2412 | ANT10 | 17.06 | 24.39 | 274.79 | ≤30.00 | 25.99 | 397.19 | ≤36.00 | PASS | 14.5 |
| | | | | ANT7 | 17.64 | 25.78 | 378.44 | ≤30.00 | 27.38 | 547.02 | ≤36.00 | PASS | 14.5 |
| | | | | Total | 20.37 | 28.15 | 653.23 | ≤30.00 | 29.75 | 944.21 | ≤36.00 | PASS | 14.5 |
| | | 106/53 | 2437 | ANT10 | 17.83 | 25.16 | 328.10 | ≤30.00 | 26.76 | 474.24 | ≤36.00 | PASS | 14.5 |
| | | | | ANT7 | 17.37 | 25.47 | 352.37 | ≤30.00 | 27.07 | 509.33 | ≤36.00 | PASS | 14.5 |
| | | | | Total | 20.62 | 28.33 | 680.47 | ≤30.00 | 29.93 | 983.57 | ≤36.00 | PASS | 14.5 |
| 106/54 | | 2462 | ANT10 | 18.02 | 26.01 | 399.02 | ≤30.00 | 27.61 | 576.77 | ≤36.00 | PASS | 14.5 | |
| | | | ANT7 | 18.10 | 25.65 | 367.28 | ≤30.00 | 27.25 | 530.88 | ≤36.00 | PASS | 14.5 | |
| | | | Total | 21.07 | 28.84 | 766.31 | ≤30.00 | 30.44 | 1107.65 | ≤36.00 | PASS | 14.5 | |











MAXIMUM POWER SPECTRAL DENSITY

TEST RESULT


| TestMode | Antenna | Frequency[MHz] | RuSize | RuIndex | Result [dBm/3kHz] | Limit [dBm/3kHz] | Verdict |
|------------|---------|----------------|---------|---------|----------------------|---------------------|---------|
| 11AX20MIMO | Ant10 | 2412 | 26Tone | RU0 | 0.12 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 26Tone | RU0 | 0.09 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2412 | 26Tone | RU0 | 3.12 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2412 | 52Tone | RU37 | -3.24 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 52Tone | RU37 | -1.44 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2412 | 52Tone | RU37 | 0.76 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2412 | 106Tone | RU53 | -5.40 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 106Tone | RU53 | -4.05 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2412 | 106Tone | RU53 | -1.66 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 26Tone | RU4 | -0.50 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 26Tone | RU4 | -0.27 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2437 | 26Tone | RU4 | 2.63 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 52Tone | RU38 | -2.54 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 52Tone | RU38 | -2.73 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2437 | 52Tone | RU38 | 0.38 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 106Tone | RU53 | -4.87 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 106Tone | RU53 | -5.26 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2437 | 106Tone | RU53 | -2.05 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 26Tone | RU8 | 1.68 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 26Tone | RU8 | -0.10 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2462 | 26Tone | RU8 | 3.89 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 52Tone | RU40 | -1.81 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 52Tone | RU40 | -2.52 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2462 | 52Tone | RU40 | 0.86 | ≤8.00 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 106Tone | RU54 | -4.03 | ≤8.00 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 106Tone | RU54 | -5.00 | ≤8.00 | PASS |
| 11AX20MIMO | total | 2462 | 106Tone | RU54 | -1.48 | ≤8.00 | PASS |

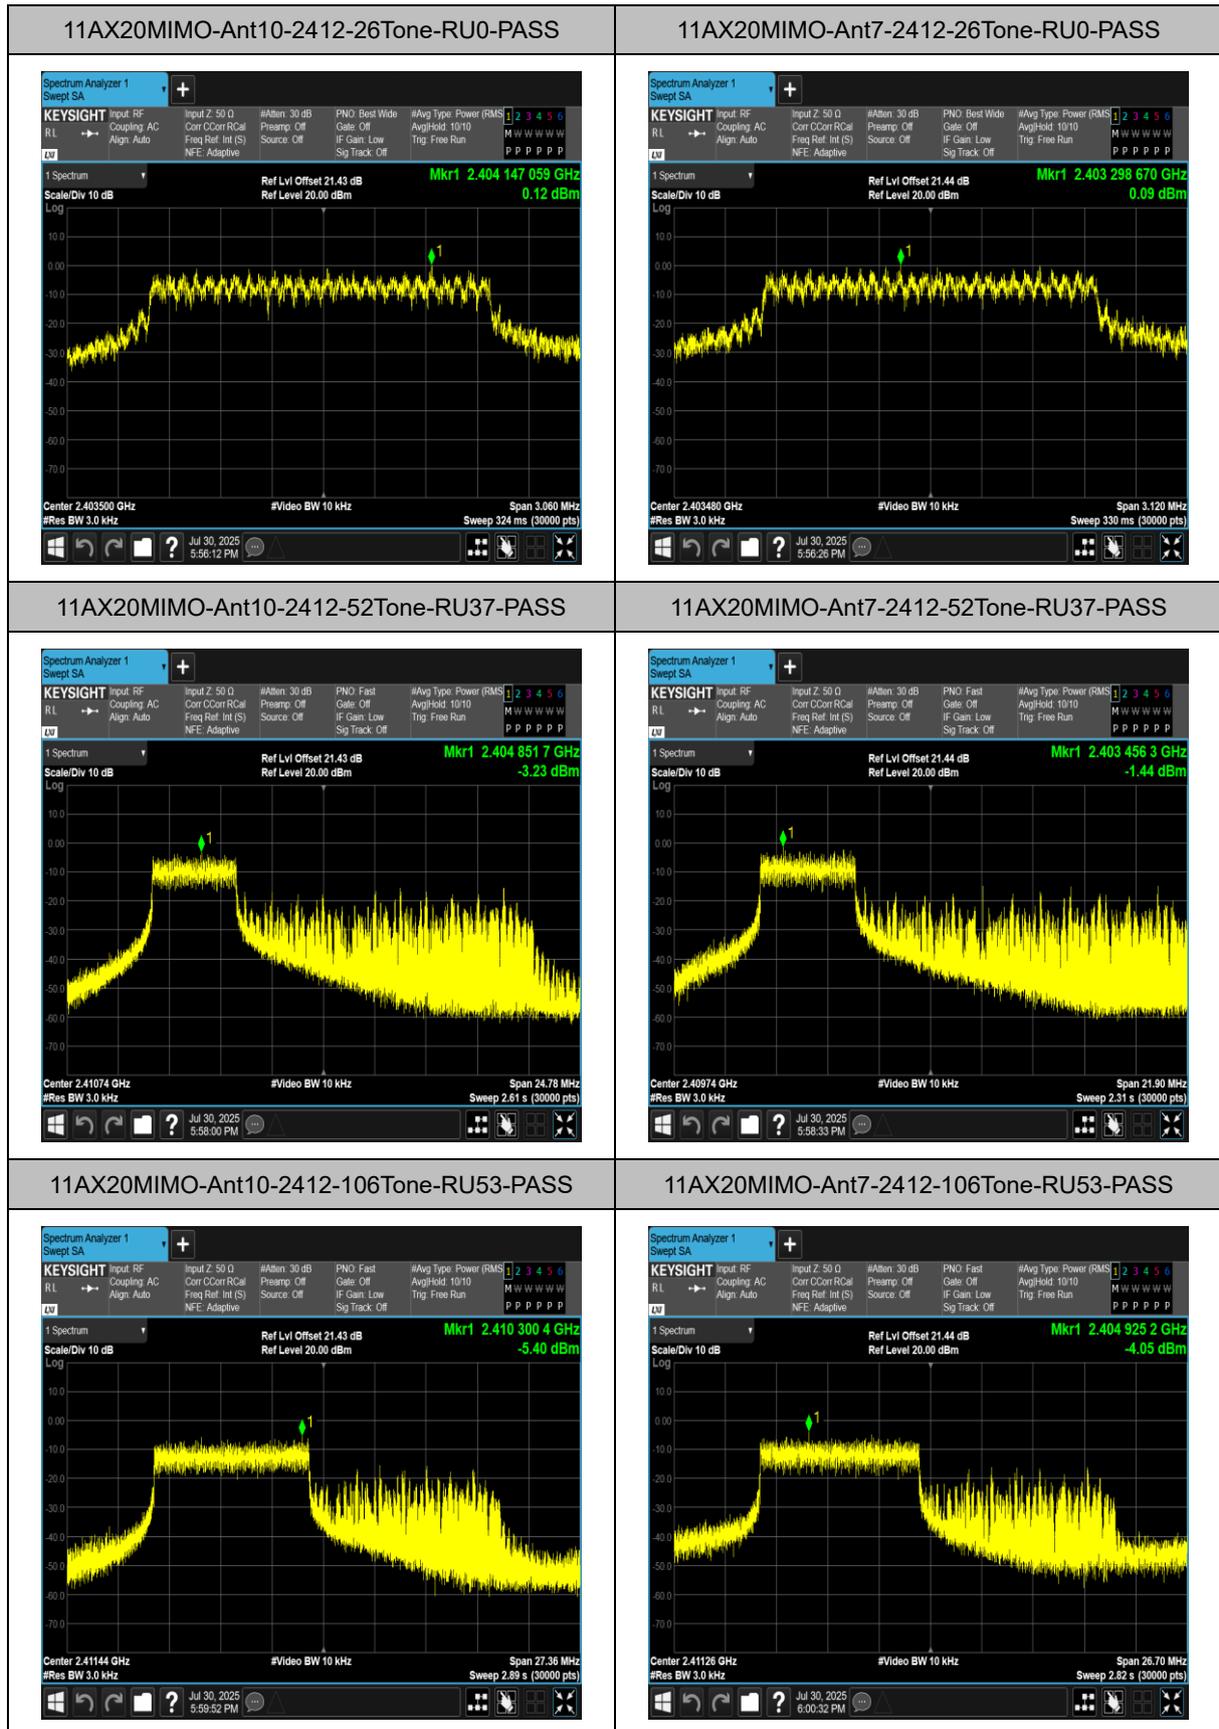

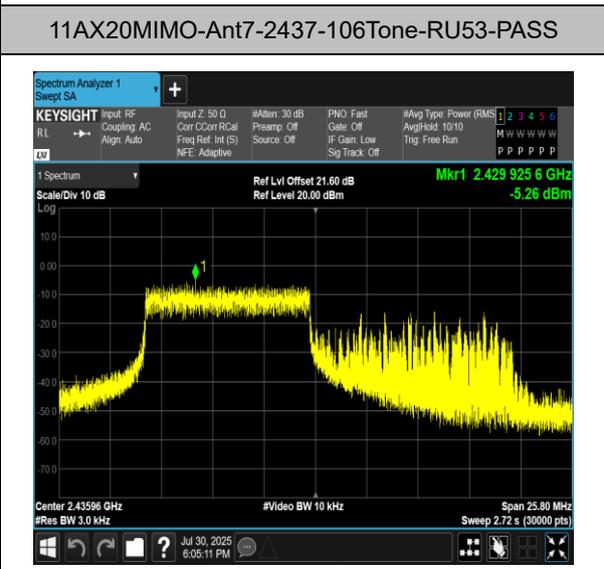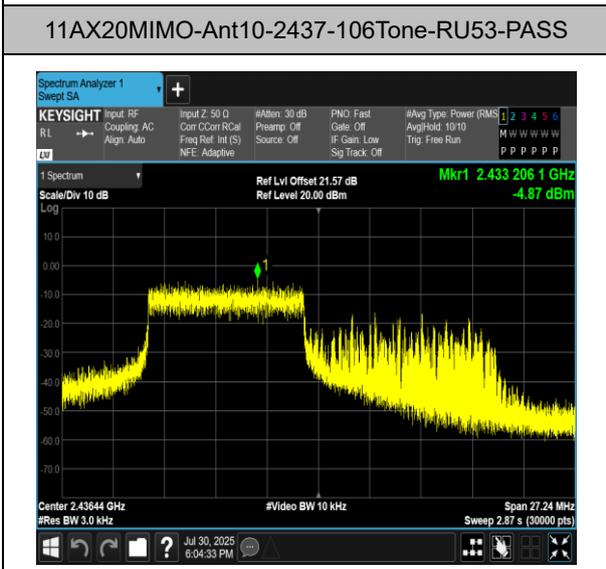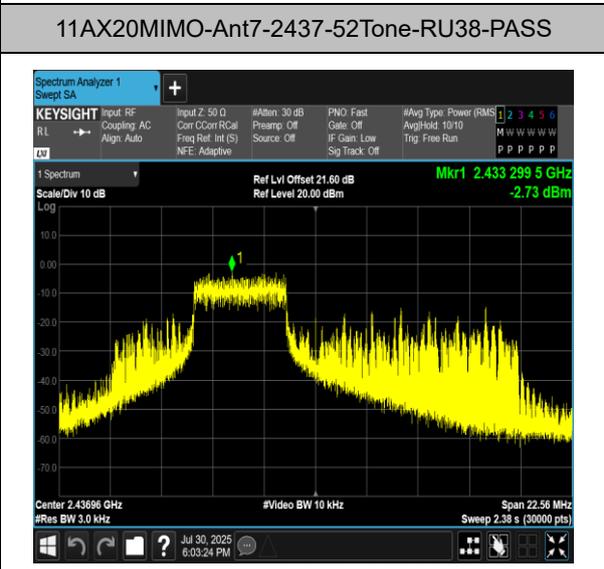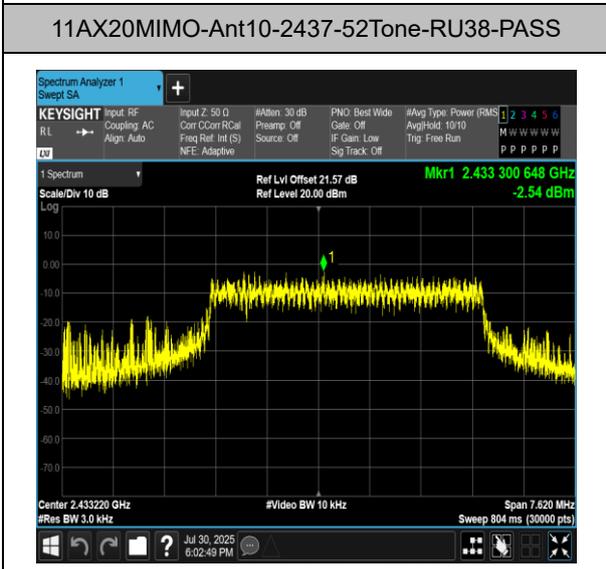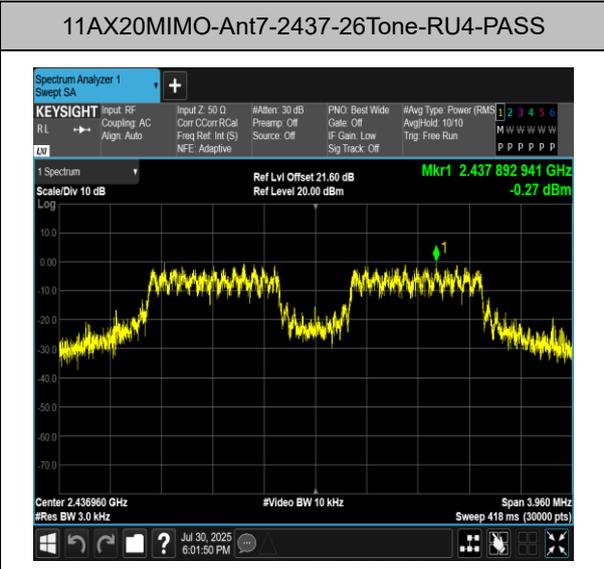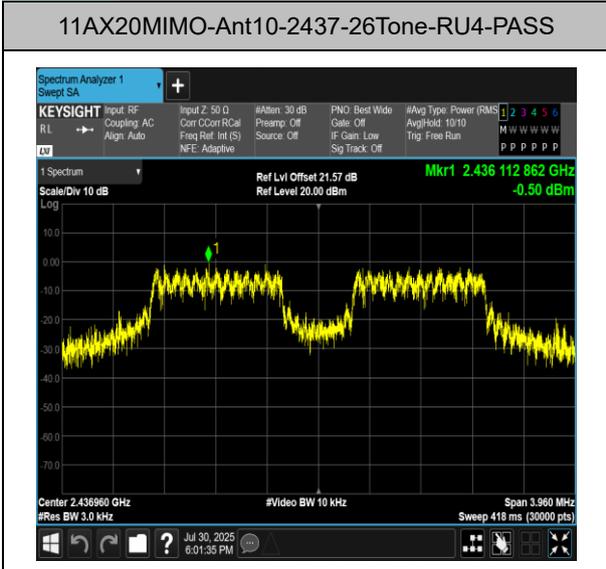


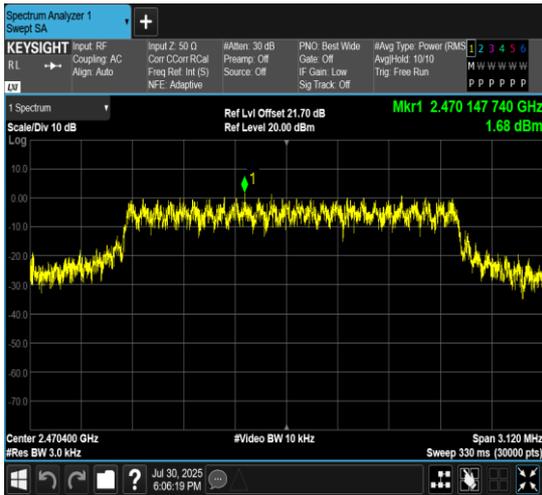


11AX20MIMO-Ant10-2462-52Tone-RU40-PASS

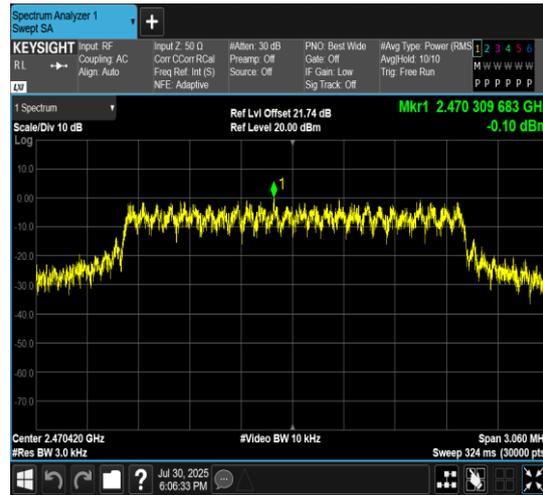



11AX20MIMO-Ant7-2462-52Tone-RU40-PASS

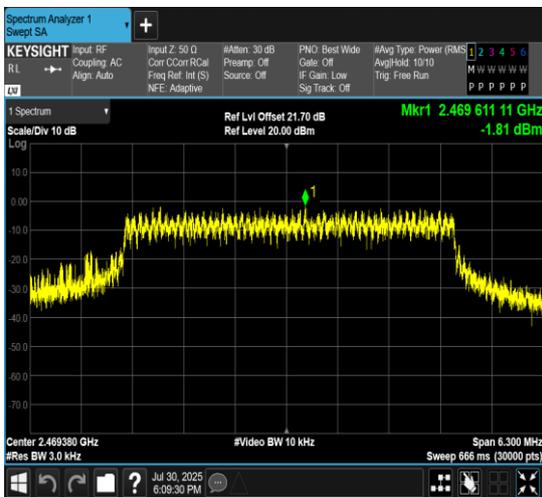

11AX20MIMO-Ant10-2462-106Tone-RU54-PASS

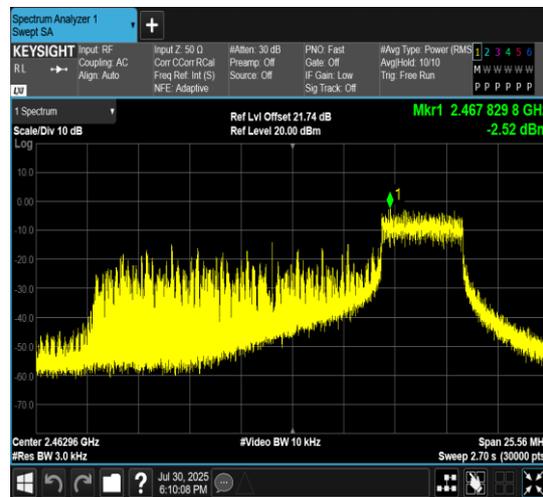

11AX20MIMO-Ant7-2462-106Tone-RU54-PASS

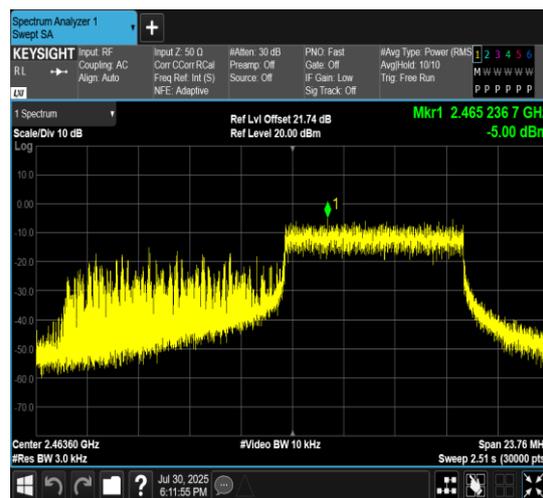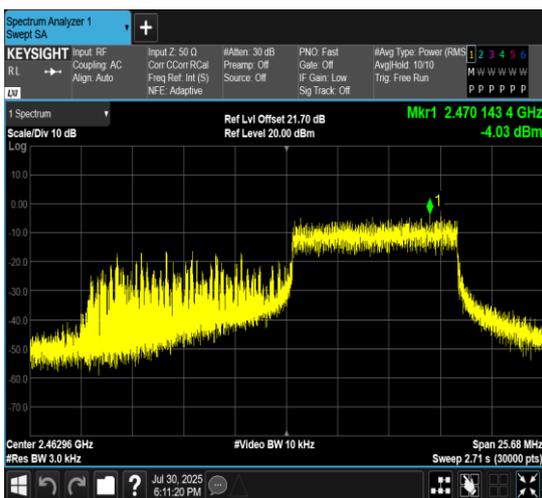




BAND EDGE MEASUREMENTS

TEST RESULT

| TestMode | Antenna | ChName | Frequency[MHz] | Ru Size | Ru Index | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|------------|---------|--------|----------------|---------|----------|----------------|--------------|-------------|---------|
| 11AX20MIMO | Ant10 | Low | 2412 | 26Tone | RU0 | 11.74 | -20.28 | ≤-8.26 | PASS |
| 11AX20MIMO | Ant7 | Low | 2412 | 26Tone | RU0 | 12.76 | -21.01 | ≤-7.24 | PASS |
| 11AX20MIMO | Ant10 | Low | 2412 | 52Tone | RU37 | 9.31 | -19.79 | ≤-10.69 | PASS |
| 11AX20MIMO | Ant7 | Low | 2412 | 52Tone | RU37 | 9.91 | -17.86 | ≤-10.09 | PASS |
| 11AX20MIMO | Ant10 | Low | 2412 | 106Tone | RU53 | 6.85 | -22.43 | ≤-13.16 | PASS |
| 11AX20MIMO | Ant7 | Low | 2412 | 106Tone | RU53 | 7.99 | -13.32 | ≤-12.01 | PASS |
| 11AX20MIMO | Ant10 | High | 2462 | 26Tone | RU8 | 14.91 | -25.75 | ≤-5.09 | PASS |
| 11AX20MIMO | Ant7 | High | 2462 | 26Tone | RU8 | 13.25 | -23.41 | ≤-6.75 | PASS |
| 11AX20MIMO | Ant10 | High | 2462 | 52Tone | RU40 | 11.24 | -26.97 | ≤-8.76 | PASS |
| 11AX20MIMO | Ant7 | High | 2462 | 52Tone | RU40 | 10.46 | -25.2 | ≤-9.54 | PASS |
| 11AX20MIMO | Ant10 | High | 2462 | 106Tone | RU54 | 8.73 | -21.34 | ≤-11.28 | PASS |
| 11AX20MIMO | Ant7 | High | 2462 | 106Tone | RU54 | 7.92 | -23.49 | ≤-12.08 | PASS |

TEST GRAPHS

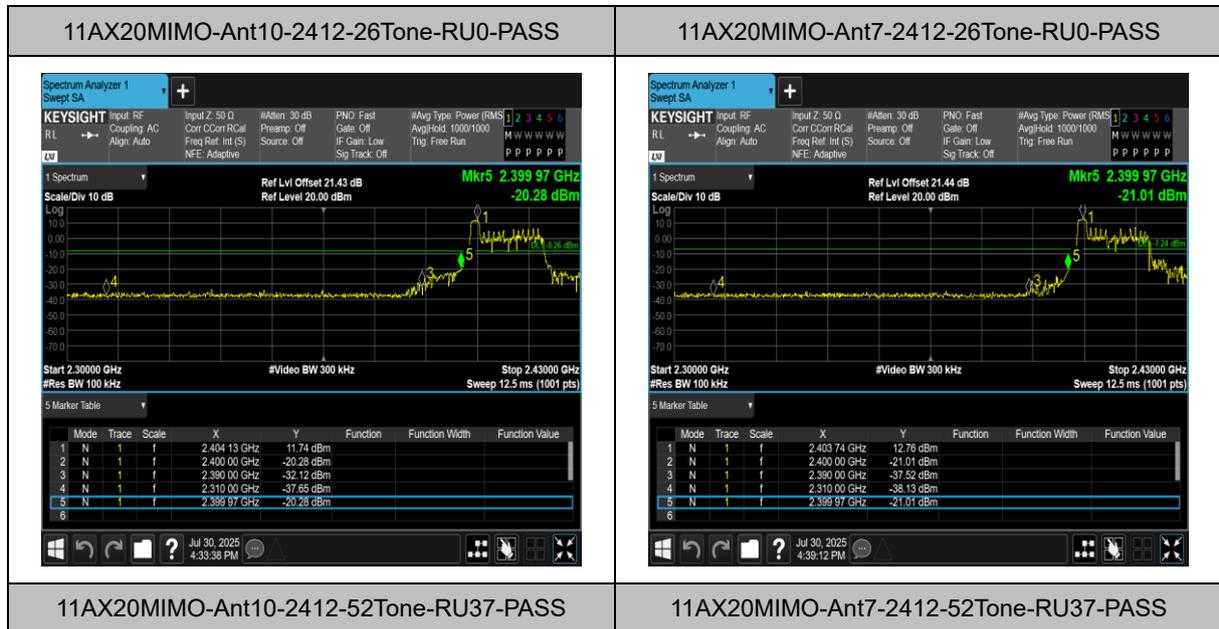



11AX20MIMO-Ant10-2412-106Tone-RU53-PASS

11AX20MIMO-Ant7-2412-106Tone-RU53-PASS



11AX20MIMO-Ant10-2462-26Tone-RU8-PASS

11AX20MIMO-Ant7-2462-26Tone-RU8-PASS



11AX20MIMO-Ant10-2462-52Tone-RU40-PASS

11AX20MIMO-Ant7-2462-52Tone-RU40-PASS



11AX20MIMO-Ant10-2462-106Tone-RU54-PASS

11AX20MIMO-Ant7-2462-106Tone-RU54-PASS





CONDUCTED SPURIOUS EMISSION

TEST RESULT

| TestMode | Antenna | Frequency[MHz] | Ru Size | Ru Index | FreqRange [Mhz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|------------|---------|----------------|---------|----------|-----------------|----------------|--------------|-------------|---------|
| 11AX20MIMO | Ant10 | 2412 | 26Tone | RU0 | 0~Reference | 11.41 | 11.41 | --- | PASS |
| 11AX20MIMO | Ant7 | 2412 | 26Tone | RU0 | 0~Reference | 12.00 | 12.00 | --- | PASS |
| 11AX20MIMO | Ant10 | 2412 | 52Tone | RU37 | 0~Reference | 8.56 | 8.56 | --- | PASS |
| 11AX20MIMO | Ant7 | 2412 | 52Tone | RU37 | 0~Reference | 9.90 | 9.90 | --- | PASS |
| 11AX20MIMO | Ant10 | 2412 | 106Tone | RU53 | 0~Reference | 6.11 | 6.11 | --- | PASS |
| 11AX20MIMO | Ant7 | 2412 | 106Tone | RU53 | 0~Reference | 7.33 | 7.33 | --- | PASS |
| 11AX20MIMO | Ant10 | 2412 | 26Tone | RU0 | 30~1000 | 11.41 | -46.57 | ≤ 8.59 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 26Tone | RU0 | 30~1000 | 12.00 | -46.40 | ≤ -8 | PASS |
| 11AX20MIMO | Ant10 | 2412 | 52Tone | RU37 | 30~1000 | 8.56 | -45.64 | ≤ 11.44 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 52Tone | RU37 | 30~1000 | 9.90 | -46.16 | ≤ 10.1 | PASS |
| 11AX20MIMO | Ant10 | 2412 | 106Tone | RU53 | 30~1000 | 6.11 | -46.47 | ≤ 13.89 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 106Tone | RU53 | 30~1000 | 7.33 | -46.41 | ≤ 12.67 | PASS |
| 11AX20MIMO | Ant10 | 2412 | 26Tone | RU0 | 1000~26500 | 11.41 | -34.54 | ≤ 8.59 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 26Tone | RU0 | 1000~26500 | 12.00 | -36.52 | ≤ -8 | PASS |
| 11AX20MIMO | Ant10 | 2412 | 52Tone | RU37 | 1000~26500 | 8.56 | -36.61 | ≤ 11.44 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 52Tone | RU37 | 1000~26500 | 9.90 | -36.84 | ≤ 10.1 | PASS |
| 11AX20MIMO | Ant10 | 2412 | 106Tone | RU53 | 1000~26500 | 6.11 | -36.15 | ≤ 13.89 | PASS |
| 11AX20MIMO | Ant7 | 2412 | 106Tone | RU53 | 1000~26500 | 7.33 | -36.41 | ≤ 12.67 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 26Tone | RU4 | 0~Reference | 11.74 | 11.74 | --- | PASS |
| 11AX20MIMO | Ant7 | 2437 | 26Tone | RU4 | 0~Reference | 12.41 | 12.41 | --- | PASS |
| 11AX20MIMO | Ant10 | 2437 | 52Tone | RU38 | 0~Reference | 9.41 | 9.41 | --- | PASS |
| 11AX20MIMO | Ant7 | 2437 | 52Tone | RU38 | 0~Reference | 9.23 | 9.23 | --- | PASS |
| 11AX20MIMO | Ant10 | 2437 | 106Tone | RU53 | 0~Reference | 7.48 | 7.48 | --- | PASS |



| | | | | | | | | | |
|------------|-------|------|---------|------|-------------|-------|--------|------------|------|
| 11AX20MIMO | Ant7 | 2437 | 106Tone | RU53 | 0~Reference | 7.18 | 7.18 | --- | PASS |
| 11AX20MIMO | Ant10 | 2437 | 26Tone | RU4 | 30~1000 | 11.74 | -45.38 | ≤ 8.26 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 26Tone | RU4 | 30~1000 | 12.41 | -46.44 | ≤ 7.59 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 52Tone | RU38 | 30~1000 | 9.41 | -46.57 | ≤ 10.59 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 52Tone | RU38 | 30~1000 | 9.23 | -46.58 | ≤ 10.77 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 106Tone | RU53 | 30~1000 | 7.48 | -46.80 | ≤ 12.52 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 106Tone | RU53 | 30~1000 | 7.18 | -46.03 | ≤ 12.82 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 26Tone | RU4 | 1000~26500 | 11.74 | -35.54 | ≤ 8.26 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 26Tone | RU4 | 1000~26500 | 12.41 | -35.89 | ≤ 7.59 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 52Tone | RU38 | 1000~26500 | 9.41 | -35.90 | ≤ 10.59 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 52Tone | RU38 | 1000~26500 | 9.23 | -35.78 | ≤ 10.77 | PASS |
| 11AX20MIMO | Ant10 | 2437 | 106Tone | RU53 | 1000~26500 | 7.48 | -35.59 | ≤ 12.52 | PASS |
| 11AX20MIMO | Ant7 | 2437 | 106Tone | RU53 | 1000~26500 | 7.18 | -36.38 | ≤ 12.82 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 26Tone | RU8 | 0~Reference | 14.72 | 14.72 | --- | PASS |
| 11AX20MIMO | Ant7 | 2462 | 26Tone | RU8 | 0~Reference | 13.01 | 13.01 | --- | PASS |
| 11AX20MIMO | Ant10 | 2462 | 52Tone | RU40 | 0~Reference | 10.86 | 10.86 | --- | PASS |
| 11AX20MIMO | Ant7 | 2462 | 52Tone | RU40 | 0~Reference | 9.76 | 9.76 | --- | PASS |
| 11AX20MIMO | Ant10 | 2462 | 106Tone | RU54 | 0~Reference | 8.75 | 8.75 | --- | PASS |
| 11AX20MIMO | Ant7 | 2462 | 106Tone | RU54 | 0~Reference | 7.62 | 7.62 | --- | PASS |
| 11AX20MIMO | Ant10 | 2462 | 26Tone | RU8 | 30~1000 | 14.72 | -46.64 | ≤ 5.28 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 26Tone | RU8 | 30~1000 | 13.01 | -46.40 | ≤ 6.99 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 52Tone | RU40 | 30~1000 | 10.86 | -46.49 | ≤ 9.14 | PASS |



BUREAU
VERITAS

Test Report No.: PSU-QBJ2507100110RF02

| | | | | | | | | | |
|------------|-------|------|---------|------|------------|-------|--------|------------|------|
| 11AX20MIMO | Ant7 | 2462 | 52Tone | RU40 | 30~1000 | 9.76 | -45.51 | ≤ 10.24 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 106Tone | RU54 | 30~1000 | 8.75 | -46.37 | ≤ 11.25 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 106Tone | RU54 | 30~1000 | 7.62 | -46.57 | ≤ 12.38 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 26Tone | RU8 | 1000~26500 | 14.72 | -36.30 | ≤ 5.28 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 26Tone | RU8 | 1000~26500 | 13.01 | -35.59 | ≤ 6.99 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 52Tone | RU40 | 1000~26500 | 10.86 | -36.03 | ≤ 9.14 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 52Tone | RU40 | 1000~26500 | 9.76 | -35.64 | ≤ 10.24 | PASS |
| 11AX20MIMO | Ant10 | 2462 | 106Tone | RU54 | 1000~26500 | 8.75 | -35.41 | ≤ 11.25 | PASS |
| 11AX20MIMO | Ant7 | 2462 | 106Tone | RU54 | 1000~26500 | 7.62 | -35.37 | ≤ 12.38 | PASS |




TEST GRAPHS

| | |
|---|--|
| <p>11AX20MIMO-Ant10-2412-26Tone-RU0- 0~Reference-PASS</p> | <p>11AX20MIMO-Ant7-2412-26Tone-RU0-0~Reference- PASS</p> |
| | |
| <p>11AX20MIMO-Ant10-2412-52Tone-RU37- 0~Reference-PASS</p> | <p>11AX20MIMO-Ant7-2412-52Tone-RU37- 0~Reference-PASS</p> |
| | |
| <p>11AX20MIMO-Ant10-2412-106Tone-RU53- 0~Reference-PASS</p> | <p>11AX20MIMO-Ant7-2412-106Tone-RU53- 0~Reference-PASS</p> |



11AX20MIMO-Ant10-2412-26Tone-RU0-30~1000-

PASS

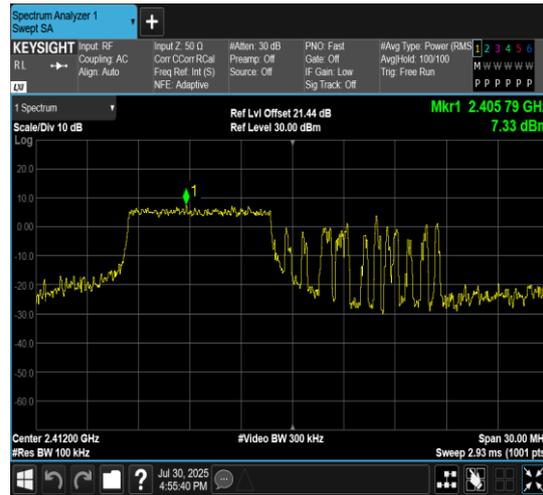

11AX20MIMO-Ant7-2412-26Tone-RU0-30~1000-

PASS



11AX20MIMO-Ant10-2412-52Tone-RU37-30~1000-

PASS



11AX20MIMO-Ant7-2412-52Tone-RU37-30~1000-

PASS




11AX20MIMO-Ant10-2412-106Tone-RU53-30~1000-




11AX20MIMO-Ant7-2412-106Tone-RU53-30~1000-



PASS

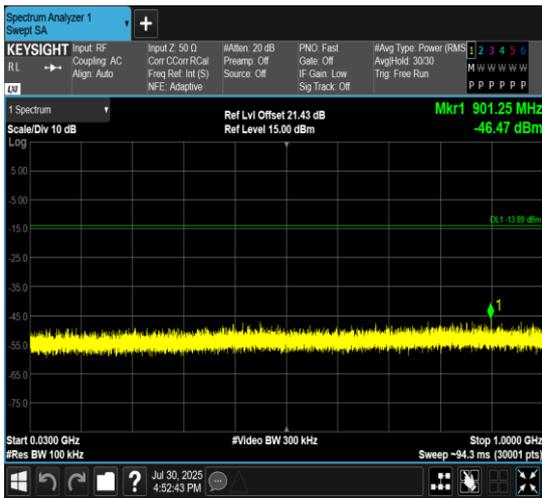

PASS

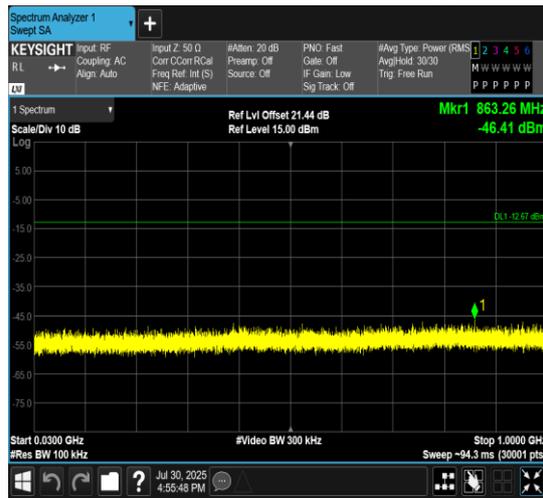

11AX20MIMO-Ant10-2412-26Tone-RU0-1000~26500-

11AX20MIMO-Ant7-2412-26Tone-RU0-1000~26500-

PASS

PASS




11AX20MIMO-Ant10-2412-52Tone-RU37-

11AX20MIMO-Ant7-2412-52Tone-RU37-1000~26500-

1000~26500-PASS



PASS

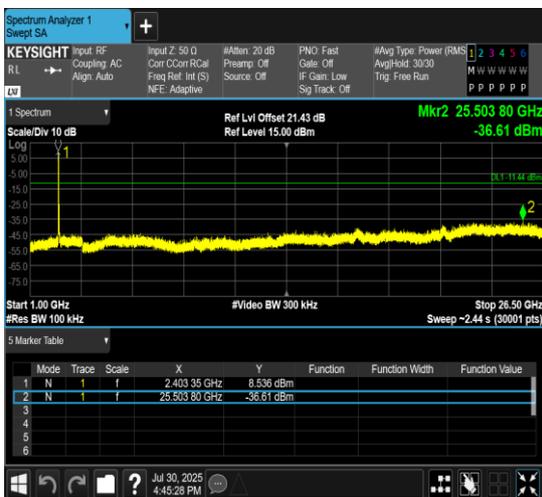



11AX20MIMO-Ant10-2412-106Tone-RU53-
1000~26500-PASS

11AX20MIMO-Ant7-2412-106Tone-RU53-
1000~26500-PASS

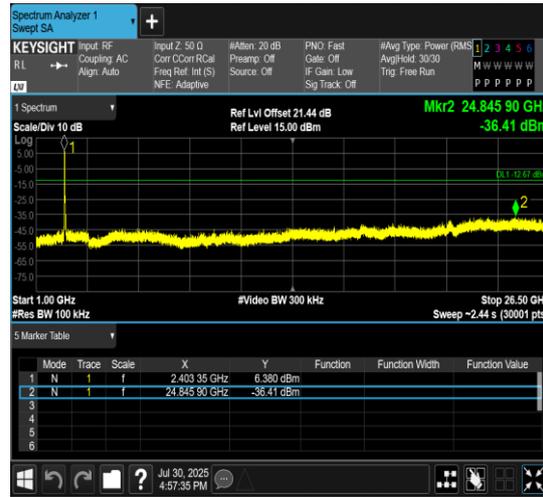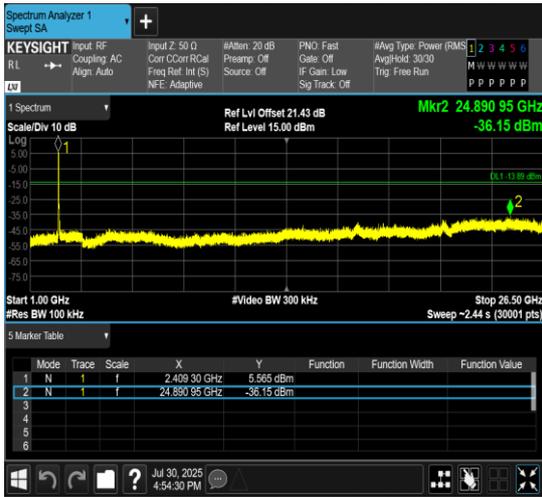

11AX20MIMO-Ant10-2437-26Tone-RU4-
0~Reference-PASS

11AX20MIMO-Ant7-2437-26Tone-RU4-0~Reference-
PASS



11AX20MIMO-Ant10-2437-52Tone-RU38-
0~Reference-PASS

11AX20MIMO-Ant7-2437-52Tone-RU38-
0~Reference-PASS



11AX20MIMO-Ant10-2437-106Tone-RU53-
0~Reference-PASS



11AX20MIMO-Ant7-2437-106Tone-RU53-
0~Reference-PASS



11AX20MIMO-Ant10-2437-26Tone-RU4-30~1000-
PASS



11AX20MIMO-Ant7-2437-26Tone-RU4-30~1000-
PASS



11AX20MIMO-Ant10-2437-52Tone-RU38-30~1000-




11AX20MIMO-Ant7-2437-52Tone-RU38-30~1000-




11AX20MIMO-Ant10-2437-52Tone-RU38-
1000~26500-PASS




11AX20MIMO-Ant7-2437-52Tone-RU38-1000~26500-
PASS

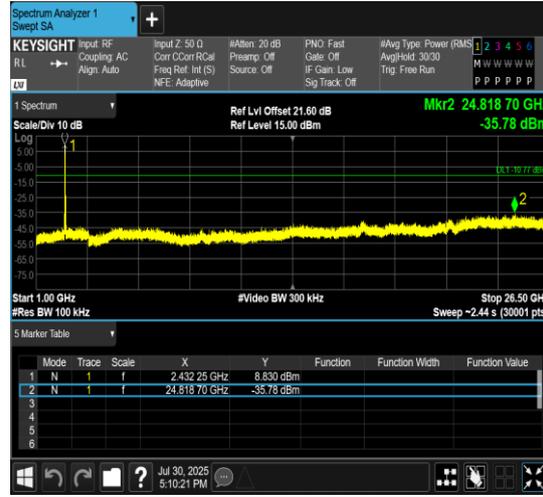

11AX20MIMO-Ant10-2437-106Tone-RU53-
1000~26500-PASS

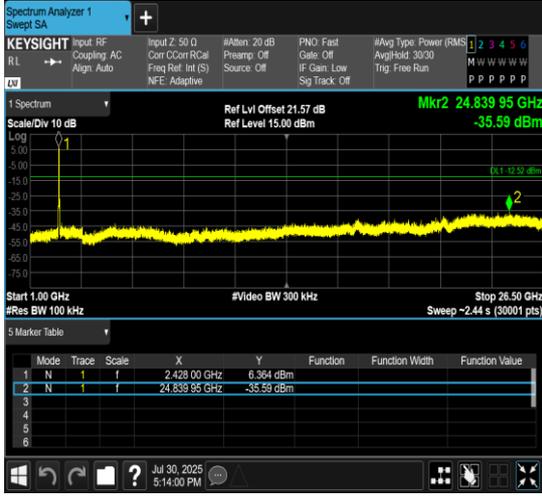


11AX20MIMO-Ant7-2437-106Tone-RU53-
1000~26500-PASS

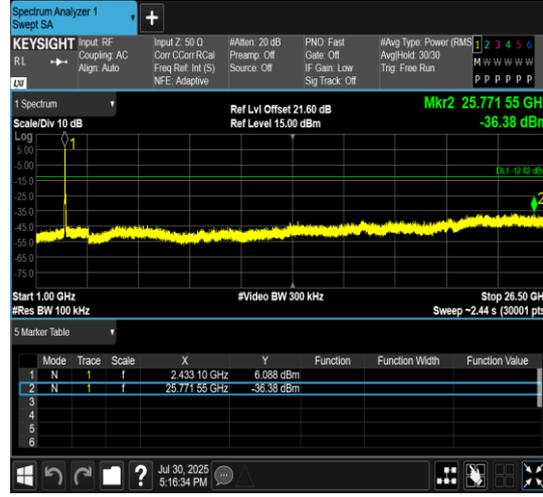


11AX20MIMO-Ant10-2462-26Tone-RU8-
0~Reference-PASS

11AX20MIMO-Ant7-2462-26Tone-RU8-0~Reference-
PASS

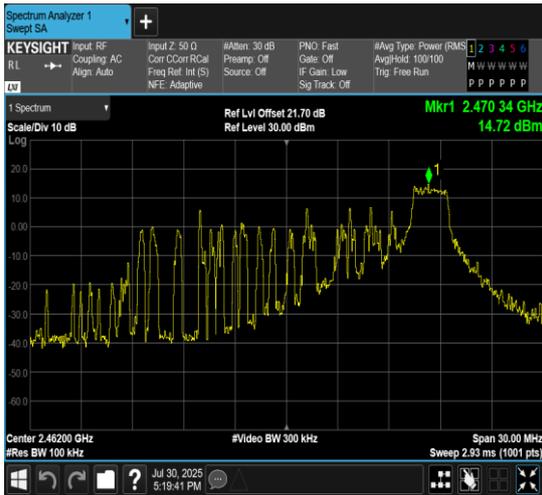

11AX20MIMO-Ant10-2462-52Tone-RU40-
0~Reference-PASS

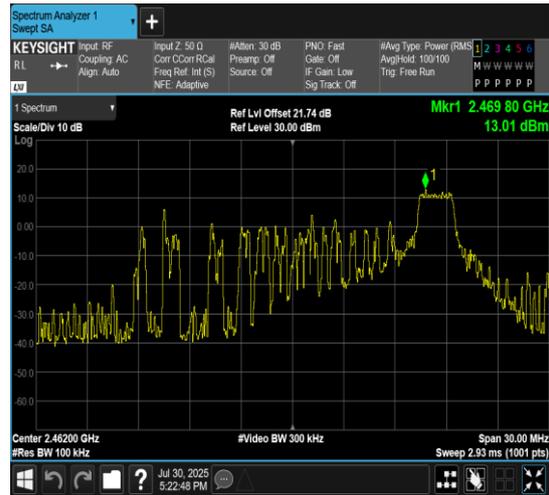

11AX20MIMO-Ant7-2462-52Tone-RU40-
0~Reference-PASS



11AX20MIMO-Ant10-2462-106Tone-RU54-
0~Reference-PASS



11AX20MIMO-Ant7-2462-106Tone-RU54-
0~Reference-PASS



11AX20MIMO-Ant10-2462-26Tone-RU8-30~1000-



11AX20MIMO-Ant7-2462-26Tone-RU8-30~1000-

