


Appendix B. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	20°C	Humidity	60%
Test Engineer	YC Chen	Test Mode	Mode 1

Horizontal

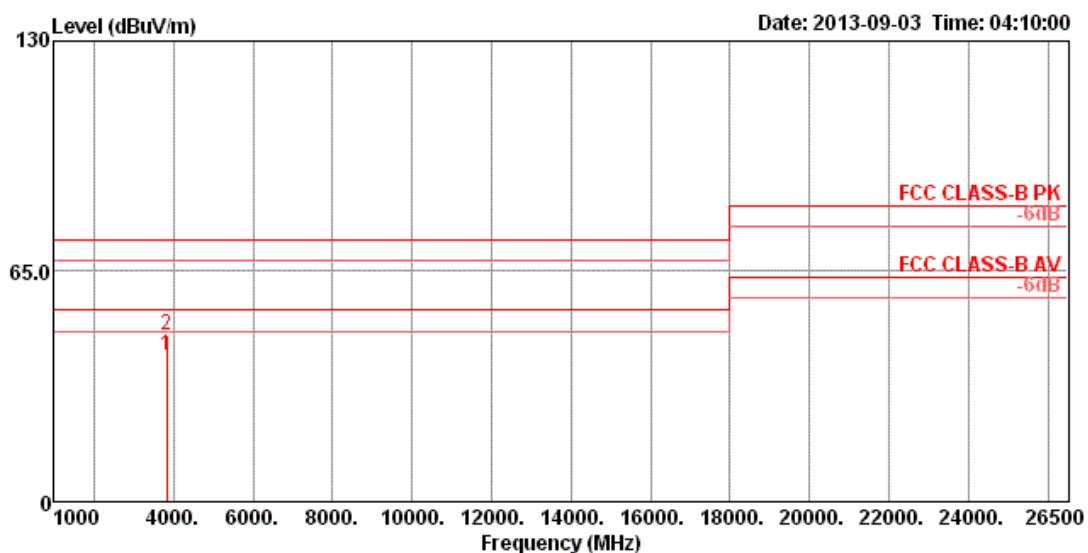

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamplifier	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	3836.54	41.16	54.00	-12.84	40.57	4.85	31.44	35.70	100	185	HORIZONTAL	Average
2	3836.54	46.85	74.00	-27.15	46.26	4.85	31.44	35.70	100	185	HORIZONTAL	Peak

Vertical

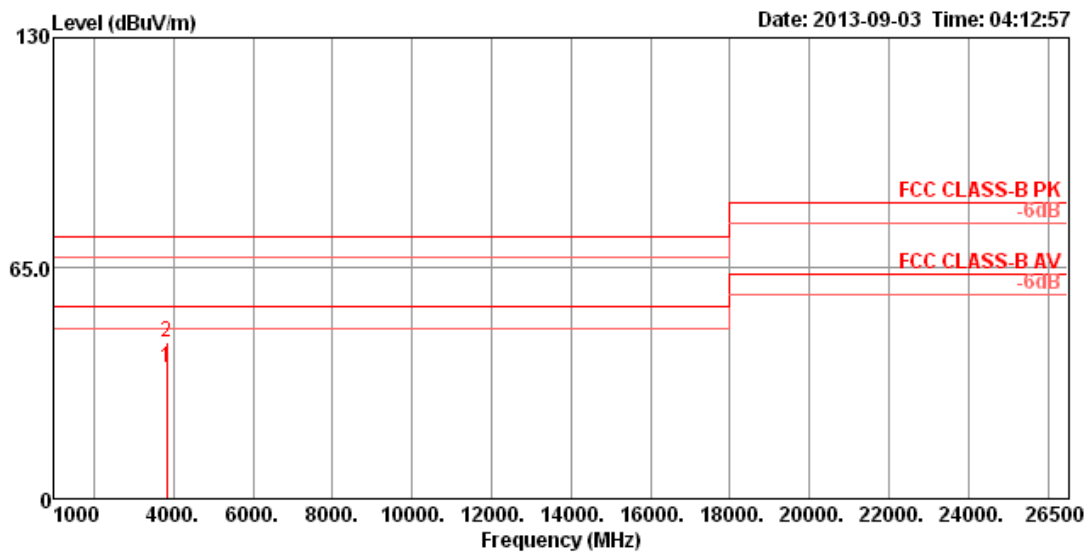

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3836.18	37.18	54.00	-16.82	36.59	4.85	31.44	35.70	166	240	VERTICAL Average
2	3836.32	44.27	74.00	-29.73	43.68	4.85	31.44	35.70	166	240	VERTICAL Peak