



Electric Monitor Stand

Installation Instruction & User Guide

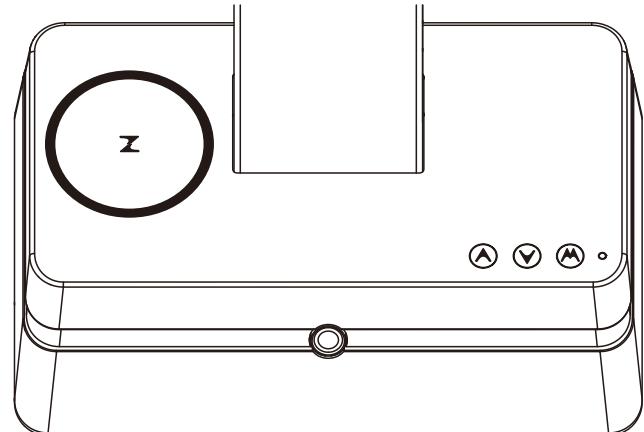

1 Operating Control Panel

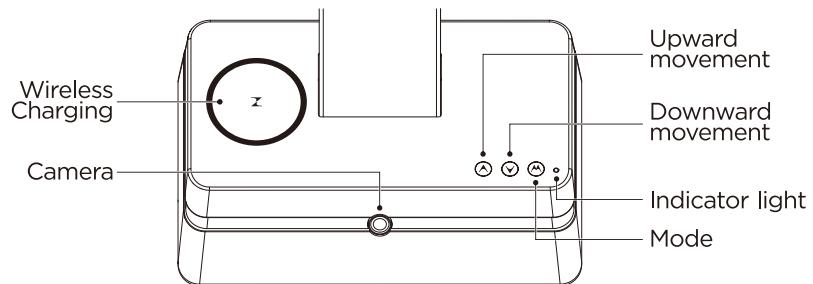

• First use

1. Install the monitor stand on the edge of the table, keeping a distance of at least 40cm from the front edge of the table. Make sure that nearby objects do not obstruct the camera.

2. Power On

- Connect the power. While the system is starting up, the indicator light will turn breathing white.
- When the start-up is successful, the indicator light turns blue to indicate automatic mode or green to indicate manual mode.

3. Reset

- Make sure there are no obstructions under the monitor.
- After connecting to the power, wait for the indicator to turn blue or green. Then press and hold the \triangle and \circlearrowleft buttons simultaneously to enter the reset mode. The indicator light will turn breathing white.
- The stand will move down to its lowest position and then bounce back a short distance. If the reset is successful, the indicator light will turn blue or green.

4. Face Recognition Data Entry

- Users need to enter facial data for the first time.
- Sit directly in front of the monitor stand at a distance of about 60cm from the camera and face the camera directly.
- Press and hold the three buttons on the base of stand simultaneously to enter the face data capture mode. The indicator light will turn breathing white.
- Once the face data is successfully entered, the system will automatically restart.

• Automatic Mode

1. Users can switch between automatic and manual modes by pressing the  button for three seconds. The indicator light will turn blue for automatic mode and green for manual mode.
2. In automatic mode, make sure that nearby objects do not obstruct the camera and that the ambient light is sufficient.
3. In automatic mode, the camera continuously monitors the user's face position. If the face is detected, the indicator light will be steady blue. If the face is not detected, the indicator light will be breathing blue.
4. Based on the detected face position, the stand automatically adjusts to an appropriate position so that the monitor height is close to the user's eye level.
5. When using automatic mode, the user should maintain a proper distance from the camera and ensure that the face is facing the camera. Avoid being too close or too far away. It is recommended to keep a vertical distance of 50cm-100cm and a horizontal distance within 20cm from the camera.

• Manual Mode

1. Users can switch between automatic and manual modes by pressing the  button for three seconds. The indicator light will turn blue for automatic mode and green for manual mode.
2. Press and hold the up button to raise the stand; release to stop. Press and hold the down button to lower the stand; release to stop.

• Lock Function

1. Press and hold the  button and  button simultaneously. The indicator light will turn steady white.
2. The system will enter a locked mode, keeping the stand stationary and preventing accidental button presses.
3. To exit the locked mode, press and hold the  button and  button simultaneously. The indicator light will turn blue or green.

• Wireless Charging

A wireless charger is located on the left side of the base. The maximum charging power is 10W.

• Manually turn off the camera function

Press and hold the  button and  button for more than 10 seconds, when you hear a beep, the camera function will be turned off, the product will automatically enter standby mode only after the camera is turned off. If you want to exit standby mode, press the  button once to exit standby mode, and the camera will work when it is turned on again. Standby mode: 0.5W; The period after which the equipment reaches automatically standby mode: 1min.

2

Troubleshooting Guide

1. The monitor stand stops moving during operation, and the indicator light turns red.

- Remove all surrounding items.
- The weight of the monitor may exceed the maximum load capacity of the system.
- The motor wire may be broken. Reset the system. If the problem still exists, contact your place of purchase for replacement.

2. The indicator light turns red after powering on.

- The circuit system may be broken, please contact your place of purchase for a replacement.

3. The monitor stand makes an abnormal noise or sound.

- Check all power connections and reset the system. If the unit continues to make an abnormal noise, please contact your place of purchase for a replacement.

Operating Frequency : 110~205 kHz

H-field strength : -15.62 dBuA/m@10m distance <or mW>

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference and 2) this device must accept any interference received, including interference that may cause undesired operation.

Federal Communications Commission (FCC) Statement 15.105(b): This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Compliance statement 15.21: You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. The Transmitter shall always be installed ensuring a minimum separation distance of 20cm between the antenna and the user.

! IMPORTANT:

The product is powered by electricity. In order to avoid burns, fire and electric shock, please read the instructions carefully. Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty. Should you ever have any questions or feel you require help please contact your place of purchase for assistance.

■ Instructions of Safety and Warnings

- Make sure that the mounting surface is strong enough to handle mounted product and equipment.
- **DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY.**
- Always use an assistant or a mechanical lifting device to safely lift and position heavy products.
- Tighten screws firmly, but do not over tighten. Over tightening can cause product damage that greatly reduces the holding power.
- Keep a clear area and distance from moving parts when using the product.
- Use only as intended. Never stand, hang or climb on the product.
- This product is intended for indoor use only.
- Any attempts to reconstruct the construction or alterations of the given power unit and control box aren't allowed.
- This product may contain small items that could be a choking hazard if swallowed. Keep children away unless the product is intended for their use and all instructions and manuals are fully reviewed and understood by them.
- Check that the product is secure and safe to use at regular intervals (at least every three months).


■ Other Cautions

- Don't clean the product with water while the power is still connected.
- Don't disassemble or replace components while the power is still connected.
- Never operate the system with a damaged cord or plug.
- Never operate the system if it's in moist environment or its electrical components have contact with liquids.
- If the control box makes unusual noise or smells, switch off the mains voltage immediately.

Disposal: The product with this mark indicates that this product shouldn't be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the local recycle service or contact your point of purchase to withdraw the product.

Instruction Manual

ELECTRIC MONITOR ARM




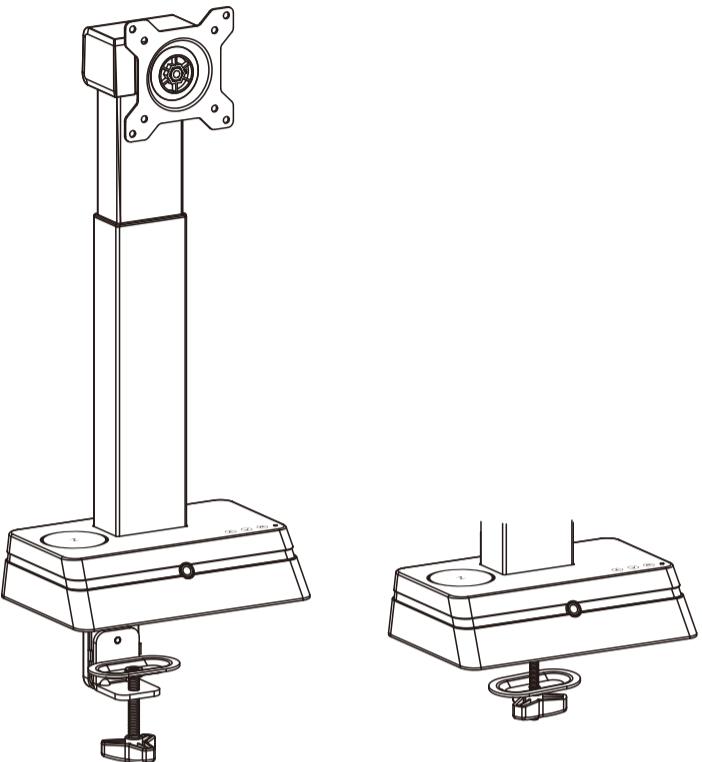



LDT83-C01W

VESA Compatible
75x75 100x100


32" MAX
FLAT/CURVED

0-10kg
(0-22lbs)
RATED

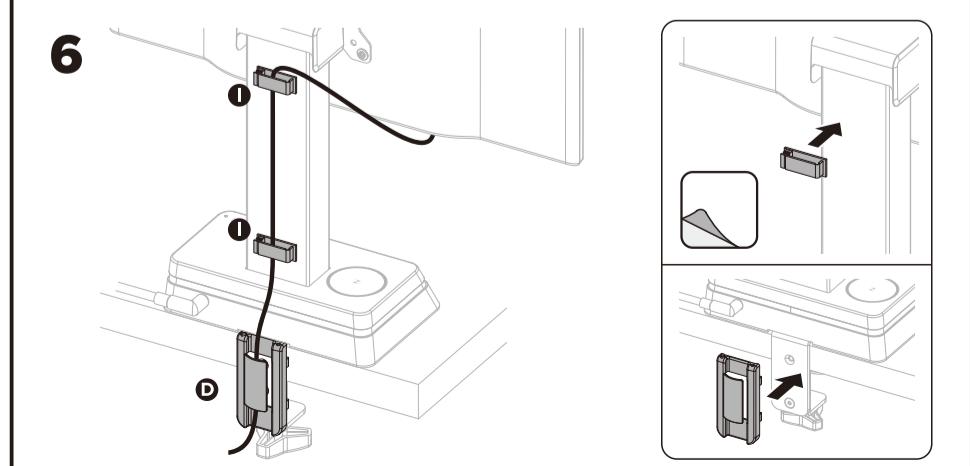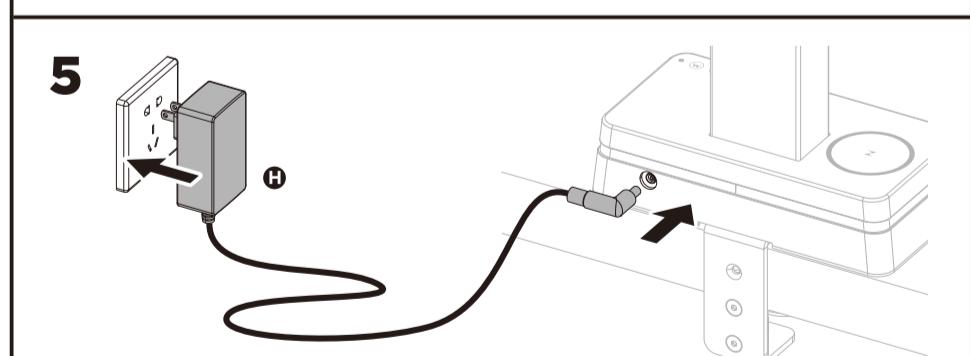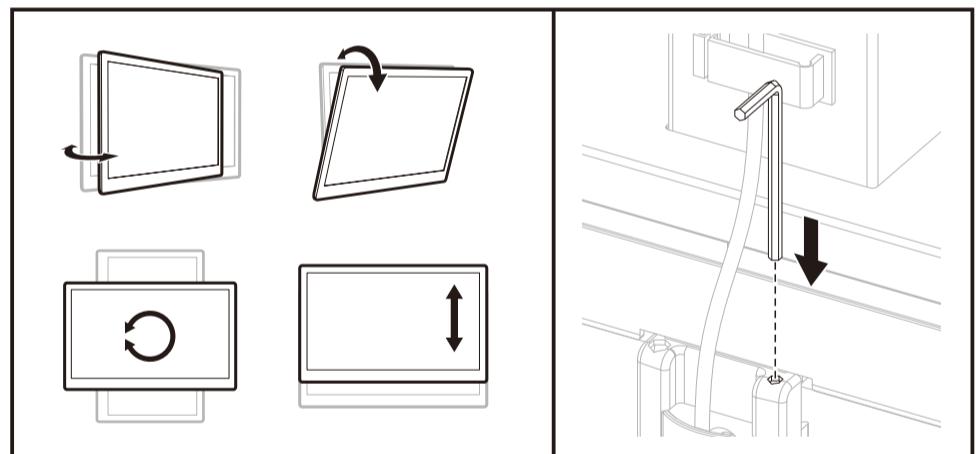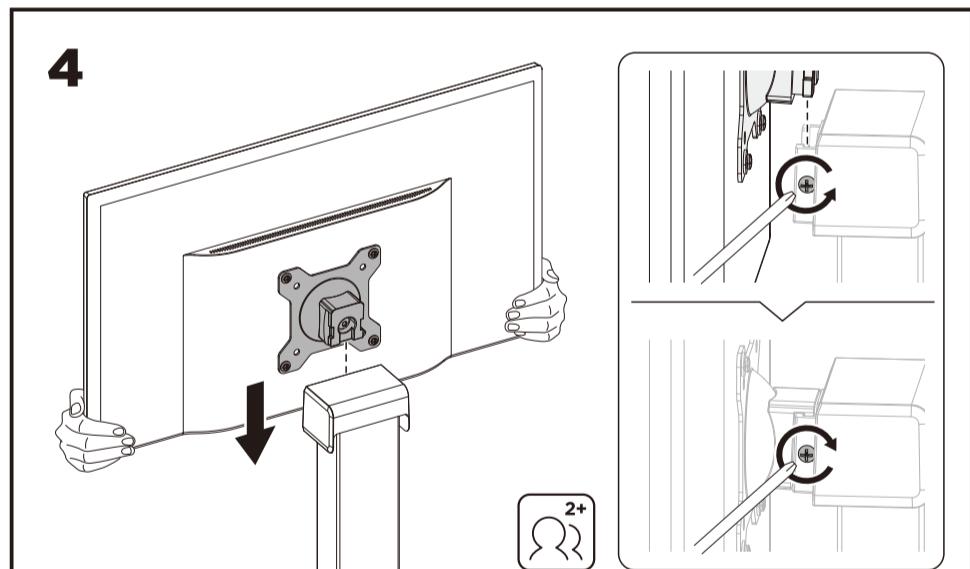


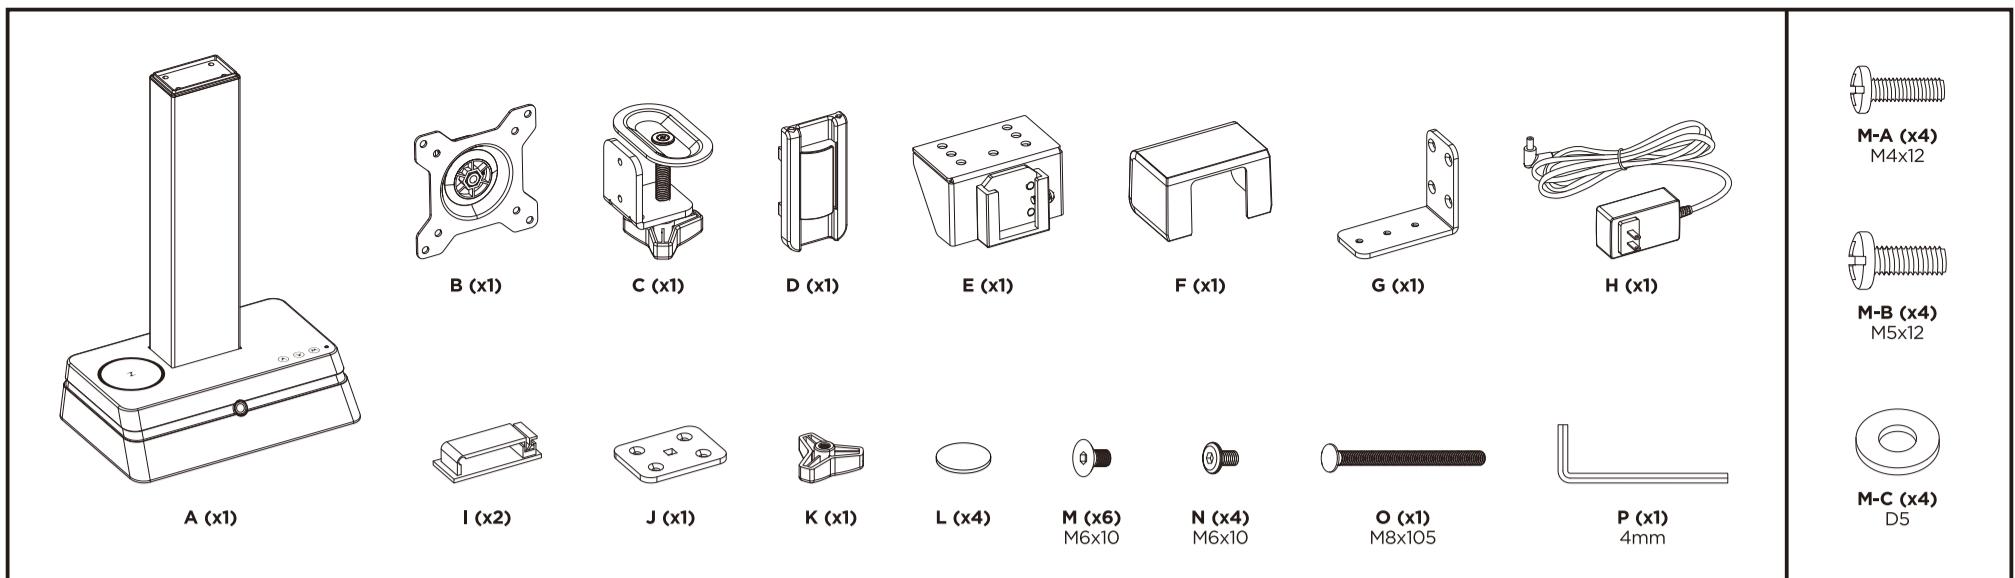


1

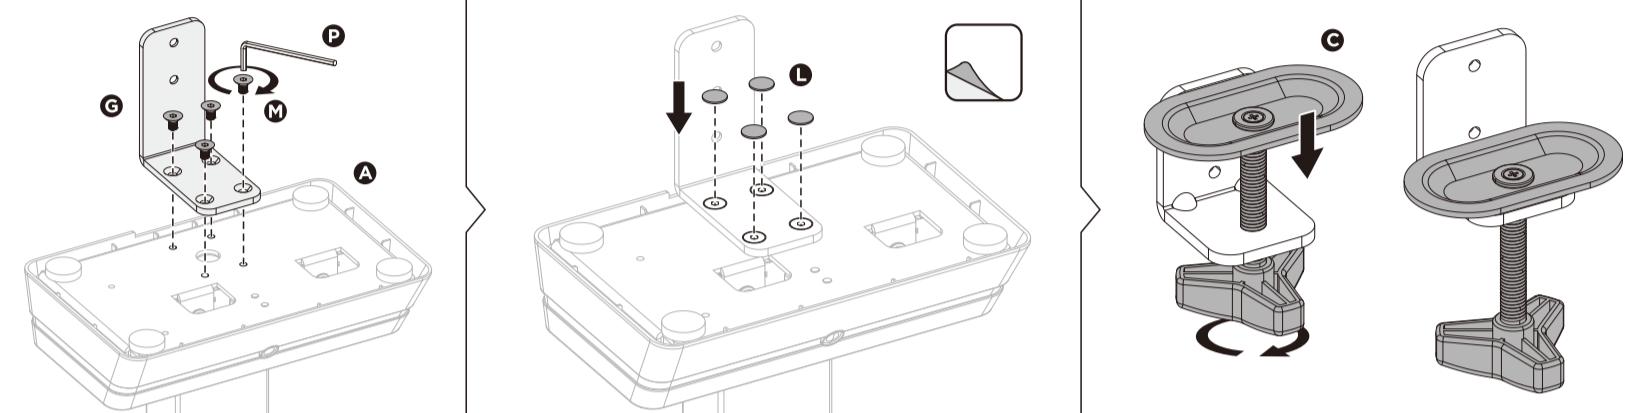


**CLAMP
INSTALLATION**

for 10-80mm thickness desks

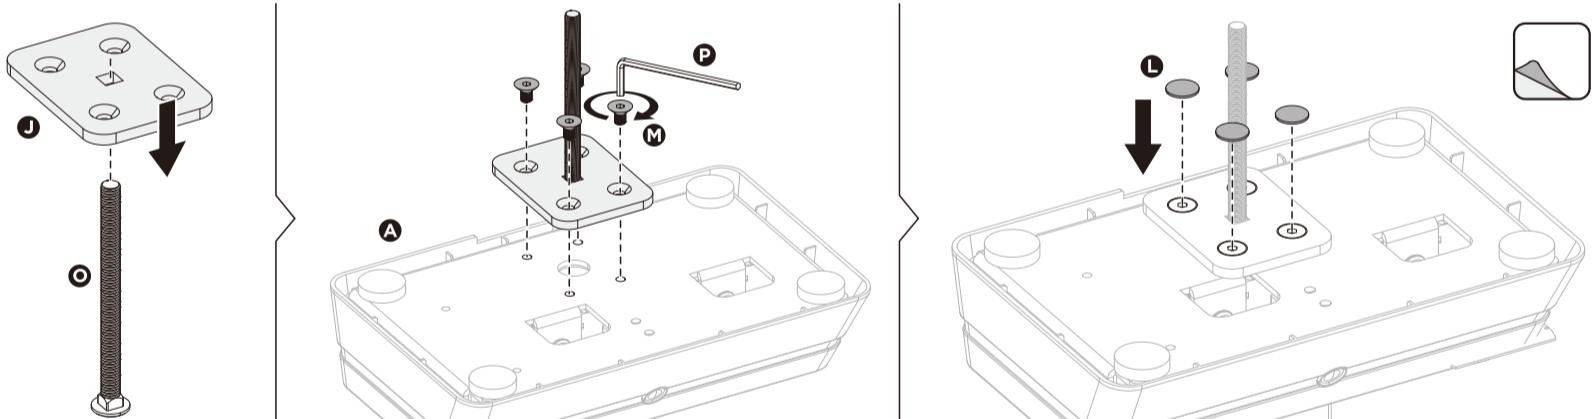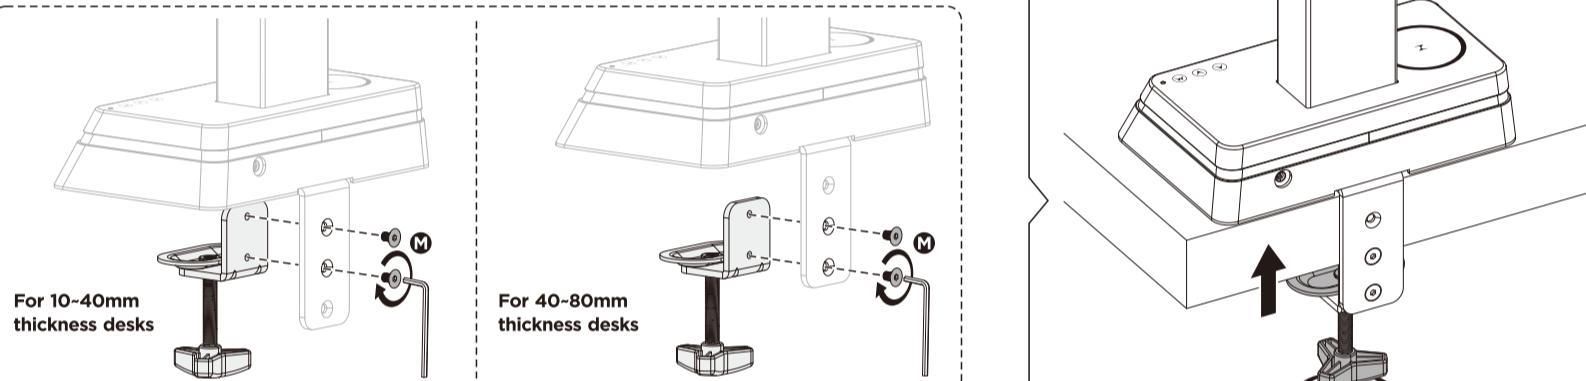


**GROMMET
INSTALLATION**


for 10-70mm thickness desks with Ø10-60mm installation holes

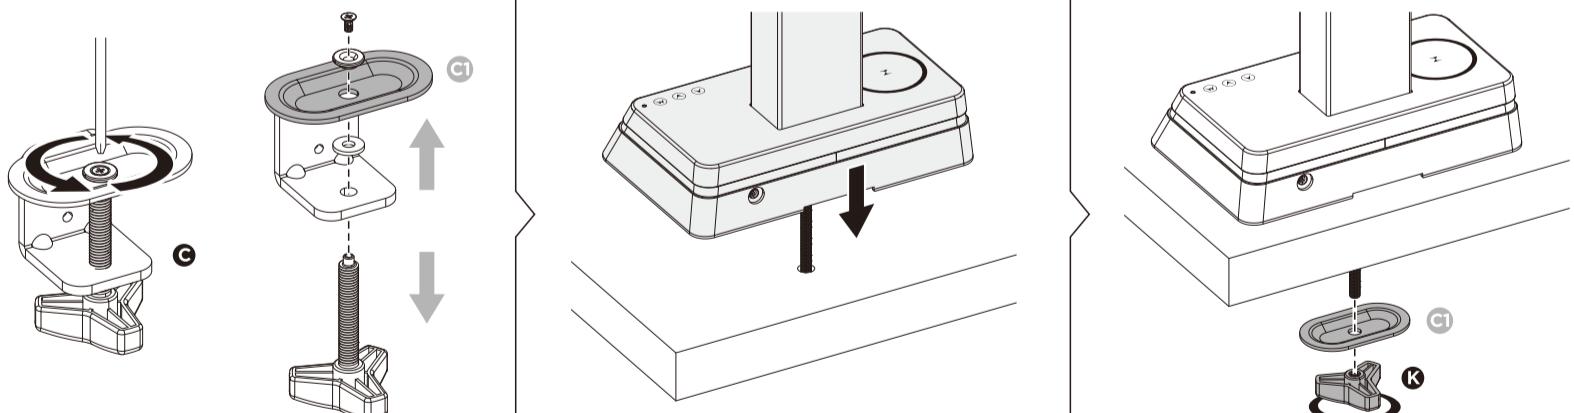

2

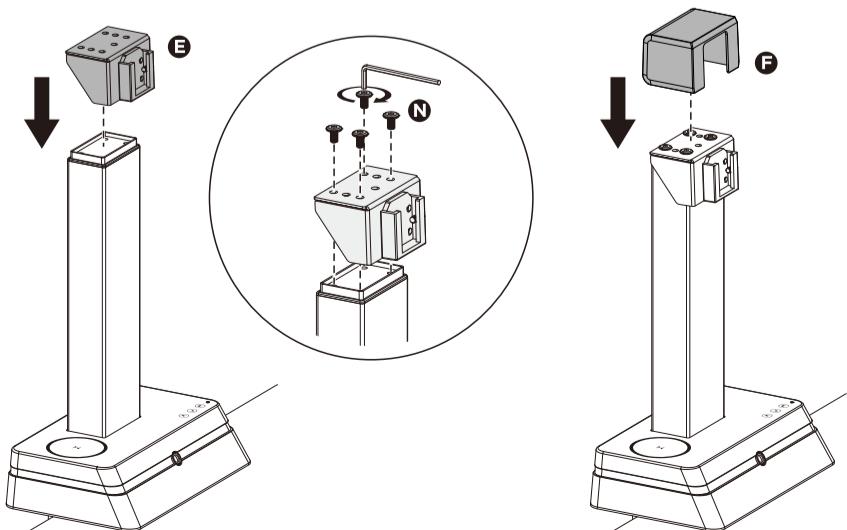

3

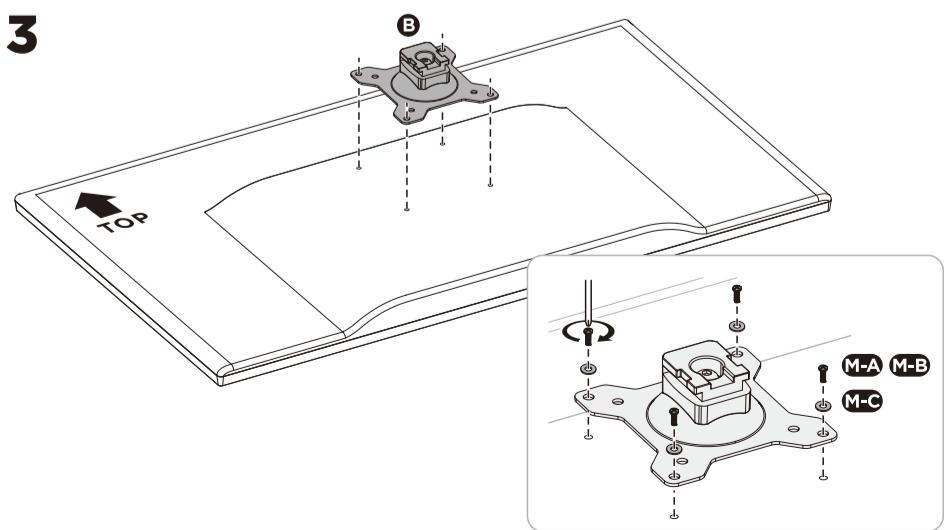

! IMPORTANT:

The product is powered by electricity. In order to avoid burns, fire and electric shock, please read the instructions carefully. Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty. Should you ever have any questions or feel you require help please contact your place of purchase for assistance.

■ Instructions of Safety and Warnings

- Make sure that the mounting surface is strong enough to handle mounted product and equipment.
- **DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY.**
- Always use an assistant or a mechanical lifting device to safely lift and position heavy products.
- Tighten screws firmly, but do not over tighten. Over tightening can cause product damage that greatly reduces the holding power.
- Keep a clear area and distance from moving parts when using the product.
- Use only as intended. Never stand, hang or climb on the product.
- This product is intended for indoor use only.
- Any attempts to reconstruct the construction or alterations of the given power unit and control box aren't allowed.
- This product may contain small items that could be a choking hazard if swallowed. Keep children away unless the product is intended for their use and all instructions and manuals are fully reviewed and understood by them.
- Check that the product is secure and safe to use at regular intervals (at least every three months).


■ Other Cautions

- Don't clean the product with water while the power is still connected.
- Don't disassemble or replace components while the power is still connected.
- Never operate the system with a damaged cord or plug.
- Never operate the system if it's in moist environment or its electrical components have contact with liquids.
- If the control box makes unusual noise or smells, switch off the mains voltage immediately.

Disposal: The product with this mark indicates that this product shouldn't be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the local recycle service or contact your point of purchase to withdraw the product.

Instruction Manual

ELECTRIC MONITOR ARM



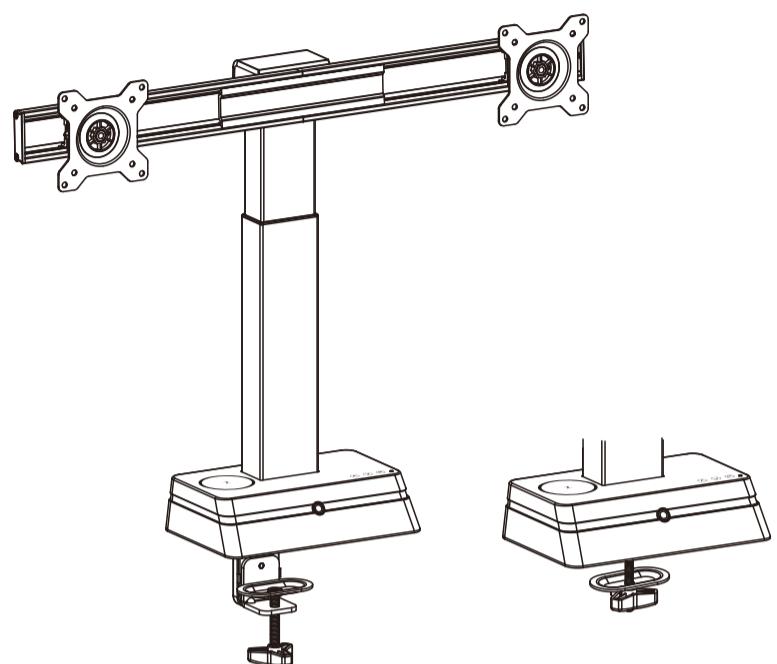



LDT83-C02W

VESA Compatible
75x75 100x100


27"
MAX
FLAT/CURVED

27"
(0-10kg) x2
(0-22lbs) x2
RATED

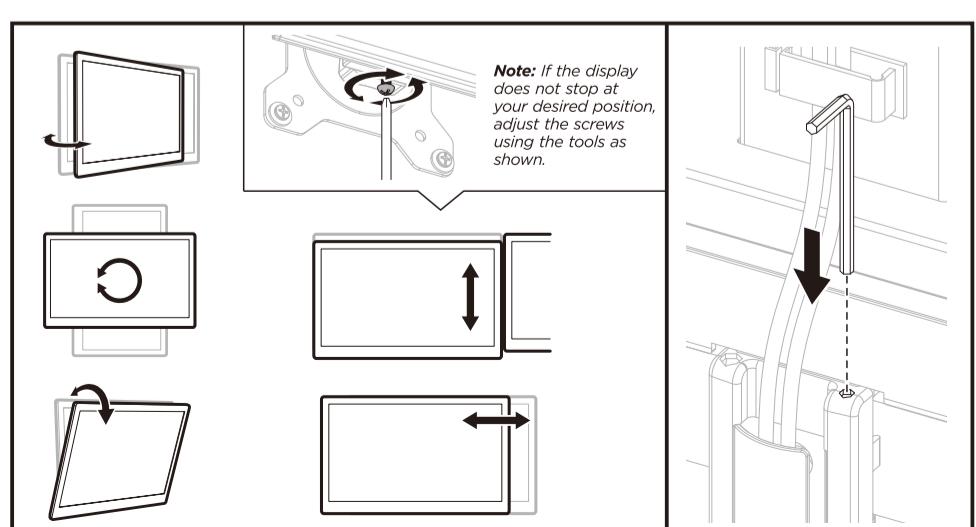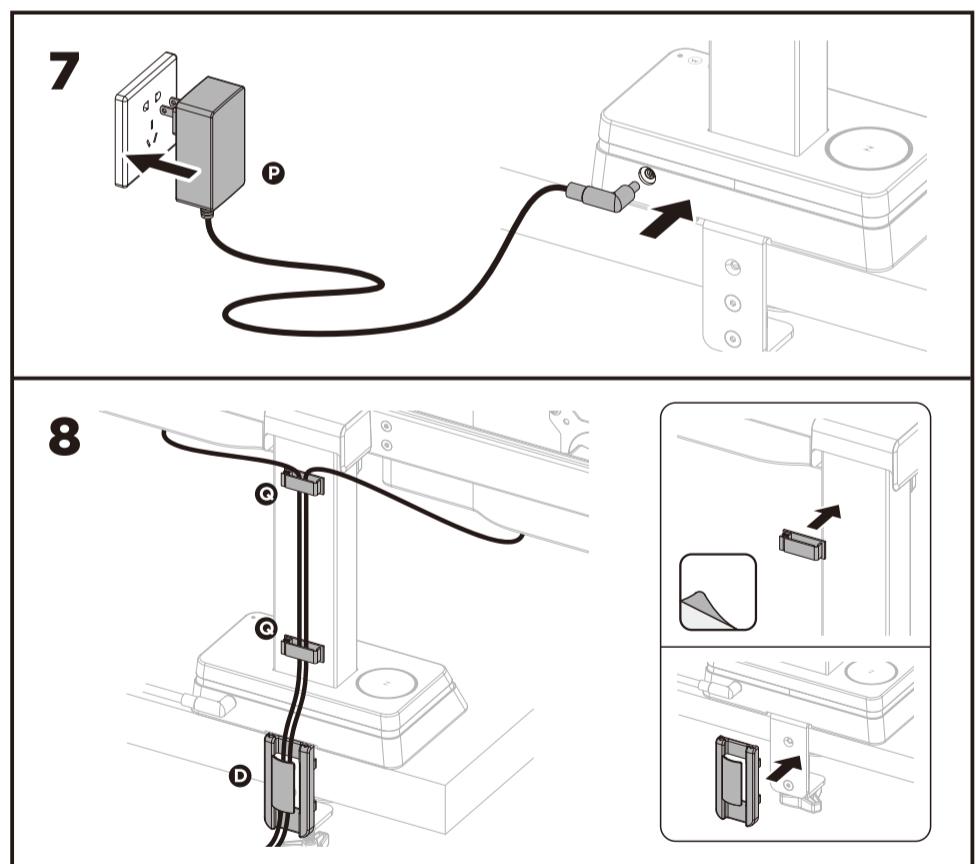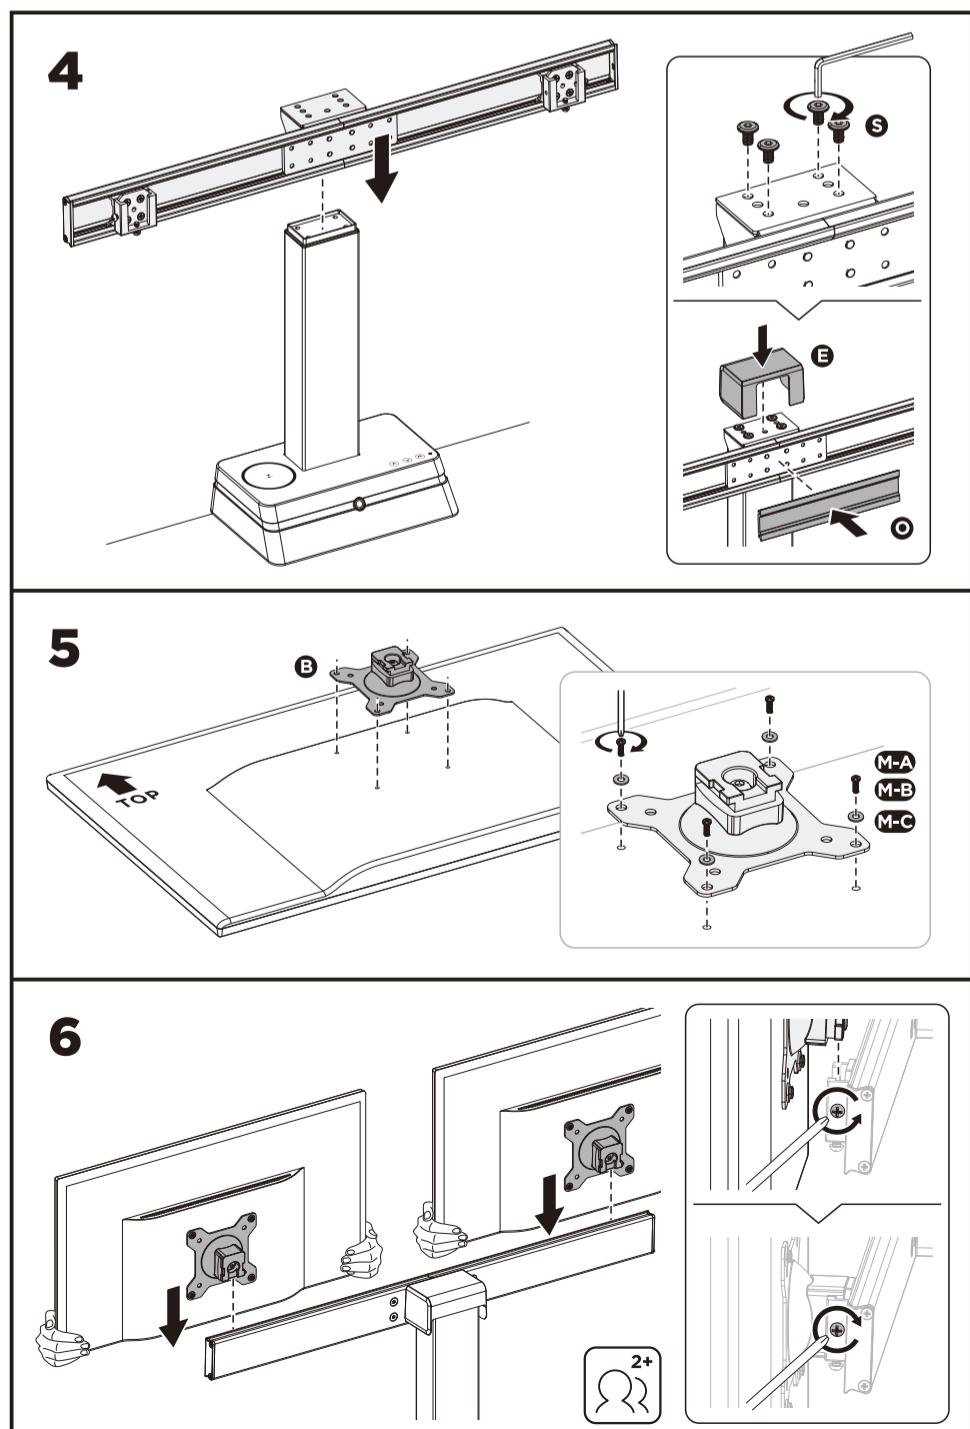

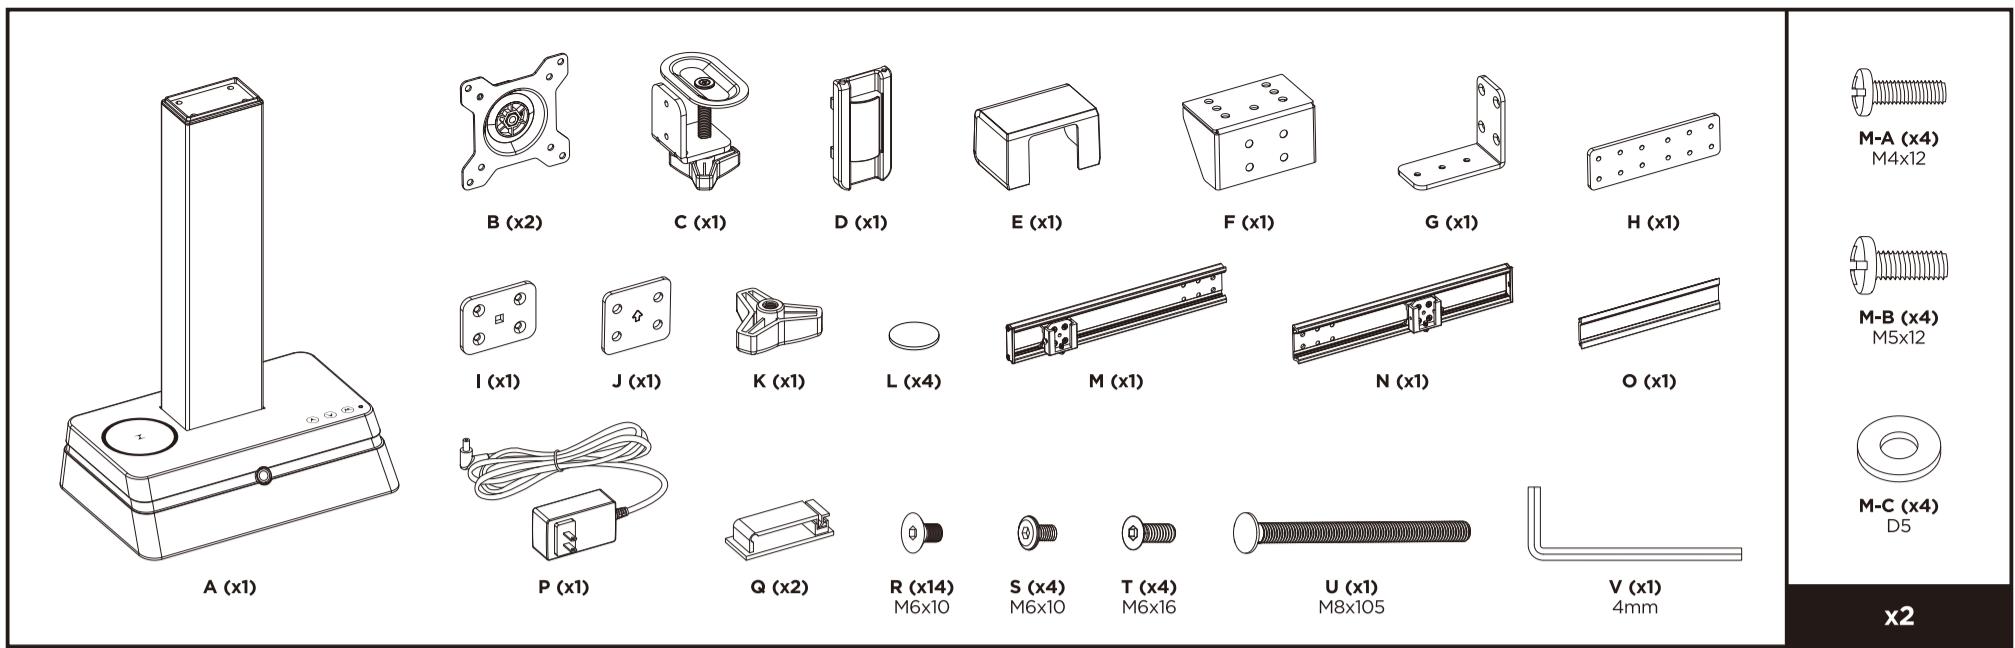


1

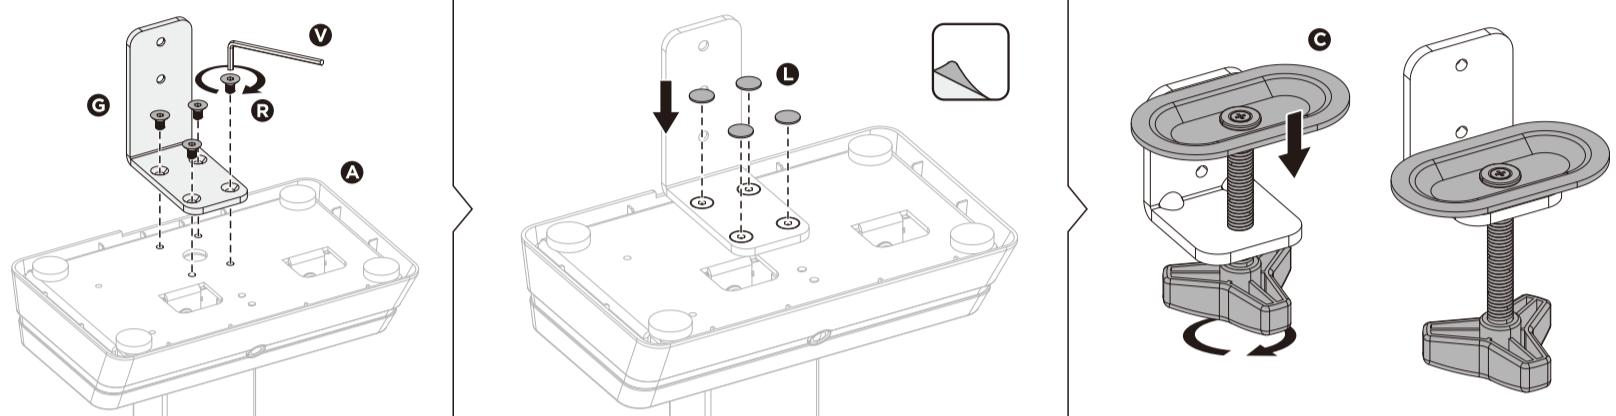

CLAMP INSTALLATION

for 10-80mm
thickness desks

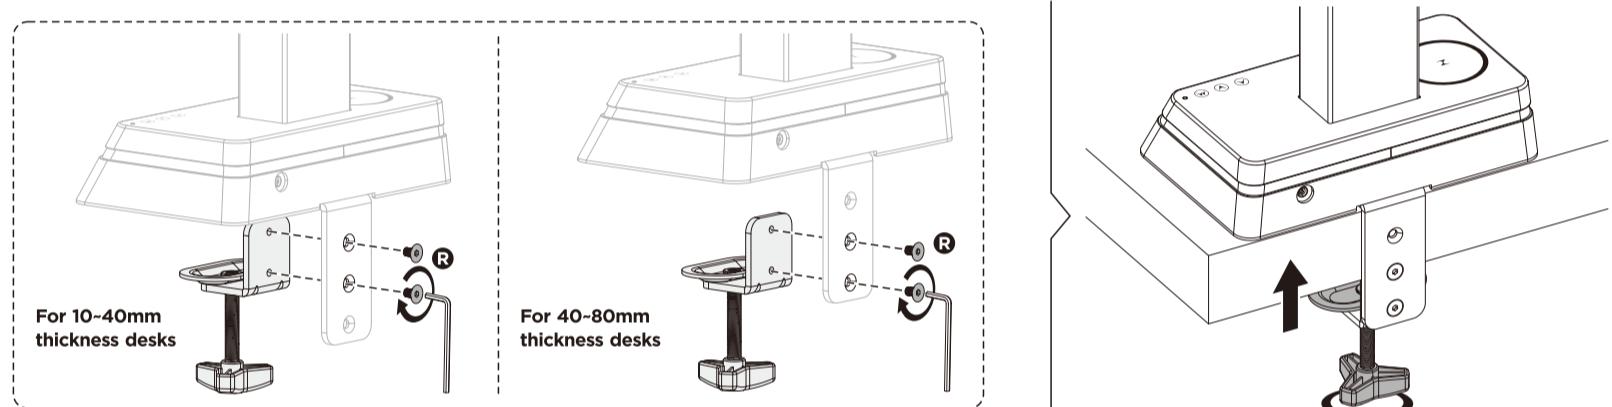


For 10-40mm
thickness desks

For 40-80mm
thickness desks


GROMMET INSTALLATION

for 10-70mm
thickness desks
with Ø10-60mm
installation holes

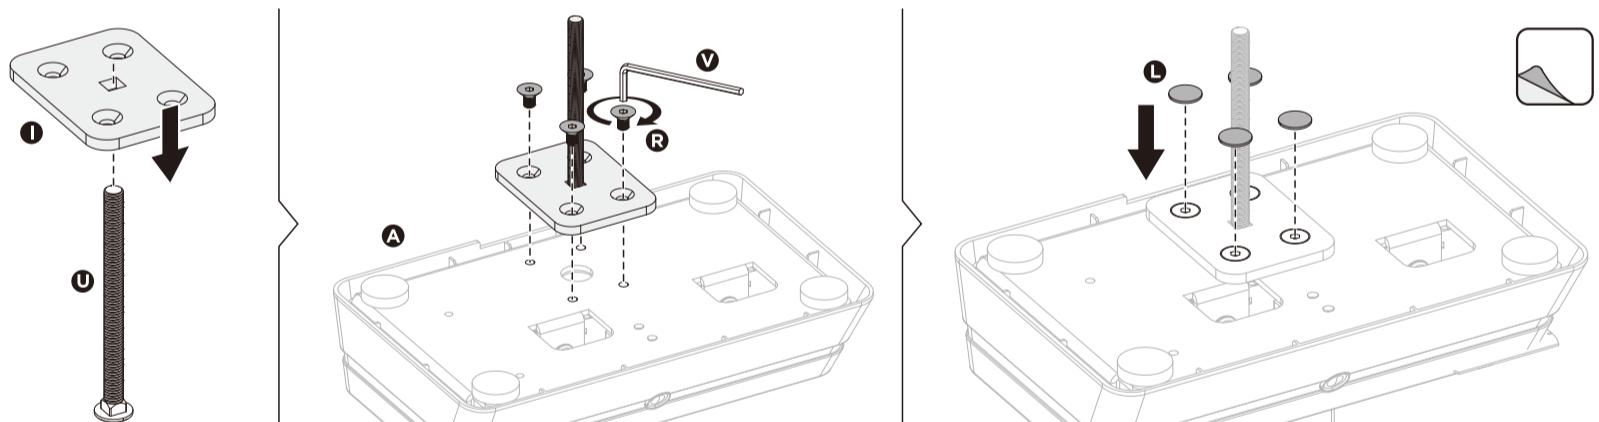

For 10-70mm
thickness desks
with Ø10-60mm
installation holes

2

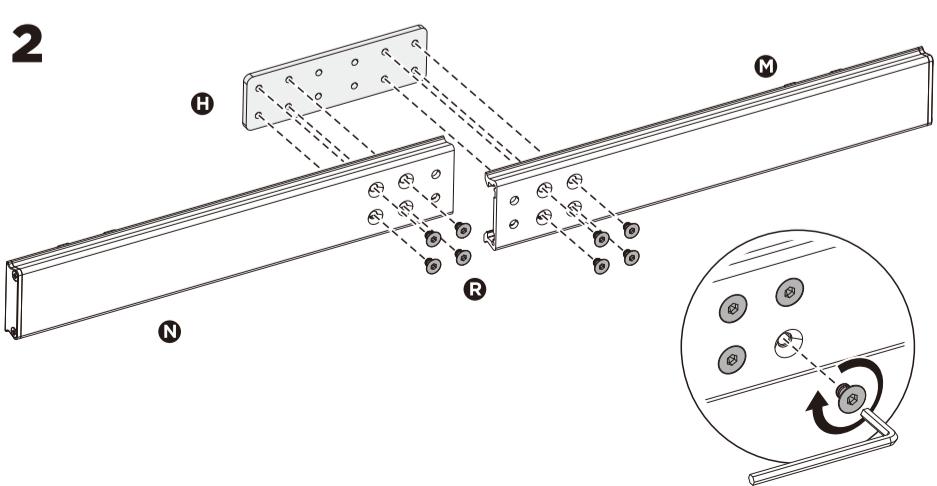

3

