

TEST REPORT

Applicant Name: Advanced Card Systems Limited
Address: Units 4108 - 4110, 41st Floor, Manhattan Place, 23 Wang Tai Road, Kowloon Bay, Hong Kong
Report Number: 2501Q44881E-RF-00
FCC ID: V5MACR1552U-MW

Test Standard (s)

FCC PART 15.225

Sample Description

Product Type: WalletMate II
Model No.: ACR1552U-MW
Multiple Model(s) No.: N/A
Trade Mark: ACS
Date Received: 2025/02/21
Issue Date: 2025/04/30

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.203 - ANTENNA REQUIREMENT	12
APPLICABLE STANDARD	12
ANTENNA CONNECTED CONSTRUCTION	12
§1.1307 (B) (3) & §2.1091 - RF EXPOSURE	13
APPLICABLE STANDARD	13
TEST RESULT	13
FCC §15.207 - AC LINE CONDUCTED EMISSION	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	14
TEST PROCEDURE	15
FACTOR & OVER LIMIT CALCULATION	15
TEST DATA	15
FCC§15.225, §15.205& §15.209 - RADIATED EMISSIONS TEST	22
APPLICABLE STANDARD	22
EUT SETUP	22
EMI TEST RECEIVER SETUP	23
FACTOR & OVER LIMIT/MARGIN CALCULATION	24
TEST DATA	24
FCC§15.225(E) - FREQUENCY STABILITY	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST DATA	58
FCC§15.215(C) - 20DBEMISSION BANDWIDTH	60
REQUIREMENT	60
TEST PROCEDURE	60
TEST DATA	61

EUT PHOTOGRAPHS64

TEST SETUP PHOTOGRAPHS65

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501Q44881E-RF-00	Original Report	2025/04/30

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	WalletMate II
Tested Model	ACR1552U-MW
Multiple Model(s)	N/A
Frequency Range	13.56 MHz
E-field Strength	63.38dBuV/m@3m
Modulation Technique	ASK, BPSK
Voltage Range	DC 5V from USB
Sample serial number	2YQC-1 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	N/A
Note: Two types of NFC cards were used in the testing process to test the two modulation technologies of ASK and BPSK.	

Objective

This Type approval report is in accordance with Part 2- Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions rules.

The objective is to determine the compliance of the EUT with FCC rules, section 15.203, 15.205, 15.207, 15.209 and 15.225.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	0.009MHz~30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

“APDU.exe”[#] Exercise Software was used.

Equipment Modifications

No modification on the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	PC	Latitude E5570	GNDLKC2
DELL	Adapter	N/A	N/A
N/A	SAM card	N/A	N/A
N/A	NFC card	N/A	N/A


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded detachable AC cable	1.2	LISN	Adapter
Un-shielded un-detachable DC cable	1.0	Adapter	PC
Un-shielded detachable RS232 to USB/RS232 cable	1.6	EUT	PC


Block Diagram of Test Setup

With cards

For Conducted Emission:

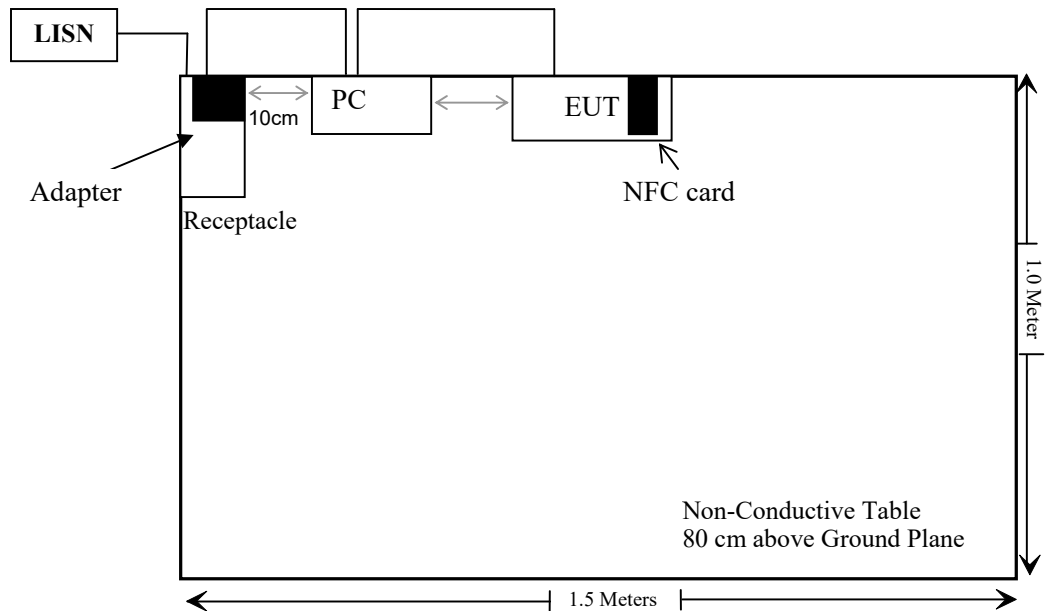


For Radiated Emissions:

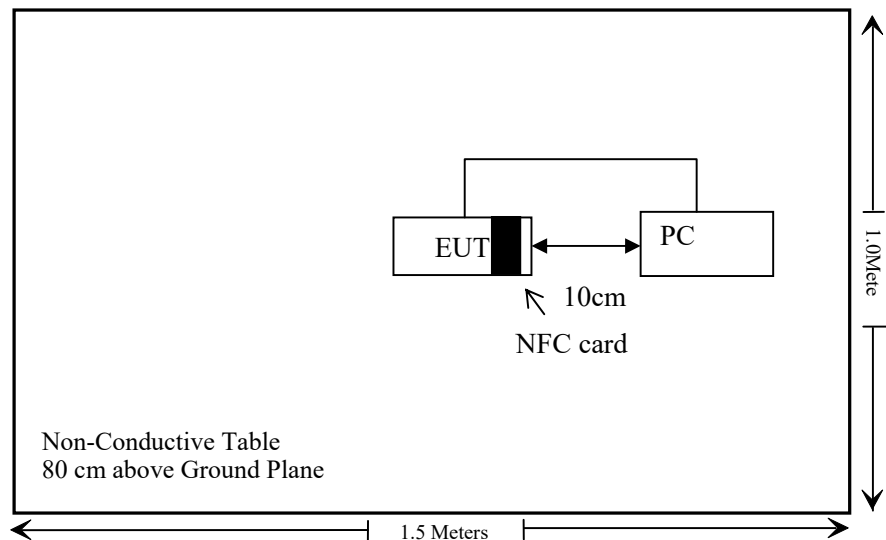


Without cards

For Conducted Emission:

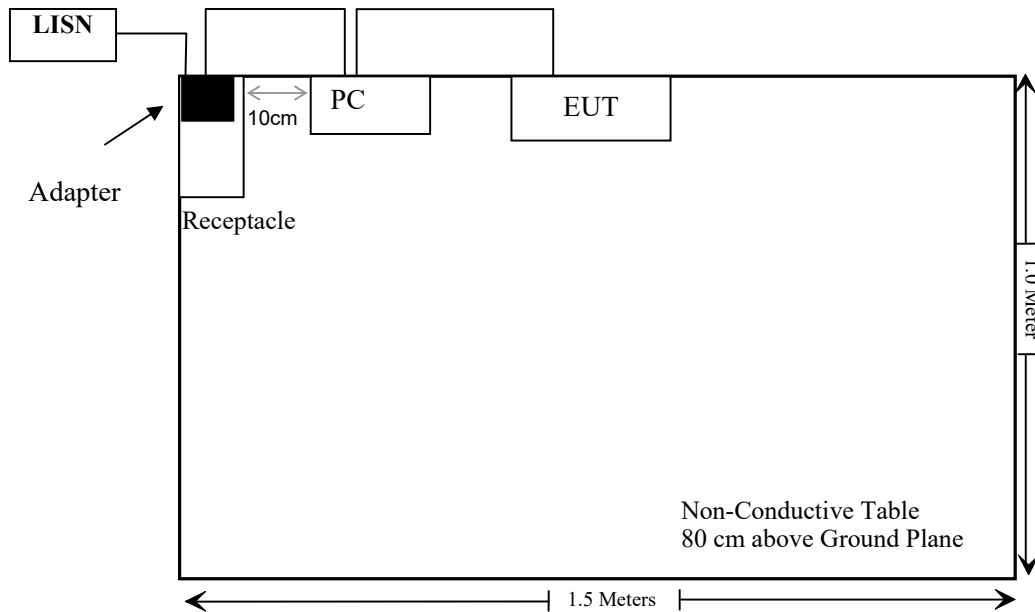

For Radiated Emissions:

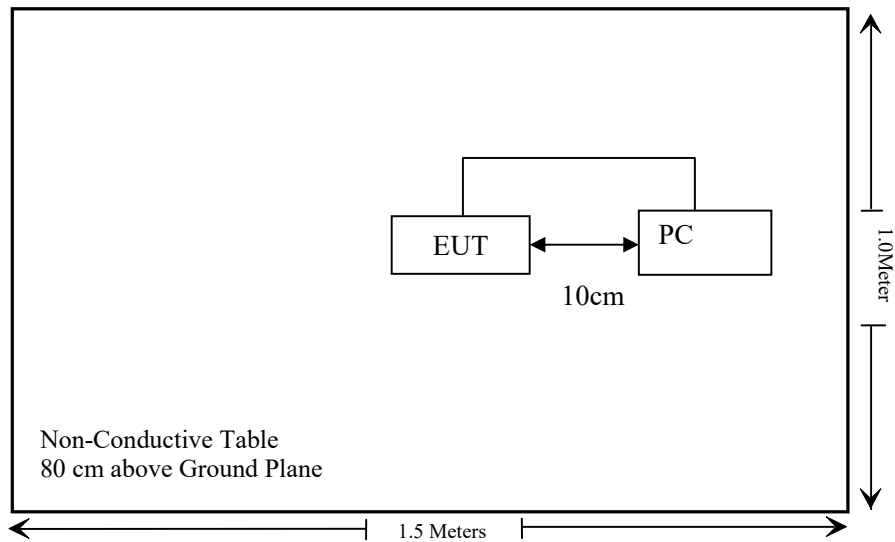

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§1.1307 (b) (3) & §2.1091	RF Exposure	Compliant
§15.207	AC Line Conducted Emission	Compliant
§15.225 §15.209§15.205	Radiated Emission Test	Compliant
§15.225(e)	Frequency Stability	Compliant
§15.215(c)	20dB Emission Bandwidth	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/12/04	2025/12/03
Rohde & Schwarz	LISN	ENV216	101613	2024/12/04	2025/12/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/12/04	2025/12/03
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/12/04	2025/12/03
Unknown	Cable	PNG214	1354	2024/12/04	2025/12/03
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connected Construction

The EUT has one internal antenna arrangement for NFC which was permanently attached; fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

§1.1307 (b) (3) & §2.1091 - RF EXPOSURE**Applicable Standard**

According to FCC §2.1091 and §1.1307(b) (3), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance

1-mW Test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

Test Result


For worst case:

Mode	Maximum E-Field (dBuV/m@3m)	Maximum EIRP (dBm)	Maximum EIRP (mW)	Exemption Limit (mW)	Test Exemption
NFC	68.94	-26.26	0.002	1	Yes

Note: EIRP = E-Field – 95.2 @3m

Result: Compliant

EUT Setup

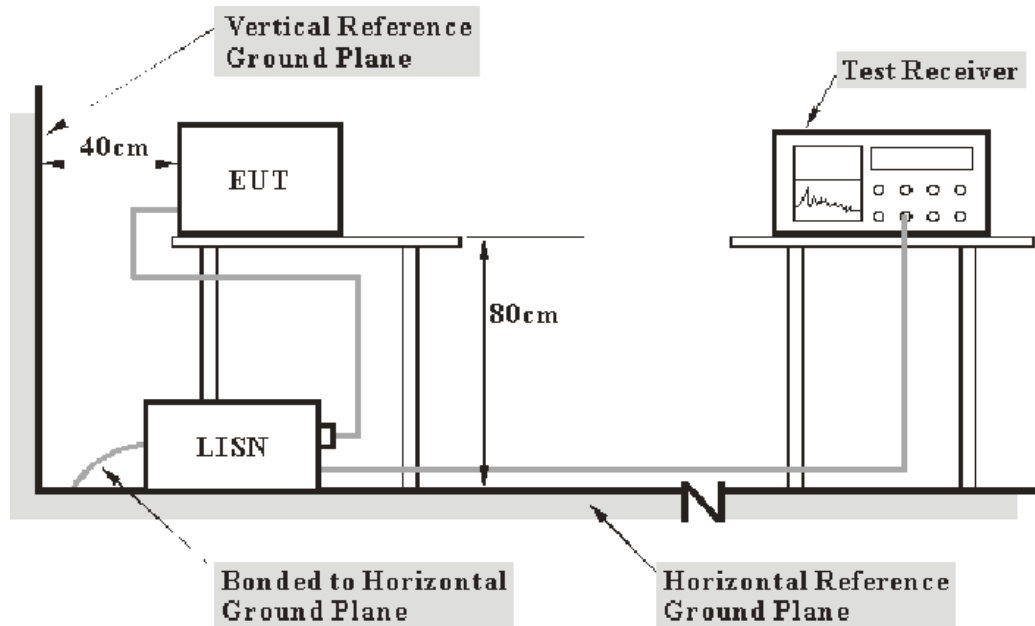

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The spacing between the peripherals was 10 cm.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions

Temperature:	22~27 °C
Relative Humidity:	46~71 %
ATM Pressure:	100~103kPa


The testing was performed by Macy Shi from 2025-03-03 to 2025-04-30.

Test mode: Transmitting

With cards

ASK

AC 120 V/60 Hz, Line

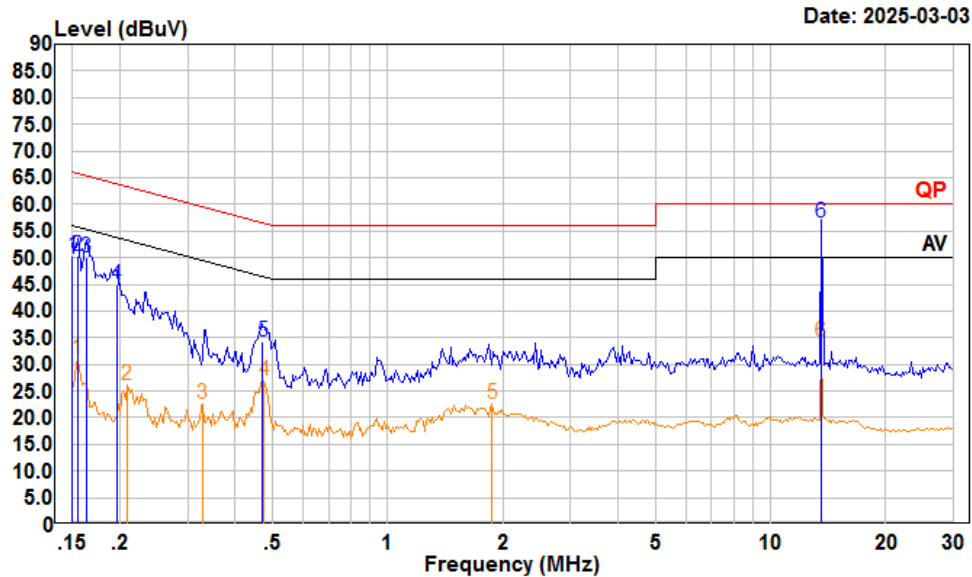

Trace: 1

Condition: Line


Project : 2501Q44881E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	29.90	50.23	10.20	10.13	66.00	-15.77	QP
2	0.155	30.11	50.40	10.17	10.12	65.74	-15.34	QP
3	0.163	29.93	50.15	10.11	10.11	65.30	-15.15	QP
4	0.195	25.00	45.01	9.92	10.09	63.80	-18.79	QP
5	0.471	13.81	34.40	10.46	10.13	56.49	-22.09	QP
6	13.560	36.05	56.49	10.22	10.22	60.00	-3.51	QP
	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.155	10.64	31.04	10.28	10.12	55.74	-24.70	Average
2	0.208	6.00	26.21	10.12	10.09	53.27	-27.06	Average
3	0.329	2.14	22.63	10.37	10.12	49.49	-26.86	Average
4	0.476	6.35	27.05	10.57	10.13	46.41	-19.36	Average
5	1.868	2.07	22.59	10.34	10.18	46.00	-23.41	Average
6	13.560	13.90	34.29	10.17	10.22	50.00	-15.71	Average

AC 120V/ 60 Hz, Neutral

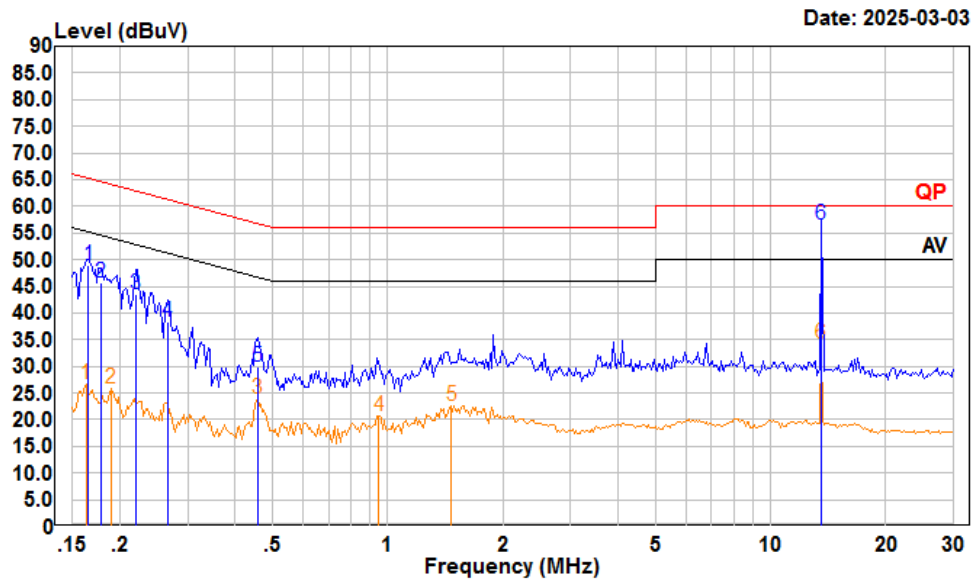

Condition: Neutral

Project : 2501Q44881E-RF


tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz VBW:Auto SWT:Auto

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.165	28.50	48.84	10.23	10.11	65.21	-16.37	QP
2	0.178	25.40	45.68	10.18	10.10	64.59	-18.91	QP
3	0.220	23.20	43.44	10.15	10.09	62.83	-19.39	QP
4	0.266	17.99	38.34	10.26	10.09	61.25	-22.91	QP
5	0.456	9.30	29.97	10.55	10.12	56.76	-26.79	QP
6	13.560	36.10	56.49	10.17	10.22	60.00	-3.51	QP
	Freq	Read		LISN	Cable	Limit	Over	
	MHz	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.163	6.25	26.60	10.24	10.11	55.30	-28.70	Average
2	0.189	5.60	25.83	10.14	10.09	54.06	-28.23	Average
3	0.456	3.15	23.82	10.55	10.12	46.76	-22.94	Average
4	0.948	0.00	20.77	10.67	10.10	46.00	-25.23	Average
5	1.464	2.07	22.71	10.48	10.16	46.00	-23.29	Average
6	13.560	13.86	34.25	10.17	10.22	50.00	-15.75	Average

BPSK**AC 120 V/60 Hz, Line**

Date: 2025-04-16

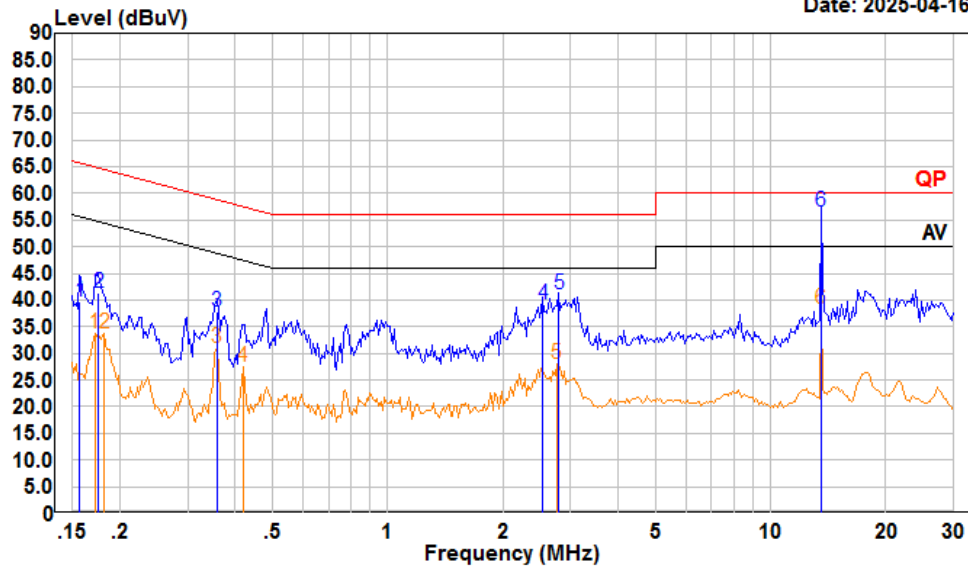

Trace: 1

Condition: Line


Project : 2501Q44881E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.156	18.40	39.73	11.21	10.12	65.65	-25.92	QP
2	0.176	20.09	41.45	11.26	10.10	64.68	-23.23	QP
3	0.358	16.70	37.93	11.11	10.12	58.78	-20.85	QP
4	2.540	17.81	39.21	11.23	10.17	56.00	-16.79	QP
5	2.794	19.59	41.02	11.25	10.18	56.00	-14.98	QP
6	13.560	35.20	56.59	11.17	10.22	60.00	-3.41	QP
	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.172	12.51	33.86	11.25	10.10	54.86	-21.00	Average
2	0.182	12.44	33.81	11.27	10.10	54.42	-20.61	Average
3	0.358	9.80	31.03	11.11	10.12	48.78	-17.75	Average
4	0.419	6.28	27.45	11.06	10.11	47.46	-20.01	Average
5	2.765	6.71	28.14	11.25	10.18	46.00	-17.86	Average
6	13.560	17.04	38.43	11.17	10.22	50.00	-11.57	Average

AC 120V/ 60 Hz, Neutral

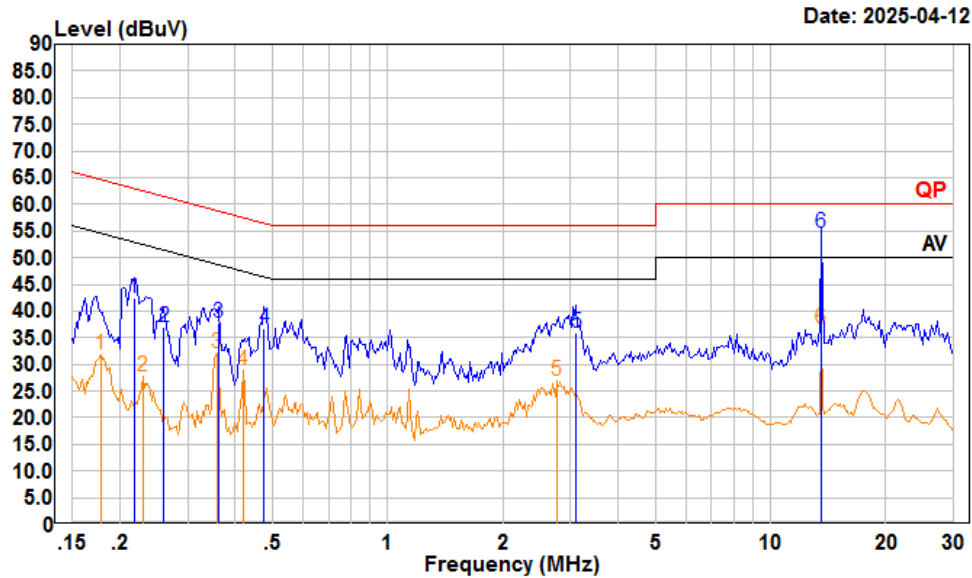

Trace: 1

Condition: Neutral


Project : 2501Q44881E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.217	21.79	42.53	10.65	10.09	62.92	-20.39	QP
2	0.260	16.39	37.01	10.53	10.09	61.42	-24.41	QP
3	0.361	17.40	37.83	10.31	10.12	58.69	-20.86	QP
4	0.476	16.40	36.66	10.13	10.13	56.41	-19.75	QP
5	3.107	15.40	35.91	10.33	10.18	56.00	-20.09	QP
6	13.560	34.50	54.74	10.02	10.22	60.00	-5.26	QP
	Freq	Read		LISN	Cable	Limit	Over	
	MHz	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.178	11.34	31.85	10.41	10.10	54.59	-22.74	Average
2	0.229	6.94	27.63	10.61	10.08	52.48	-24.85	Average
3	0.358	11.75	32.19	10.32	10.12	48.78	-16.59	Average
4	0.419	8.51	28.84	10.22	10.11	47.46	-18.62	Average
5	2.765	6.55	27.02	10.29	10.18	46.00	-18.98	Average
6	13.560	16.57	36.81	10.02	10.22	50.00	-13.19	Average

Without cards
AC 120 V/60 Hz, Line

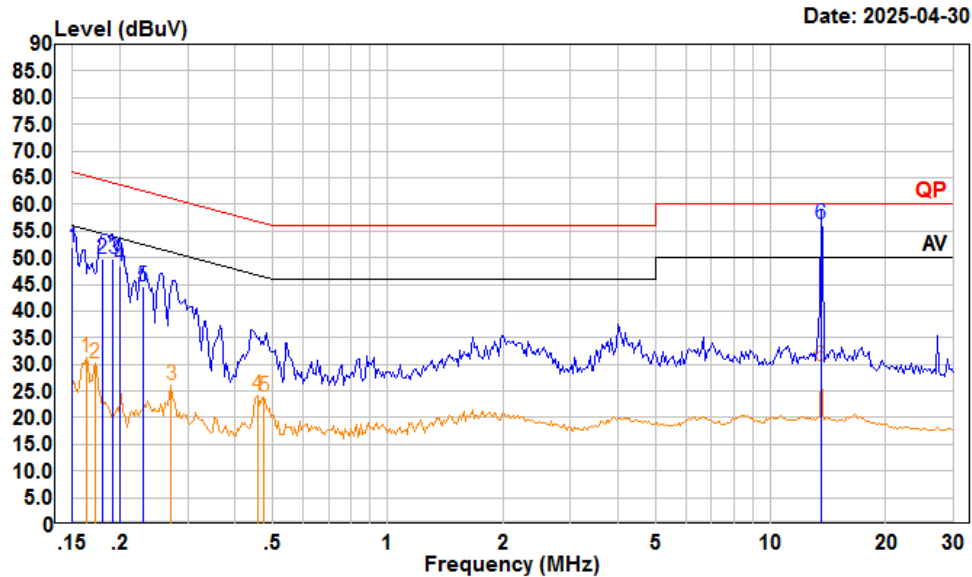

Trace: 1

Condition: Line


Project : 2501Q44881E-RF

tester : Macy.shi Note:Transmitting

Setting : RBW:9kHz

	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	31.50	51.83	10.20	10.13	66.00	-14.17	QP
2	0.180	29.60	49.71	10.01	10.10	64.50	-14.79	QP
3	0.191	29.70	49.74	9.95	10.09	63.98	-14.24	QP
4	0.200	28.30	48.29	9.90	10.09	63.62	-15.33	QP
5	0.229	24.50	44.57	9.99	10.08	62.48	-17.91	QP
6	13.560	35.76	56.20	10.22	10.22	60.00	-3.80	QP
	Freq	Read Level	LISN Level	Cable Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.163	10.99	31.21	10.11	10.11	55.30	-24.09	Average
2	0.172	10.15	30.31	10.06	10.10	54.86	-24.55	Average
3	0.272	5.90	26.09	10.10	10.09	51.07	-24.98	Average
4	0.456	3.57	24.13	10.44	10.12	46.76	-22.63	Average
5	0.476	3.45	24.05	10.47	10.13	46.41	-22.36	Average
6	13.560	9.21	29.65	10.22	10.22	50.00	-20.35	Average

AC 120V/ 60 Hz, Neutral

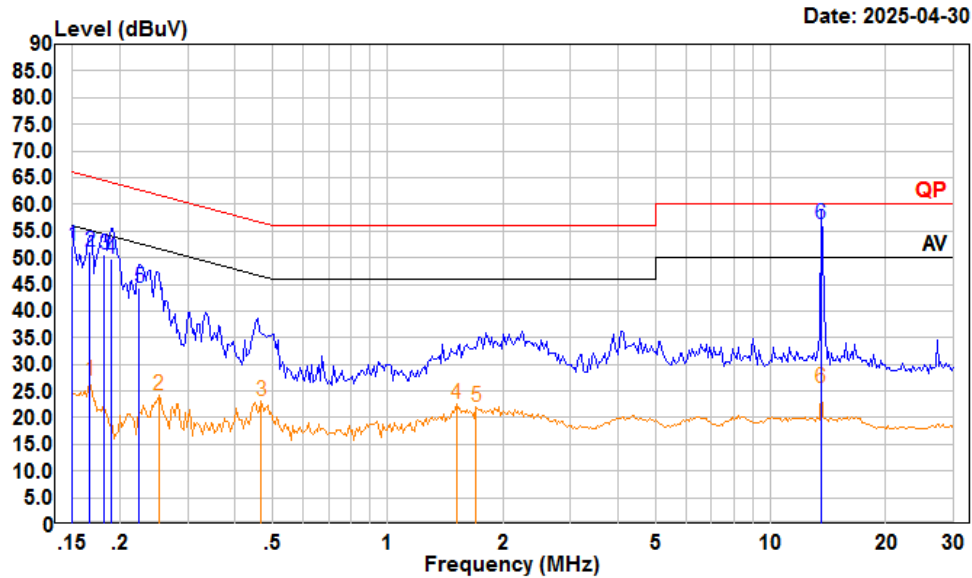

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	31.90	52.33	10.30	10.13	66.00	-13.67	QP
2	0.167	30.80	51.13	10.23	10.10	65.12	-13.99	QP
3	0.182	30.19	50.46	10.17	10.10	64.42	-13.96	QP
4	0.189	29.60	49.83	10.14	10.09	64.06	-14.23	QP
5	0.224	24.00	44.25	10.16	10.09	62.66	-18.41	QP
6	13.560	36.01	56.40	10.17	10.22	60.00	-3.60	QP

		Read		LISN	Cable	Limit	Over	
	Freq	Level	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.167	6.68	27.01	10.23	10.10	55.12	-28.11	Average
2	0.252	3.84	24.15	10.23	10.08	51.69	-27.54	Average
3	0.466	2.53	23.22	10.56	10.13	46.58	-23.36	Average
4	1.511	1.88	22.50	10.46	10.16	46.00	-23.50	Average
5	1.698	1.38	21.94	10.39	10.17	46.00	-24.06	Average
6	13.560	5.28	25.67	10.17	10.22	50.00	-24.33	Average

FCC§15.225, §15.205& §15.209 - RADIATED EMISSIONS TEST


Applicable Standard

As per FCC Part 15.225


- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

9 kHz-30MHz:

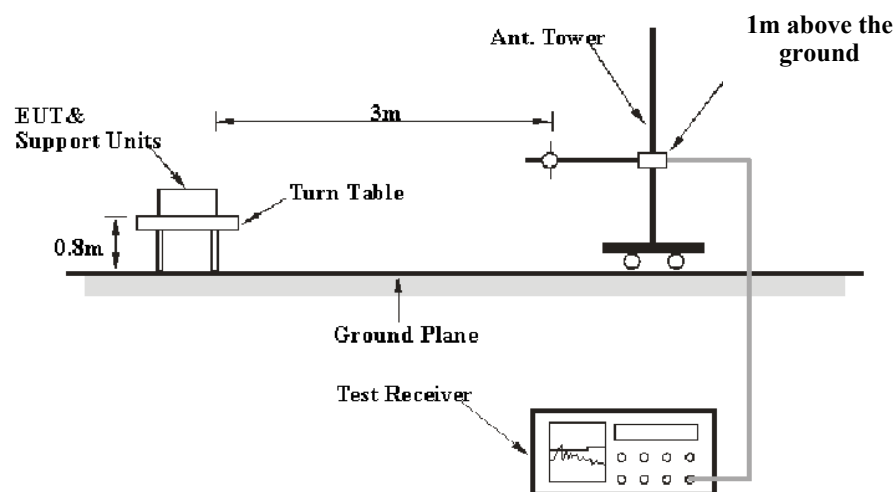

Note: Antenna is set up at 1m during test for below 30MHz.

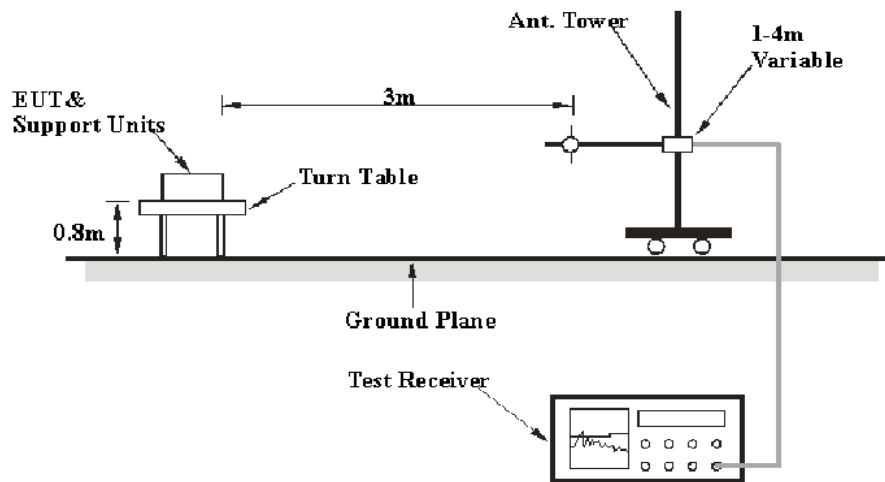30MHz-1GHz:

The radiated emission tests were performed in the 3-meter chamber a test site, using the setup accordance with the ANSI C63.10-2020.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated up to 1000 MHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz.

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform QP/Average measurement.

Factor & Over Limit/Margin Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\begin{aligned}\text{Factor} &= \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

Test Data

Environmental Conditions

Temperature:	23.5~24.9 °C
Relative Humidity:	46~50 %
ATM Pressure:	101.2~101.5 kPa

The testing was performed by Anson Su from 2025-03-07 to 2025-04-30.

Test mode: Transmitting

1) Spurious Emissions (9 kHz~30 MHz):

Part 15 Section 15.31(f)(2) (9kHz-30MHz)


Limit @ 3m = Limit @ 300m - 40 * log(3(m)/300(m))

Limit @ 3m = Limit @ 30m - 40 * log(3(m)/30(m))

With cards**ASK**

Ground-parallel


9 kHz~150 kHz

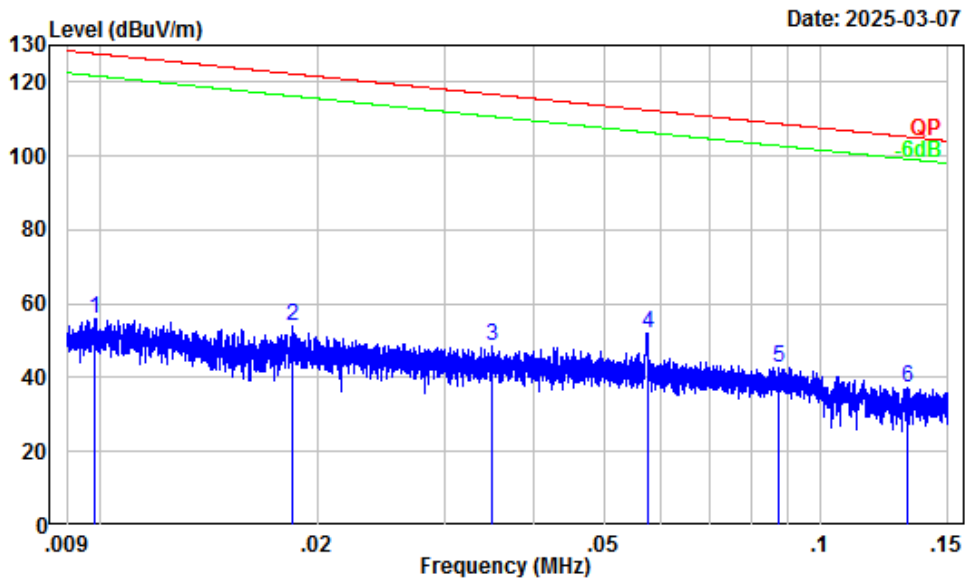

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.33	23.42	55.75	127.73	-71.98	Peak
2	0.02	30.69	23.21	53.90	122.27	-68.37	Peak
3	0.03	27.98	20.68	48.66	116.74	-68.08	Peak
4	0.06	25.65	26.54	52.19	112.41	-60.22	Peak
5	0.09	22.88	19.79	42.67	108.77	-66.10	Peak
6	0.13	20.12	17.29	37.41	105.21	-67.80	Peak


150 kHz~30 MHz

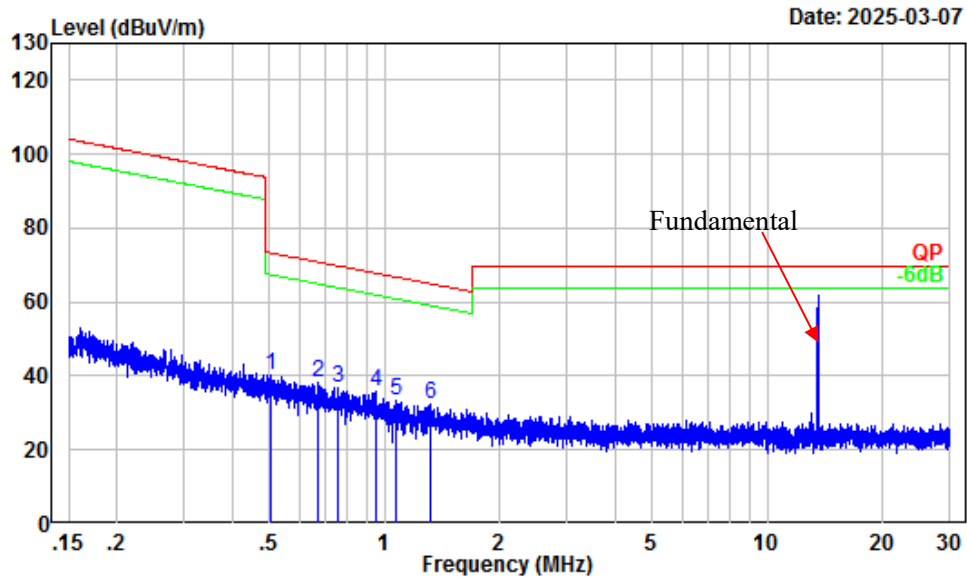

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.51	6.34	33.84	40.18	73.53	-33.35	Peak
2	0.67	4.33	33.94	38.27	71.05	-32.78	Peak
3	0.76	3.23	33.45	36.68	69.94	-33.26	Peak
4	0.95	1.60	34.30	35.90	67.96	-32.06	Peak
5	1.07	1.00	32.26	33.26	66.85	-33.59	Peak
6	1.32	0.30	32.04	32.34	65.00	-32.66	Peak


Perpendicular
9 kHz~150 kHz

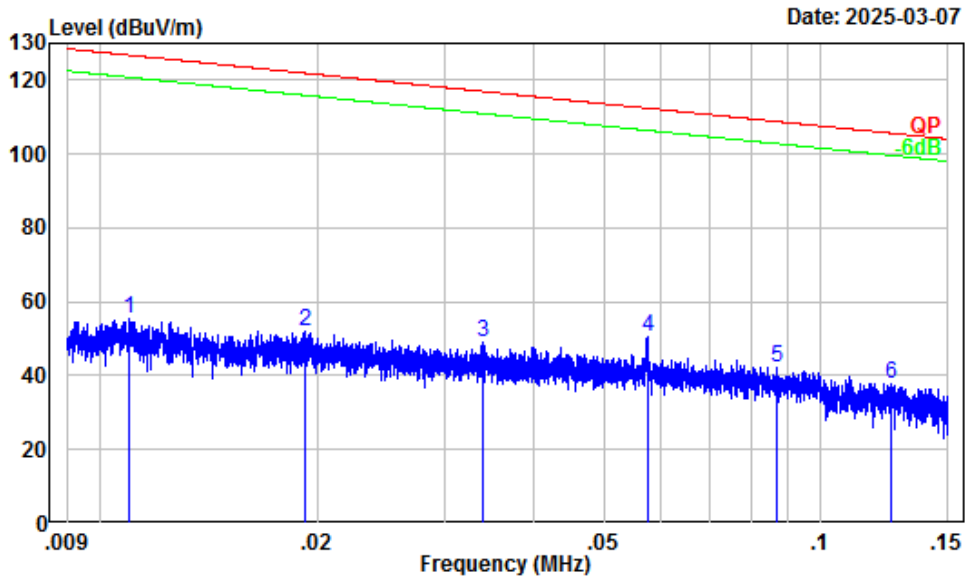

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.11	23.21	55.32	126.77	-71.45	Peak
2	0.02	30.54	21.55	52.09	121.92	-69.83	Peak
3	0.03	28.07	20.99	49.06	116.96	-67.90	Peak
4	0.06	25.66	24.75	50.41	112.42	-62.01	Peak
5	0.09	22.93	19.30	42.23	108.85	-66.62	Peak
6	0.13	20.52	17.28	37.80	105.66	-67.86	Peak


150 kHz~30 MHz

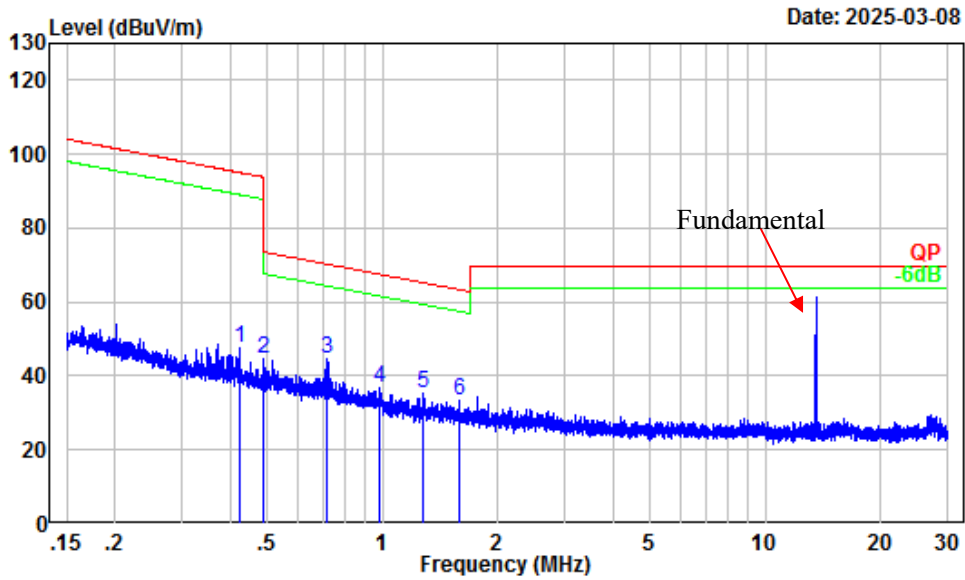

Site : Chamber A
 Condition : 3m
 Project Number : 2501Q44881E-RF
 Test Mode : Transmitting
 Note : Perpendicular
 Detector: Peak RBW/VBW: 10/30kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.42	7.85	39.90	47.75	95.07	-47.32	Peak
2	0.49	6.63	38.18	44.81	93.84	-49.03	Peak
3	0.72	3.69	40.71	44.40	70.39	-25.99	Peak
4	0.99	1.31	35.65	36.96	67.60	-30.64	Peak
5	1.28	0.41	34.69	35.10	65.27	-30.17	Peak
6	1.59	-0.46	33.82	33.36	63.35	-29.99	Peak


Parallel
9 kHz~150 kHz

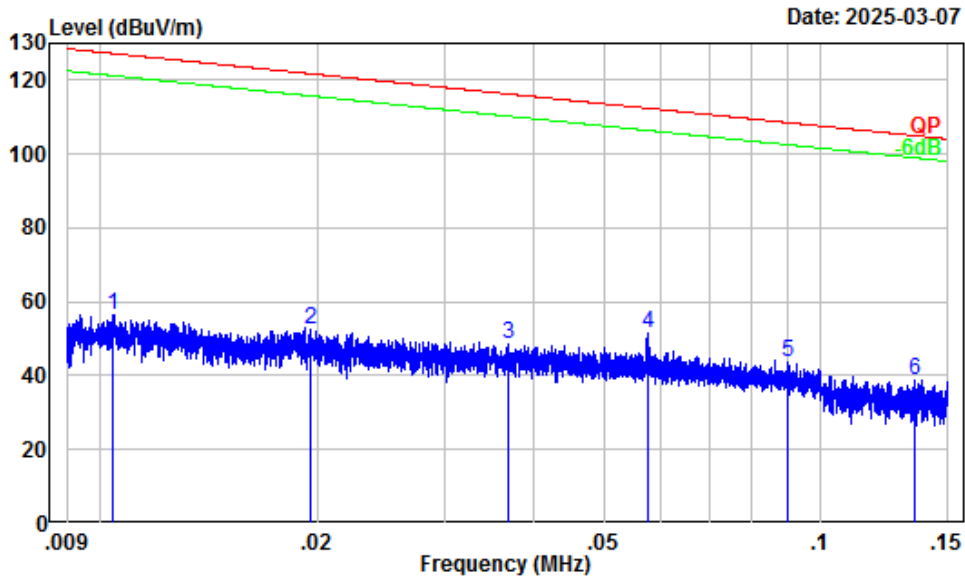

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	0.01	32.22	24.37	56.59	127.22	-70.63	Peak
2	0.02	30.47	22.25	52.72	121.75	-69.03	Peak
3	0.04	27.79	20.61	48.40	116.29	-67.89	Peak
4	0.06	25.65	25.67	51.32	112.41	-61.09	Peak
5	0.09	22.69	21.01	43.70	108.50	-64.80	Peak
6	0.13	19.95	18.61	38.56	105.01	-66.45	Peak

150 kHz~30 MHz

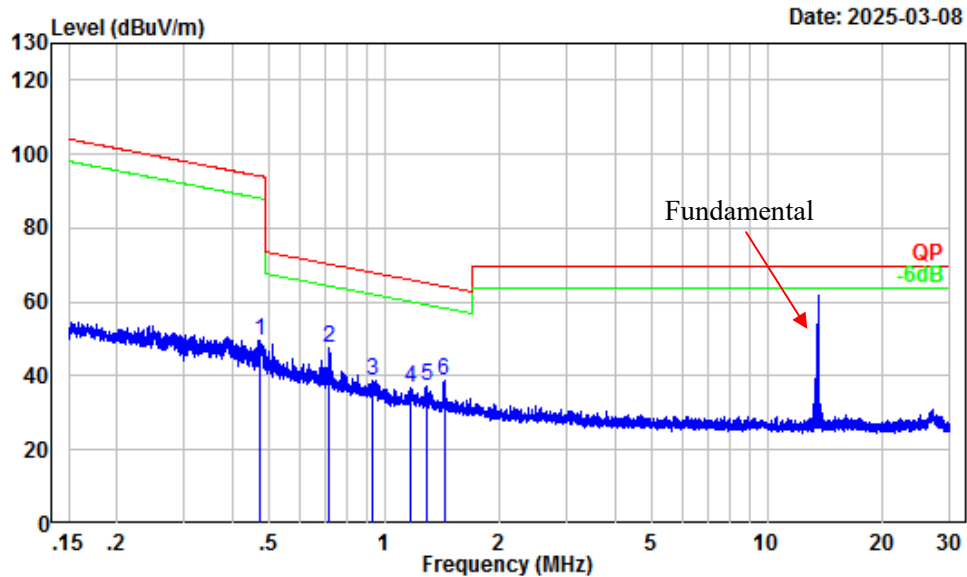


Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.47	6.88	42.75	49.63	94.07	-44.44	Peak
2	0.72	3.71	43.79	47.50	70.41	-22.91	Peak
3	0.94	1.68	37.09	38.77	68.06	-29.29	Peak
4	1.18	0.71	36.32	37.03	66.04	-29.01	Peak
5	1.29	0.38	37.12	37.50	65.19	-27.69	Peak
6	1.43	-0.01	38.58	38.57	64.29	-25.72	Peak

BPSK

Ground-parallel


9 kHz~150 kHz

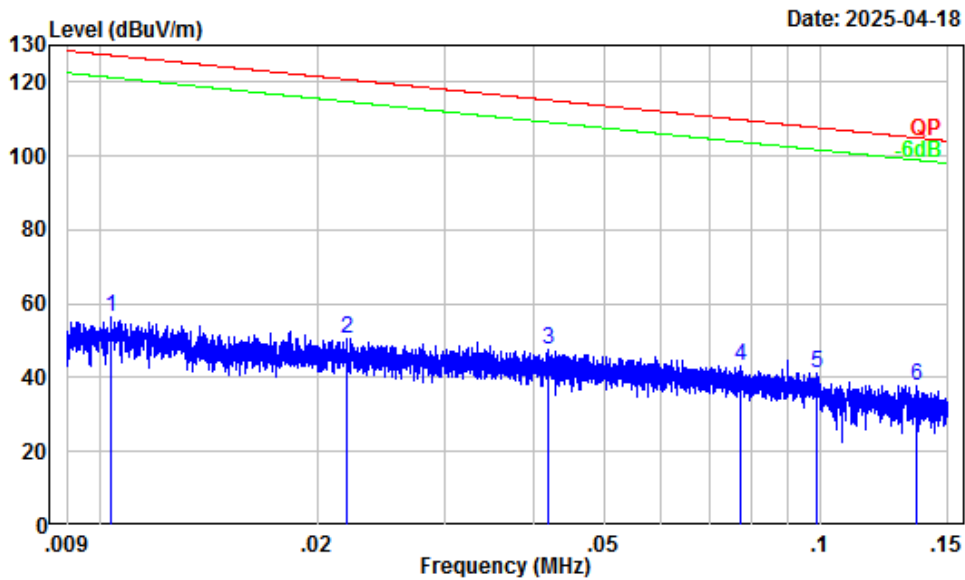

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.23	24.10	56.33	127.28	-70.95	Peak
2	0.02	30.02	20.63	50.65	120.76	-70.11	Peak
3	0.04	27.25	20.10	47.35	115.16	-67.81	Peak
4	0.08	23.64	19.59	43.23	109.81	-66.58	Peak
5	0.10	22.09	19.22	41.31	107.71	-66.40	Peak
6	0.14	19.90	18.10	38.00	104.96	-66.96	Peak


150 kHz~30 MHz

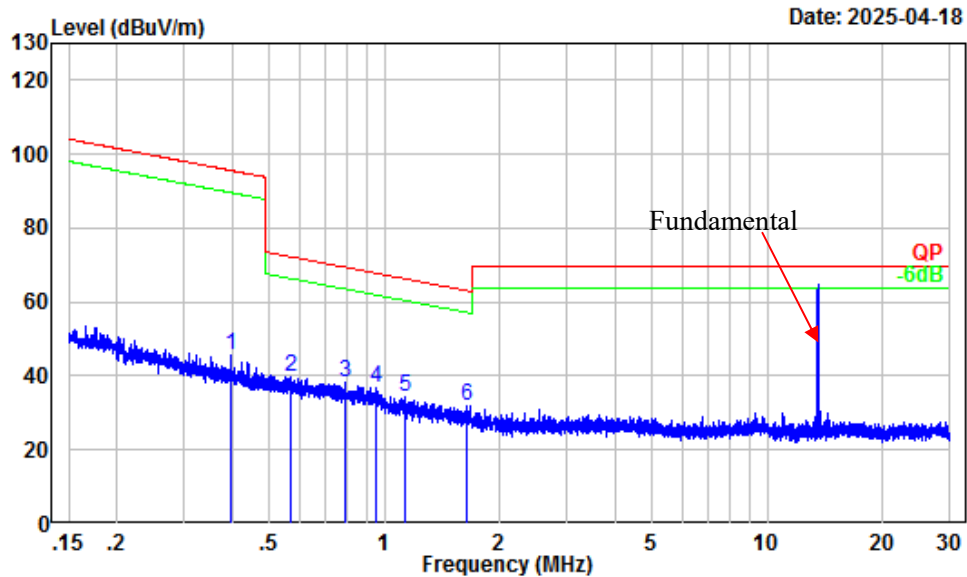

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.40	8.34	37.11	45.45	95.61	-50.16	Peak
2	0.57	5.54	34.01	39.55	72.47	-32.92	Peak
3	0.79	2.80	35.31	38.11	69.54	-31.43	Peak
4	0.95	1.55	35.23	36.78	67.89	-31.11	Peak
5	1.13	0.84	33.48	34.32	66.40	-32.08	Peak
6	1.64	-0.58	32.61	32.03	63.11	-31.08	Peak


Perpendicular
9 kHz~150 kHz

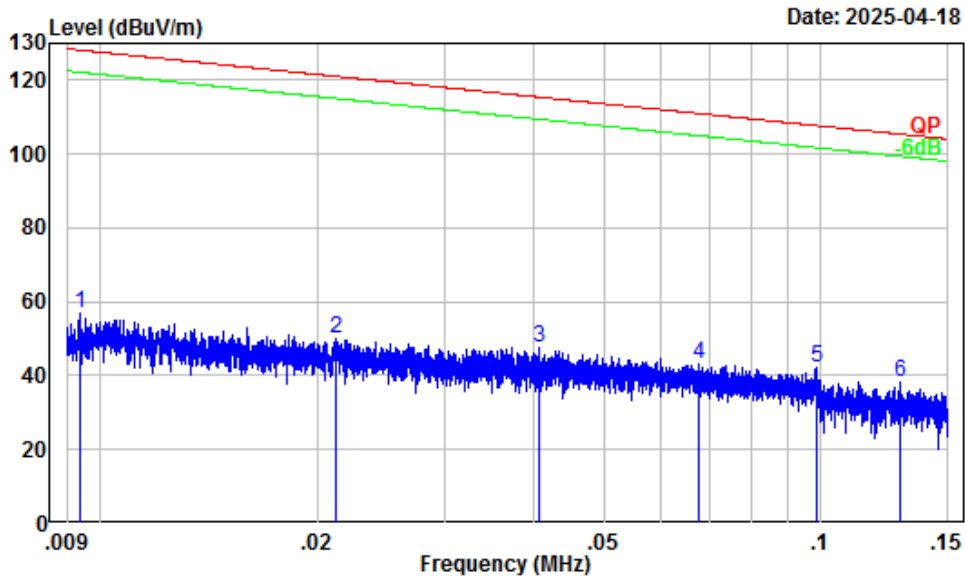

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.42	24.24	56.66	128.14	-71.48	Peak
2	0.02	30.16	19.78	49.94	121.06	-71.12	Peak
3	0.04	27.39	20.07	47.46	115.44	-67.98	Peak
4	0.07	24.61	18.71	43.32	110.97	-67.65	Peak
5	0.10	22.09	20.32	42.41	107.72	-65.31	Peak
6	0.13	20.30	17.85	38.15	105.41	-67.26	Peak


150 kHz~30 MHz

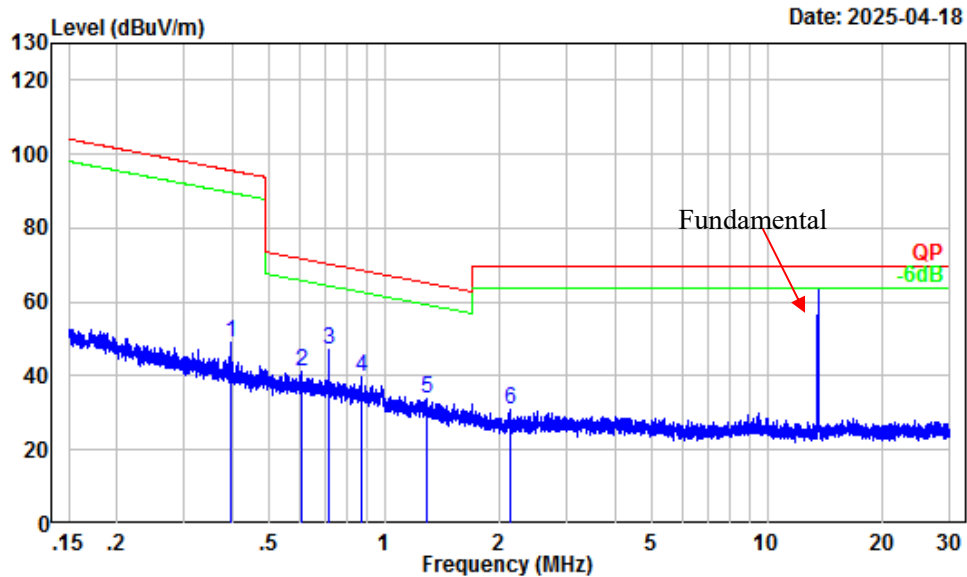

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.40	8.36	40.51	48.87	95.64	-46.77	Peak
2	0.61	5.04	36.18	41.22	71.86	-30.64	Peak
3	0.72	3.71	43.44	47.15	70.41	-23.26	Peak
4	0.87	2.18	37.73	39.91	68.72	-28.81	Peak
5	1.29	0.40	33.29	33.69	65.23	-31.54	Peak
6	2.13	-1.67	32.34	30.67	69.54	-38.87	Peak


Parallel
9 kHz~150 kHz

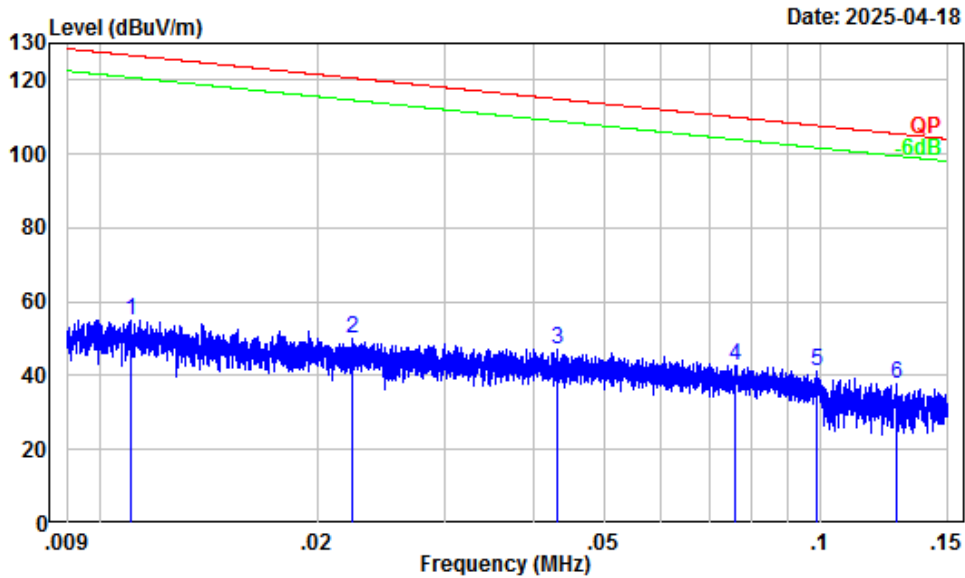

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	32.11	23.00	55.11	126.77	-71.66	Peak
2	0.02	29.95	20.30	50.25	120.61	-70.36	Peak
3	0.04	27.13	19.90	47.03	114.93	-67.90	Peak
4	0.08	23.79	18.96	42.75	109.97	-67.22	Peak
5	0.10	22.10	19.00	41.10	107.72	-66.62	Peak
6	0.13	20.40	17.26	37.66	105.52	-67.86	Peak

150 kHz~30 MHz

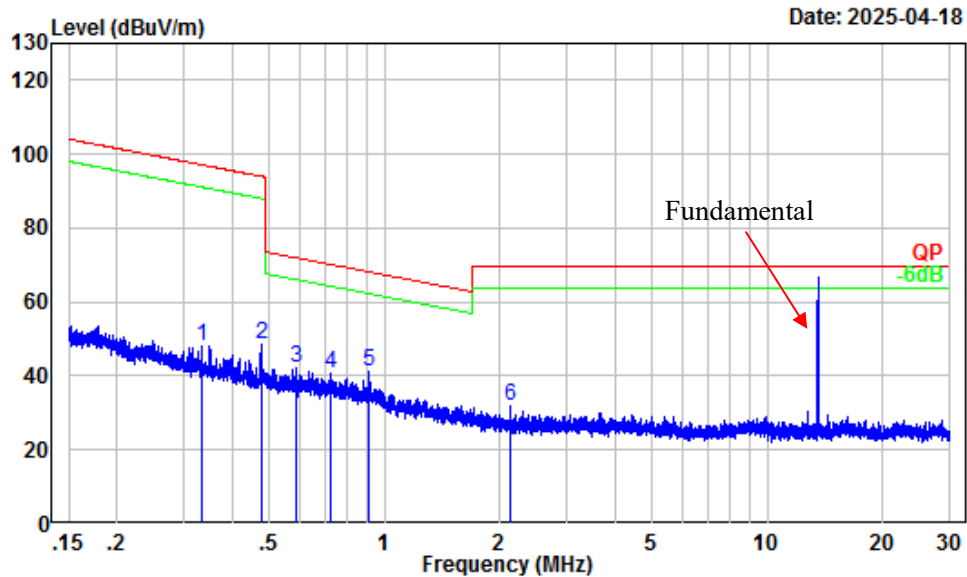


Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.33	9.57	38.61	48.18	97.14	-48.96	Peak
2	0.48	6.78	41.66	48.44	93.97	-45.53	Peak
3	0.59	5.29	36.89	42.18	72.16	-29.98	Peak
4	0.72	3.63	37.13	40.76	70.33	-29.57	Peak
5	0.91	1.84	39.28	41.12	68.26	-27.14	Peak
6	2.13	-1.67	33.42	31.75	69.54	-37.79	Peak

Without cards

Ground-parallel


9 kHz~150 kHz

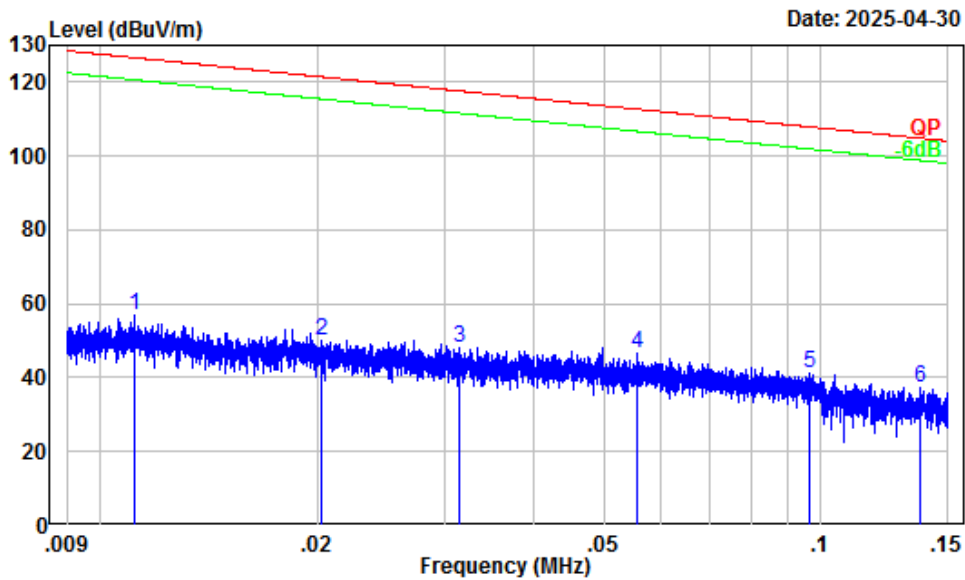

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.08	24.73	56.81	126.66	-69.85	Peak
2	0.020	30.34	19.92	50.26	121.44	-71.18	Peak
3	0.032	28.34	19.60	47.94	117.62	-69.68	Peak
4	0.056	25.83	20.58	46.41	112.68	-66.27	Peak
5	0.096	22.25	19.06	41.31	107.92	-66.61	Peak
6	0.137	19.80	17.40	37.20	104.85	-67.65	Peak


150 kHz~30 MHz

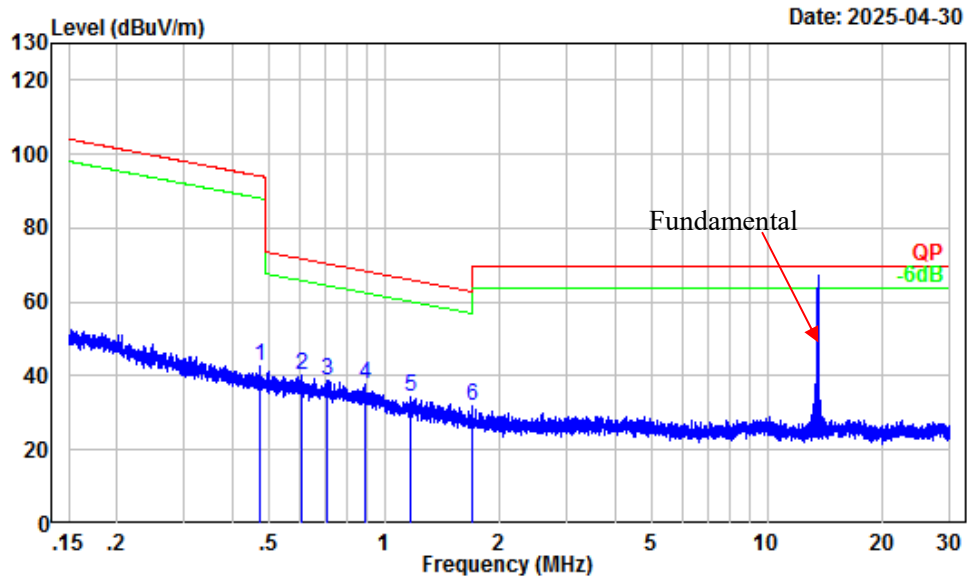

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.475	6.88	35.84	42.72	94.08	-51.36	Peak
2	0.608	5.07	35.08	40.15	71.89	-31.74	Peak
3	0.712	3.79	34.99	38.78	70.49	-31.71	Peak
4	0.893	2.00	35.77	37.77	68.47	-30.70	Peak
5	1.171	0.72	33.79	34.51	66.07	-31.56	Peak
6	1.696	-0.75	32.51	31.76	62.79	-31.03	Peak


Perpendicular
9 kHz~150 kHz

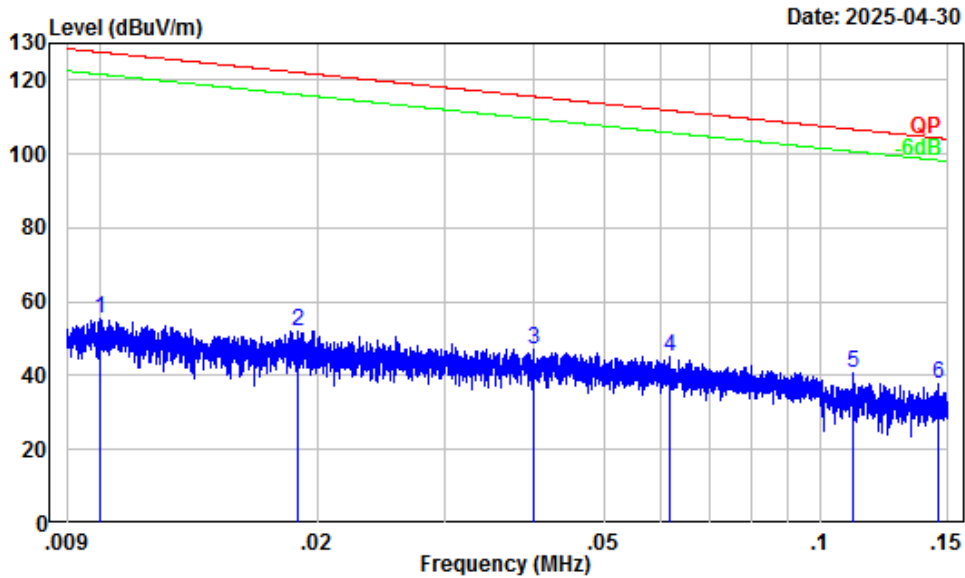

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.30	23.01	55.31	127.60	-72.29	Peak
2	0.019	30.62	21.62	52.24	122.11	-69.87	Peak
3	0.040	27.45	19.64	47.09	115.56	-68.47	Peak
4	0.062	25.23	19.66	44.89	111.80	-66.91	Peak
5	0.111	21.35	19.30	40.65	106.70	-66.05	Peak
6	0.145	19.34	18.32	37.66	104.37	-66.71	Peak


150 kHz~30 MHz

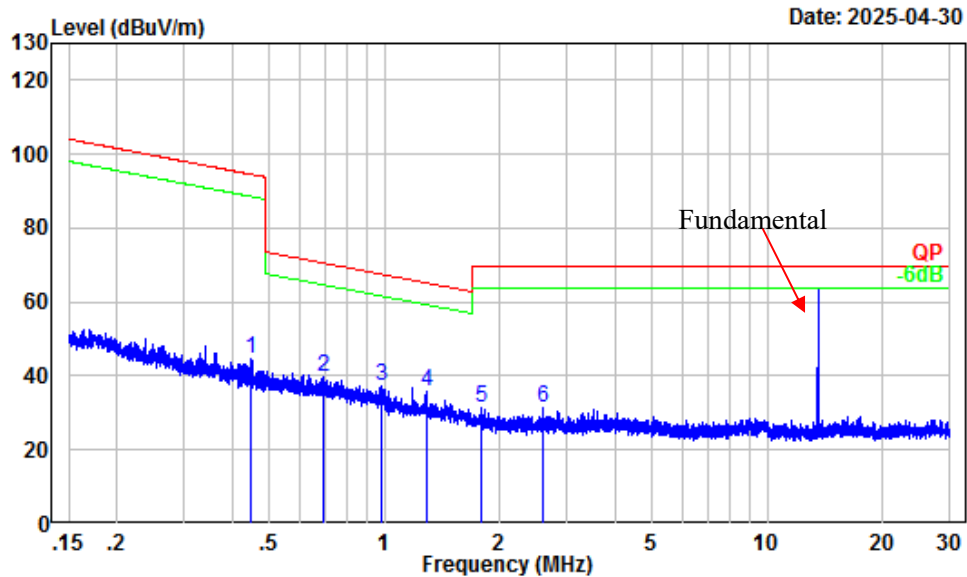

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.448	7.39	37.24	44.63	94.58	-49.95	Peak
2	0.691	4.05	35.44	39.49	70.75	-31.26	Peak
3	0.985	1.32	36.03	37.35	67.61	-30.26	Peak
4	1.287	0.40	35.60	36.00	65.24	-29.24	Peak
5	1.793	-1.02	32.63	31.61	69.54	-37.93	Peak
6	2.607	-1.93	33.19	31.26	69.54	-38.28	Peak


Parallel
9 kHz~150 kHz

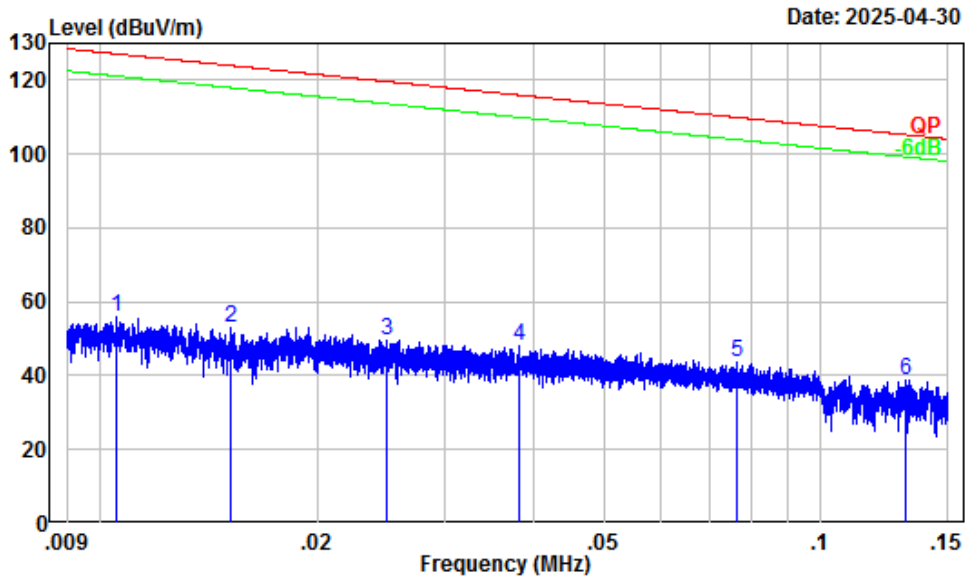

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.011	32.20	23.76	55.96	127.16	-71.20	Peak
2	0.015	31.31	21.89	53.20	123.96	-70.76	Peak
3	0.025	29.46	20.17	49.63	119.66	-70.03	Peak
4	0.038	27.64	20.21	47.85	115.96	-68.11	Peak
5	0.076	23.75	19.95	43.70	109.93	-66.23	Peak
6	0.131	20.17	18.52	38.69	105.25	-66.56	Peak

150 kHz~30 MHz

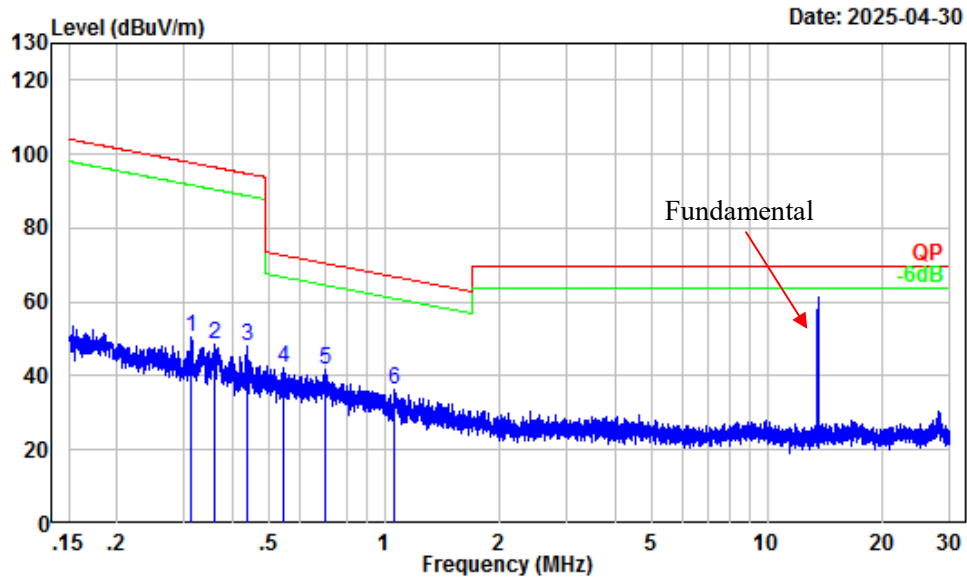


Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.312	9.97	40.56	50.53	97.72	-47.19	Peak
2	0.361	9.05	39.45	48.50	96.47	-47.97	Peak
3	0.440	7.54	40.73	48.27	94.74	-46.47	Peak
4	0.546	5.83	36.46	42.29	72.83	-30.54	Peak
5	0.699	3.94	37.82	41.76	70.65	-28.89	Peak
6	1.057	1.04	35.27	36.31	66.98	-30.67	Peak

2) Emission Mask & Fundamental:


ASK
Ground-parallel

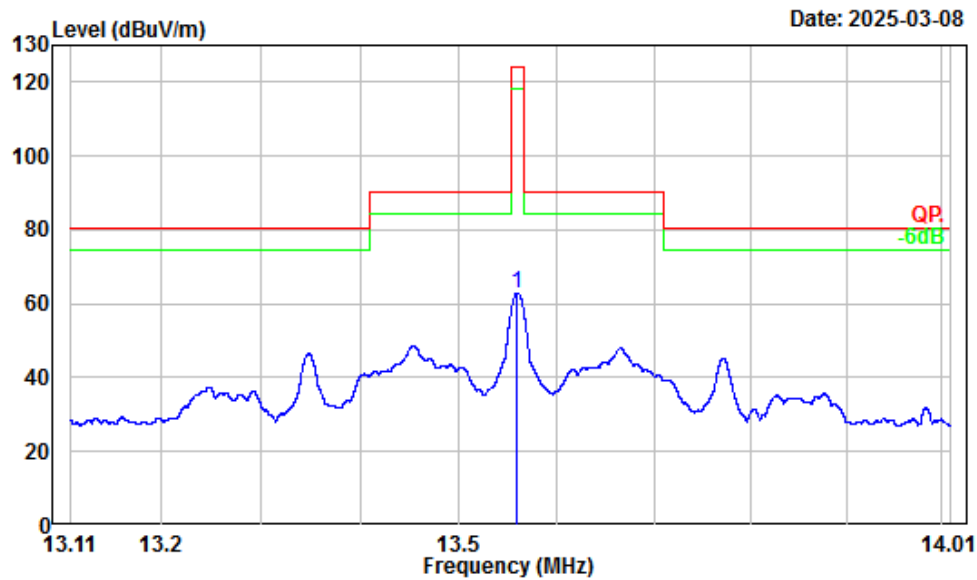

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq Factor		Read	Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	
			dBuV	dBuV/m	dBuV/m	dB
1	13.56	-2.72	65.74	63.02	124.00	-60.98 Peak


Perpendicular

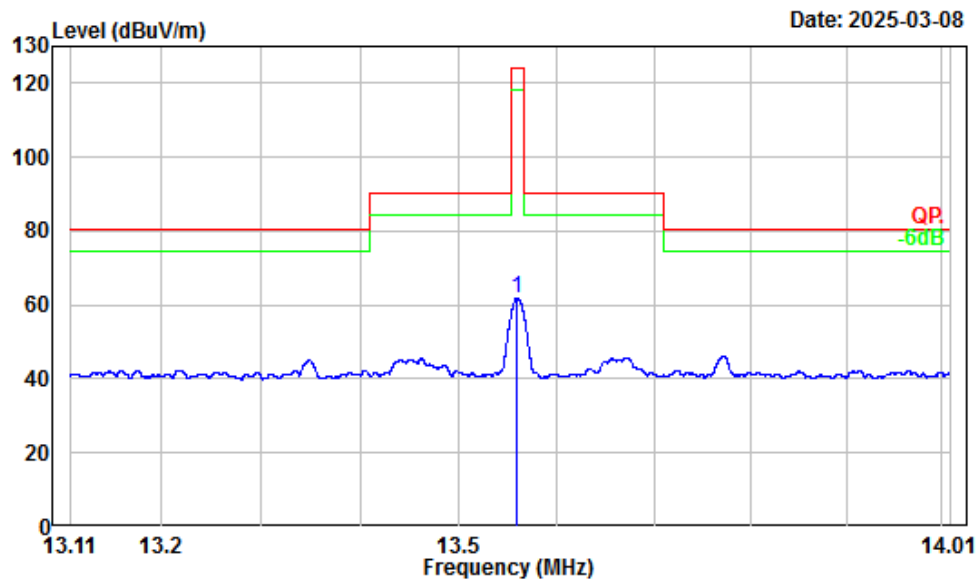

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.56	-2.72	64.65	61.93	124.00	-62.07	Peak


Parallel

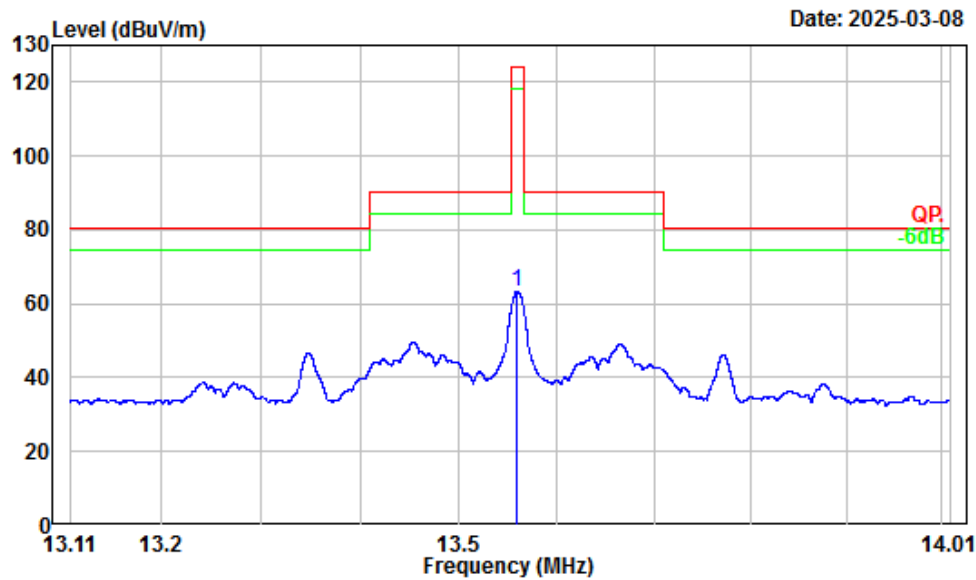

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.56	-2.72	66.10	63.38	124.00	-60.62	Peak


BPSK
Ground-parallel

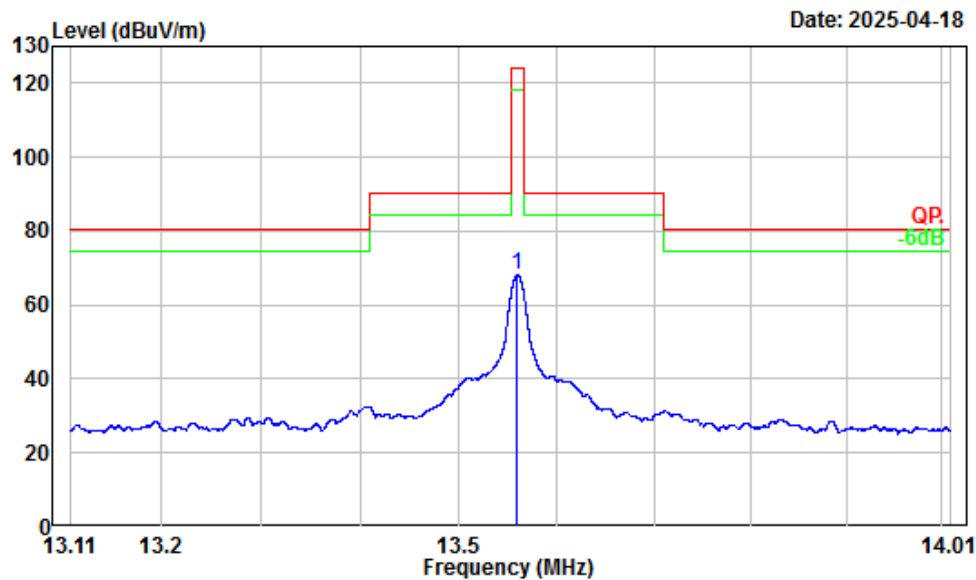

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.56	-2.72	70.74	68.02	124.00	-55.98	Peak


Perpendicular

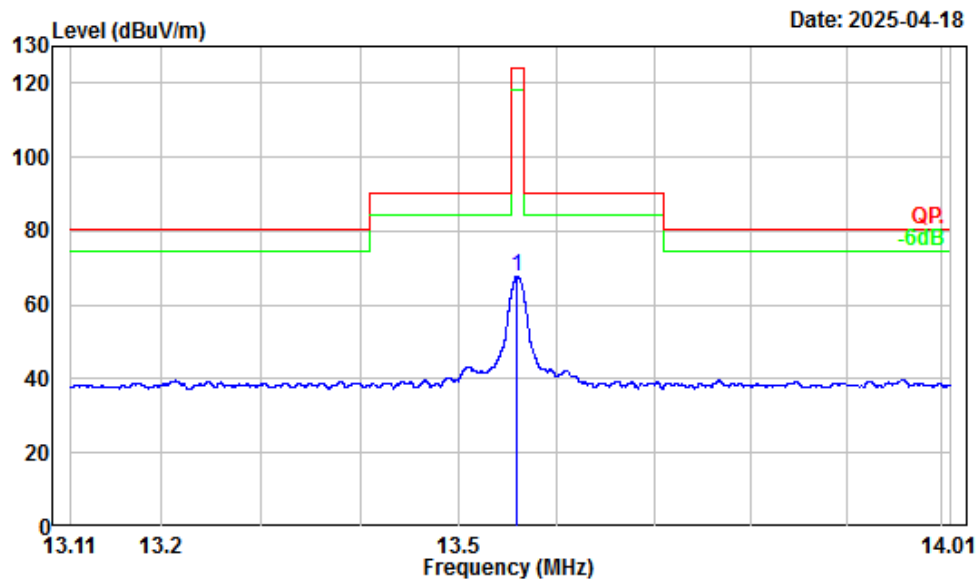

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.56	-2.72	70.51	67.79	124.00	-56.21	Peak


Parallel

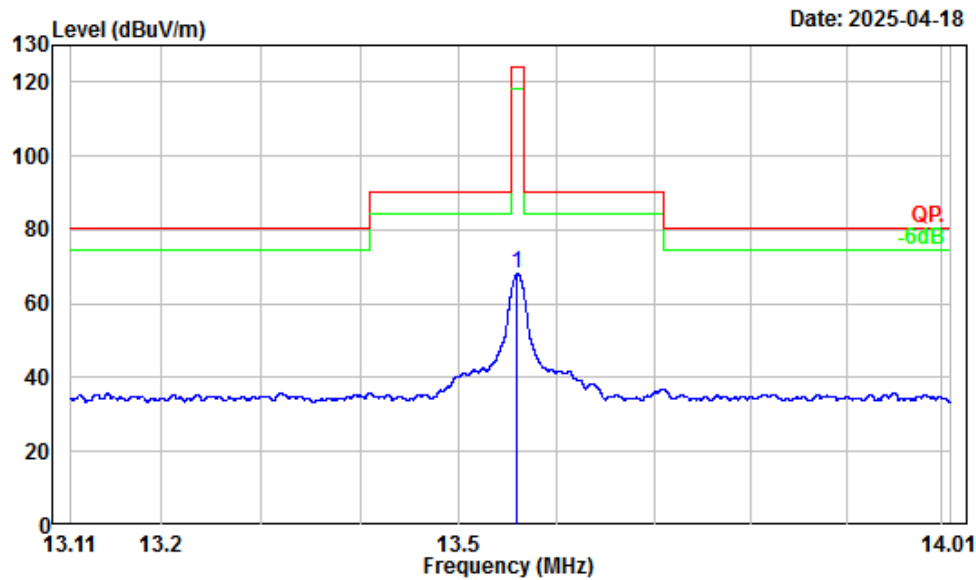

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.56	-2.72	70.68	67.96	124.00	-56.04 Peak


Without cards
Ground-parallel

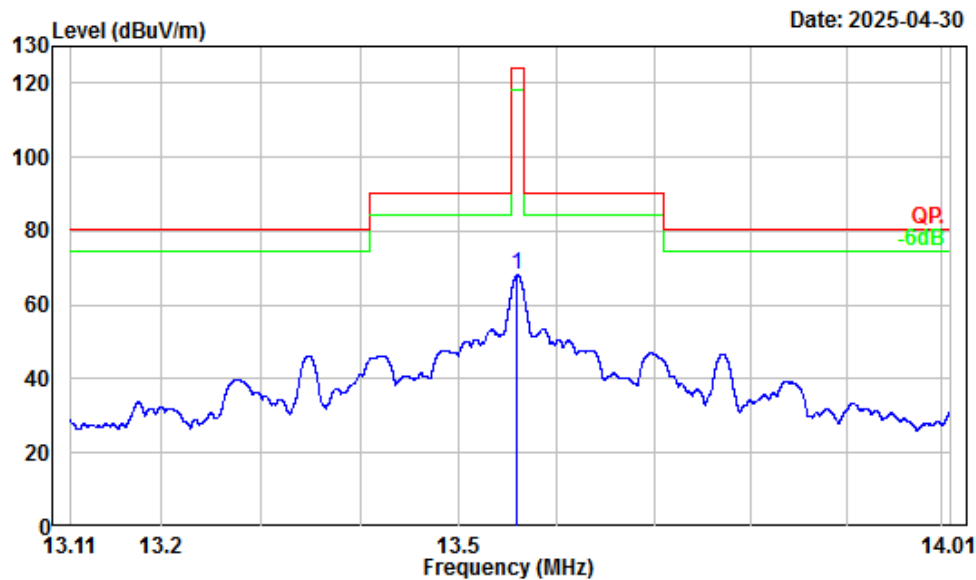

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Ground-parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.560	-2.72	70.78	68.06	124.00	-55.94	Peak


Perpendicular

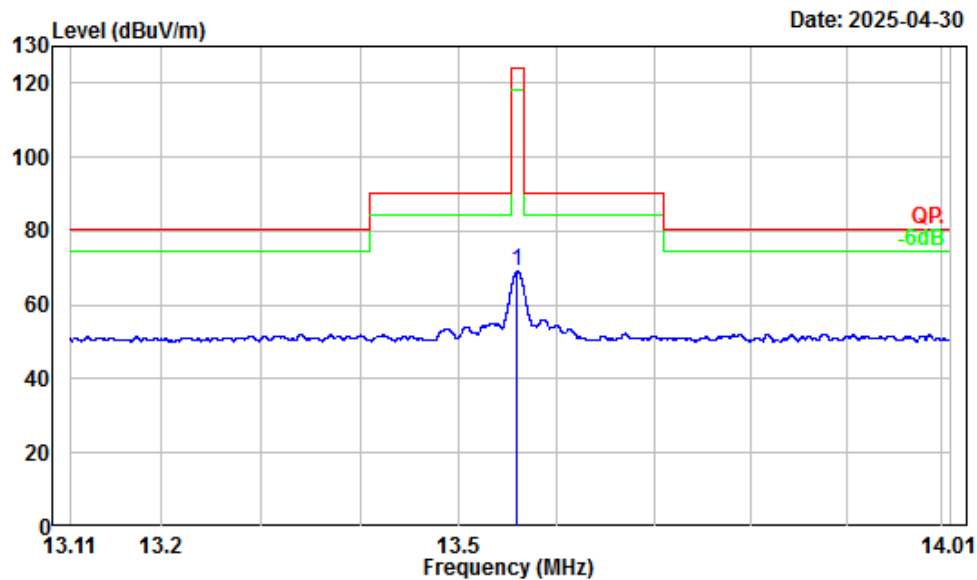

Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Perpendicular
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.560	-2.72	71.66	68.94	124.00	-55.06	Peak

Parallel

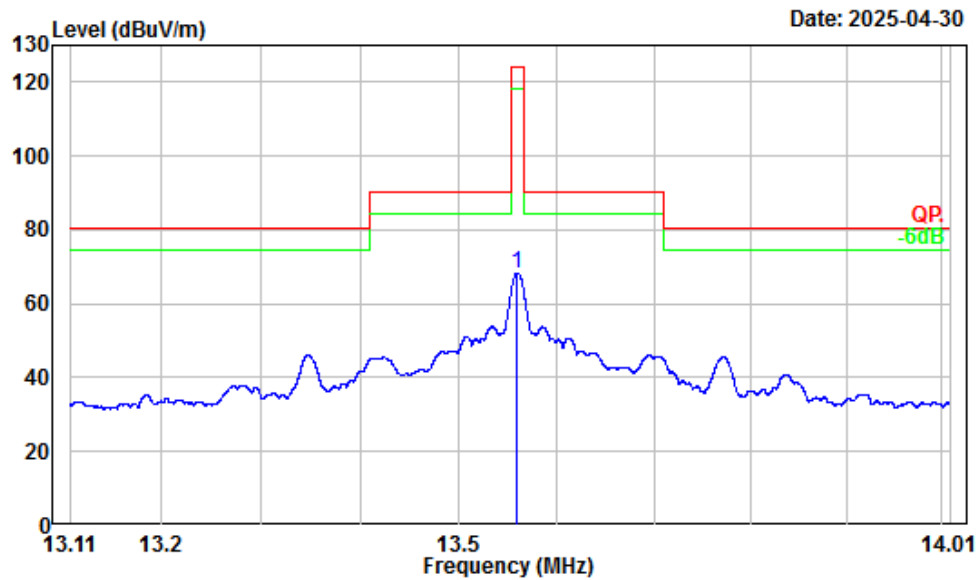


Site : Chamber A
Condition : 3m
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Note : Parallel
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	13.560	-2.72	71.12	68.40	124.00	-55.60 Peak

3) Spurious Emissions (30 MHz~1GHz):

ASK


Horizontal

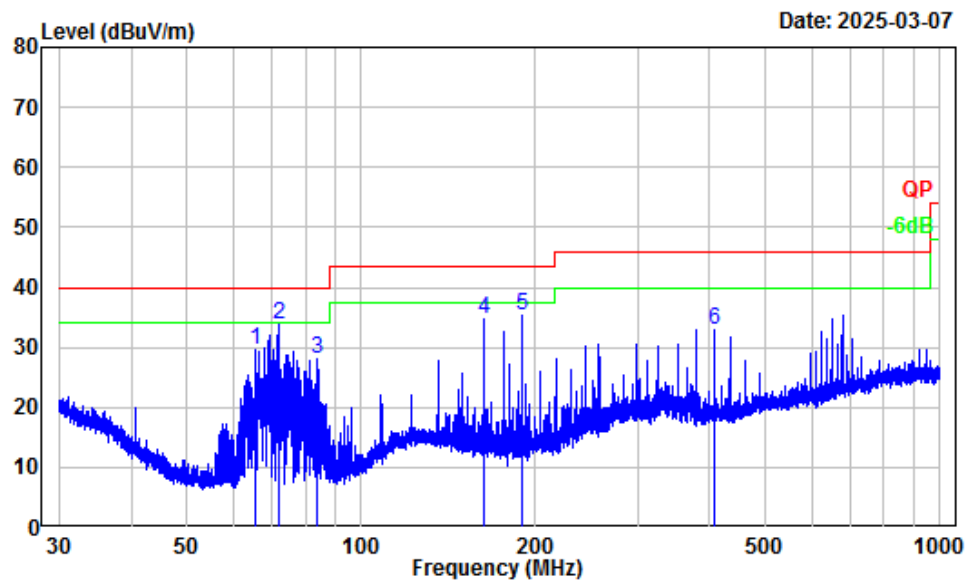

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	65.57	-17.93	47.54	29.61	40.00	-10.39	Peak
2	71.86	-17.85	51.66	33.81	40.00	-6.19	Peak
3	84.11	-18.08	46.27	28.19	40.00	-11.81	Peak
4	162.75	-12.79	47.56	34.77	43.50	-8.73	Peak
5	189.82	-14.22	49.45	35.23	43.50	-8.27	Peak
6	406.80	-8.22	41.18	32.96	46.00	-13.04	Peak

Vertical

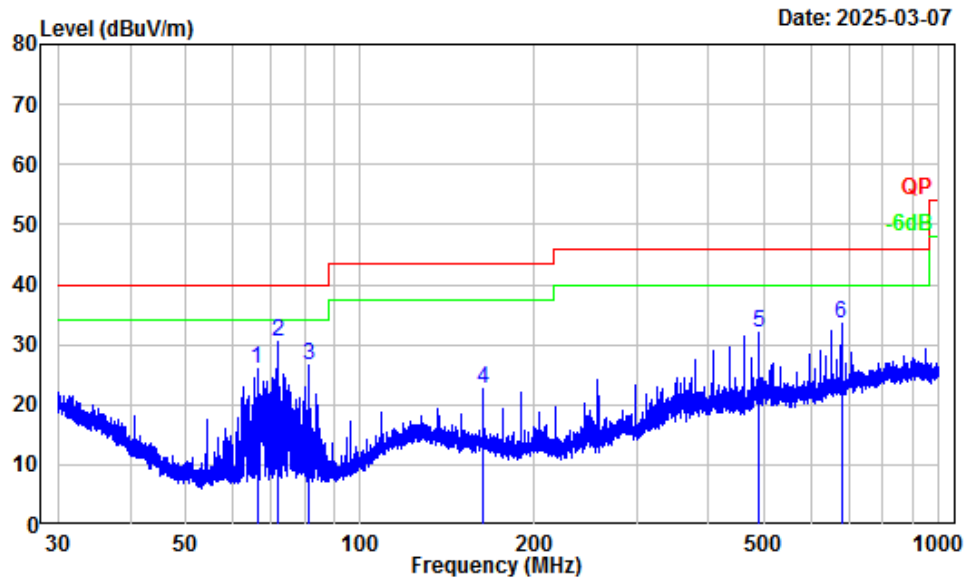


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	66.30	-17.88	43.92	26.04	40.00	-13.96	Peak
2	72.08	-17.85	48.42	30.57	40.00	-9.43	Peak
3	81.32	-18.00	44.56	26.56	40.00	-13.44	Peak
4	162.75	-12.79	35.38	22.59	43.50	-20.91	Peak
5	488.17	-6.06	38.13	32.07	46.00	-13.93	Peak
6	678.17	-3.75	37.28	33.53	46.00	-12.47	Peak

BPSK


Horizontal

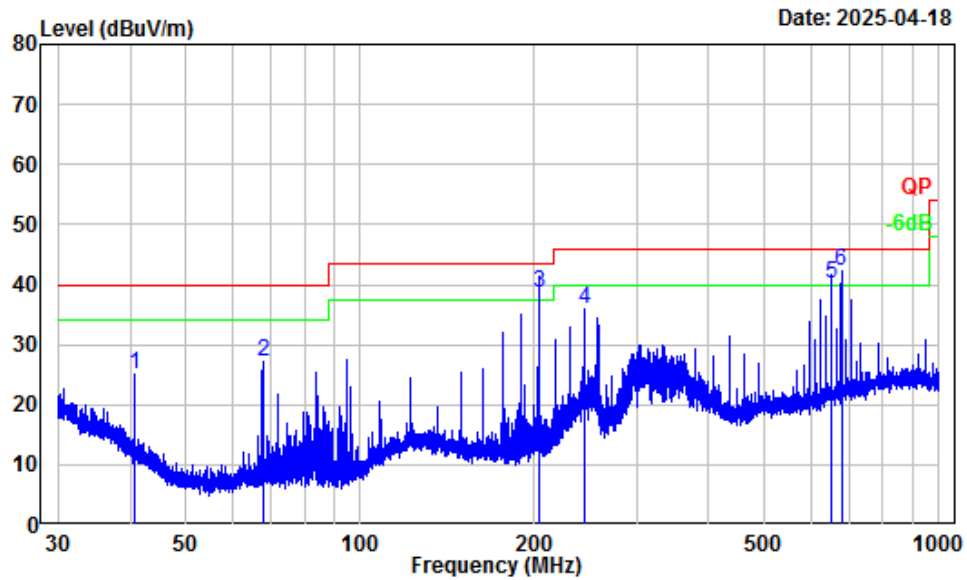

Site : Chamber A
 Condition : 3m Horizontal
 Project Number : 2501Q44881E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 100/300kHz
 Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.68	-12.85	37.98	25.13	40.00	-14.87	Peak
2	67.79	-17.88	44.90	27.02	40.00	-12.98	Peak
3	203.43	-13.32	52.10	38.78	43.50	-4.72	QP
4	244.13	-13.23	49.15	35.92	46.00	-10.08	Peak
5	651.09	-4.11	44.41	40.30	46.00	-5.70	QP
6	678.17	-3.75	46.00	42.25	46.00	-3.75	QP

Vertical

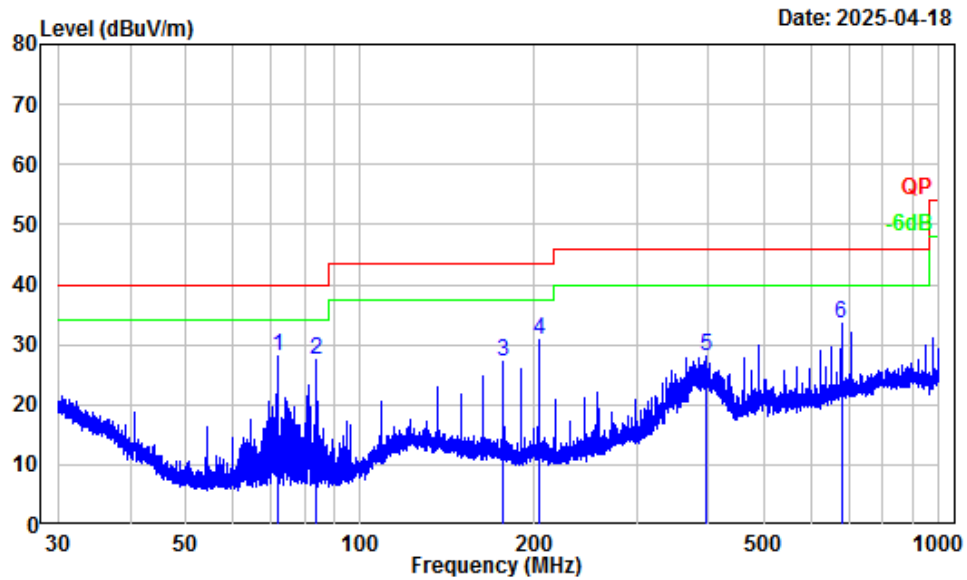


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	71.93	-17.85	45.88	28.03	40.00	-11.97	Peak
2	84.00	-18.09	45.68	27.59	40.00	-12.41	Peak
3	176.27	-13.46	40.52	27.06	43.50	-16.44	Peak
4	203.43	-13.32	44.24	30.92	43.50	-12.58	Peak
5	394.68	-8.66	36.73	28.07	46.00	-17.93	Peak
6	678.17	-3.75	37.16	33.41	46.00	-12.59	Peak

Without cards


Horizontal

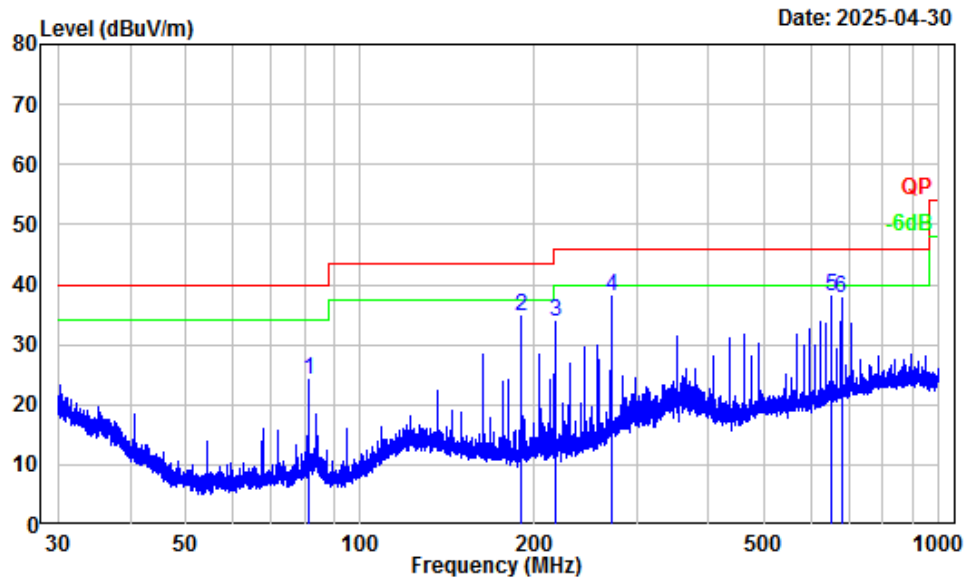

Site : Chamber A
 Condition : 3m Horizontal
 Project Number : 2501Q44881E-RF
 Test Mode : Transmitting
 Detector: Peak RBW/VBW: 100/300kHz
 Tester : Anson Su

	Freq Factor		Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	81.35	-18.00	42.04	24.04	40.00	-15.96	Peak
2	189.82	-14.22	49.01	34.79	43.50	-8.71	Peak
3	216.97	-14.20	48.14	33.94	46.00	-12.06	Peak
4	271.21	-11.73	49.75	38.02	46.00	-7.98	Peak
5	651.09	-4.11	42.25	38.14	46.00	-7.86	Peak
6	678.17	-3.75	41.49	37.74	46.00	-8.26	Peak

Vertical

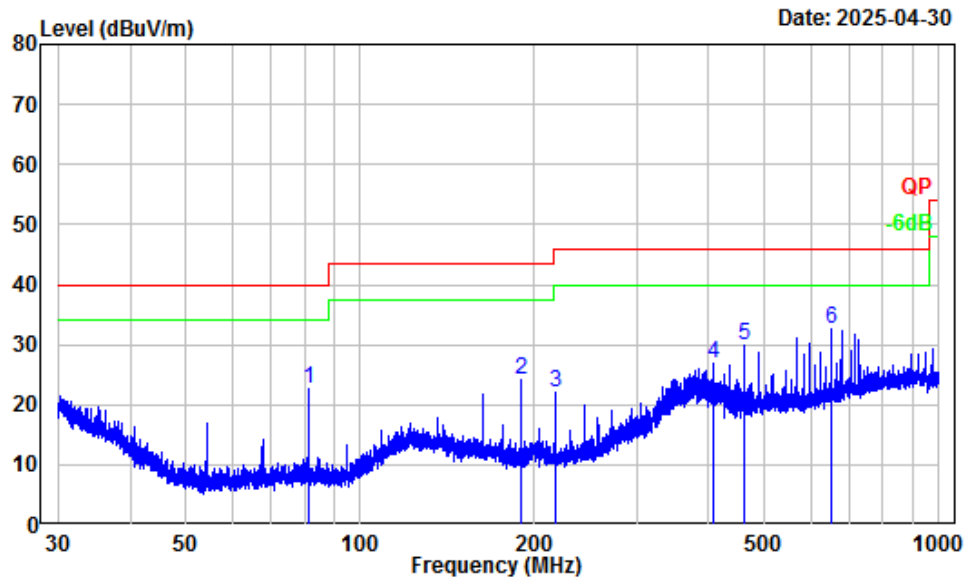

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501Q44881E-RF
Test Mode : Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	81.35	-18.00	40.51	22.51	40.00	-17.49	Peak
2	189.82	-14.22	38.35	24.13	43.50	-19.37	Peak
3	216.97	-14.20	36.30	22.10	46.00	-23.90	Peak
4	406.80	-8.22	35.11	26.89	46.00	-19.11	Peak
5	461.13	-7.07	36.90	29.83	46.00	-16.17	Peak
6	651.09	-4.11	36.64	32.53	46.00	-13.47	Peak

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard


The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and inductive antenna was connected to a Spectrum Analyzer. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

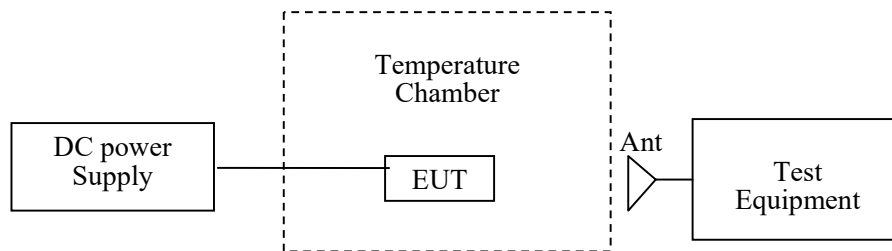

Test Data

Environmental Conditions

Temperature:	23.5~24.9 °C
Relative Humidity:	46~50 %
ATM Pressure:	101.2~101.5 kPa

The testing was performed by Anson Su from 2025-03-07 to 2025-04-30.

Test Mode: Transmitting

Test Result: Pass

With cards**ASK**

Voltage Supply (V _{DC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Part 15.225 Limit (%)
5	-20	13.56106	0.0078	±0.01
	-10	13.56112	0.0083	±0.01
	0	13.56122	0.0090	±0.01
	10	13.56104	0.0077	±0.01
	20	13.56121	0.0089	±0.01
	30	13.56116	0.0086	±0.01
	40	13.56102	0.0075	±0.01
	50	13.56127	0.0094	±0.01
4.25	20	13.56111	0.0082	±0.01
5.75	20	13.56129	0.0095	±0.01

BPSK

Voltage Supply (V _{DC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Part 15.225 Limit (%)
5	-20	13.56102	0.0075	±0.01
	-10	13.56114	0.0084	±0.01
	0	13.56121	0.0089	±0.01
	10	13.56116	0.0086	±0.01
	20	13.56119	0.0088	±0.01
	30	13.56111	0.0082	±0.01
	40	13.56107	0.0079	±0.01
	50	13.56123	0.0091	±0.01
4.25	20	13.56106	0.0078	±0.01
5.75	20	13.56118	0.0087	±0.01

Without cards

Voltage Supply (V _{DC})	Temperature (°C)	Measured Frequency (MHz)	Frequency Error (%)	Part 15.225 Limit (%)
5	-20	13.56124	0.0091	±0.01
	-10	13.56108	0.0080	±0.01
	0	13.56106	0.0078	±0.01
	10	13.56116	0.0086	±0.01
	20	13.56111	0.0082	±0.01
	30	13.56115	0.0085	±0.01
	40	13.56103	0.0076	±0.01
	50	13.56121	0.0089	±0.01
4.25	20	13.56124	0.0091	±0.01
5.75	20	13.56115	0.0085	±0.01

Note: the extreme voltage was declared by the applicant.


FCC§15.215(c) - 20dBEMISSION BANDWIDTH

Requirement

Per 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

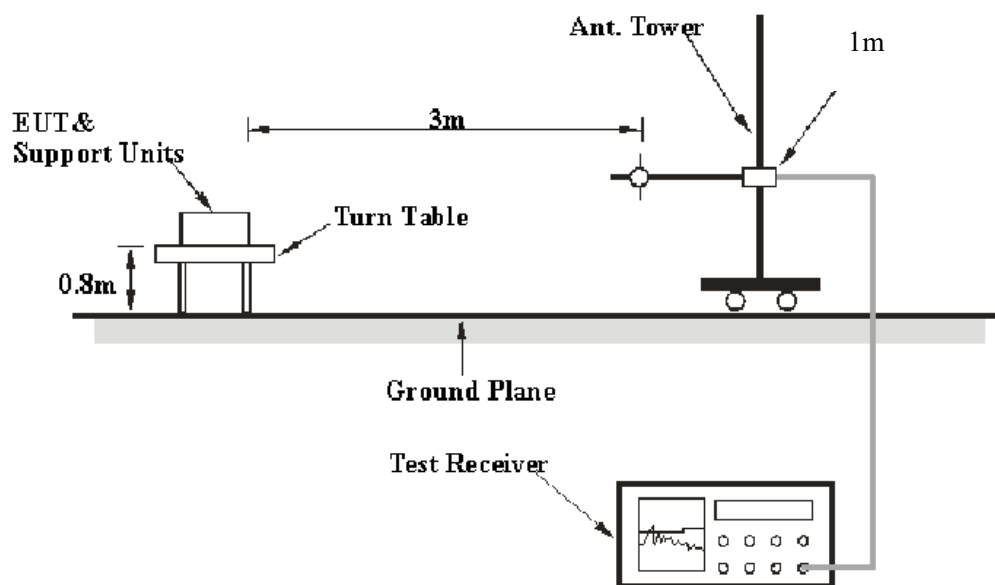

Test Data

Environmental Conditions

Temperature:	23.5~24.9 °C
Relative Humidity:	46~50 %
ATM Pressure:	101.2~101.5 kPa

The testing was performed by Anson Su from 2025-03-07 to 2025-04-30.


Test Mode: Transmitting

Test Result: Pass

With cards
ASK

Test Frequency (MHz)	20dB Bandwidth (kHz)
13.56	1.259


20 dB Emission Bandwidth

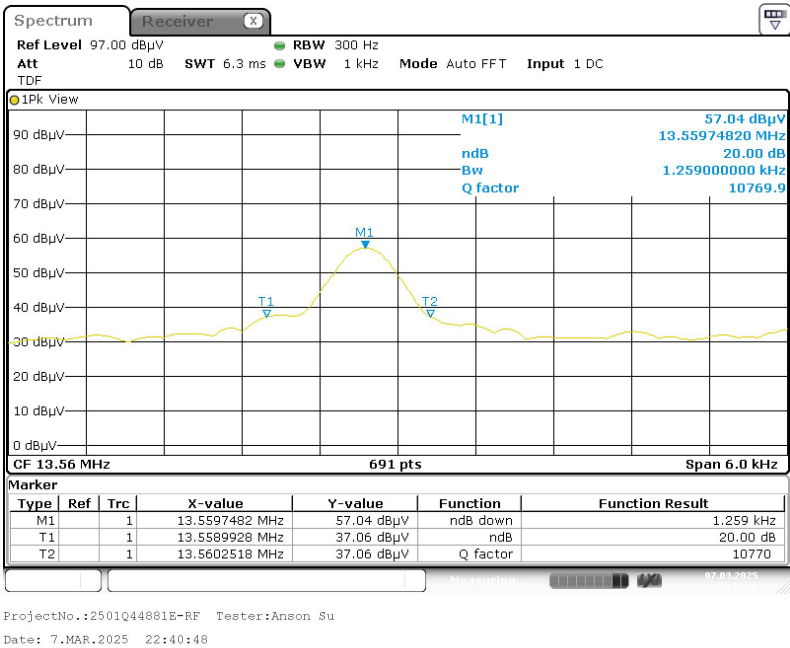

BPSK

Test Frequency (MHz)	20dB Bandwidth (kHz)
13.56	0.0015456

20 dB Emission Bandwidth

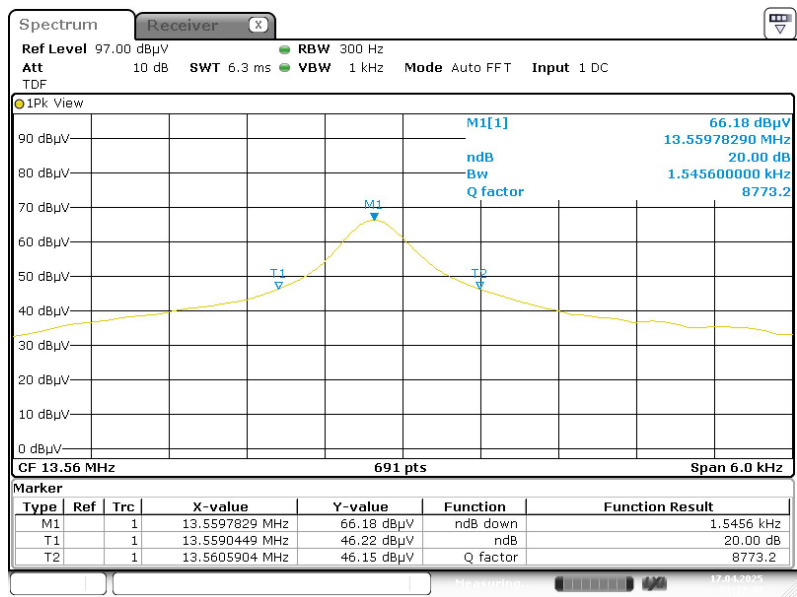


ProjectNo.:2501Q44881E-RF Tester:Anson Su
Date: 17.APR.2025 01:12:44

Without cards

Test Frequency (MHz)	20dB Bandwidth (kHz)
13.56	0.0013632

20 dB Emission Bandwidth

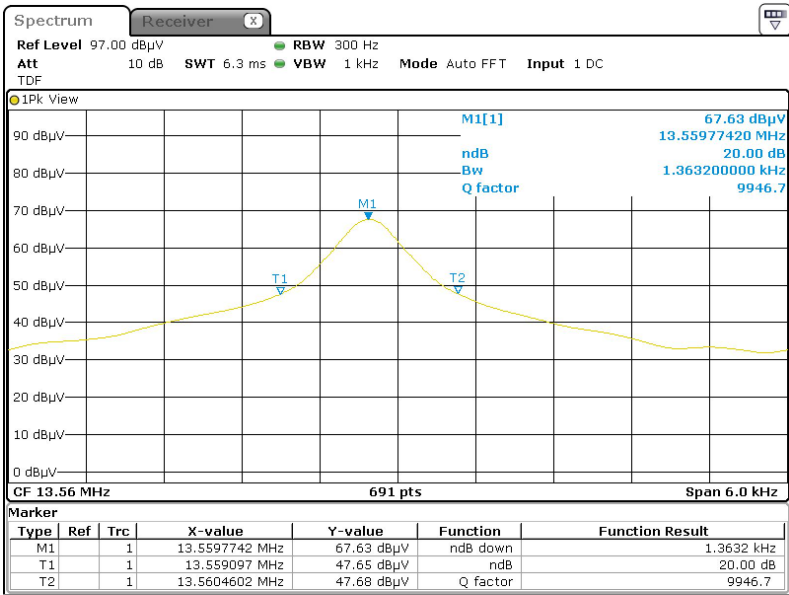

ProjectNo.:2501Q44881E-RF Tester:Anson Su
Date: 30.APR.2025 03:14:24

EUT PHOTOGRAPHS

Please refer to the attachment 2501Q44881E-RF External photo and 2501Q44881E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2501Q44881E-RF Test Setup photo.

******* END OF REPORT *******