

Test Report

Prepared for: Level Up Holding Co., Inc

Models:LBA-VI-7
LBA-VI-7-CELL-V

Description: Video Intercom System with 7 inch Screen

FCC ID: 2A267-LBAVI7-CV

To

FCC Part 15.209

Date of Issue: October 12, 2021

On the behalf of the applicant: Level UP Holding Co.
6020 N 55th Ave
Glendale, AZ 85301

Attention of: Joseph Butler
Ph: (602)775-5360
E-Mail: jbutter@golittlebird.com

Prepared by
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p2180004.7



Greg Corbin
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested

Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	October 12, 2021	Greg Corbin	Original Document
2.0	November 15, 2021	Greg Corbin	Added AC conducted test photos, added reference to ANSI standards on page 6

Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions Engineering Practices	6
Test Results Summary	9
Field Strength	10
Radiated Spurious Emissions	11
Powerline Conducted	12
Radiated Spurious Emissions_ Co-Location.....	14
Output Power_ BLE module.....	16
Emissions at Band Edges_ BLE Module	17
Restricted Band_ BLE module.....	19
Output Power_ Cellular module	21
Emissions at Band Edges_ Cellular Module	22
Measurement Uncertainty	23
Test Equipment Utilized	24

ANAB

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.



FCC Site Reg. #349717

IC Site Reg. #2044A-2

The applicant has been cautioned as to the following:

15.21 Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

ANSI C63.4-2014 was followed for testing the 125 kHz transmitter.

ANSI C63.10-2013 was followed for testing the WIFI transmitter.

ANSI C63.26-2015 was followed for testing the cellular transmitter.

In accordance with ANSI C63.4-2014, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
23.5 – 25.4	38.1 – 44.1	965.1 – 967.7

EUT Description

Model Tested: LBA-VI-7-CELL-V

Description: Video Intercom System with 7 inch Screen

Software: Littlebird Test Software Rev 1.0

Serial Number: N/A

Additional Information:

The EUT is a modern version of the traditional telephone entry system for a gated community or complex. This device allows residents to access the property by swiping a physical credential such as a key fob, or their smartphone, as well as providing directory lookup and calling for property guests. The system includes a screen, keypad, card reader, speakers, microphone, cell modem (optional), and connections to interface with an access control system.

The EUT contains a 125 kHz transmitter and 2 pre-certified modules, (BLE and Cellular).

The 125 kHz transmitter was a pre-certified module with Limited Modular Approval. Full compliance testing was performed and a new FCC ID was issued.

For the pre-certified modules, the output power, band edge and radiated spurious testing was performed.

Co-location radiated spurious testing was performed with all 3 transmitters transmitting simultaneously.

The 125kHz transmitter is for an RFID Reader. The module of the transmitter is manufactured by ID-Innovations. In this configuration it has an external 455 uH wire wound antenna. It communicates to a microcontroller using a UART connection at 9600 baud.

The manufacturer produces a variant of the model tested. The variant is the same as the model tested with the cellular module removed. The model with the cellular module was tested to represent the worse cast of the 2 models.

The LBA-VI-7-CELL-V includes the Verizon cell modem and has a 7" non-touch screen.

The LBA-VI-7 does not include the Verizon cell modem and has a 7" non-touch screen.

Pre-certified Modules installed in the EUT

Module Description	Manufacturer	FCC ID	Frequency Range (MHz)
BLE	Raytac Corp.	SH6MDBT42Q	2402 – 2480
Cellular	Sierra Wireless	N7NHL7618RD	1710 – 1755 777 – 787

Model Tested and Variants

Model Tested	Description
LBA-VI-7-CELL-V	7 inch non-touch screen with Verizon Cellular Modem
Variants	
LBA-VI-7	7 inch non-touch screen without Verizon Cellular Modem

EUT Operation during Tests

The EUT was tested in normal operation.

All tests were performed radiated.

For all tests, the 125 kHz transmitter was powered on and transmitting.

For the 125 kHz transmitter test, the cellular and BLE modules were powered on with the RF output turned off.

For the BLE transmitter verification tests, the cellular module was powered on with the RF output turned off.

For the cellular transmitter verification tests, the BLE module was powered on with the RF output turned off.

For both the BLE and cellular verification tests, the output power, band edge, and radiated spurious was recorded.

Cables:

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Termination
1	AC Power Cable 24 VAC, 16awg 2 conductor	2	N	N	EUT
1	Ethernet (CAT5e)	> 3	N	N	EUT to switch or pc
1	Ground wire, 16 awg	3	N	N	EUT to ground
1	Multi-conductor cable 22 AWG, 6 conductor	> 3	N	N	DMP 734 to Video Intercom

Accessories:


Qty	Description	Manufacturer	Model	S/N
1	AC to DC Power Converter 24 VAC to 12 VDC	Altronix	TP2450	N/A

Modifications:

1 modification occurred during the testing.

1. On the model with the 7 inch screen, a ferrite was added to the ribbon cable going to the HDMI circuitry to lower radiated spurious emission levels.

Ferrite Information: Mfr: Wurth P/N:7427227

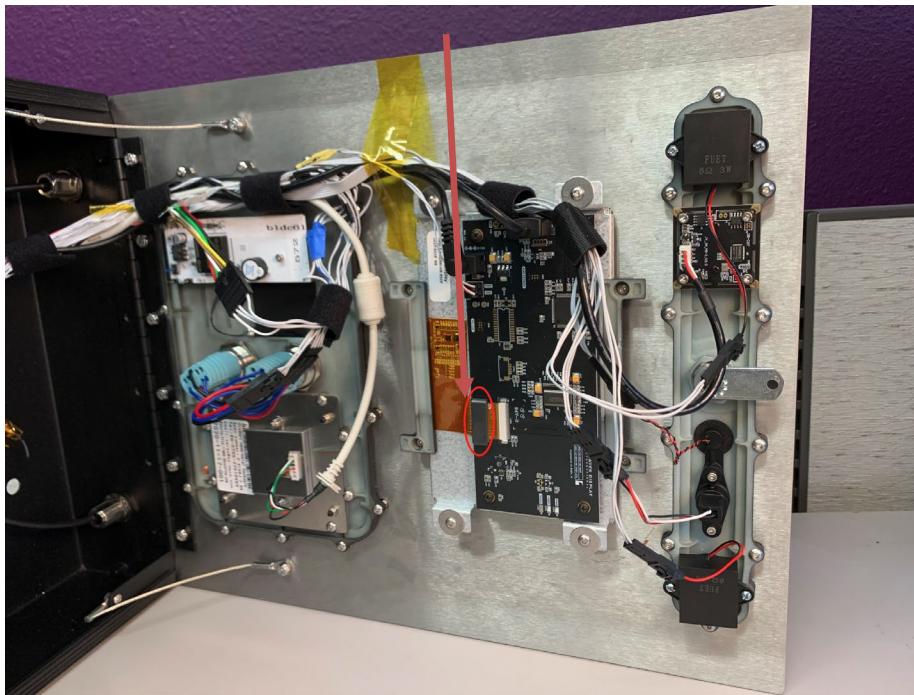

Test Results Summary

125 kHz Transmitter

Specification	Test Name	Pass, Fail, N/A	Comments
15.209	Output Power	Pass	
15.209	Radiated Emissions	Pass	
15.207	Conducted Powerline Emissions	Pass	
15.209	Radiated Emissions_ Co-Location	Pass	All 3 transmitters on

Bluetooth module_ pre-certified module spot check

Specification	Test Name	Pass, Fail, N/A	Comments
15.247(b)(3)	Output Power	Pass	
15.247(d)	Band Edge	Pass	
15.205	Restricted Band	Pass	

Cellular module_ pre-certified module spot check

Specification	Test Name	Pass, Fail, N/A	Comments
27.5	Output Power	Pass	
27.53(g)	Band Edge	Pass	

Statements of conformity are reported as:

- Pass - the measured value is below the acceptance limit, *acceptance limit = test limit*.
- Fail - the measured value is above the acceptance limit, *acceptance limit = test limit*.

15.203: Antenna Requirement:

<input checked="" type="checkbox"/>	The antenna is permanently attached to the EUT
<input type="checkbox"/>	The antenna uses a unique coupling
<input type="checkbox"/>	The EUT must be professionally installed
<input type="checkbox"/>	The antenna requirement does not apply

Field Strength

Engineer: Greg Corbin

Test Date: 9/28/2021

Test Procedure

The EUT was tested in an anechoic chamber at a 3 meter distance from the loop antenna.

The Limit is at 300 meters, so a distance correction factor was applied to the measured result.

The antenna was rotated on the X,Y,Z axis and the highest output power was recorded.

The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

The field strength was also recorded using a peak detector.

Frequency = 125 kHz


Detector = RMS Average

RBW = 200 Hz

Distance Correction Factor = $20 \cdot \log(D1/D2)$

Corrected Level = measured level – (antenna correction factor – distance correction factor)

Test Setup



Field Strength

Detector	Measured Level	Antenna CF	Distance CF	Corrected Level	Limit	Margin	Result
	dBuV/m	dB	dB	dBuV/m	dBuV/m	dB	Pass
Average	57.6	13.8	-40	3.8	25.67	-21.87	Pass
Peak	57.9	13.8	-40	4.1	45.67	-41.57	Pass

Note: Cable correction factors are not included in this measurement as the low loss of the high quality coax cable at low frequencies is practically non-existent.

Radiated Spurious Emissions

Engineer: Greg Corbin

Test Date: 9/28/2021

Test Procedure

The EUT was tested in an anechoic chamber at a 3 meter distance from the loop antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions from 9 kHz to 30 MHz.


The emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For QP measurements, a peak detector was used, and any emissions over the limit were measured with a QP detector. Peak and Average data was recorded as required.

Distance Correction Factor = $20 \cdot \log(D1/D2)$

Corrected Level = measured level – (antenna correction factor – distance correction factor)

Test Setup



Radiated Emissions

Frequency Range	Detector	Measured Frequency	Measured Level	Distance Correction Factor	Antenna Correction Factor	Corrected Level	Limit	Margin
kHz	Pk / Avg	kHz	dBuV/m	dB	dB	dBuV/m	dBuV/m	dB
9 - 150	Average	9.677	44.1	-40	15.4	-11.3	47.89	-59.19
9 - 150	Peak	10.354	54.9	-40	14.8	0.1	47.30	-47.20
110 - 490	Average	146.56	37.8	-40	13.8	-16	24.28	-40.28
490 - 30000	Peak	8129	20.4	-40	14.2	-33.8	-10.60	-23.20

Refer to Annex A for Radiated Spurious Emissions plots.



Powerline Conducted
Engineer: Greg Corbin

Test Date: 10/4/2021

Test Procedure

The EUT power cable connected to a LISN and the monitored output of the LISN was connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were monitored and compared to the specification limits.

Test Setup

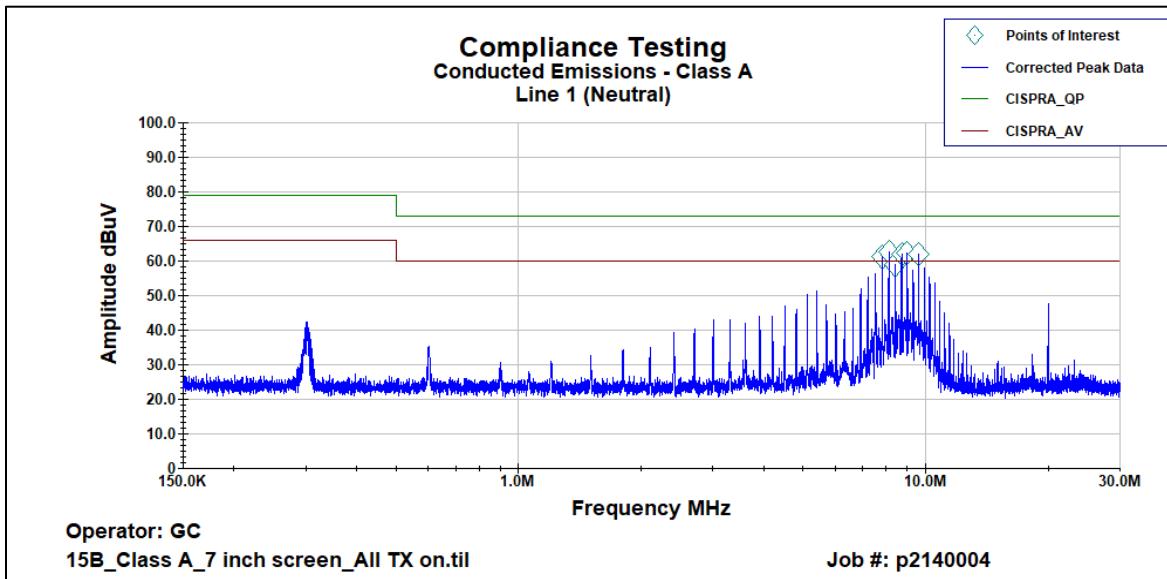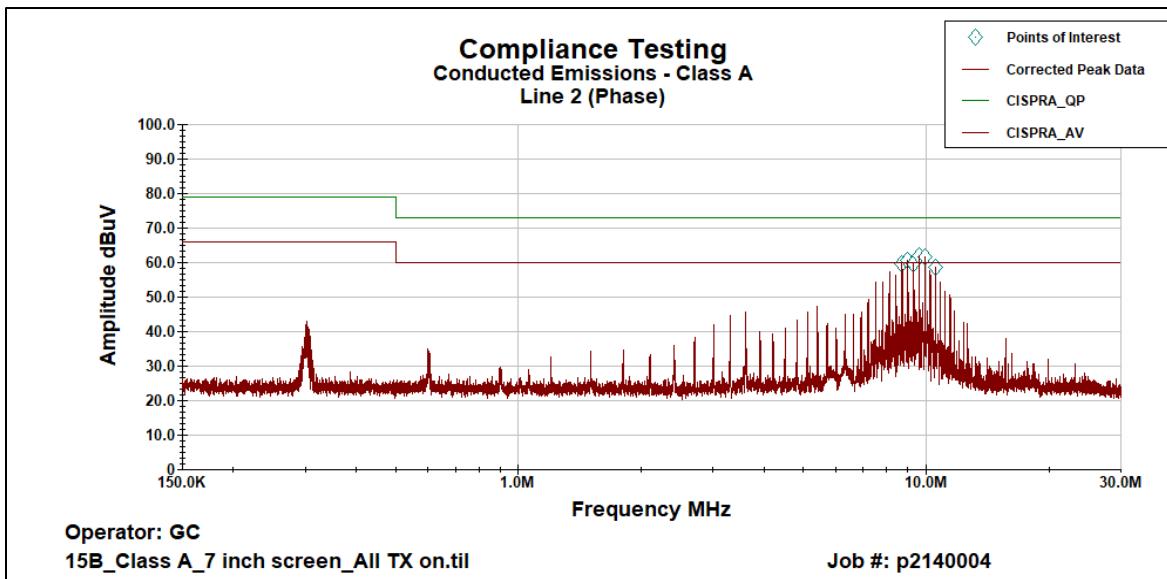Test Results Summary
Line 1 Peak Plot

Line 2 Peak Plot


Test Results Summary

Line 1 Neutral Avg Detector

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Attenuator (dB)	Final Data (dBuV)	Limit (dBuV)	Avg Margin (dB)
7.8147 MHz	42.157	0.06	0.121	10.2	52.537	60	-7.463
8.1152 MHz	42.51	0.06	0.13	10.2	52.9	60	-7.1
8.4156 MHz	40.29	0.06	0.15	10.2	50.7	60	-9.3
8.7182 MHz	43.33	0.056	0.144	10.2	53.73	60	-6.27
9.0193 MHz	42.167	0.05	0.15	10.2	52.567	60	-7.433
9.6213 MHz	42.66	0.048	0.15	10.2	53.058	60	-6.942

Line2 Phase Avg Detector

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Attenuator (dB)	Final Data (dBuV)	Limit (dBuV)	Avg Margin (dB)
8.7195 MHz	43.14	0.02	0.144	10.2	53.5	60	-6.5
9.0222 MHz	42.92	0.01	0.15	10.2	53.283	60	-6.717
9.3188 MHz	39.43	0	0.15	10.2	49.787	60	-10.213
9.6234 MHz	44.33	0	0.15	10.2	54.683	60	-5.317
9.925 MHz	40.19	0	0.15	10.2	50.543	60	-9.457
10.523 MHz	38.83	0	0.16	10.2	49.193	60	-10.807

Line 1 Neutral QP Detector

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Attenuator (dB)	Final Data (dBuV)	Limit (dBuV)	QP Margin (dB)
7.8147 MHz	49.95	0.06	0.121	10.2	60.331	73	-12.669
8.1152 MHz	50.58	0.06	0.13	10.2	60.97	73	-12.03
8.4156 MHz	49.27	0.06	0.15	10.2	59.68	73	-13.32
8.7182 MHz	51.26	0.056	0.144	10.2	61.66	73	-11.34
9.0193 MHz	50.47	0.05	0.15	10.2	60.87	73	-12.13
9.6213 MHz	50.56	0.048	0.15	10.2	60.958	73	-12.042

Line 2 Phase 2 QP Detector

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Attenuator (dB)	Final Data (dBuV)	Limit (dBuV)	QP Margin (dB)
8.7195 MHz	51.34	0.02	0.144	10.2	61.7	73	-11.3
9.0222 MHz	51.42	0.01	0.15	10.2	61.78	73	-11.22
9.3188 MHz	49.51	0	0.15	10.2	59.864	73	-13.136
9.6234 MHz	52.23	0	0.15	10.2	62.58	73	-10.42
9.925 MHz	49.98	0	0.15	10.2	60.33	73	-12.67
10.523 MHz	47.28	0	0.16	10.2	57.64	73	-15.36

Radiated Spurious Emissions_ Co-Location

Engineer: Greg Corbin

Test Date: 9/28/2021

Test Procedure

The EUT was tested in an anechoic chamber at a 3 meter distance from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions from 30 MHz to 25 GHz.

For co-location, all 3 transmitters were powered on and transmitting at the maximum power level. The BT transmitter was set to lowest and highest available channel. The Cellular transmitter was set to the lowest and highest frequency and the lowest and highest modulation bandwidths provided by the module.

The transmitter settings are recorded in the test summary table below.

The antenna, cable and pre-amplifier correction factors were entered into the spectrum analyzer before recording the final results.

A reference level offset of 11.8 dB was included to compare the measured level to the -13 dBm limit.

A 3.4 GHz high pass filter was used to measurements from 3.4 – 25 GHz, to suppress the fundamental signal and allow a wider dynamic range on the spectrum analyzer.


The emission limits are based on measurements employing a CISPR quasi-peak detector for 30 – 1000 MHz and a average detector from 1 – 25 GHz.

A peak detector set to max hold was used for all measurements. If the spurious emissions were within 10 dB of the limit a second measurement was performed using a QP detector for frequencies below 1 GHz and an average detector for frequencies above 1 GHz.

RBW = 100 kHz (30 – 1000 MHz)

RBW = 1 MHz (1 – 25 GHz)

Test Setup



Co-Location Test Summary

Frequency Range	BT Frequency	Cellular Frequency	Cellular BW	Measured Frequency	Measured Level	Limit	Margin	Results
GHz	MHz	MHz	MHz	MHz	dBm	dBm	dB	Pass / Fail
0.030 - 1	2402	779.5	5	932.09	-22.4	-13	-9.4	Pass
0.030 - 1	2402	784.5	5	844.19	-23.5	-13	-10.5	Pass
0.030 - 1	2480	779.5	5	919.86	-23.9	-13	-10.9	Pass
0.030 - 1	2480	784.5	5	962.16	-22.1	-13	-9.1	Pass
0.030 - 1	2402	782	10	942.18	-24.4	-13	-11.4	Pass
0.030 - 1	2480	782	10	945.09	-23.5	-13	-10.5	Pass
0.030 - 1	2402	1710.7	1.4	934.41	-22.7	-13	-9.7	Pass
0.030 - 1	2402	1754.3	1.4	927.24	-23.2	-13	-10.2	Pass
0.030 - 1	2480	1710.7	1.4	916.56	-23.3	-13	-10.3	Pass
0.030 - 1	2480	1754.3	1.4	934.61	-22.6	-13	-9.6	Pass
0.030 - 1	2402	1720	20	935.97	-23.3	-13	-10.3	Pass
0.030 - 1	2402	1745	20	977.1	-23.5	-13	-10.5	Pass
0.030 - 1	2480	1720	20	935.97	-23.3	-13	-10.3	Pass
0.030 - 1	2480	1745	20	951.3	-23.0	-13	-10	Pass
1 - 18	2402	779.5	5	4804.8	-45.0	-13	-32	Pass
1 - 18	2402	784.5	5	17567.8	-43.4	-13	-30.4	Pass
1 - 18	2480	779.5	5	17714.8	-34.6	-13	-21.6	Pass
1 - 18	2480	784.5	5	14650.1	-35.8	-13	-22.8	Pass
1 - 18	2402	782	10	17798.5	-36.0	-13	-23	Pass
1 - 18	2480	782	10	17.755	-35.6	-13	-22.6	Pass
1 - 18	2402	1710.7	1.4	13686.3	-33.6	-13	-20.6	Pass
1 - 18	2402	1754.3	1.4	14720.2	-35.8	-13	-22.8	Pass
1 - 18	2480	1710.7	1.4	13686.3	-33.3	-13	-20.3	Pass
1 - 18	2480	1754.3	1.4	17605.7	-36.1	-13	-23.1	Pass
1 - 18	2402	1720	20	1042.2	-29.8	-13	-16.8	Pass
1 - 18	2402	1745	20	1075.4	-25.5	-13	-12.5	Pass
1 - 18	2480	1720	20	3248.3	-28.4	-13	-15.4	Pass
1 - 18	2480	1745	20	1002.9	-20.5	-13	-7.5	Pass
18 - 25	2402	779.5	5	24962.9	-28.3	-13	-15.3	Pass
18 - 25	2402	1710.7	1.4	24806.8	-28.0	-13	-15	Pass
18 - 25	For 18 - 25 GHz, no spurious emissions were observed. Sample plots were provided for each unit to show noise floor with no spurious present. For the sample plots, each unit was tested with the BT and Cell modules set to the following: BT at 2402 MHz, cell at 779.5 MHz with 5 MHz BW and 1710.7 MHz with 1.4 MHz BW. The 125 kHz transmitter was on. A 3.4 GHz HPF was installed at the receive antenna output.							

Refer to Annex B for Co-located Radiated Spurious Emissions

Output Power_ BLE module

Engineer: Greg Corbin

Test Date: 10/1/2021

Test Procedure

The BLE module is a pre-certified module that was installed with per the module manufacturer's instructions.

The frequency Range of the BLE module is 2402 – 2480 MHz.

The output power, band edge, and restricted band were verified to still be within the FCC limits after being installed in a new host.

The radiated spurious emissions were verified during the Radiated Spurious Emissions Co-Location test.

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was set to transmit on the lowest and highest frequency of operation at the maximum power level. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized.

A spectrum analyzer was used to verify that the EUT met the requirements for Output Power.

The Spectrum Analyzer was set to the following:

RBW \geq DTS Bandwidth

VBW \geq 3 x RBW

Span \geq 3 x RBW


Sweep time = auto couple

Detector = peak

Trace Mode = max hold

The RF output power was measured using the spectrum analyzer's marker peak function

Test Setup



BLE Output Power Summary Table

Tuned Frequency	Measured Value	Specification Limit	Result
MHz	dBm	dBm	Pass / Fail
2402	0.58	30	Pass
2480	3.40	30	Pass

Emissions at Band Edges_ BLE Module

Engineer: Greg Corbin

Test Date: 10/01/2021

Test Procedure


The BLE module is a pre-certified module that was installed with per the module manufacturer's instructions. The output power, band edge, and restricted band were verified to still be within the FCC limits after being installed in a new host.

The radiated spurious emissions were verified during the Radiated Spurious Emissions Co-Location test.

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was set to transmit on the lowest and highest frequency of operation at the maximum power level. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized. A spectrum analyzer was used to verify that the EUT met the requirements for band edges.

Detector = Peak, max hold

Test Setup




Band Edge Emissions Summary


Tuned Frequency (MHz)	Emission Frequency (MHz)	Monitored Level	Limit	Result
MHz	MHz	dBc	dBc	Pass / Fail
2402	2400	-55.0	-20	Pass
2480	2483.5	-51.0	-20	Pass

Band Edge Plots

Low Channel

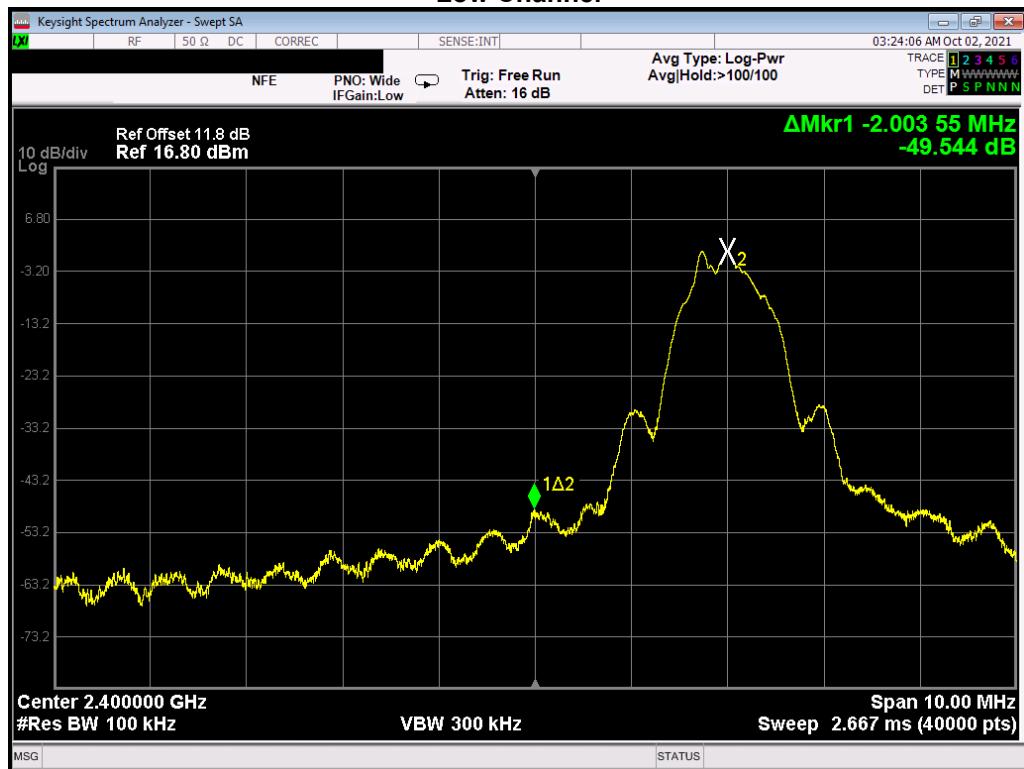

High Channel

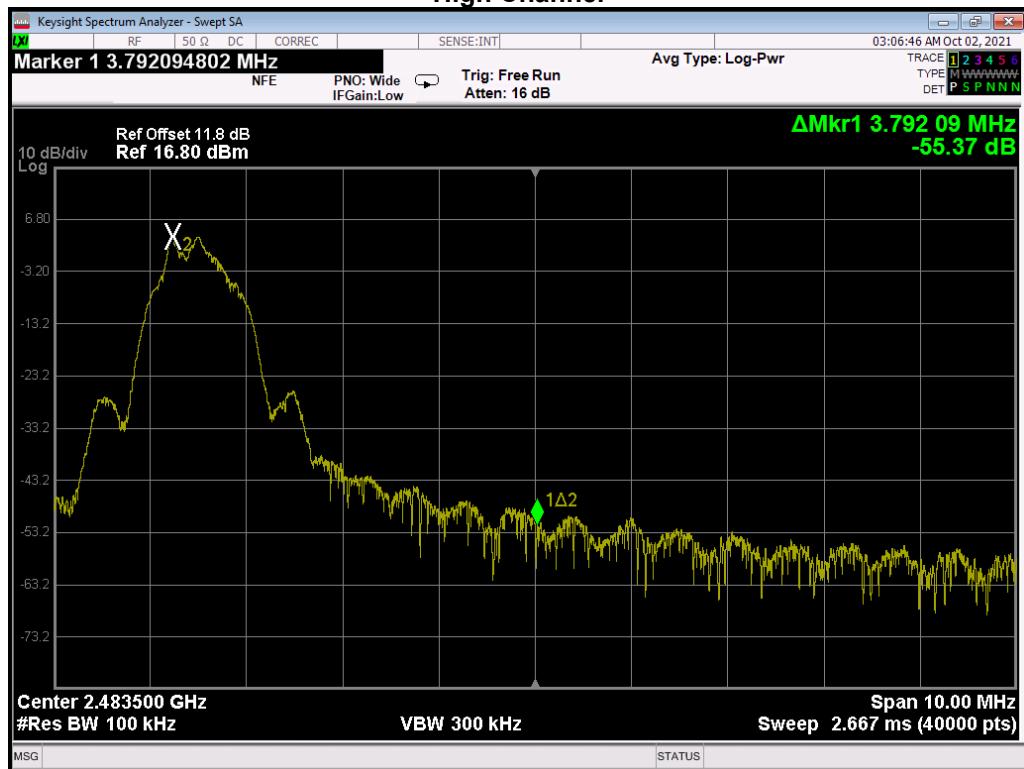

Restricted Band_ BLE module

Engineer: Greg Corbin

Test Date: 10/01/2021

Test Procedure


The BLE module is a pre-certified module that was installed with per the module manufacturer's instructions. The output power, band edge, and restricted band were verified to still be within the FCC limits after being installed in a new host.

The radiated spurious emissions were verified during the Radiated Spurious Emissions Co-Location test.

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was set to transmit on the lowest and highest frequency of operation at the maximum power level. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized. A spectrum analyzer was used to verify that the EUT met the requirements for the restricted bands in the frequency range of 2310 – 2390 MHz and 2483.5 – 2500 MHz.

Detector = RMS Average

Test Setup




Restricted Band Emissions Summary


Restricted Band	Tuned Frequency (MHz)	Emission Frequency (MHz)	Monitored Level	Limit	Margin	Result
MHz	MHz	MHz	dBuV	dBuV	dB	Pass / Fail
2310 - 2390	2402	2310.856	31.8	54	-22.2	Pass
2483.5 - 2500	2480	2483.969	41.5	54	-12.5	Pass

Restricted Band Plots

2310 – 2390 MHz

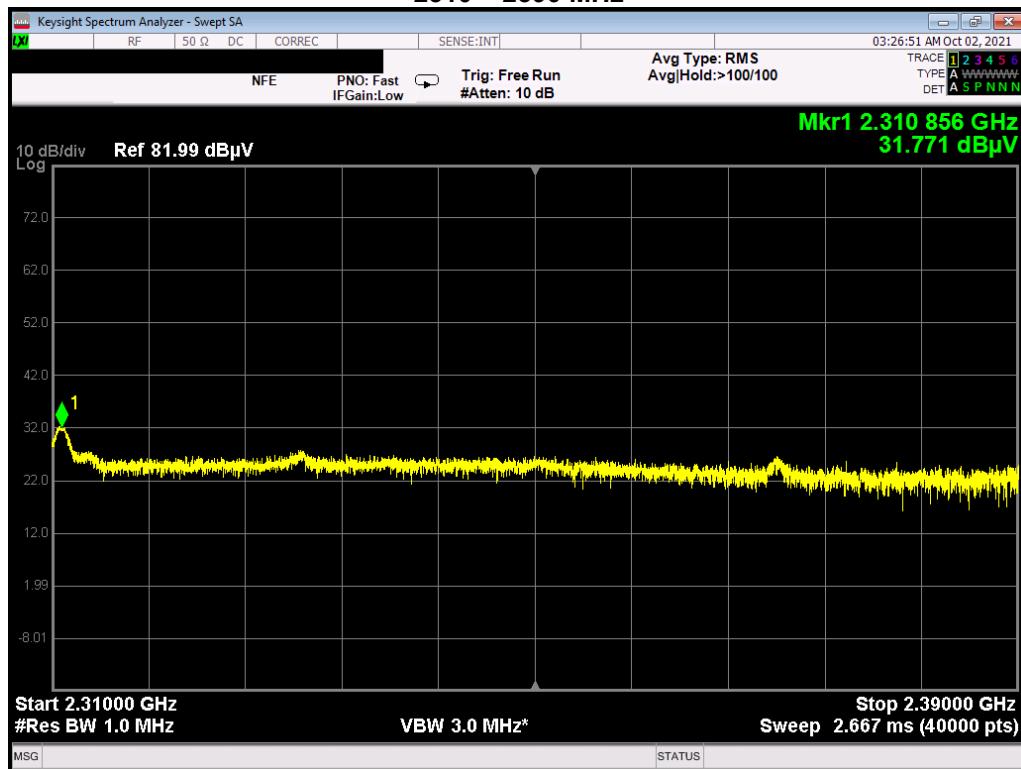

2483.5 – 2500 MHz

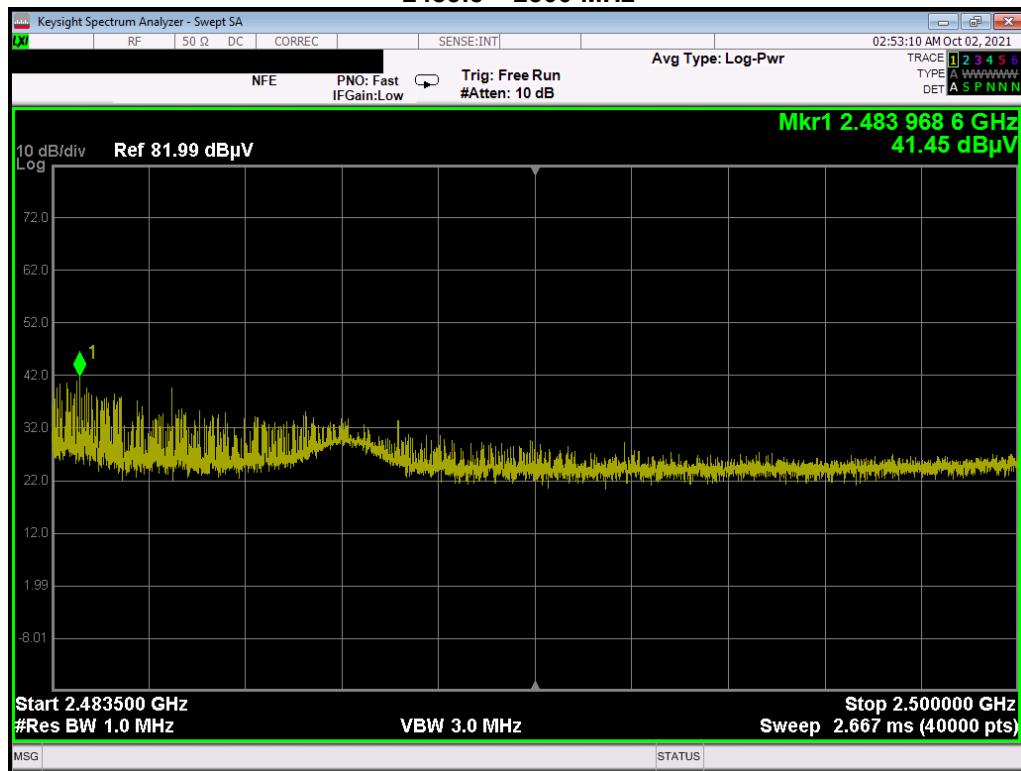

Output Power_ Cellular module

Engineer: Greg Corbin

Test Date: 10/1/2021

Test Procedure

The Cellular module is a pre-certified module that was installed with per the module manufacturer's instructions.

The Cellular module bands of operation are listed below.

Band	TX Frequency		RX Frequency		Bandwidth	
	MHz	MHz	MHz	MHz	MHz	MHz
LTE Band 4	1710 – 1755		2110 - 2155		1.4, 3, 5, 10, 15, 20	
LTE Band 13	777 – 787		746 - 756		5, 10	

The output power and band edge were verified to still be within the FCC limits after being installed in a new host.


The radiated spurious emissions were verified during the Radiated Spurious Emissions Co-Location test.

The output power was verified for the lowest and highest available channel with the minimum and maximum specified bandwidths.

The RF output power was measured using the spectrum analyzer's channel power tool.

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was set to transmit on the lowest and highest frequency of operation at the maximum power level. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized.

Test Setup



Cellular module Output Power Summary Table

Cellular Band	Tuned Frequency	Cellular Module Bandwidth	Measured Value		Specification Limit	Result
	MHz	MHz	dBm	W	W	Pass / Fail
4	1710.7	1.4	13.7	0.023	1	Pass
4	1754.3	1.4	14.4	0.028	1	Pass
4	1720	20	14.4	0.028	1	Pass
4	1745	20	14.4	0.028	1	Pass
13	779.5	5	25.3	0.339	3	Pass
13	784.5	5	26.9	0.490	3	Pass
13	782	10	26.6	0.457	3	Pass

Emissions at Band Edges_ Cellular Module

Engineer: Greg Corbin

Test Date: 10/01/2021

Test Procedure

The Cellular module is a pre-certified module that was installed with the module manufacturer's instructions.

The Cellular module bands of operation are listed below.

Band	TX Frequency	RX Frequency	Bandwidth
	MHz	MHz	MHz
LTE Band 4	1710 – 1755	2110 - 2155	1.4, 3, 5, 10, 15, 20
LTE Band 13	777 – 787	746 - 756	5, 10

The output power and band edge were verified to still be within the FCC limits after being installed in a new host.


The radiated spurious emissions were verified during the Radiated Spurious Emissions Co-Location test.

The band edge was recorded for the lowest and highest channels of operation and the minimum and maximum module bandwidths.

The EUT was setup in a semi-anechoic test chamber set 3m from the receiving antenna. The EUT was tested, in 3 orthogonal axis, by rotating it 360° with the receive antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the TX signal levels were maximized.

A spectrum analyzer was used to verify that the EUT met the band edge requirements.

Test Setup



Cellular module Band Edge Summary Table

Cellular Band	Tuned Frequency	Cellular Module Bandwidth	Measured Frequency	Measured Value	Specification Limit	Margin	Pass / Fail
	MHz	MHz	MHz	dBm	dBm	dB	
4	1710.7	1.4	1710	-16.5	-13	-3.5	Pass
4	1754.3	1.4	1755	-15.2	-13	-2.2	Pass
4	1720	20	1710	-23.7	-13	-10.7	Pass
4	1745	20	1755	-25.2	-13	-12.2	Pass
13	779.5	5	777	-16.7	-13	-3.7	Pass
13	784.5	5	787	-15.3	-13	-2.3	Pass
13	782	10	777	-16.2	-13	-3.2	Pass
13	782	10	787	-15.3	-13	-2.3	Pass

Refer to Annex C for Band Edge emissions for the cellular module

Measurement Uncertainty

Measurement Uncertainty (U_{lab}) for Compliance Testing is listed in the table below.

Measurement	U_{lab}
Radio Frequency	$\pm 3.3 \times 10^{-8}$
RF Power, conducted	± 1.5 dB
RF Power Density, conducted	± 1.0 dB
Conducted Emissions	± 1.8 dB
Radiated Emissions	± 4.5 dB
Temperature	± 1.5 deg C
Humidity	± 4.3 %
DC voltage	± 0.20 VDC
AC Voltage	± 1.2 VAC

The reported expanded uncertainty $\pm U_{lab}$ (dB) has been estimated at a 95% confidence level ($k=2$)

U_{lab} is less than or equal to U_{ETSI} therefore

- Compliance is deemed to occur if no measured disturbance exceeds the disturbance limit
- Non-Compliance is deemed to occur if any measured disturbance exceeds the disturbance limit

Test Equipment Utilized

Description	MFG	Model Number	CT Asset Number	Last Cal Date	Cal Due Date
EMI Receiver	HP	85462A	i00033	6/9/21	6/9/22
Horn Antenna, 18 – 40 GHz	EMCO	3116	i00085	2/22/21	2/22/22
Transient Limiter	Com-Power	LIT-153	i00123	Verified on: 10/4/21	
Horn Antenna, 1 – 18 GHz	ARA	DRG-118/A	i00271	8/3/20	8/3/21 **
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	8/28/20	8/28/21 **
Bi-Log Antenna	Teseq	CBL 6111D	i00349	1/20/21	1/21/22
AC Power Source	Behlman	BL 6000	i00362	Verified on: 10/4/21	
EMI Analyzer	Agilent	E7405A	i00379	12/29/20	12/29/21
LISN	COM-Power	LI-125A	i00447	4/28/20	4/28/22
LISN	COM-Power	LI-125A	i00449	4/28/20	4/28/22
EMI Receiver	Keysight	N9038A	i00552	1/12/21	1/12/22
Loop Antenna	COM-Power	AL-130R	Rental S/N: 10160027	9/14/21	9/14/24

**Note: A 60 day calibration extension was approved by the lab manager.

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT