

## TEST REPORT

**APPLICANT** : KATSURAGAWA ELECTRIC CO., LTD.

**ADDRESS** : 21-1, SHIMOMARUKO 4-CHOME OHTAKU, TOKYO  
146-8585, JAPAN

**PRODUCTS** : RFID Reader & Writer incorporated with DIGITAL PRINTER

**MODEL No.** : KIP 7900

**SERIAL No.** : --

**FCC ID** : VP8—K120

**TEST STANDARD** : CFR 47 FCC Rules and Regulations Part 15 Subpart A and C

**TESTING LOCATION** : Japan Quality Assurance Organization  
Safety & EMC Center  
EMC Engineering Department, TSURU EMC Branch  
2096, Ohata, Tsuru-shi, Yamanashi-ken 402-0045, Japan

**TEST RESULTS** : **Passed**

**DATE OF TEST** : February 26, 2009 - March 9, 2009

This report must not be used by the client to claim product endorsement by NVLAP or NIST or any agency of the U.S. Government.



NVLAP LAB CODE 200192-0

A handwritten signature in cursive script, reading 'M. Takahashi', is written over a horizontal line.

Masanori Takahashi

Manager

Japan Quality Assurance Organization

Safety & EMC Center

EMC Engineering Department, TSURU EMC Branch

2096, Ohata, Tsuru-shi, Yamanashi-ken 402-0045, Japan

- 
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
  - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
  - The test results presented in this report relate only to the offered test sample.
  - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
  - This test report shall not be reproduced except in full without the written approval of JQA.

**Table of Contents**

<b>Documentation</b>	<b>Page</b>
1 Test Regulation	3
2 Test Location	3
3 Recognition of Test Laboratory	3
4 Description of the Equipment Under Test	4
5 Test Condition	5-6
6 Preliminary Test and Test-Setup	7-12
7 Equipment Under Test Modification	13
8 Responsible Party	13
9 Deviation from Standard	13
10 Test Results	14-15
11 Summary	16
12 Operating Condition	17
13 Test Configuration	17
14 Equipment Under Test Arrangement (Drawings)	17
<b>Appendix A : Test Data</b>	<b>18-23</b>
<b>Appendix B : Test Arrangement (Photographs)</b>	<b>24-25</b>
<b>Appendix C : Test Instruments</b>	<b>26-28</b>

**Definitions for Abbreviation and Symbols Used In This Test Report**

“EUT” means Equipment Under the Test.

“AE” means Associated Equipment.

“N/A” means that Not Applicable.

“N/T” means that Not Tested.

☒-indicates that the listed condition, standard or equipment is applicable for this report.

☐-indicates that the listed condition, standard or equipment is not applicable for this report.

## Documentation

### 1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 15 Subpart A and C

Test procedure : ANSI C63.4-2003

### 2 Test Location

Japan Quality Assurance Organization  
Safety & EMC Center  
EMC Engineering Department, TSURU EMC Branch  
2096, Ohata, Tsuru-shi, Yamanashi-ken 402-0045, JAPAN

### 3 Recognition of Test Laboratory

Japan Quality Assurance Organization, Safety & EMC Center EMC Engineering Department, TSURU EMC Branch is recognized under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is accredited by the following bodies .

VLAC Code: VLAC-001-4 (Effective through : April 3, 2010)

NVLAP Lab Code:200192-0 (Effective through : June 30, 2009)

BSMI Recognition Number:

SL2-IN-E-6004, SL2-IS-E-6004, SL2-A1-E-6004 (Effective through : September 14, 2010)

VCCI Registration Number:

R-004, R-824, R-828, C-003, C-005, C-859, C-860, C-864, C-3085,

T-1420, T-1421, T-1422, T-1423, T-1424, T-1425 (Effective through : April 3, 2010)

FCC Registration Number : 444763 (Effective through : April 1, 2010)

IC Registration Number : 2079D-1, 2079D-2, 2079D-3 (Effective through : December 11, 2010)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Effective through : February 22, 2010)

#### 4 Description of the Equipment Under Test

- |    |   |   |   |
|----|---|---|---|
| 1  | Manufacturer                            | : | KATSURAGAWA ELECTRIC CO., LTD.<br>21-1 Shimomaruko 4-chome, ohta-ku, Tokyo, 146-8585, Japan     |
| 2  | Products                                | : | RFID Reader & Writer incorporated with DIGITAL PRINTER  |
| 3  | Model No.                               | : | KIP 7900  |
| 4  | Serial No.                              | : | --  |
| 5  | Product Type                            | : | Pre-Production  |
| 6  | Date of Manufacture                     | : | --  |
| 7  | Power Rating                            | : | 5.0VDC<br>* The EUT was operated with the printer.<br>(Input: 220-240VAC 50/60Hz, Output: 5Vdc) |
| 8  | EUT Grounding                           | : | None  |
| 9  | Received Date of EUT                    | : | March 2, 2009   |
| 10 | EUT Authorization                       | : | Certification   |
| 11 | EUT Highest Frequency<br>Used/Generated | : | 13.56MHz(Section 15.225)<br>Operation within the band 13.110 – 14.010 MHz                       |
| 12 | Modulation                              | : | FSK   |
| 13 | Antenna type                            | : | Fixed using   |
| 14 | Temperature Range                       | : | 0 ~ 50 degree   |

## 5 Test Condition

### 5.1 AC Powerline Conducted Emission

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)					
Test Site	<input type="checkbox"/> OS-1	<input type="checkbox"/> OS-2	<input checked="" type="checkbox"/> AC-1	<input type="checkbox"/> SR-A	<input type="checkbox"/> SR-B	<input type="checkbox"/> SR-C
Test Receiver	<input checked="" type="checkbox"/> R-3	<input type="checkbox"/> R-4	<input type="checkbox"/> R-5			
Cable	<input checked="" type="checkbox"/> CB-3	<input type="checkbox"/> CB-4	<input type="checkbox"/> CB-5			
Network (for EUT)	<input checked="" type="checkbox"/> L-1	<input type="checkbox"/> L-2	<input type="checkbox"/> L-3	<input type="checkbox"/> L-4	<input type="checkbox"/> L-5	<input type="checkbox"/> L-6
	<input type="checkbox"/> L-7	<input type="checkbox"/> L-8	<input type="checkbox"/> L-9	<input type="checkbox"/> L-10	<input type="checkbox"/> L-11	<input type="checkbox"/> L-12
	<input type="checkbox"/> L-13					
Network (for AE)	<input type="checkbox"/> L-1	<input type="checkbox"/> L-2	<input type="checkbox"/> L-3	<input type="checkbox"/> L-4	<input type="checkbox"/> L-5	<input type="checkbox"/> L-6
	<input type="checkbox"/> L-7	<input type="checkbox"/> L-8	<input type="checkbox"/> L-9			
Pulse Limiter	<input checked="" type="checkbox"/> PL-3	<input type="checkbox"/> PL-4	<input type="checkbox"/> PL-5			
Termination	<input type="checkbox"/> TM-1	<input type="checkbox"/> TM-2				

## 5.2 Radiated Emission

### 5.2.1 Radiated Emission 0.009 MHz - 30 MHz

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)					
Test Site	<input type="checkbox"/> OS-1	<input type="checkbox"/> OS-2	<input checked="" type="checkbox"/> AC-1			
Test Receiver	<input checked="" type="checkbox"/> R-4	<input type="checkbox"/> R-5	<input type="checkbox"/> S-1			
Cable	<input type="checkbox"/> CN-1	<input type="checkbox"/> CN-2	<input type="checkbox"/> CN-3			
Antenna	<input type="checkbox"/> AB-1	<input type="checkbox"/> AB-2	<input type="checkbox"/> AB-3	<input type="checkbox"/> AD-1	<input type="checkbox"/> AD-2	<input type="checkbox"/> AD-3
	<input type="checkbox"/> AL-1	<input type="checkbox"/> AL-2	<input type="checkbox"/> AL-3	<input type="checkbox"/> AL-4	<input type="checkbox"/> AL-5	<input type="checkbox"/> AD-4
	<input checked="" type="checkbox"/> AL-0					

### 5.2.2 Radiated Emission 30 MHz - 1000 MHz

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)					
Test Site	<input type="checkbox"/> OS-1	<input type="checkbox"/> OS-2	<input checked="" type="checkbox"/> AC-1			
Test Receiver	<input type="checkbox"/> R-1	<input type="checkbox"/> R-2	<input checked="" type="checkbox"/> R-3	<input type="checkbox"/> R-5	<input type="checkbox"/> S-1	<input type="checkbox"/> S-4
Cable	<input type="checkbox"/> CN-1	<input type="checkbox"/> CN-2	<input checked="" type="checkbox"/> CN-3			
Antenna	<input type="checkbox"/> AB-1	<input type="checkbox"/> AB-2	<input checked="" type="checkbox"/> AB-3	<input type="checkbox"/> AD-1	<input type="checkbox"/> AD-2	<input type="checkbox"/> AD-3
	<input type="checkbox"/> AL-1	<input type="checkbox"/> AL-2	<input checked="" type="checkbox"/> AL-3	<input type="checkbox"/> AL-4	<input type="checkbox"/> AL-5	<input type="checkbox"/> AD-4

### 5.2.3 Radiated Emission above 1 GHz

The requirements are ☐-Applicable ☐-Tested ☐-Not tested by applicant request.]  
☒-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)
Test Site	<input type="checkbox"/> OS-1 <input type="checkbox"/> OS-2 <input type="checkbox"/> AC-1
Test Receiver	<input type="checkbox"/> R-3 <input type="checkbox"/> R-5 <input type="checkbox"/> S-1 <input type="checkbox"/> S-3 <input type="checkbox"/> S-4 <input type="checkbox"/> S-5
Cable	<input type="checkbox"/> CS-1 <input type="checkbox"/> CS-2
Antenna	<input type="checkbox"/> AL-1 <input type="checkbox"/> AL-2 <input type="checkbox"/> AL-3 <input type="checkbox"/> AL-4 <input type="checkbox"/> AL-5 <input type="checkbox"/> AL-6
Pre-Amplifier	<input type="checkbox"/> PA-1 <input type="checkbox"/> PA-2 <input type="checkbox"/> PA-3 <input type="checkbox"/> PA-5

### 5.3 Frequency Stability

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)
Test Receiver	<input type="checkbox"/> R-1 <input type="checkbox"/> R-2 <input type="checkbox"/> R-3 <input type="checkbox"/> R-4 <input type="checkbox"/> R-5 <input type="checkbox"/> S-1 <input type="checkbox"/> S-3 <input type="checkbox"/> 13
Cable	<input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CS-1 <input type="checkbox"/> CS-2 <input type="checkbox"/> CS-3 <input type="checkbox"/> CS-4 <input type="checkbox"/> CS-5 <input type="checkbox"/> CN-0
Oven	<input checked="" type="checkbox"/> OV-1
Frequency Counter	<input checked="" type="checkbox"/> FC-1
Antenna	<input type="checkbox"/> AB-1 <input type="checkbox"/> AB-2 <input type="checkbox"/> AB-3 <input type="checkbox"/> AD-1 <input type="checkbox"/> AD-2 <input type="checkbox"/> AD-3 <input type="checkbox"/> AL-1 <input type="checkbox"/> AL-2 <input type="checkbox"/> AL-3 <input type="checkbox"/> AL-4 <input type="checkbox"/> AL-5 <input type="checkbox"/> AD-4 <input type="checkbox"/> AL-0

### 5.4 Occupied Bandwidth

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

Test site & instruments :

Type	Number of test site & instruments (Refer to Appendix C)
Oven	<input type="checkbox"/> OV-1
Test Receiver	<input type="checkbox"/> R-1 <input type="checkbox"/> R-2 <input type="checkbox"/> R-3 <input type="checkbox"/> R-4 <input type="checkbox"/> R-5 <input type="checkbox"/> S-1 <input type="checkbox"/> S-3 <input checked="" type="checkbox"/> 13
Cable	<input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5 <input type="checkbox"/> CS-1 <input type="checkbox"/> CS-2 <input type="checkbox"/> CB-3 <input type="checkbox"/> CB-4 <input type="checkbox"/> CB-5
Pre-Amplifier	<input type="checkbox"/> PA-1 <input type="checkbox"/> PA-2 <input type="checkbox"/> PA-3
Antenna	<input type="checkbox"/> AB-1 <input type="checkbox"/> AB-2 <input type="checkbox"/> AB-3 <input type="checkbox"/> AD-1 <input type="checkbox"/> AD-2 <input type="checkbox"/> AD-3 <input type="checkbox"/> AL-1 <input type="checkbox"/> AL-2 <input type="checkbox"/> AL-3 <input type="checkbox"/> AL-4 <input type="checkbox"/> AL-5 <input type="checkbox"/> AD-4 <input type="checkbox"/> AL-0

## 6 Preliminary Test and Test Setup


### 6.1 AC Powerline Conducted Emission

The preliminary conducted disturbance at the mains ports measurements were carried out.

The preliminary conducted disturbance at the mains ports were performed using the spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. This configurations was used for final conducted disturbance at the mains ports measurements.

- Side View -

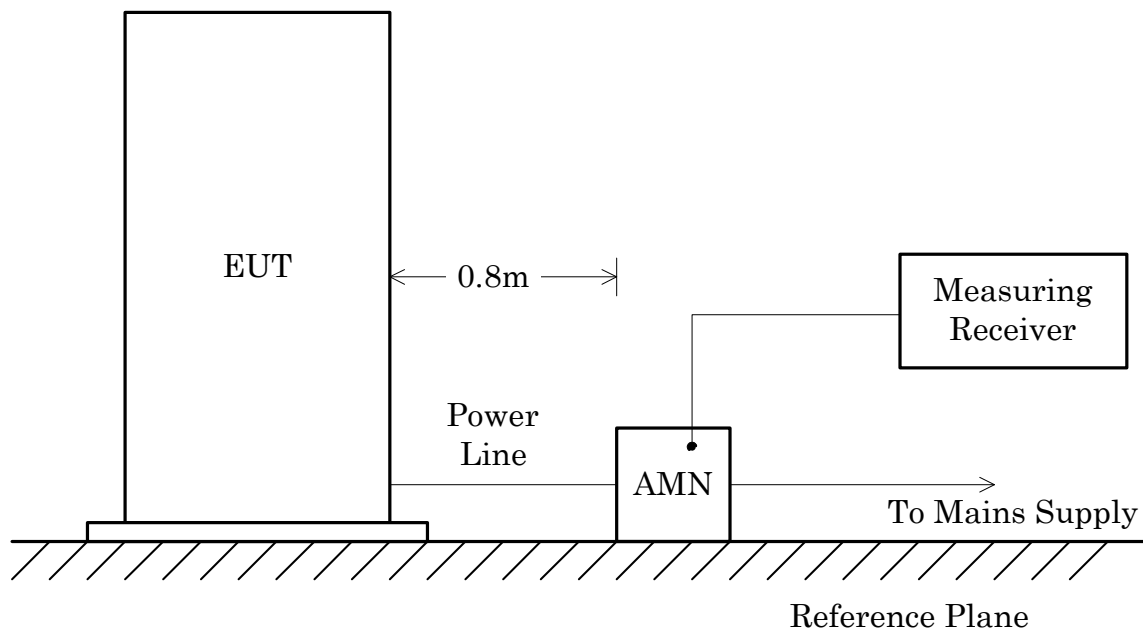

\* AMN : Artificial Mains Network

## 6.2 Radiated Emission


### 6.2.1 Radiated Emission 0.009 MHz - 30 MHz

The preliminary radiated disturbance measurements were carried out.

The preliminary radiated disturbance measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final radiated disturbance measurements.

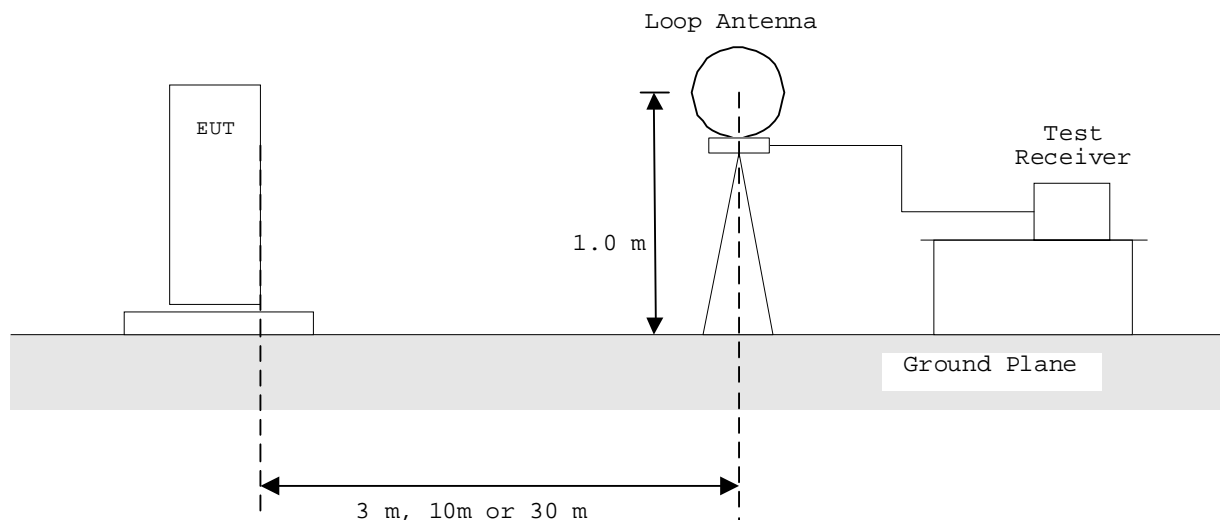



## 6.2.2 Radiated Emission 30 MHz - 1000 MHz


The preliminary radiated disturbance measurements were carried out.

The preliminary radiated disturbance measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final radiated disturbance measurements.

- Side View -

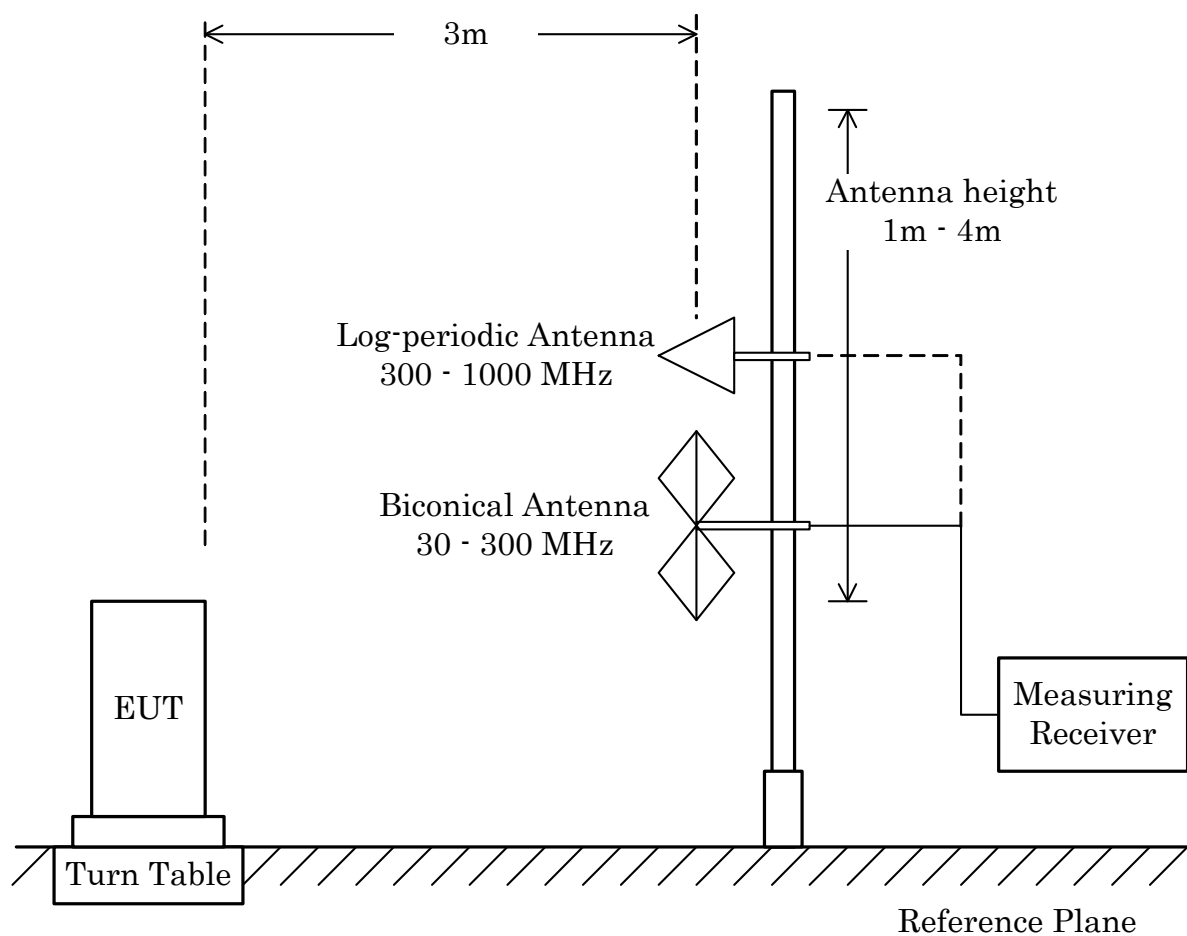

### 6.2.3 Radiated Emission above 1 GHz


The preliminary radiated disturbance measurements were carried out.

The preliminary radiated disturbance measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final radiated disturbance measurements.


- Side View -

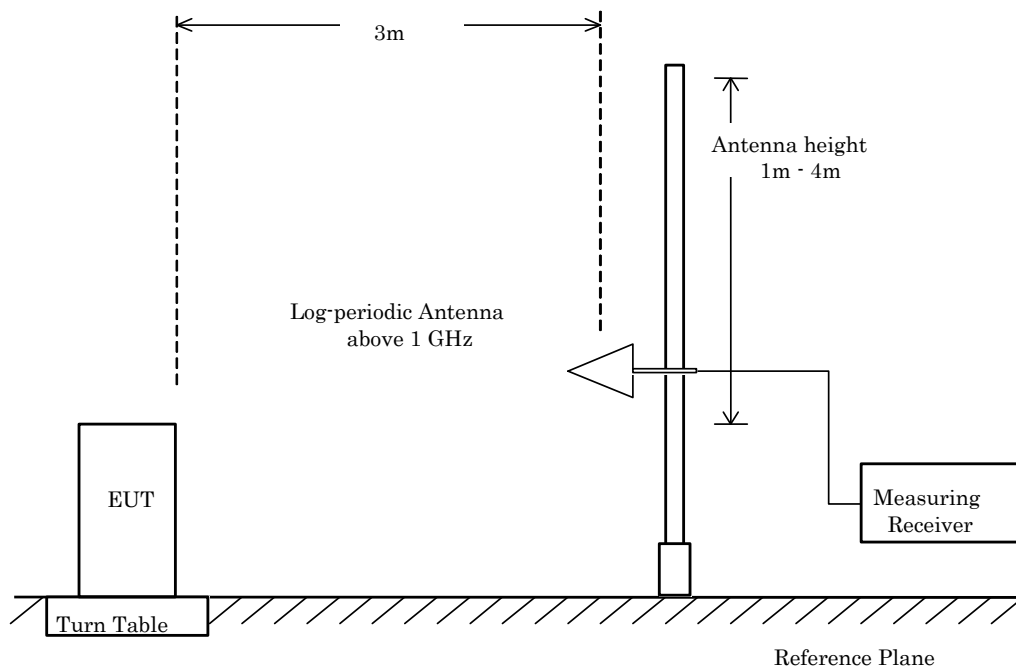

### 6.3 Frequency Stability

The frequency stability measurements were carried out. By using frequency counter with suitable RF amplifier, the carrier frequency of the transmitter under test was measured with a temperature variation of  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at the normal supply voltage, and if required, with a variation in the primary voltage from 85% to 115% the rated supply voltage at the temperature of  $+20^{\circ}\text{C}$ .


These measurements were carried out after allow sufficient time (approximately 1 hour) for the temperature of the chamber to stabilize.

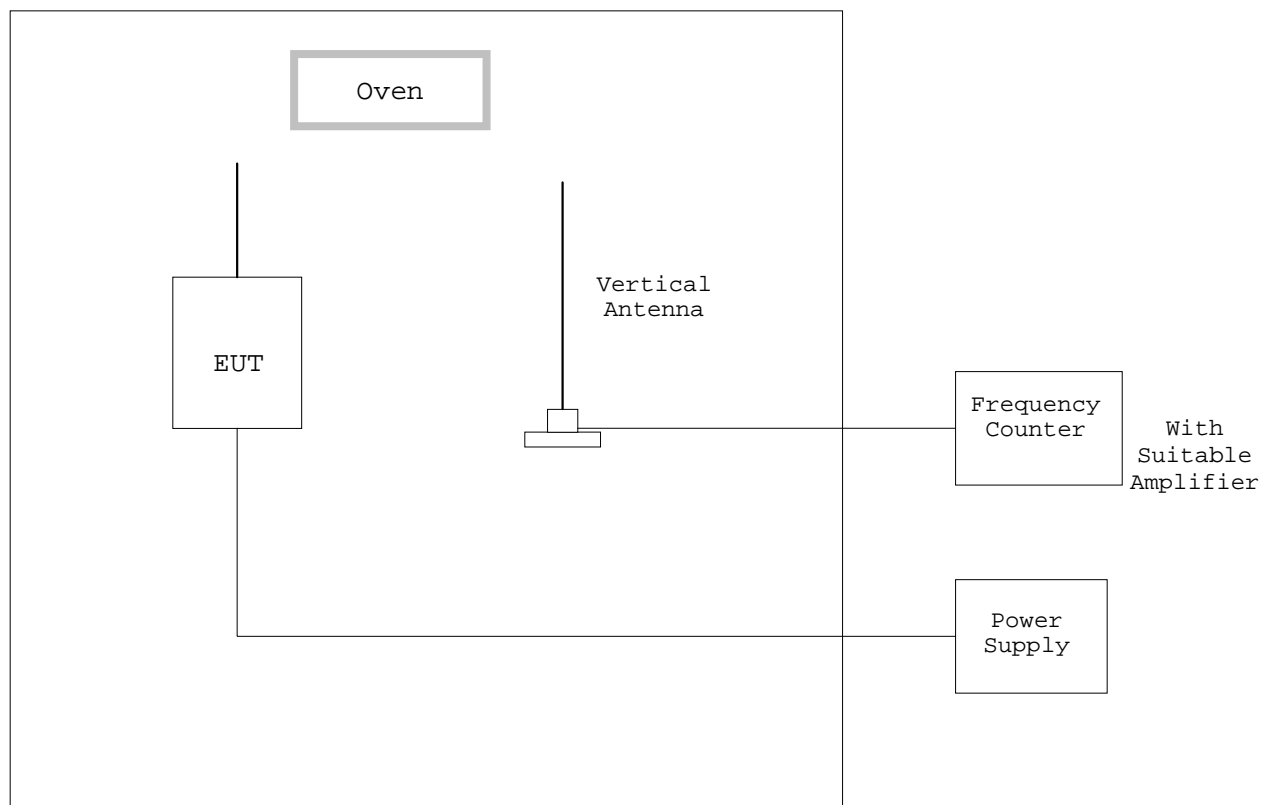

## 6.4 Occupied Bandwidth

According to description of ANSI C63.4-2003 sec.13.1.7, the occupied bandwidth measurements were carried out. By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the emission were made under the transmitting modes of the EUT.

The resolution bandwidth of spectrum analyzer was set to the value specified in sec.13.1.7.

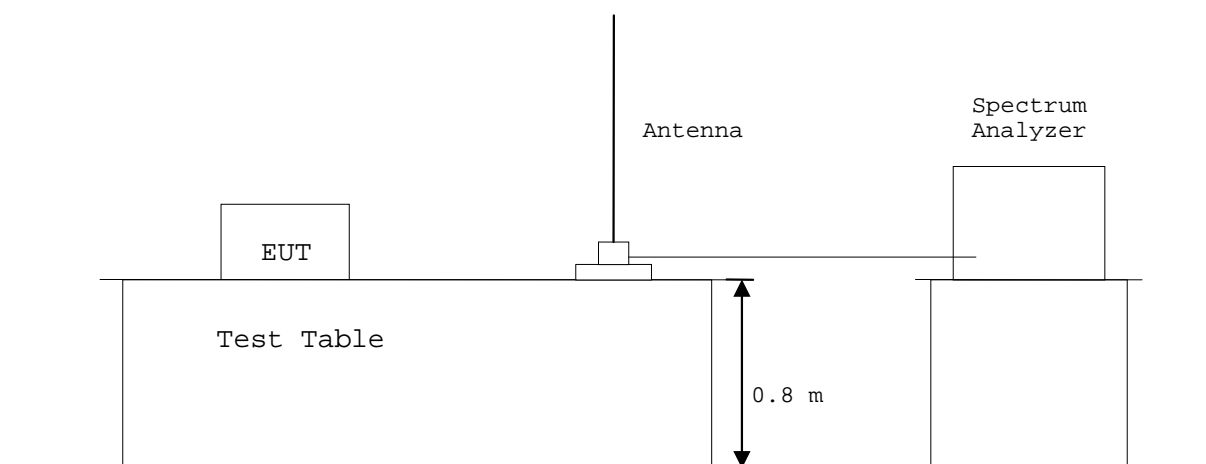

**7 Equipment Under Test Modification**

- ☒ - No modifications were conducted by JQA to achieve compliance to the limitations.  
☐ - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory: Not Applicable

**8 Responsible Party****Responsible Party of Test Item (Product)**

Responsible Party :

Contact Person :

\_\_\_\_\_  
Signatory

**9 Deviation from Standard**

- ☒ - No deviations from the standard described in clause 1.  
☐ - The following deviations were employed from the standard described in clause 1.

---

---

---

## 10 Test Results

### 10.1 AC Powerline Conducted Emission (Section 15.207)

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Min. Limit Margin (QP)	<u>4.8</u>	dB	at	<u>0.38</u>	MHz
Min. Limit Margin (AVE)	<u>27.1</u>	dB	at	<u>0.38</u>	MHz
Max. Limit Exceeding	<u>N/A</u>	dB	at	<u>N/A</u>	MHz
Uncertainty of measurement results	<u>± 2.6</u>	dB(2σ)			

Remarks : \_\_\_\_\_  
 \_\_\_\_\_

### 10.2 Radiated Emissions (Section 15.225(a)(b)(c)(d))

The requirements are ☒-Applicable ☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Min. Limit Margin	<u>10.8</u>	dB	at	<u>162.7</u>	MHz
Max. Limit Exceeding	<u>N/A</u>	dB	at	<u>N/A</u>	MHz

Uncertainty of measurement results

<input checked="" type="checkbox"/> - 3 meters	0.009-30	MHz	<u>± 1.9</u>	dB(2σ)
	30- 300	MHz	<u>± 4.5</u>	dB(2σ)
	300-1000	MHz	<u>± 4.6</u>	dB(2σ)
	1 - 18	GHz	<u>± 3.7</u>	dB(2σ)
<input type="checkbox"/> -10 meters	0.009-30	MHz	<u>± 1.9</u>	dB(2σ)
	30- 300	MHz	<u>± 4.5</u>	dB(2σ)
	300-1000	MHz	<u>± 4.5</u>	dB(2σ)
	1 - 18	GHz	<u>± 3.7</u>	dB(2σ)

Remarks : \_\_\_\_\_  
 \_\_\_\_\_

**10.3 Frequency Stability (Section 15.225(e))**

The requirements are ☒-Applicable [☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Remarks : \_\_\_\_\_  
\_\_\_\_\_

**10.4 Occupied Bandwidth**

The requirements are ☒-Applicable [☒-Tested ☐-Not tested by applicant request.]  
☐-Not Applicable

☒-Passed ☐-Failed ☐-Not judged

Remarks : \_\_\_\_\_  
\_\_\_\_\_

## 11 Summary

### General Remarks :

The EUT was tested according to the requirements of CFR 47 FCC Rules and Regulations Part 15. under the test configuration, as shown in clause 11 to 13.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.


Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### Test Results :

The “as received” sample;


- ☒-fulfill the test requirements of the regulation mentioned on clause 1.
- ☐- doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:



Masanori Takahashi  
Manager  
TSURU EMC Branch  
EMC Engineering Department

Tested by:



Taisuke Tsurui  
Assistant Manager  
TSURU EMC Branch  
EMC Engineering Department



## 12 Operating Condition

Power Supply Voltage : 5.0VDC

\* The EUT was operated with the printer.  
(Input: 230VAC 60Hz, Output: 5.0Vdc)

Operation Mode : Transmitting

The Test have been carried out under continuous transmission/Reception Mode.

## 13 Test Configuration

The equipment under test consists of :

Sign	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	RFID Reader & Writer	KATSURAGAWA ELECTRIC CO., LTD.	ARW13T-RF01	--	VP8-K120
B	DIGITAL PRINTER	KATSURAGAWA ELECTRIC CO., LTD.	KIP 7900	10310409	


The auxiliary equipment used for testing :

Sign	Item	Manufacturer	Model No.	Serial No.	FCC ID
C	Personal Computer	DELL	PP07L	CN-09U784-12961-3CI-8046	N/A (DoC)
D	AC Adapter	DELL	ADP-90FB	CN-06G356-48661-3C5-46DH	N/A
E	Mouse	Logitech	M-UN58a	LZE04106357	N/A (DoC)

Type of Cable:

No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	Ethernet Cable (Category 5e, crossover)	--	No	No	Yes	30.0
2	USB Cable	--	Yes	Yes	No	0.9
3	RS-232C Cable	--	Yes	Yes	No	2.9
4	AC Power Cable	--	No	No	No	2.4
5	Mouse Cable	--	Yes	Yes	No	1.7
6	DC Power Cable	--	No	No	Yes	1.8
7	AC Power Cable	--	No	No	No	1.8

## 14 Equipment Under Test Arrangement (Drawings)

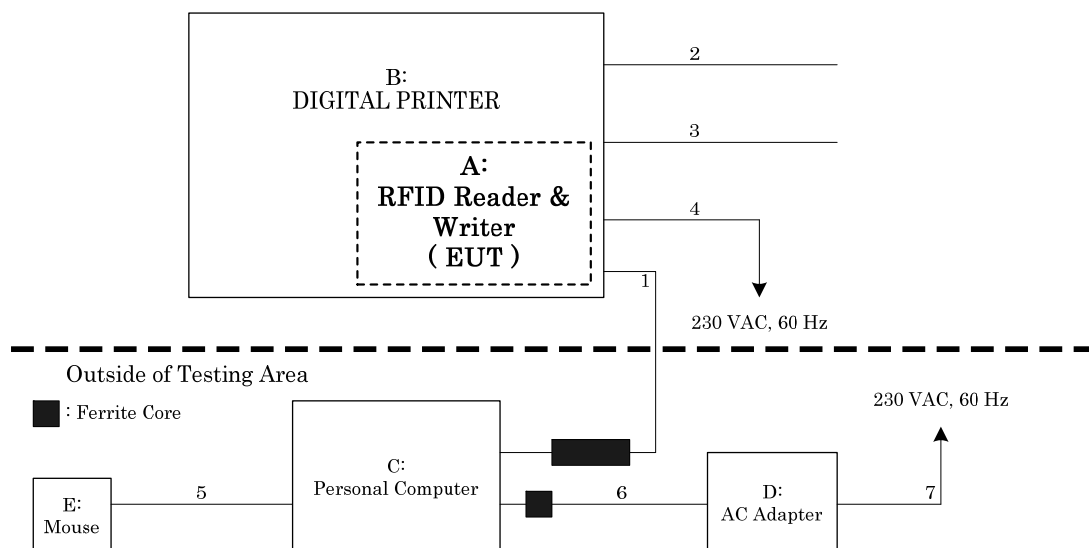


## Appendix A: Test Data

### A.1 AC Powerline Conducted Emission (Section 15.207)

Date : March 4, 2009

Temp : 17°C Humi : 39% Atom : 954hPa

Frequency (MHz)	AMN Factor (dB)	Meter Reading (dBμV)				Limits (dBμV)		Max. Emission Level (dBμV)		Margin (dB)	
		V-A		V-B		Q.P	AVE	Q.P	AVE	Q.P	AVE
0.15	10.2	34.7	-	31.0	-	66.0	56.0	44.9	-	21.1	-
0.19	10.1	27.8	-	25.5	-	64.0	54.0	37.9	-	26.1	-
0.38	10.0	43.5	11.2	41.7	11.2	58.3	48.3	53.5	21.2	4.8	27.1
0.62	10.0	26.6	-	27.7	-	56.0	46.0	37.7	-	18.3	-
0.81	10.0	35.9	-	37.0	-	56.0	46.0	47.0	-	9.0	-
1.00	10.0	27.2	-	28.9	-	56.0	46.0	38.9	-	17.1	-
2.38	10.0	25.4	-	24.3	-	56.0	46.0	35.4	-	20.6	-
3.99	10.1	31.4	-	31.5	-	56.0	46.0	41.6	-	14.4	-
5.09	10.1	30.4	-	30.5	-	60.0	50.0	40.6	-	19.4	-
9.02	10.2	23.0	-	23.1	-	60.0	50.0	33.3	-	26.7	-
13.56	10.3	10.4	-	12.3	-	60.0	50.0	22.6	-	37.4	-
21.39	10.6	20.1	-	19.6	-	60.0	50.0	30.7	-	29.3	-
27.12	10.7	< 10.0	-	< 10.0	-	60.0	50.0	< 20.7	-	> 39.3	-
29.90	10.8	< 10.0	-	< 10.0	-	60.0	50.0	< 20.8	-	> 39.2	-

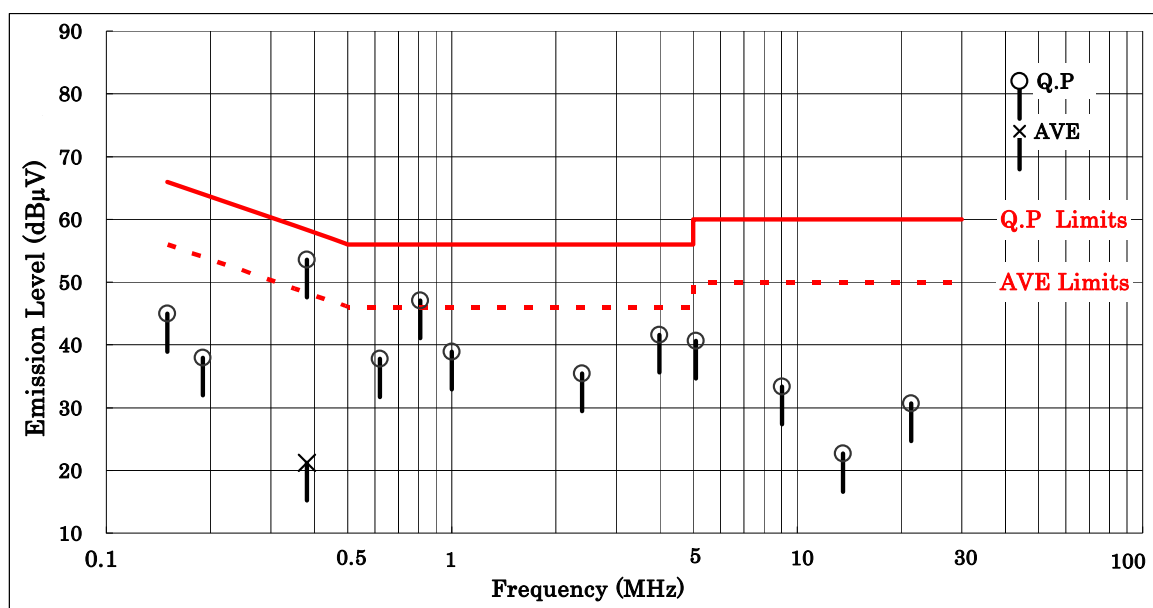

- Notes:
- 1) The testing location : Anechoic Chamber No.1
  - 2) The spectrum was checked from 0.15 MHz to 30 MHz
  - 3) AMN(Artificial Mains Network) factor includes the cable loss.
  - 4) V-A : One end & Ground V-B : The other end & Ground
  - 5) Q.P : Quasi-Peak Detector AVE : Average Detector
  - 6) The symbol of "<" means "or less".
  - 7) The symbol of ">" means "more than".
  - 8) The symbol of "-" means "Not applicable".
  - 9) A sample calculation was made at 0.15 MHz  
 $(\text{AMN Factor}) + (\text{Meter Reading}) = 10.2 + 34.7 = 44.9 \text{ dB}\mu\text{V}$

## A.2 Radiated Emissions

### A.2.1 Radiated Emission 0.009 MHz - 30 MHz (Section 15.225(a)(b)(C))

Date : March 9, 2009

Temp : 21°C Humi : 35% Atom : 959hPa

Frequency (MHz)	Antenna Factor (dB)	Meter Reading/ 3m (dBμV) Q.P	Limits/ 30m (dBμV) Q.P	Field Strength/ 30m (dBμV) Q.P	Margin (dB) Q.P
13.110	-	< 30.0	29.5	< -10.0	> 39.5
13.410	-	< 30.0	40.5	< -10.0	> 50.5
13.553	-	< 30.0	50.5	< -10.0	> 60.5
13.560	-	35.2	84.0	-4.8	88.8
13.567	-	< 30.0	50.5	< -10.0	> 60.5
13.710	-	< 30.0	40.5	< -10.0	> 50.5
14.010	-	< 30.0	29.5	< -10.0	> 39.5

Notes: 1) The testing location : Anechoic Chamber No.1 Distance : 3 m

2) Q.P : Quasi-Peak Detector (IF Band width : 9 kHz)

3) The symbol of "<" means "or less".

4) The symbol of ">" means "more than".

5) The symbol of "-" means "Zero", because the used test receiver calculated and displayed in the Meter Reading including the Correction Factor(Antenna and cable loss) directly .

6) The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions. The above Meter Reading was maximum emissions level.

7) Calculation :

For fundamental, the measured field strength was extrapolated to distance 30 meters, using the formula that field strength varies as the inverse distance square (40 dB per decade of distance).

Fundamental(13.560MHz):  $35.2 \text{ dB}\mu\text{V/m} - 20\log_{10}((30/3)^2) = 35.2 - 40.0 = -4.8 \text{ dB}\mu\text{V/m}$  at 30 meters

Limits for 13.553-13.567MHz (§15.225(a)) =  $20\log_{10}(15848) = 84.0 \text{ dB}\mu\text{V/m}$

Limits for 13.410-13.553, 13.567-13.710 MHz (§15.225(b)) =  $20\log_{10}(334) = 50.5 \text{ dB}\mu\text{V/m}$

Limits for 13.110-13.410, 13.710-14.010MHz (§15.225(c)) =  $20\log_{10}(106) = 40.5 \text{ dB}\mu\text{V/m}$


Limits for except for 13.110-14.010MHz (§15.225(d)) =  $20\log_{10}(30) = 29.5 \text{ dB}\mu\text{V/m}$

## A.2.2 Radiated Emission 0.009 MHz - 30 MHz (Section 15.225(d))

Date : March 9, 2009

Temp : 21°C Humi : 35% Atom : 959hPa

Frequency  (MHz)	Antenna Factor (dB)	Meter Reading (dBμV)		Limits (dBμV) Q.P	Specified Distance (m)	Extrapolated Emission Level (dBμV)		Margin (dB) Q.P
		Q.P	Q.P			Q.P	Q.P	
*	0.009	-	< 56.0	48.5	300.0	< -24.0	> 72.5	
*	0.021	-	61.6	41.2	300.0	-18.4	59.6	
*	0.043	-	57.1	34.9	300.0	-22.9	57.8	
*	0.070	-	< 56.0	30.7	300.0	< -24.0	> 54.7	
*	0.108	-	< 56.0	26.9	300.0	< -24.0	> 50.9	
*	0.25	-	< 56.0	19.7	300.0	< -24.0	> 43.7	
*	2.38	-	< 56.0	29.5	30.0	< 16.0	> 13.5	
	27.12	-	< 27.0	29.5	30.0	< -13.0	> 42.5	

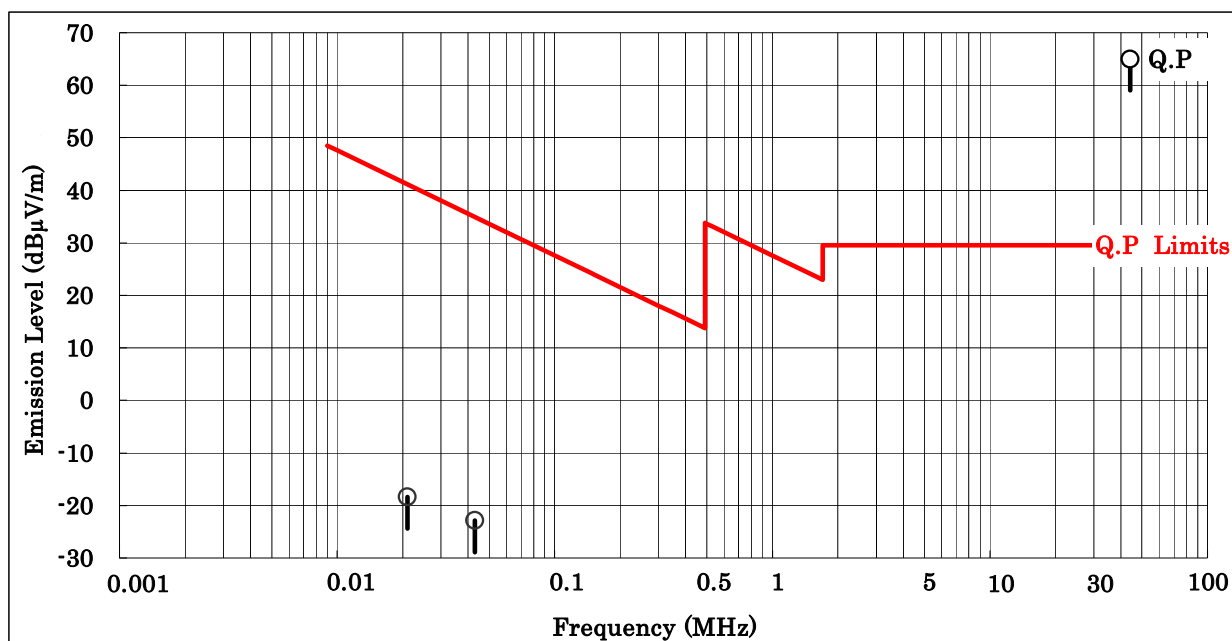

- Notes:
- 1) The testing location : Anechoic Chamber No.1 Distance : 3 m
  - 2) The symbol of "<" means "or less".
  - 3) The symbol of ">" means "more than".
  - 4) The symbol of "-" means "Zero", because the used test receiver calculated and displayed in the Meter Reading including the Correction Factor(Antenna and cable loss) directly
  - 5) A sample calculation was made at 0.009 MHz  


$$56 \text{ dB}\mu\text{V/m (at 3 m distance)} \Rightarrow 56 - 20\log_{10}((300/3)^2) = <-24 \text{ dB}\mu\text{V/m (at 300m distance)}$$
  - 6) Setting of measuring instrument :  
 Quasi-Peak Detector, IF Bandwidth: 9 kHz or 200Hz (9 kHz - 90 kHz, 110-490kHz)  
 Average Detector, IF Bandwidth: 9 kHz or 200Hz (except for 9 kHz - 90 kHz, 110-490kHz)
  - 7) The spectrum was checked from 0.009 MHz to 30 MHz.
  - 8) The symbol of "\*" means . When RFID is in off the measurement value is not change, therefore it is judged for the emission to be not from the EUT(RFID).

## A.2.2 Radiated Emission 30 MHz - 1000 MHz

Date : March 9, 2009

Temp : 21°C Humi : 35% Atom : 959hPa

Frequency (MHz)	Antenna Factor (dB/m)	Meter Reading (dBμV)		Limits (dBμV) Q.P	Emission Level (dBμV/m)		Margin (dB)	
		Hori.	Vert.		Hori.	Vert.	Hori.	Vert.
40.7	14.7	< 0.0	7.8	40.0	< 14.7	22.5	> 25.3	17.5
68.8	7.3	10.2	17.0	40.0	17.5	24.3	22.5	15.7
81.4	7.1	5.1	13.5	40.0	12.2	20.6	27.8	19.4
162.7	16.6	7.5	16.1	43.5	24.1	32.7	19.4	10.8
203.4	18.0	8.3	10.3	43.5	26.3	28.3	17.2	15.2
217.0	18.3	6.2	13.2	46.0	24.5	31.5	21.5	14.5
244.1	18.5	7.9	9.5	46.0	26.4	28.0	19.6	18.0
257.6	18.7	13.0	7.2	46.0	31.7	25.9	14.3	20.1
271.2	19.0	8.9	8.1	46.0	27.9	27.1	18.1	18.9
284.8	19.6	7.8	8.7	46.0	27.4	28.3	18.6	17.7
298.3	20.9	10.0	5.6	46.0	30.9	26.5	15.1	19.5
311.9	16.1	10.5	11.9	46.0	26.6	28.0	19.4	18.0
325.4	16.6	10.6	12.0	46.0	27.2	28.6	18.8	17.4
352.6	17.4	9.4	16.5	46.0	26.8	33.9	19.2	12.1
366.1	17.8	6.5	13.1	46.0	24.3	30.9	21.7	15.1
379.7	18.1	5.0	10.8	46.0	23.1	28.9	22.9	17.1
447.5	19.2	1.3	3.5	46.0	20.5	22.7	25.5	23.3
488.2	19.7	1.8	10.8	46.0	21.5	30.5	24.5	15.5

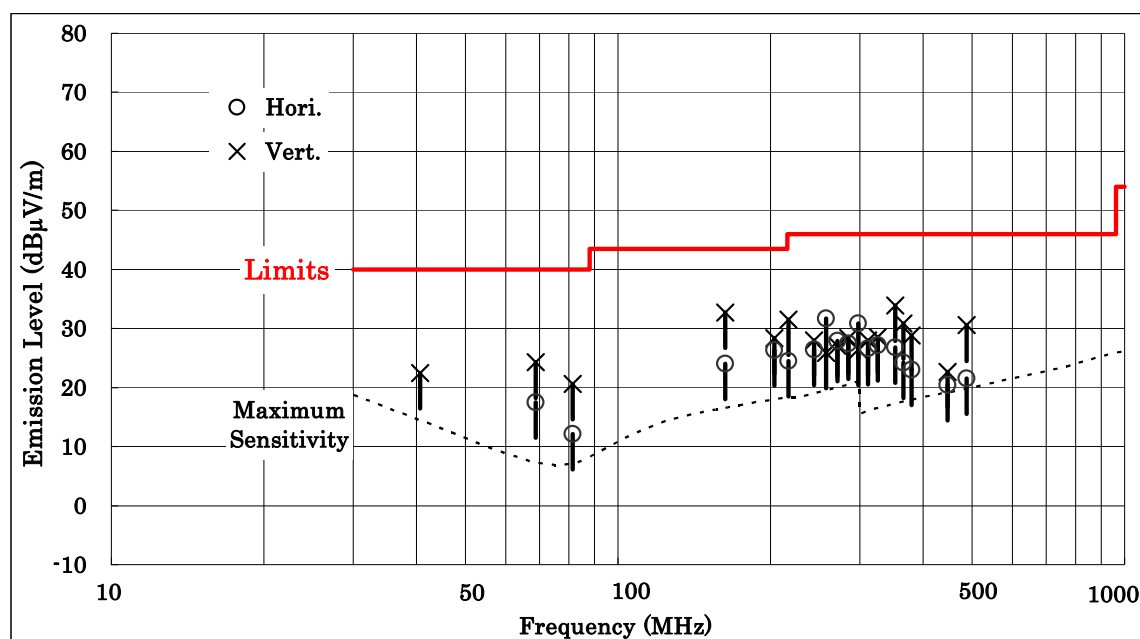

- Notes:
- 1) The testing location : Anechoic Chamber No.1 Distance : 3 m
  - 2) The spectrum was checked from 30 MHz to 1000 MHz.
  - 3) Antenna factor includes the cable loss.
  - 4) Hori. : Horizontal polarization Vert. : Vertical polarization
  - 5) Q.P: Quasi-Peak Detector
  - 6) The symbol of "<" means "or less", ">" means "more than".
  - 7) A sample calculation was made at 40.7 MHz  
 $(\text{Antenna Factor}) + (\text{Meter Reading}) = 14.7 + 7.8 = 22.5 \text{ dB}\mu\text{V}$

## A.2.3 Radiated Emission above 1 GHz

Not Applicable

### A.3 Frequency Stability (Section 15.225(e))

Testing Date : February 26, 2009


Temperature (°C)	Primary Supply Voltage (V)	Frequency (MHz)			
		0 minute later	2 minutes later	5 minutes	10 minutes
0	170	13.55896025	13.55876758	13.55884410	13.55904623
	230	13.55891435	13.55874675	13.55969742	13.55874531
	276	13.55867441	13.55869134	13.55865413	13.55902036
20	170	13.55877905	13.55870957	13.55965798	13.55909682
	230	13.55883117	13.55869258	13.55925452	13.55871731
	276	13.55923127	13.55922756	13.55878286	13.55921882
50	170	13.55933272	13.55867038	13.55867212	13.55873993
	230	13.55868100	13.55866115	13.55864803	13.55875676
	276	13.55909882	13.55895303	13.55885233	13.55870659

Operating Frequency: 13.56MHz


Temperature (°C)	Primary Supply Voltage (V)	Frequency with time elapse (%)			
		0 minute later	2 minutes later	5 minutes	10 minutes
0	170	0.00766777	0.00908864	0.00852434	0.00703370
	230	0.00800627	0.00924226	0.00223142	0.00925288
	276	0.00977574	0.00965088	0.00992529	0.00722448
20	170	0.00900406	0.00951645	0.00252227	0.00666062
	230	0.00861969	0.00964174	0.00549764	0.00945937
	276	0.00566910	0.00569646	0.00897596	0.00576091
50	170	0.00492094	0.00980546	0.00979263	0.00929255
	230	0.00972714	0.00987353	0.00997028	0.00916844
	276	0.00664587	0.00772102	0.00846364	0.00953842

Specified Limit +/-0.01%


## A.4 Occupied Bandwidth

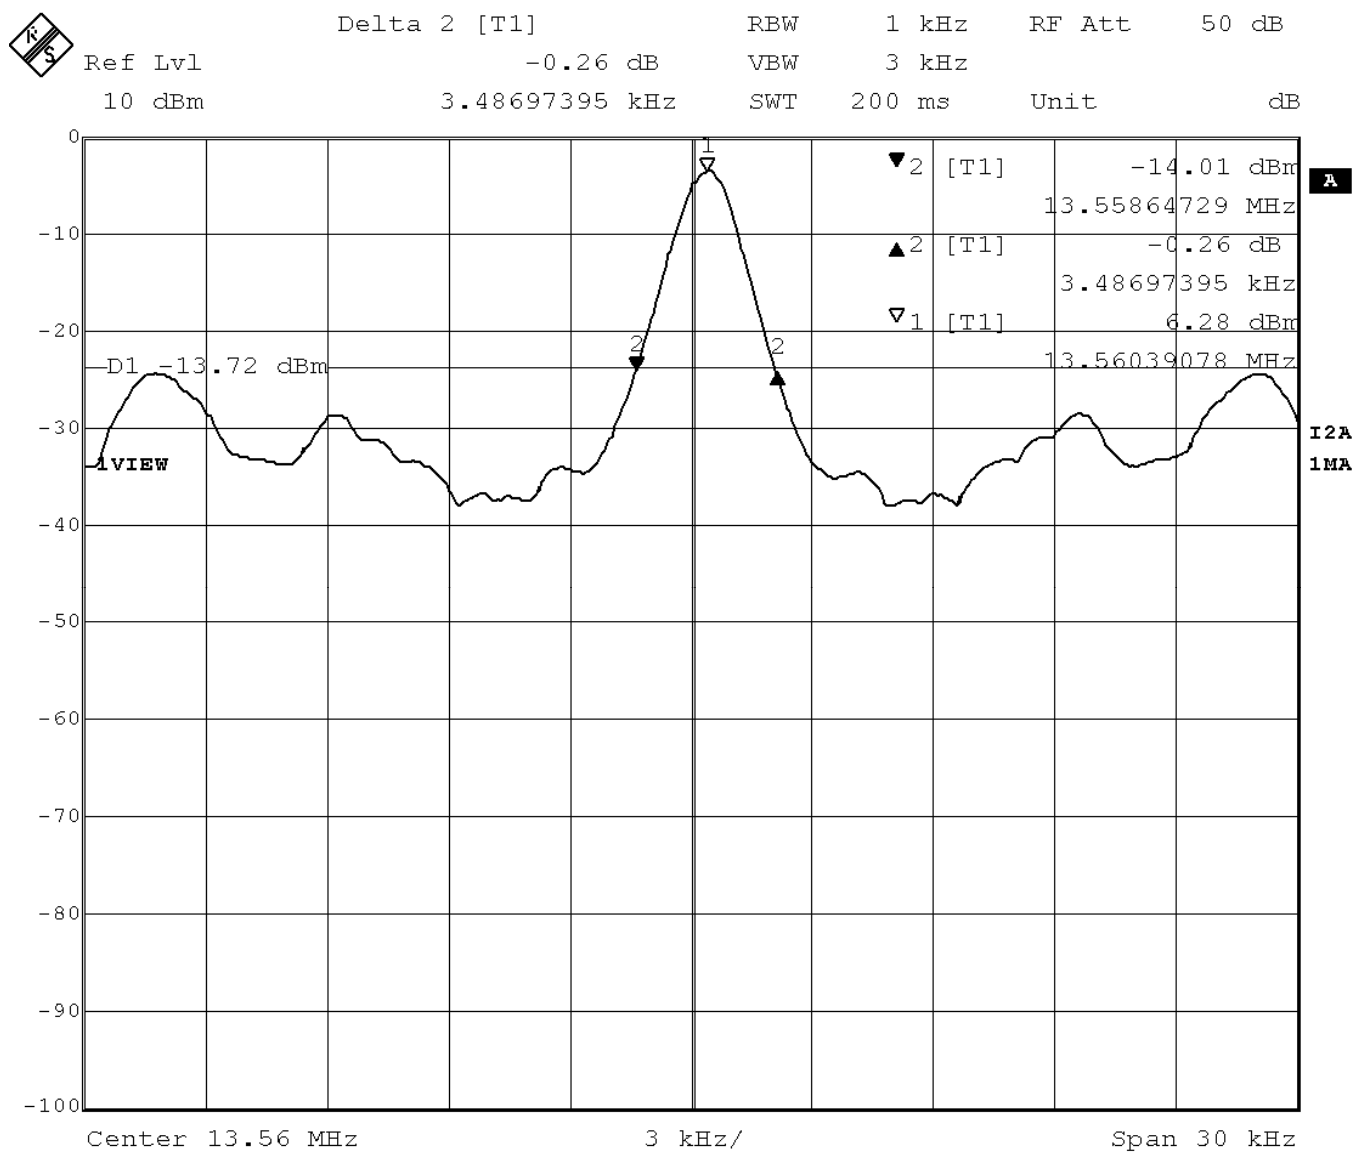

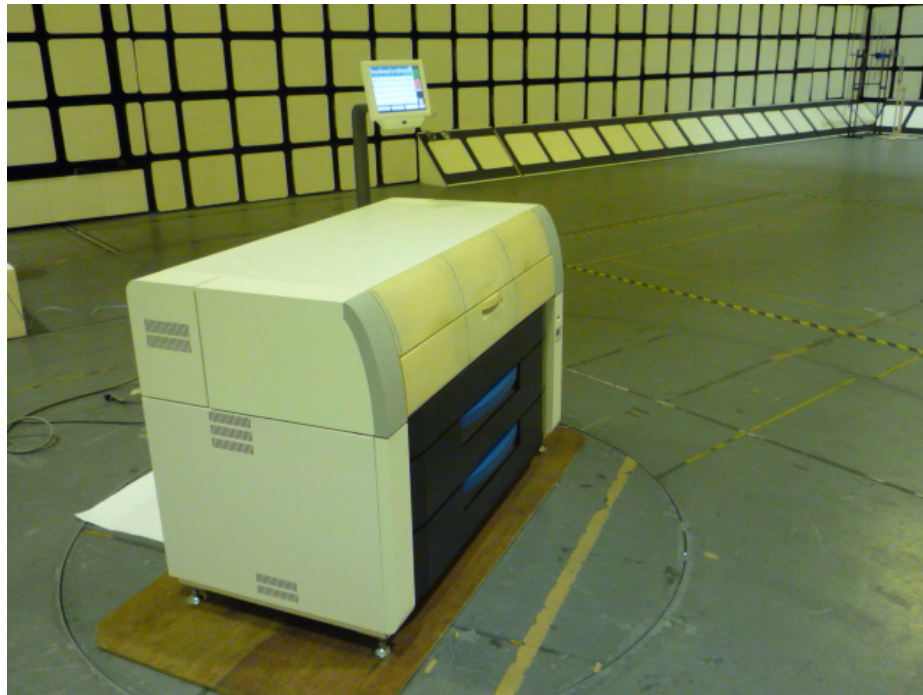

**Appendix B : Test Arrangement (Photographs)****B.1 AC Powerline Conducted Emission**


- Front View -

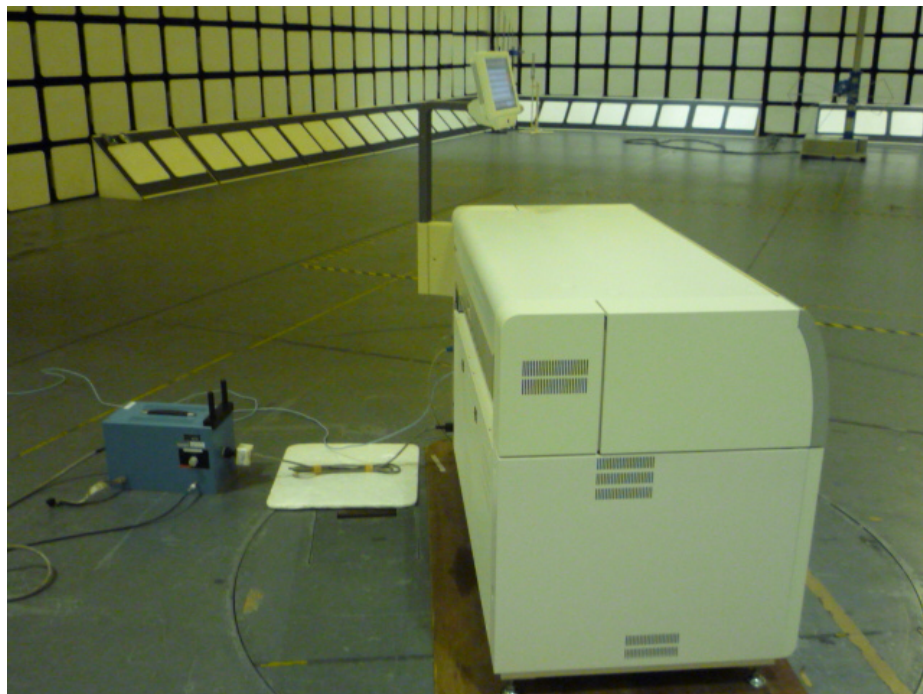


- Side View -

Photograph present configuration with maximum emission

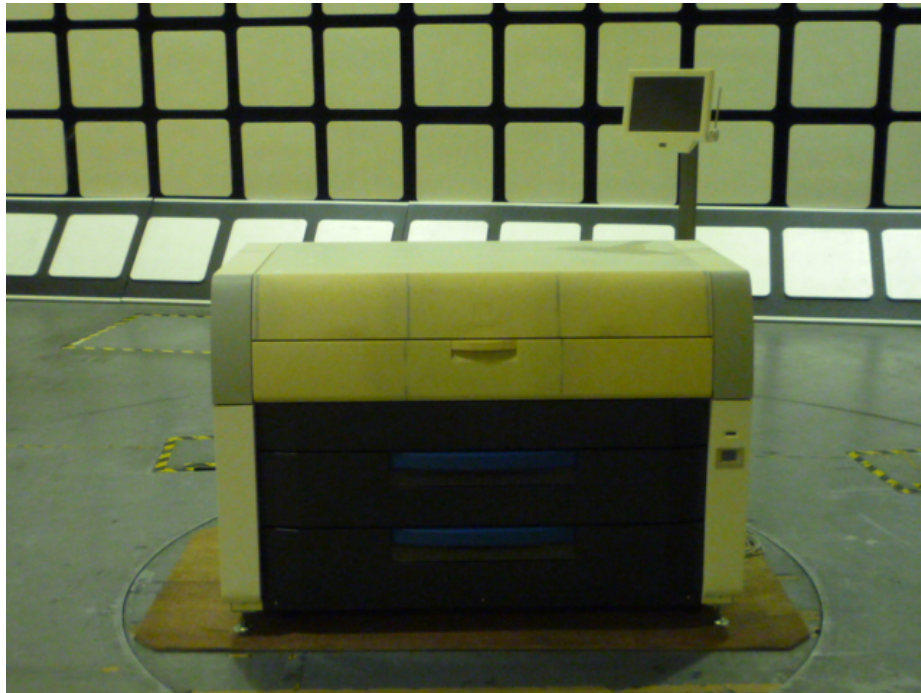

**B.2 Radiated Emissions**

- Front View -

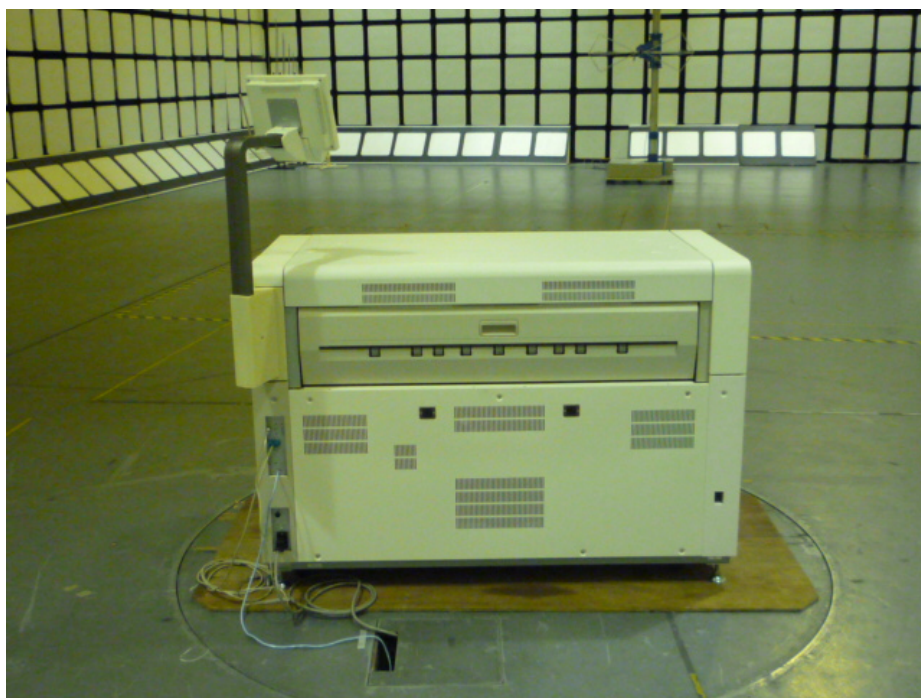

- Rear View -

Photograph present configuration with maximum emission

# Appendix C: Test Instruments

Sign	Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
OS-1	Open Site	-	Toshiba	-	2008/5	1 Year
OS-2	Open Site	-	Toshiba	-	2008/5	1 Year
AC-1	Anechoic Chamber (L)	-	TDK	-	2008/5	1 Year
AC-2	Anechoic Chamber (S)	-	TDK	-	2008/11	1 Year
SR-A	Shielded Room	-	TDK	-	-	-
SR-B	Shielded Room	-	TDK	-	-	-
SR-C	Shielded Room	-	TDK	-	-	-
TR-1	Tested Room	-	-	-	-	-
R-1	Test Receiver	ESVS10	Rohde & Schwarz	849231/004	2008/3	1 Year
R-2	Test Receiver	ESVS10	Rohde & Schwarz	843744/018	2008/6	1 Year
R-3	Test Receiver	ESI7	Rohde & Schwarz	100059/007	2008/10	1 Year
R-4	Test Receiver	ESHS30	Rohde & Schwarz	842053/001	2008/2	1 Year
R-5	Test Receiver	ESCS30	Rohde & Schwarz	100203	2008/5	1 Year
S-3	Spectrum Analyzer	U3751	Advantest	160100139	2008/3	1 Year
S-4	Spectrum Analyzer	8563E	Hewlett Packard	3221A00201	2008/4	1 Year
S-5	Spectrum Analyzer	U3751	Advantest	170500170	2008/5	1 Year
CB-3	RF Cable	3D-2W	Fujikura	-	2008/5	1 Year
CB-4	RF Cable	3D-2W	Fujikura	-	2008/5	1 Year
CB-5	RF Cable	3D-2W	Fujikura	-	2008/5	1 Year
CN-1	RF Cable	20D/5D-2W	Fujikura	-	2008/5	1 Year
CN-2	RF Cable	20D/5D-2W	Fujikura	-	2008/5	1 Year
CN-3	RF Cable	20D/5D-2W	Fujikura	-	2008/5	1 Year
CS-1	RF Cable	SUCOFLEX 104P	Huber+Suhner	27290/4P	2008/2	1 Year
CS-2	RF Cable	SUCOFLEX 104P	Huber+Suhner	27289/4P	2008/2	1 Year
L-1	AMN	KNW-407	Kyoritsu Corp.	8-833-5	2008/10	1 Year
L-2	AMN	KNW-407	Kyoritsu Corp.	8-680-14	2008/10	1 Year
L-3	AMN	KNW-407	Kyoritsu Corp.	8-757-1	2008/6	1 Year
L-4	AMN	KNW-242	Kyoritsu Corp.	8-755-1	2008/7	1 Year
L-5	AMN	KNW-242C	Kyoritsu Corp.	8-837-14	2008/7	1 Year
L-6	AMN	KNW-243C	Kyoritsu Corp.	8-692-5	2008/10	1 Year
L-7	AMN	KNW-243C	Kyoritsu Corp.	8-831-3	2008/6	1 Year
L-9	AMN	KNW-244C	Kyoritsu Corp.	8-1373-3	2008/8	1 Year
L-10	ISN	FCC-TLISN-T2-02	FCC	20234	2008/11	1 Year
L-11	ISN	FCC-TLISN-T4-02	FCC	20235	2008/11	1 Year
L-12	High Impedance Probe	KNW-410	Kyoritsu Corp.	8-876-3	2008/8	1 Year
L-13	Artificial Hand	K-9003	Kyoritsu Corp.	7-1639-4	2008/10	1 Year
L-14	Hi-pass Filter	KFL-009D	Kyoritsu Corp.	8-1996-8	2008/7	1 Year
L-15	ISN	F-070306-1057-1	FCC	20591	2008/7	1 Year
PL-3	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	2008/10	1 Year
PL-4	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	2008/2	1 Year
PL-5	Pulse Limiter	ESH3-Z2	Rohde & Schwarz	-	2008/5	1 Year
TM-1	50ohm Termination	BNC-P-1.5	TDC	-	2008/3	1 Year
TM-2	50ohm Termination	-	Y&R	-	2008/3	1 Year
AL-0	Loop Antenna	HFH2-Z2	Rohde & Schwarz	879284/14	2008/5	1 Year
AT-1	Triple Loop Antenna	HXYZ9170	Schwarzbeck	9170-138	2008/7	1 Year
AT-2	Trilog Broadband Antenna	VULB9160	Schwarzbeck	9160-3251	2008/9	1 Year
AB-1	Biconical Antenna	BBA9106	Schwarzbeck	91031741	2008/8	1 Year
AB-2	Biconical Antenna	BBA9106	Schwarzbeck	91032349	2008/9	1 Year
AB-3	Biconical Antenna	BBA9106	Schwarzbeck	VHA11905516	2008/9	1 Year
AL-1	Log-Periodic Antenna	UHALP9108-A	Schwarzbeck	0678	2008/8	1 Year
AL-2	Log-Periodic Antenna	UHALP9108-A	Schwarzbeck	0679	2008/9	1 Year
AL-3	Log-Periodic Antenna	UHALP9108-A	Schwarzbeck	0278	2008/9	1 Year
AL-4	Log-Periodic Antenna	USLP9143	Schwarzbeck	140	2008/6	1 Year
AL-5	Log-Periodic Antenna	94612-1	Eaton	97062301	2008/4	1 Year
AL-6	Log-Periodic Antenna	ESLP9145	Schwarzbeck	9145-216	2008/3	1 Year
AH-5	Horn Antenna	12-12	Scientific Atlanta	741	2008/5	1 Year

AD-1	Dipole Antenna	KBA-511A	Kyoritsu Corp.	0-195-5	2008/8	1 Year
AD-2	Dipole Antenna	KBA-511A	Kyoritsu Corp.	0-228-13	2008/9	1 Year
AD-3	Dipole Antenna	KBA-611	Kyoritsu Corp.	0-196-8	2008/8	1 Year
AD-4	Dipole Antenna	KBA-611	Kyoritsu Corp.	0-230-6	2008/9	1 Year
CL-1	Absorbing Clamp	MDS21	Rohde & Schwarz	894245/002	2008/5	1 Year
PA-1	Pre-Amplifier	WJ-6811-513	Watkins Johnson	0288	2008/2	1 Year
PA-2	Pre-Amplifier	WJ-6682-824	Watkins Johnson	0052	2008/2	1 Year
PA-3	Pre-Amplifier	WJ-6870-506	Watkins Johnson	0018	2008/2	1 Year
PA-5	Pre-Amplifier	AMF-4D-005080-18-13P	MITEQ, INC.	1218917	2008/11	1 Year
RN-1	Reference Impedance Network	4151	NF ELECTRONIC INSTRUMENTS	3168114151011	2008/5	1 Year
RN-2	Reference Impedance Network	ES4153	NF ELECTRONIC INSTRUMENTS	9099436	2008/10	1 Year
HF-1	Harmonic/Flicker Analyzer	KHA3000	KIKUSUI ELECTRONICS CORPORATION	NB001642	2008/5	1 Year
2-1	ESD Tester	ESD3000	EMC PARTNER	092	2008/5	1 Year
2-2	ESD Tester	ESD3000	EMC PARTNER	164	2008/3	1 Year
3-1	Signal Generator	SMT 02	Rohde & Schwarz	838616/021	2008/5	1 Year
3-2	Signal Generator	83732B	Hewlett Packard	US37101411	2008/10	1 Year
3-3	Function Generator	1941	NF	328730	2008/10	1 Year
3-4	RF Power Amplifier	150W1000M1	Amplifier Research	0328963	2009/1	1 Year
3-5	RF Power Amplifier	500A100M1	Amplifier Research	19671	2008/5	1 Year
3-6	RF Power Amplifier	200W1000M2A	Amplifier Research	19572	2008/5	1 Year
3-7	RF Power Amplifier	60S1G3M1	Amplifier Research	0325545	2008/5	1 Year
3-8	Biconical Antenna	3109	EMCO	9607-3014	2008/5	1 Year
3-10	Log-Periodic Antenna	3144	EMCO	9701-1032	2008/5	1 Year
3-11	Log-Periodic Antenna	AT5080	Amplifier Research	322092	2008/11	1 Year
3-12	Horn Antenna	AT4002A	Amplifier Research	0325039	2008/5	1 Year
3-13	Field Monitor	FM2000	Amplifier Research	19166	-	1 Year
3-14	Field Monitor	FM5004	Amplifier Research	25843	-	1 Year
3-15	Field Probe	FP2000	Amplifier Research	18767	2008/5	1 Year
3-16	Field Probe	FP2000	Amplifier Research	22646	2008/8	1 Year
3-17	Field Probe	FP5080	Amplifier Research	25212	2008/8	1 Year
3-18	Field Probe	FP6001	Amplifier Research	303557	2008/10	1 Year
3-19	Power Meter	4421	Bird	2919	2008/7	1 Year
3-20	Power Head	4022	Bird	6147	2008/7	1 Year
3-21	Power Meter	PM2002	Amplifier Research	25774	2008/7	1 Year
3-22	Power Head	PH2000	Amplifier Research	26413	2008/7	1 Year
3-23	Power Head	PH2000	Amplifier Research	26414	2008/7	1 Year
3-24	Dual Coupler	DC2600	Amplifier Research	19734	2008/7	1 Year
3-25	Dual Coupler	DC6080	Amplifier Research	302555	2008/7	1 Year
3-26	Dual Coupler	DC7144	Amplifier Research	26463	2008/7	1 Year
3-27	Signal Generator	SML 03	Rohde & Schwarz	103413	2008/9	1 Year
3-28	Field Probe	FP6001	ETS LINDGREN	00064158	2008/9	1 Year
3-29	Power Meter	NRT	Rohde & Schwarz	103116	2008/9	1 Year
3-30	Power Head	NRT-Z44	Rohde & Schwarz	102682	2008/9	1 Year
4-1	Immunity Tester	TRA2000	EMC PARTNER	659	2008/7	1 Year
4-2	EFT/B Generator	PEFT-Junior	HAEFELY	083818-13	2008/5	1 Year
4-3	EFT/B Generator	FNS-AXII B50	Noise Laboratory	FNS0620431	2008/5	1 Year
4-4	Coupling Clamp	IP4	HAEFELY	-	-	-
4-5	Coupling Clamp	15-00001A	Noise Laboratory	-	-	-
5-1	Surge Tester	PSURGE4.1	HAEFELY	083665-08	2008/11	1 Year
5-2	Coupling Filter	FP-SURGE 100M	HAEFELY	149163	2008/11	1 Year
5-3	Coupling Network	IP6.2	HAEFELY	083811-10	2008/11	1 Year
5-4	Decoupling Network	DEC1A	HAEFELY	083793-08	2008/11	1 Year
5-5	Pruefpistole	AP 300	HAEFELY	081 438	2008/11	1 Year
6-1	Signal Generator	PSG1000B	W.K. Electronics	000234	2008/6	1 Year
6-2	RF Power Amplifier	75A250	Amplifier Research	19502	2008/8	1 Year

6-3	RF Power Amplifier	75A250	Amplifier Research	26255	2008/8	1 Year
6-4	6dB Attenuator	8343-060	Bird	2054	2008/8	1 Year
6-5	6dB Attenuator	65-6-33	Weinschel	LW166	2008/8	1 Year
6-6	CDN	FCC-801-M1-16	FCC	50	2008/5	1 Year
6-7	CDN	FCC-801-M1-25A	FCC	04001	2008/5	1 Year
6-8	CDN	FCC-801-M2-25	FCC	59	2008/5	1 Year
6-9	CDN	FCC-801-M2-25A	FCC	03023	2008/5	1 Year
6-10	CDN	FCC-801-M2-25A	FCC	03024	2008/6	1 Year
6-11	CDN	FCC-801-M3-25	FCC	137	2008/5	1 Year
6-12	CDN	FCC-801-M3-25A	FCC	05021	2008/5	1 Year
6-13	CDN	FCC-801-M3-25A	FCC	99133	2008/6	1 Year
6-14	CDN	FCC-801-M4-25	FCC	21	2008/5	1 Year
6-15	CDN	FCC-801-M4-50	FCC	9806	2008/4	1 Year
6-16	CDN	FCC-801-C1	FCC	79	2008/5	1 Year
6-17	CDN	FCC-801-T2	FCC	77	2008/5	1 Year
6-18	CDN	FCC-801-T4	FCC	81	2008/6	1 Year
6-19	CDN	FCC-801-T8	FCC	9956	2008/6	1 Year
6-20	150-50 Ohms Adaptor	FCC-801-150-50	FCC	638	2008/6	1 Year
6-21	150-50 Ohms Adaptor	FCC-801-150-50	FCC	639	2008/6	1 Year
6-22	EM Clamp	F-203I	FCC	220	2008/8	1 Year
6-23	Decoupling Clamp	F-203I-DCN	FCC	105	-	-
6-24	Bulk Current Injection Clamp	F-120-2	FCC	53	2008/8	1 Year
6-25	CDN	FCC-801-M3-25A	FCC	08008	2008/6	1 Year
8-1	Interference Tester	LFP6.1	HAEFELY	083374-03	2008/3	1 Year
8-2	Magnetic Field Tester	MFG100.1	HAEFELY	080136-06	2008/3	1 Year
8-3	Field Coil	FC-1	ES Factory	001	2008/6	1 Year
8-4	Large Coil	L2X1.6	ES Factory	001	2008/3	1 Year
11-1	Voltage Dip Tester	PLINE1610	HAEFELY	148709	2008/4	1 Year
11-2	3 Phase Extension	PLS1630	HAEFELY	149685	2008/4	1 Year
11-3	External Variac Network	VAR-EXT1000	EMC PARTNER	046	2008/12	1 Year