RF TEST REPORT

Report No.: 16021116-FCC-R1
Supersede Report No.: N/A

Applicant	Sunpery (Nanjing) Co., Ltd
Product Name	Universal MMC/RS232 Interface
Main Model	C112
Serial Model	N/A
Test Standard	FCC Part 15.231: 2015, ANSI C63.10: 2013
Test Date	August 31 to September 13, 2016
Issue Date	September 13, 2016
Test Result	☑ Pass ☐ Fail
Equipment complied with the specification	☑
Equipment did not comply with the specification	☐

Deon Dai	Miro Bao	
Deon Dai Test Engineer	Miro Bao Checked By	

This test report may be reproduced in full only
Test result presented in this test report is applicable to the tested sample only

Issued by:
SIEMIC (Nanjing-China) Laboratories
2-1 Longcang Avenue Yuhua Economic and
Technology Development Park, Nanjing, China
Tel:+86(25)86730138 Fax:+86(25)86730127 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.

In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC , RF/Wireless , Telecom
Canada	EMC, RF/Wireless , Telecom
Taiwan	EMC, RF, Telecom , Safety
Hong Kong	RF/Wireless ,Telecom
Australia	EMC, RF, Telecom , Safety
Korea	EMI, EMS, RF , Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC , RF , Telecom
Europe	EMC, RF, Telecom , Safety

This page has been left blank intentionally.

CONTENTS

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16021116-FCC-R1	NONE	Original	September 13, 2016

2. Customer information

Applicant Name	Sunpery (Nanjing) Co., Ltd
Applicant Add	No. 588 Xiaoshan Road, Dachang District, Nanjing 210044
Manufacturer Name	Sunpery (Nanjing) Co., Ltd
Manufacturer Add	No. 588 Xiaoshan Road, Dachang District, Nanjing 210044

3. Test site information

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Add	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	EZ_EMC

4. Equipment Under Test (EUT) Information

Description of EUT:	Universal MMC/RS232 Interface
Main Model:	C112
Serial Model:	N/A
Date EUT received:	August 22, 2016
Test Date(s):	August 31 to September 13, 2016
Antenna Gain:	3 dBi
Type of Modulation:	ASK
RF Operating Frequency (ies):	Tx:433.92MHz
Number of Channels:	1 CH
Port:	Power Port, LAN Port
Input Power:	Adapter: Model: T090060-2A1 INPUT: 100-240V~50/60Hz 0.3A OUTPUT: 9Vdc 0.6A
Trade Name :	N/A
FCC ID:	VXC-C112

5. Test Summary

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	Conducted Emissions Voltage	Compliance
§15.231(b)	Fundamental & Radiated Spurious Emission	Compliance
§15.231(c)	20dB Bandwidth	Compliance
§15.231(a)(1)	Deactivation	Compliance

Note: Preliminary radiated emission testing has been performed on X, Y, Z axis, only worst case test result is presented in this test report.

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Conducted Emissions & Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	1.634dB / 3.952dB

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

a) Antenna must be permanently attached to the device.

b) Antenna must use a unique type of connector to attach to the device.

c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The antenna is permanently attached to the device which meets the requirement.

Result: Compliance.

6.2 AC Conducted Emissions Voltage

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	September 06, 2016
Tested By :	Deon Dai

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBμV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

Spec	Item	Requirement	Applicable
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	☑
Test Setup	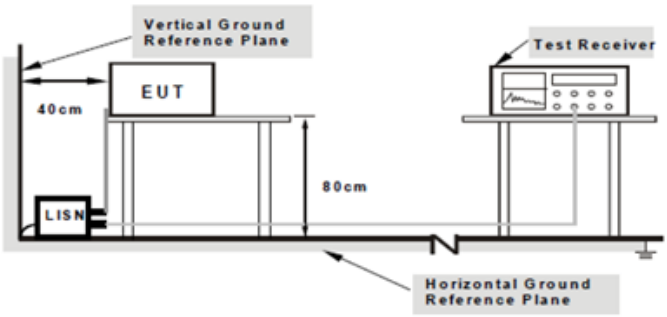 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.		
Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment were powered separately from another main supply.		
Remark			
Result	☑ Pass ☐ Fail		

Test Data ☑ Yes ☐ N/A

Test Plot ☑ Yes (See below) ☐ N/A

Data sample

No.	Frequency	Reading	Detector	Lisn/Isn	Ps_Lmt	Cab_L	Result	Limit	Margin
	(MHz)	(dBμV)		(dB}	(dB)	(dB)	(dBμV)	(dBμV)	(dB)

Frequency (MHz) = Emission frequency in MHz

Reading (dBμV) = Receiver Reading Value

Detector=Quasi Peak Detector or Average Detector

Lisn/ISN= Insertion loss of LISN

Ps_Lmt= Insertion loss of transient limiter (The transient limiter included 10dB attenuation)

Cab_L= cable loss

Result (dBμV) = Reading Value + Corrected Value

Limit (dBμV) = Limit stated in standard

Calculation Formula:

Margin (dB) = Result (dBμV) – limit (dBμV)

Test Mode:	Transmitting Mode

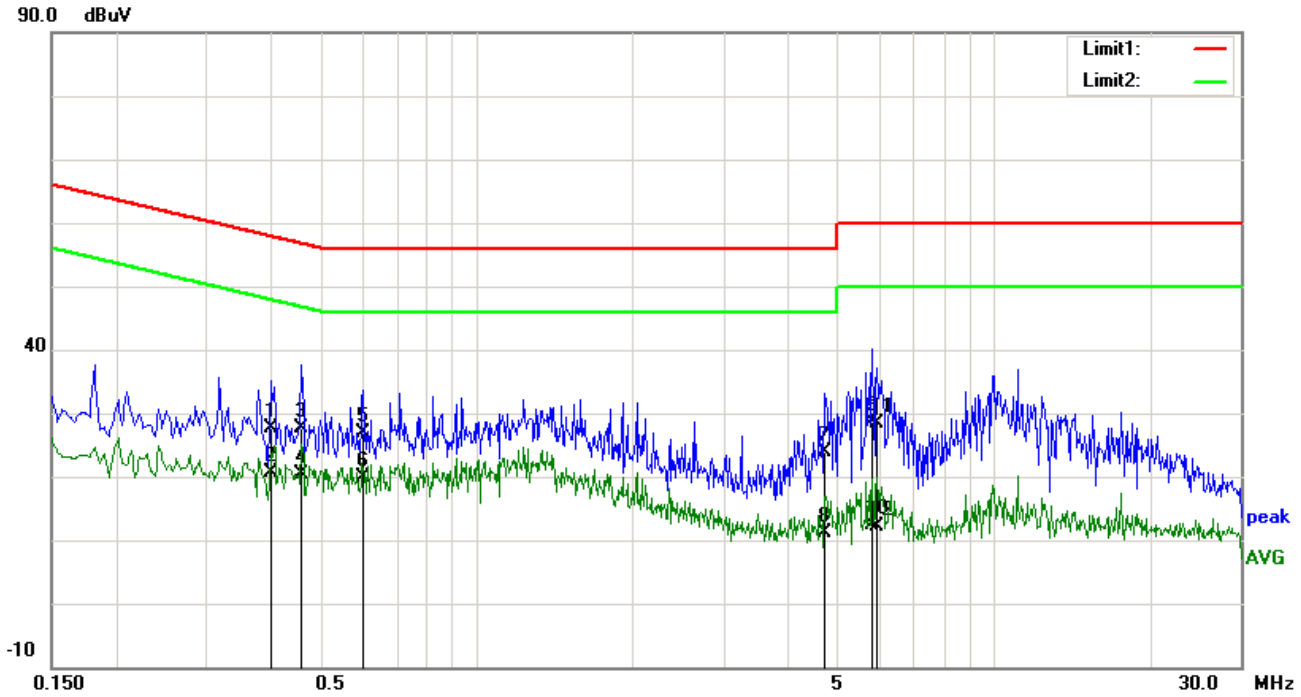

Test Data

Phase Line Plot at 120Vac, 60Hz

No.	Frequency (MHz)	Reading (dBμV)	Detector	Lisn/Isn (dB}	Ps_Lmt (dB)	Cab_L (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	0.3980	17.26	QP	0.11	-10.00	0.21	27.58	57.90	-30.32
2	0.3980	10.29	AVG	0.11	-10.00	0.21	20.61	47.90	-27.29
3	0.4580	17.31	QP	0.12	-10.00	0.21	27.64	56.73	-29.09
4	0.4580	9.93	AVG	0.12	-10.00	0.21	20.26	46.73	-26.47
5	0.6020	16.48	QP	0.13	-10.00	0.21	26.82	56.00	-29.18
6	0.6020	9.66	AVG	0.13	-10.00	0.21	20.00	46.00	-26.00
7	4.7060	13.41	QP	0.26	-10.00	0.28	23.95	56.00	-32.05
8	4.7060	0.49	AVG	0.26	-10.00	0.28	11.03	46.00	-34.97
9	5.8340	18.04	QP	0.32	-10.00	0.31	28.67	60.00	-31.33
10	5.8340	1.64	AVG	0.32	-10.00	0.31	12.27	50.00	-37.73
11	5.9420	17.83	QP	0.33	-10.00	0.31	28.47	60.00	-31.53
12	5.9420	1.42	AVG	0.33	-10.00	0.31	12.06	50.00	-37.94

Test Mode:	Transmitting Mode

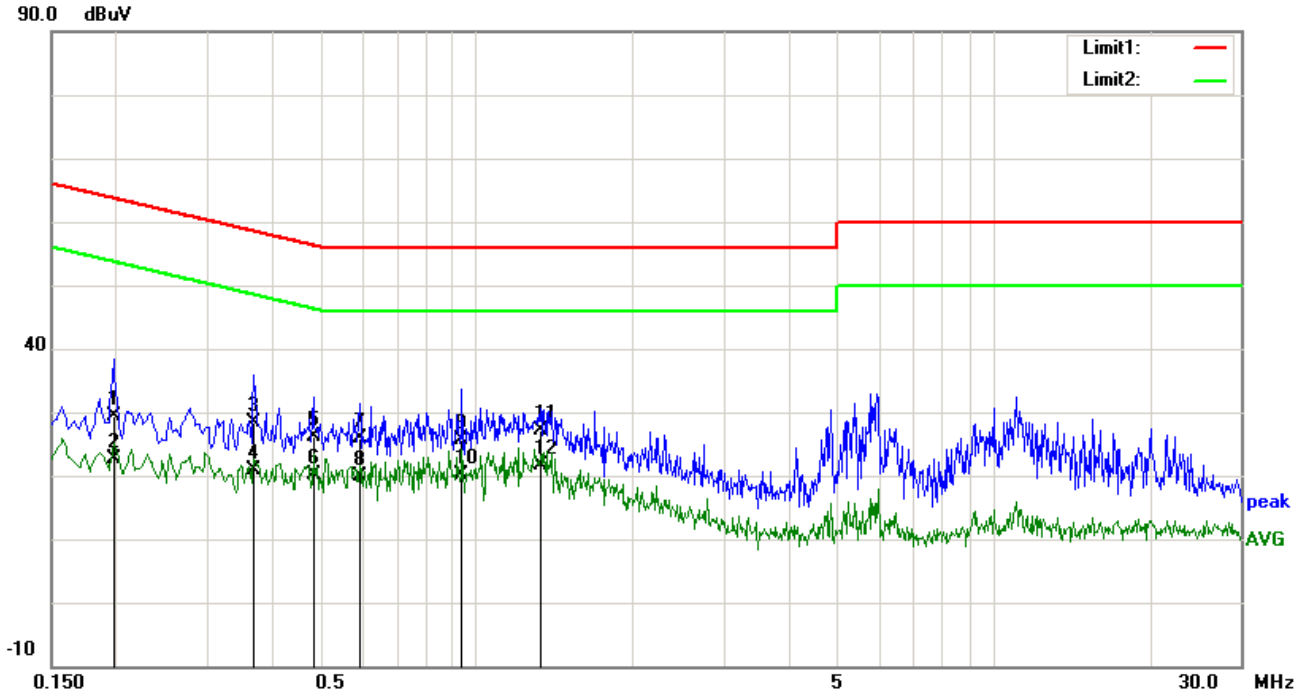

Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	Frequency (MHz)	Reading (dBμV)	Detector	Lisn/Isn (dB}	Ps_Lmt (dB)	Cab_L (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	0.1980	19.12	QP	0.10	-10.00	0.28	29.50	63.69	-34.19
2	0.1980	12.27	AVG	0.10	-10.00	0.28	22.65	53.69	-31.04
3	0.3700	18.12	QP	0.11	-10.00	0.20	28.43	58.50	-30.07
4	0.3700	10.63	AVG	0.11	-10.00	0.20	20.94	48.50	-27.56
5	0.4820	15.92	QP	0.11	-10.00	0.21	26.24	56.30	-30.06
6	0.4820	9.79	AVG	0.11	-10.00	0.21	20.11	46.30	-26.19
7	0.5940	15.46	QP	0.11	-10.00	0.21	25.78	56.00	-30.22
8	0.5940	9.55	AVG	0.11	-10.00	0.21	19.87	46.00	-26.13
9	0.9340	15.36	QP	0.13	-10.00	0.19	25.68	56.00	-30.32
10	0.9340	9.93	AVG	0.13	-10.00	0.19	20.25	46.00	-25.75
11	1.3300	16.72	QP	0.14	-10.00	0.21	27.07	56.00	-28.93
12	1.3300	11.38	AVG	0.14	-10.00	0.21	21.73	46.00	-24.27

Test Mode:	Transmitting Mode

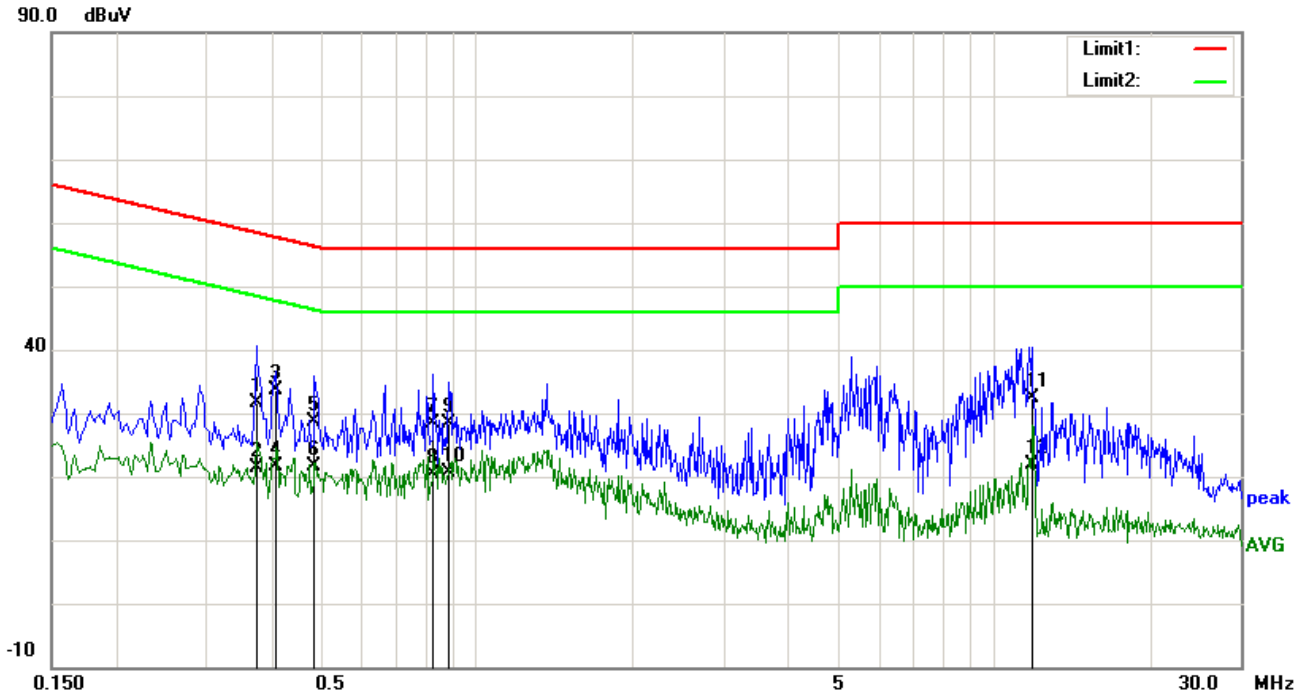

Test Data

Phase Line Plot at 240Vac, 50Hz

No.	Frequency (MHz)	Reading (dBμV)	Detector	Lisn/Isn (dB}	Ps_Lmt (dB)	Cab_L (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	0.3740	21.20	QP	0.11	-10.00	0.20	31.51	58.41	-26.90
2	0.3740	11.15	AVG	0.11	-10.00	0.20	21.46	48.41	-26.95
3	0.4100	23.21	QP	0.11	-10.00	0.21	33.53	57.65	-24.12
4	0.4100	11.26	AVG	0.11	-10.00	0.21	21.58	47.65	-26.07
5	0.4860	18.37	QP	0.12	-10.00	0.21	28.70	56.24	-27.54
6	0.4860	11.31	AVG	0.12	-10.00	0.21	21.64	46.24	-24.60
7	0.8260	18.05	QP	0.13	-10.00	0.20	28.38	56.00	-27.62
8	0.8260	10.03	AVG	0.13	-10.00	0.20	20.36	46.00	-25.64
9	0.8820	18.15	QP	0.14	-10.00	0.19	28.48	56.00	-27.52
10	0.8820	10.33	AVG	0.14	-10.00	0.19	20.66	46.00	-25.34
11	11.8460	21.34	QP	0.63	-10.00	0.48	32.45	60.00	-27.55
12	11.8460	10.79	AVG	0.63	-10.00	0.48	21.90	50.00	-28.10

Test Mode:	Transmitting Mode

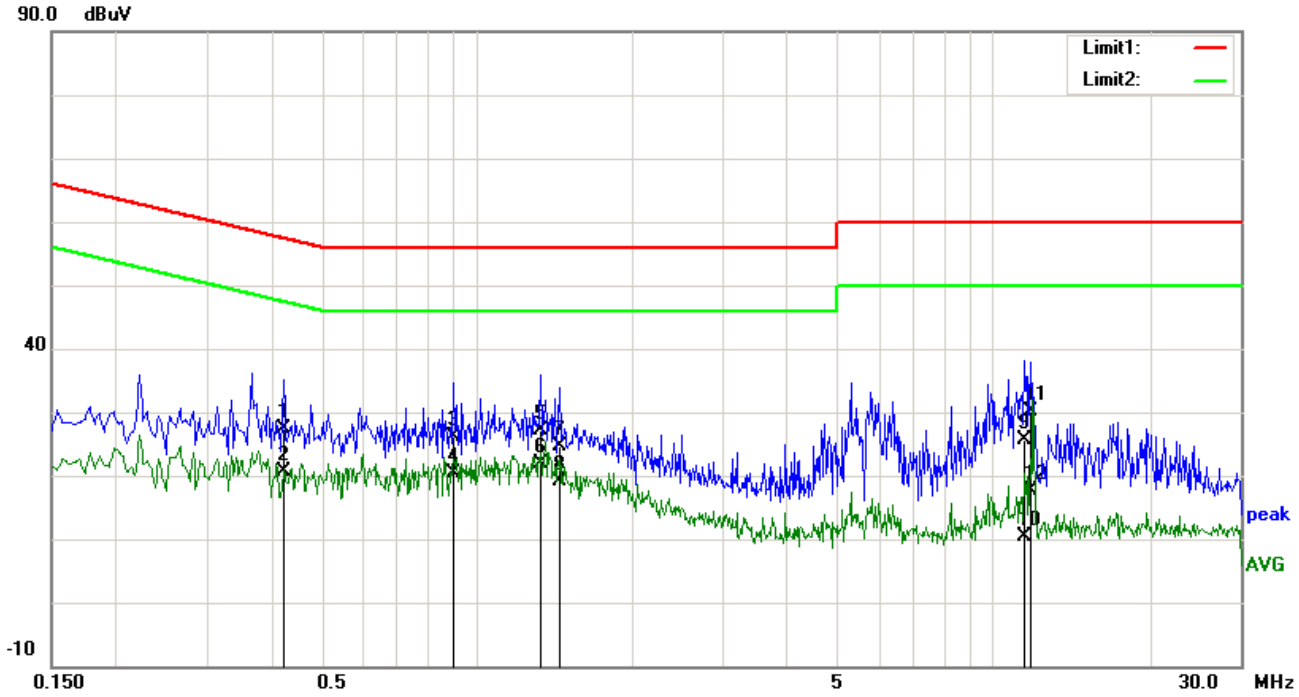

Test Data

Phase Neutral Plot at 240Vac, 50Hz

No.	Frequency (MHz)	Reading (dBμV)	Detector	Lisn/Isn (dB}	Ps_Lmt (dB)	Cab_L (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)
1	0.4220	16.99	QP	0.11	-10.00	0.21	27.31	57.41	-30.10
2	0.4220	10.22	AVG	0.11	-10.00	0.21	20.54	47.41	-26.87
3	0.9020	15.87	QP	0.13	-10.00	0.19	26.19	56.00	-29.81
4	0.9020	10.00	AVG	0.13	-10.00	0.19	20.32	46.00	-25.68
5	1.3260	16.76	QP	0.14	-10.00	0.21	27.11	56.00	-28.89
6	1.3260	11.42	AVG	0.14	-10.00	0.21	21.77	46.00	-24.23
7	1.4460	14.26	QP	0.15	-10.00	0.20	24.61	56.00	-31.39
8	1.4460	8.75	AVG	0.15	-10.00	0.20	19.10	46.00	-26.90
9	11.4660	14.47	QP	0.65	-10.00	0.48	25.60	60.00	-34.40
10	11.4660	-0.73	AVG	0.65	-10.00	0.48	10.40	50.00	-39.60
11	11.8020	18.92	QP	0.68	-10.00	0.48	30.08	60.00	-29.92
12	11.8020	6.36	AVG	0.68	-10.00	0.48	17.52	50.00	-32.48

6.3 20dB Occupied Bandwidth

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 31, 2016
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable
§15.231(c)	a)	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.	☑
	b)	For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.	☐
Test Setup	Spectrum Analyzer — EUT		
Test Procedure	20dB Emission bandwidth measurement procedure - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥3*RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.		
Remark			
Result	☑ Pass ☐ Fail		

Test Data ☑ Yes ☐ N/A

Test Plot ☑ Yes ☐ N/A

20dB Bandwidth measurement result

Type	Freq (MHz)	CH	Measured 20dB Bandwidth (kHz)	Limit (kHz)	Result
20dB BW	433.90	1 CH	877.3	1084.75	Pass

Test Plots

20dB Bandwidth measurement result

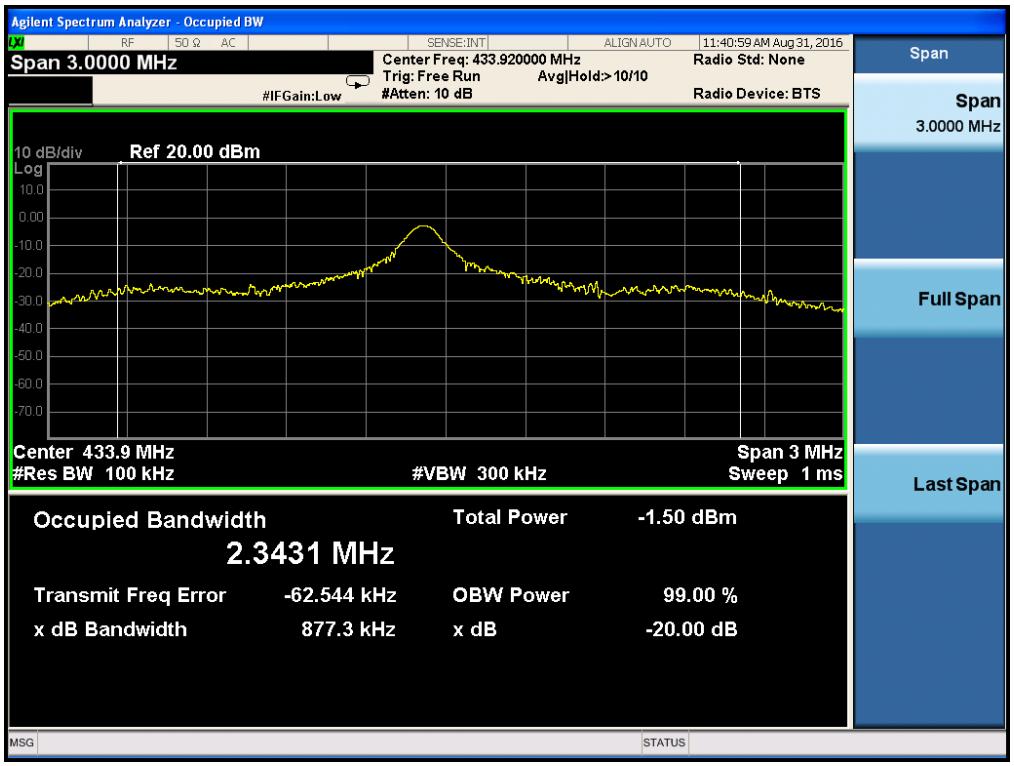

20dB Bandwidth

6.4 Radiated Fundamental and Spurious Emission

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	August 31, 2016
Tested By :	Deon Dai

Requirement(s):

<table>
<tr><th>Spec</th><th>Item</th><th>Requirement</th><th>Applicable</th></tr>
<tr><td>§15.231(b)</td><td>a)</td><td>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges
<table>
<tr><th>Fundamental frequency (MHz)</th><th>Field strength of fundamental (microvolts/meter)</th><th>Field strength of spurious emissions (microvolts/meter)</th></tr>
<tr><td>40.66-40.70</td><td>2250</td><td>225</td></tr>
<tr><td>70-130</td><td>1250</td><td>125</td></tr>
<tr><td>130-174</td><td>1250 to 3750</td><td>125 to 375</td></tr>
<tr><td>174-260</td><td>3750</td><td>375</td></tr>
<tr><td>260-470</td><td>3750-12500</td><td>375 to 1250</td></tr>
<tr><td>Above 470</td><td>12500</td><td>1250</td></tr>
<tr><td colspan="3">Note: All 3 axes have been investigated. Only worst case is presented in the test report.</td></tr>
</table></td><td>☑</td></tr>
<tr><td>Test Setup</td><td colspan="3">A: < 1GHz
 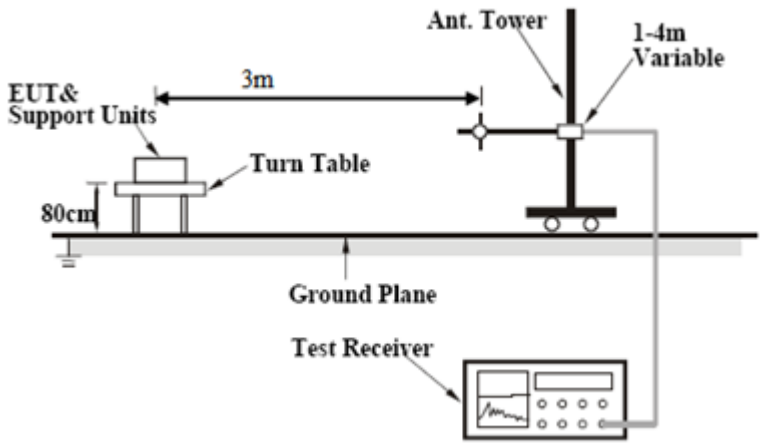

B: >1GHz</td></tr>
</table>

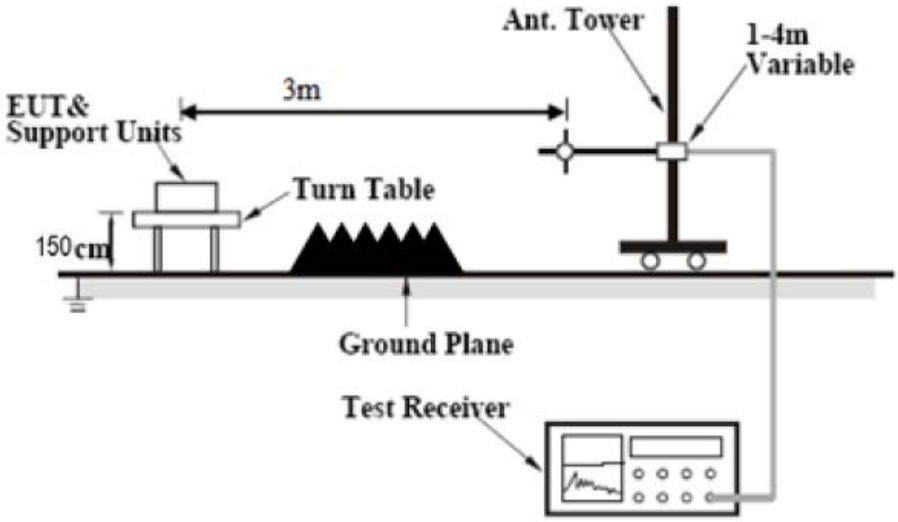

Procedure	1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☑ Pass ☐ Fail

Test Data ☑ Yes ☐ N/A

Test Plot ☑ Yes (See below) ☐ N/A

Data sample

No.	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
	(MHz)	(dBμV/m)		(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(cm)	(°)

Frequency (MHz) = Emission frequency in MHz

Reading (dBμV/m) = Receiver Reading Value

Detector= Peak Detector or Quasi Peak Detector

Ant_F=Antenna Factor

PA_G=Pre-Amplifier Gain

Cab_L=Cable Loss

Result (dBμV/m) = Read ing Value + Corrected Value

Limit (dBμV/m) = Limit stated in standard

Height (cm) = Height of Receiver antenna

Degree = Turn table degree

Calculation Formula:

Margin (dB) = Result (dBμV/m) – limit (dBμV/m)

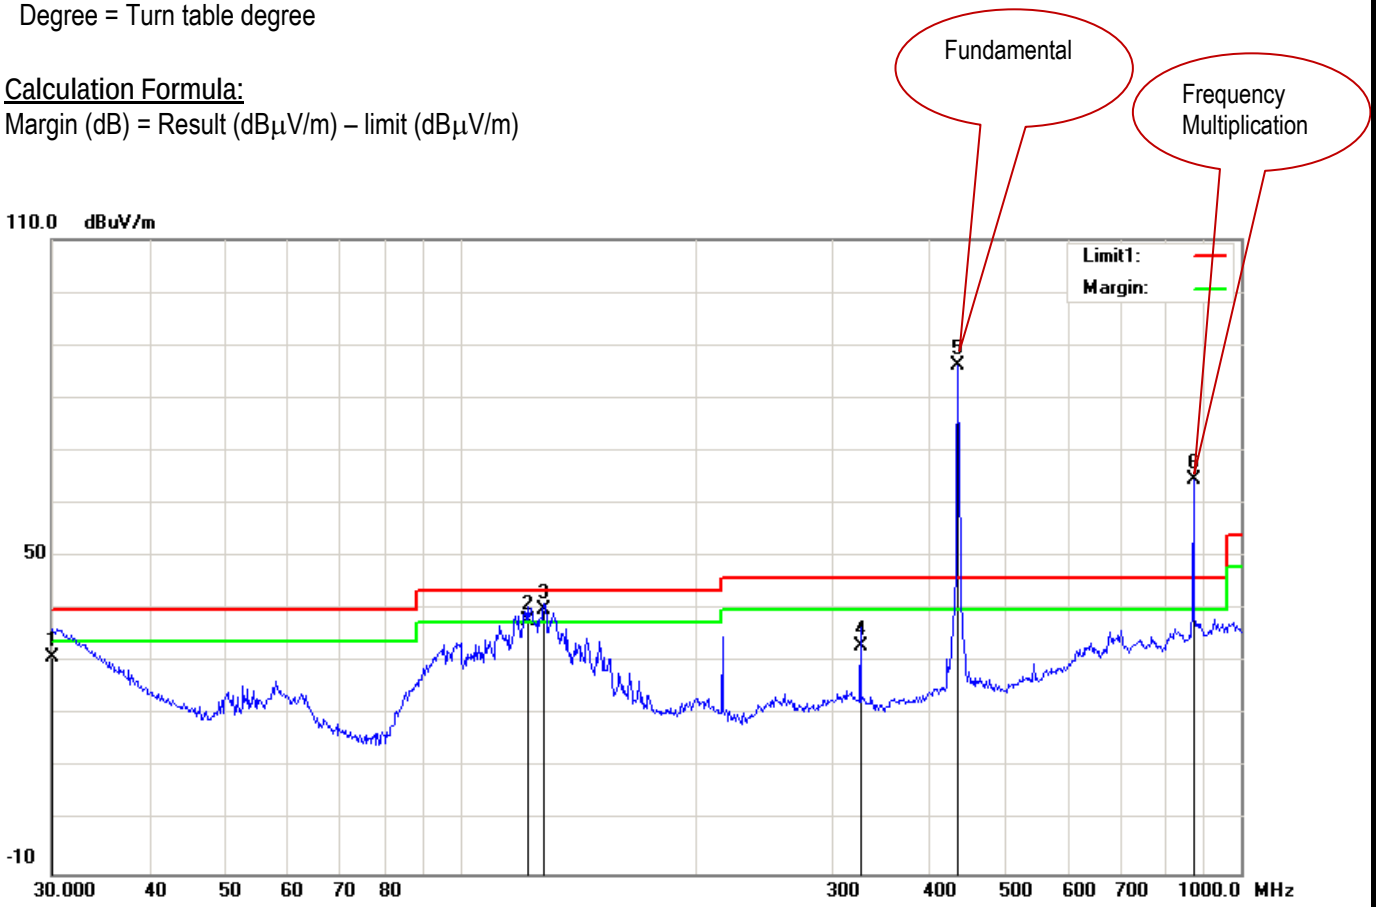

Vertical Polarity Plot @3m

Field strength of fundamental Result

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
5	433.92	114.98	Pk	16.84	49.13	3.35	86.04	100.8	-14.76	100	116
5	433.92	-	Ave	-	-	-	78.39	80.8	-2.41	-	-

Field strength of spurious emissions Result

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
6	867.84	82.27	peak	23.61	46.12	4.76	64.52	80.8	-16.28	100	266
6	867.84	-	Ave	-	-	-	56.87	60.8	-3.93	-	-

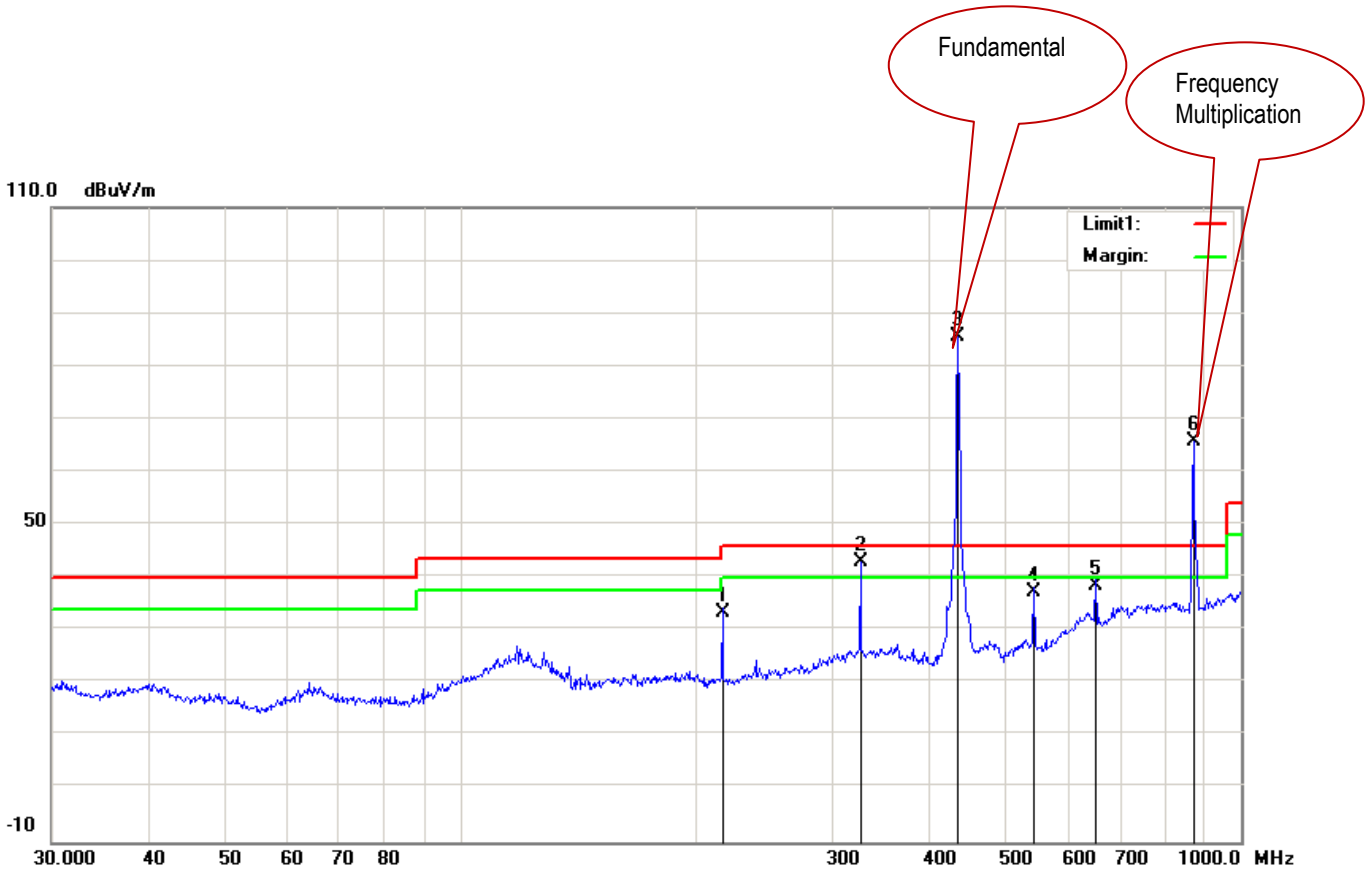

Horizontal Polarity Plot @3m

Field strength of fundamental Result

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
3	433.92	114.97	Pk	16.48	49.13	3.35	85.67	100.8	-15.13	200	115
3	433.92	-	Ave	-	-	-	78.02	80.8	-2.78	-	-

Field strength of spurious emissions Result

No.	Frequency (MHz)	Reading (dBμV/m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Degree (°)
6	867.84	97.49	Pk	22.11	46.12	4.76	65.74	80.8	-15.06	200	161
6	867.84	-	Ave	-	-	-	58.09	60.8	-2.71	-	-

Spurious Emissions (< 1GHz) Measurement Result

Vertical Polarity Plot @3m

No.	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
	(MHz)	(dBμV/m)		(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(cm)	(°)
1	30.0000	47.52	QP	28.30	45.69	0.87	31.00	40.00	-9.00	100	334
2	121.9755	66.74	QP	16.17	46.71	1.80	38.00	43.50	-5.50	100	325
3	128.1130	69.09	QP	16.23	47.16	1.84	40.00	43.50	-3.50	200	120
4	325.5958	64.30	QP	14.55	48.74	2.89	33.00	46.00	-13.00	200	98

Horizontal Polarity Plot @3m

No.	Frequency	Reading	Detector	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degree
	(MHz)	(dBμV/m)		(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(cm)	(°)
1	216.7828	66.02	QP	12.61	47.74	2.34	33.23	46.00	-12.77	200	351
2	325.5958	70.67	QP	18.18	48.74	2.89	43.00	46.00	-3.00	200	360
4	543.2742	64.06	QP	18.03	48.65	3.72	37.16	46.00	-8.84	200	225
5	651.9417	60.94	QP	21.70	48.15	4.10	38.59	46.00	-7.41	200	137

Notes:

1. Duty cycle is 41.46%, 20log (duty cycle) = -7.65dB correction was used to determine the average level from the peak reading. Average = peak reading + 20log (duty cycle), Final Average= peak reading -7.65dB

2. All the data measurement of peak values.

3. FCC Limit for Average Measurement=41.67* (433.92MHz)-7083.3333=10998.1131μV/m=80.8dBμV/m

4. Average pulsed signal over one complete pulse train or 100 ms time frame if pulse train exceeds 100 ms

5. Maximum average in 100 ms

6. Calculate duty cycle for pulse train or 100 ms

7. Duty cycle = (t1 + t2 + t3+…tn)/T where tn = pulse width, T = pulse train length or 100 ms

Spurious Emissions (> 1GHz) Measurement Result

Frequency GHz	Reading (dBμV/m)	Direction Degree	Height Meter	Polar H/V	Factors (dB)	correct (dBμV/m)	FCC 15.231 Limit (dBμV/m)	Margin	Comments
1.302	80.26	154.00	2.00	H	-25.85	54.41	74.0	-19.59	Peak
1.302	-	-	-	H	-	46.76	54.0	-7.24	Ave
1.736	76.16	245.00	2.00	H	-23.33	52.83	80.8	-27.97	Peak
1.736	-	-	-	H	-	45.18	60.8	-15.62	Ave
2.169	72.16	68.00	2.00	H	-20.66	51.5	80.8	-29.3	Peak
2.169	-	-	-	H	-	43.85	60.8	-16.95	Ave
2.603	76.14	235.00	2.00	H	-18.42	57.72	80.8	-23.08	Peak
2.603	-	-	-	H	-	50.07	60.8	-10.73	Ave
3.037	75.83	93.00	2.00	H	-15.46	60.37	80.8	-20.43	Peak
3.037	-	-	-	H	-	52.72	60.8	-8.08	Ave
3.471	66.91	168.00	2.00	H	-11.48	55.43	80.8	-25.37	Peak
3.471	-	-	-	H	-	47.78	60.8	-13.02	Ave
3.905	63.14	252.00	2.00	H	-9.25	53.89	80.8	-26.91	Peak
3.905	-	-	-	H	-	46.24	60.8	-14.56	Ave
4.338	60.16	213.00	2.00	H	-6.73	53.43	80.8	-27.37	Peak
4.338	-	-	-	H	-	45.78	60.8	-15.02	Ave
1.302	78.69	310.00	1.00	V	-25.85	52.84	74.0	-21.16	Peak
1.302	-	-	-	V	-	45.19	54.0	-8.81	Ave
1.736	77.82	122.00	1.00	V	-23.33	54.49	80.8	-26.31	Peak
1.736	-	-	-	V	-	46.84	60.8	-13.96	Ave
2.169	73.38	221.00	1.00	V	-20.66	52.72	80.8	-28.08	Peak
2.169	-	-	-	V	-	45.07	60.8	-15.73	Ave
2.603	78.17	68.00	1.00	V	-18.42	59.75	80.8	-21.05	Peak
2.603	-	-	-	V	-	52.1	60.8	-8.7	Ave
3.037	76.49	41.00	1.00	V	-15.46	61.03	80.8	-19.77	Peak
3.037	-	-	-	V	-	53.38	60.8	-7.42	Ave
3.471	68.58	324.00	1.00	V	-11.48	57.1	80.8	-23.7	Peak
3.471	-	-	-	V	-	49.45	60.8	-11.35	Ave
3.905	65	153.00	1.00	V	-9.25	55.75	80.8	-25.05	Peak
3.905	-	-	-	V	-	48.1	60.8	-12.7	Ave
4.338	61.92	286.00	1.00	V	-6.73	55.19	80.8	-25.61	Peak
4.338	-	-	-	V	-	47.54	60.8	-13.26	Ave

Note: Duty cycle is 41.46%, 20log (duty cycle) = -7.65dB correction was used to determine the average level from the peak reading.
Average = peak reading + 20log (duty cycle), final Average= peak reading -7.65dB

Note:
Narrow Pulse: 0.3ms
2/NP = 2/0.3ms =6.67 kHz
RBW > 2/NP (6.67 kHz)
Therefore PDCF is not needed.

Duty Cycle Measurement Result

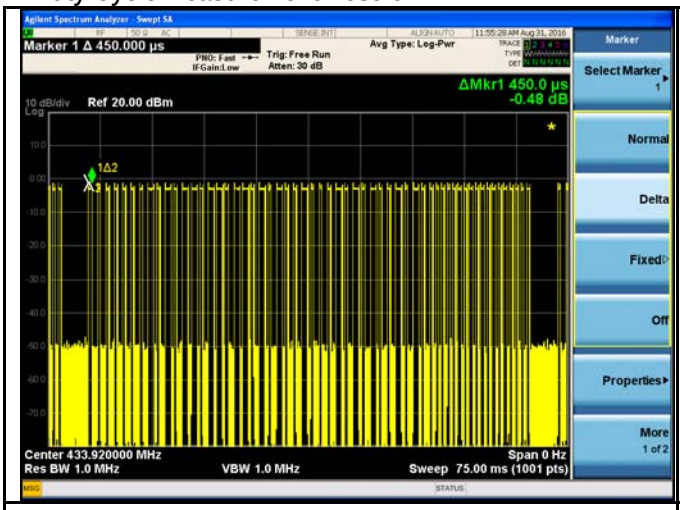	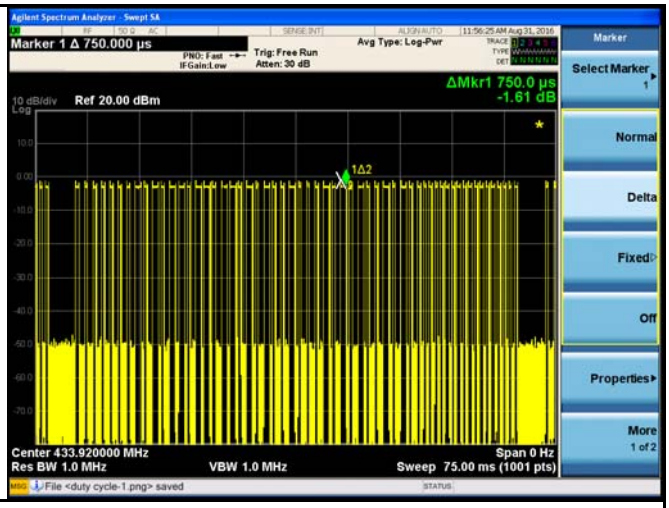
Duty Cycle 1#	Duty Cycle 2#
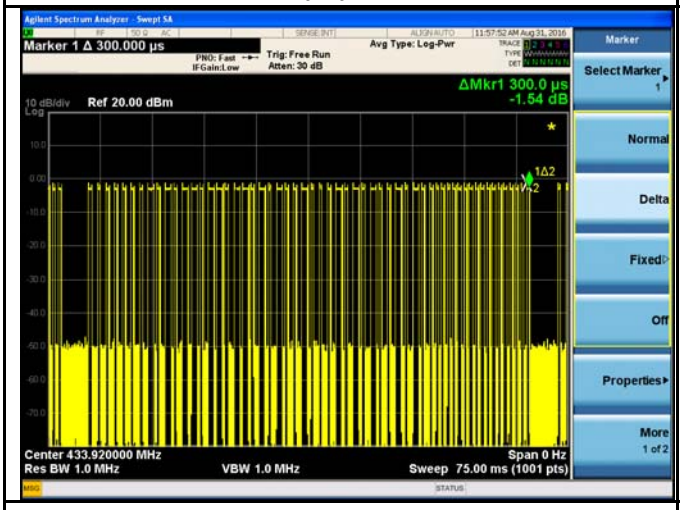	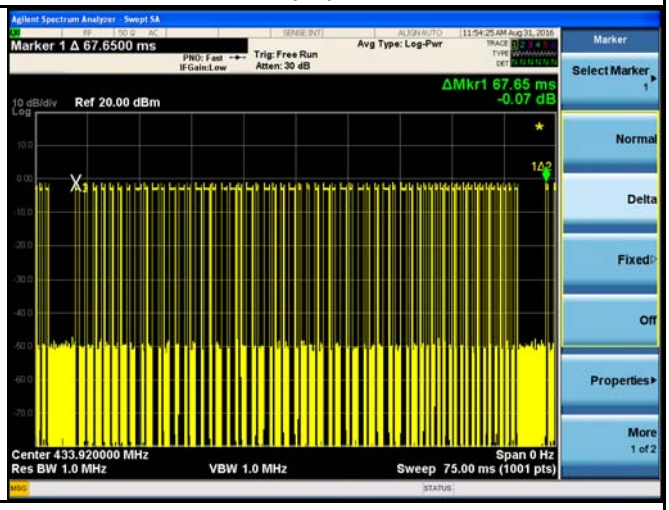
Duty Cycle 3#	Duty Cycle 4#
Wide Pulse: 0.75ms Middle Pulse: 0.45ms Narrow Pulse: 0.3ms Duty cycle= (0.75*16+0.45*23+0.3*19)/67.65 =41.46% Average Duty Factor: 20*log (Duty Cycle) = -7.65dB	
Pulse Duty Cycle	

6.5 Deactivation

Temperature	25°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
Test date :	September 13, 2016
Tested By :	Deon Dai

Requirement(s):

Spec	Item	Requirement	Applicable
§15.231 (a)(1)	a)	A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	☑
Test Setup	Spectrum Analyzer — EUT		
Test Procedure	measurement procedure - Set analyzer center frequency to channel center frequency. - Set the span to 0Hz. - Set the VBW ≥ 3 ´ RBW. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize.		
Remark			
Result	☑ Pass ☐ Fail		

Test Data ☐ Yes ☑ N/A

Test Plot ☑ Yes (See below) ☐ N/A

Test Plots

Deactivation Measurement Result

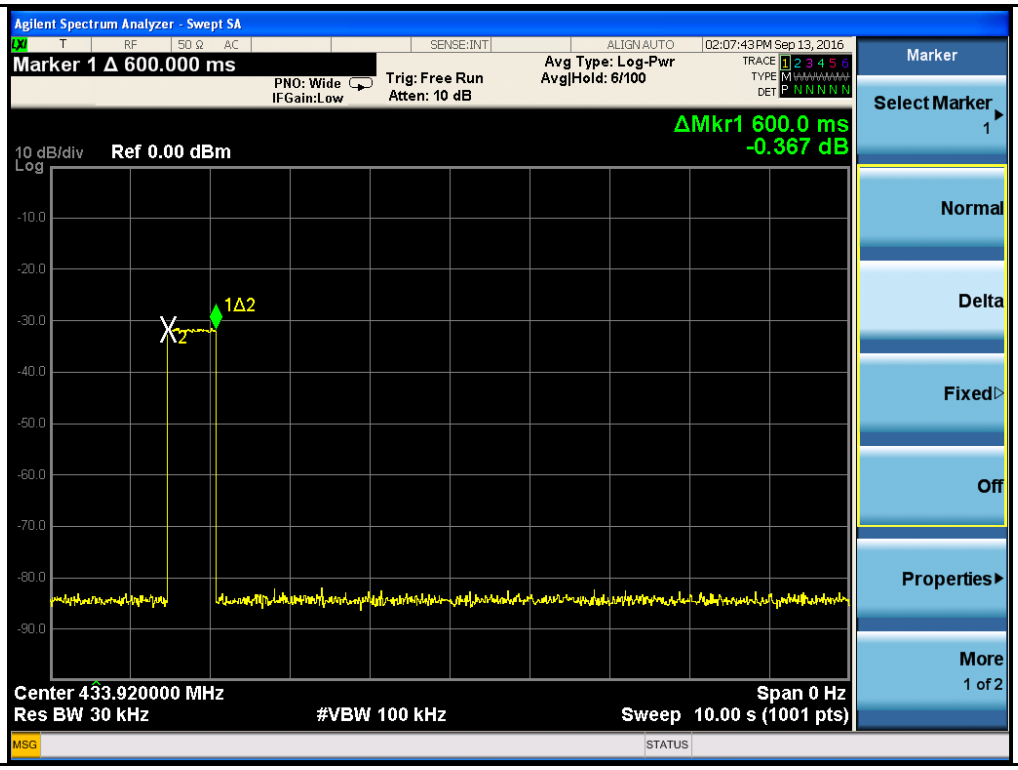

< 5 seconds

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
R&S EMI Test Receiver	ESPI3	101216	03/31/2016	03/31/2017	☑
V-LISN	ESH3-Z5	838979/005	03/31/2016	03/31/2017	☑
SIEMIC EZ_EMC software Conducted Emissions	Ver.ICP-03A1	N/A	N/A	N/A	☑
RF conducted test					
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	☑
Radiated Emissions					
Agilent Technologies Spectrum Analyzer	N9010A	MY47191130	03/11/2016	03/10/2017	☑
R&S EMI Receiver	ESPI3	101216	03/31/2016	03/31/2017	☑
Antenna (30MHz~6GHz)	JB6	A121411	10/31/2015	10/31/2016	☑
EMCO Horn Antenna (1 ~18GHz)	3115	N/A	10/09/2015	10/08/2016	☑
Hp Agilent Pre-Amplifier	8447F	1937A01160	10/27/2015	10/26/2016	☑
Pre-Amplifier	8449B	3008A02224	10/30/2015	10/30/2016	☑
SIEMIC EZ_EMC software Radiated Emissions	Ver.ICP-03A1	N/A	N/A	N/A	☑

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photos

All Packages Front View

Front View of EUT

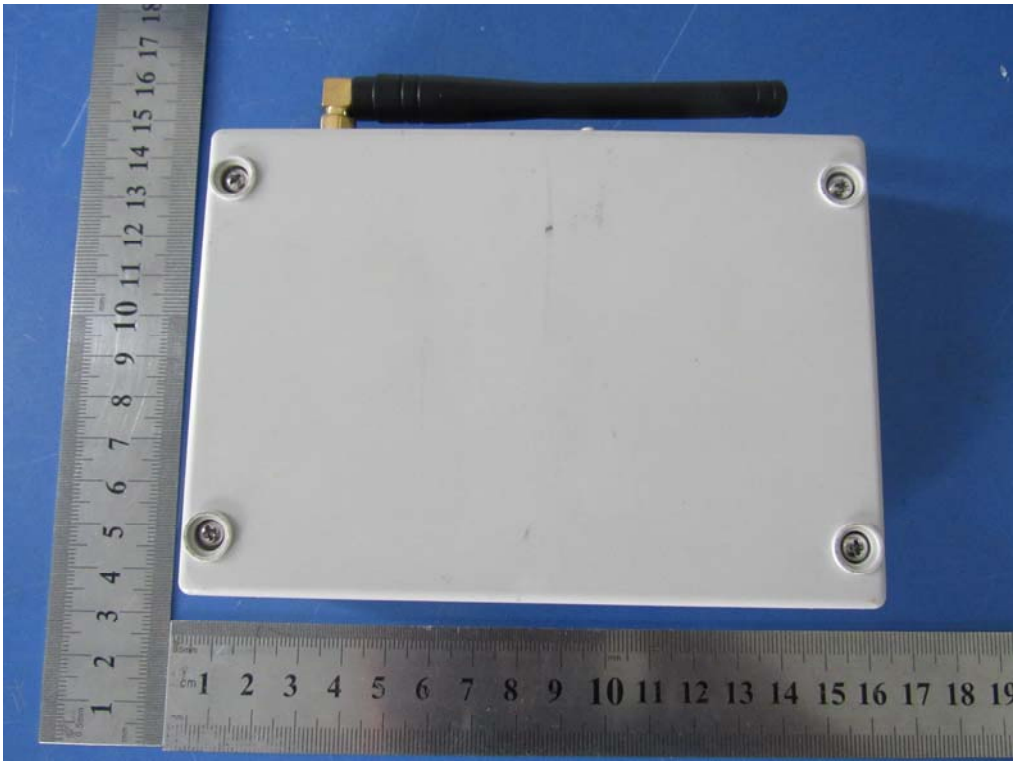

Rear View of EUT

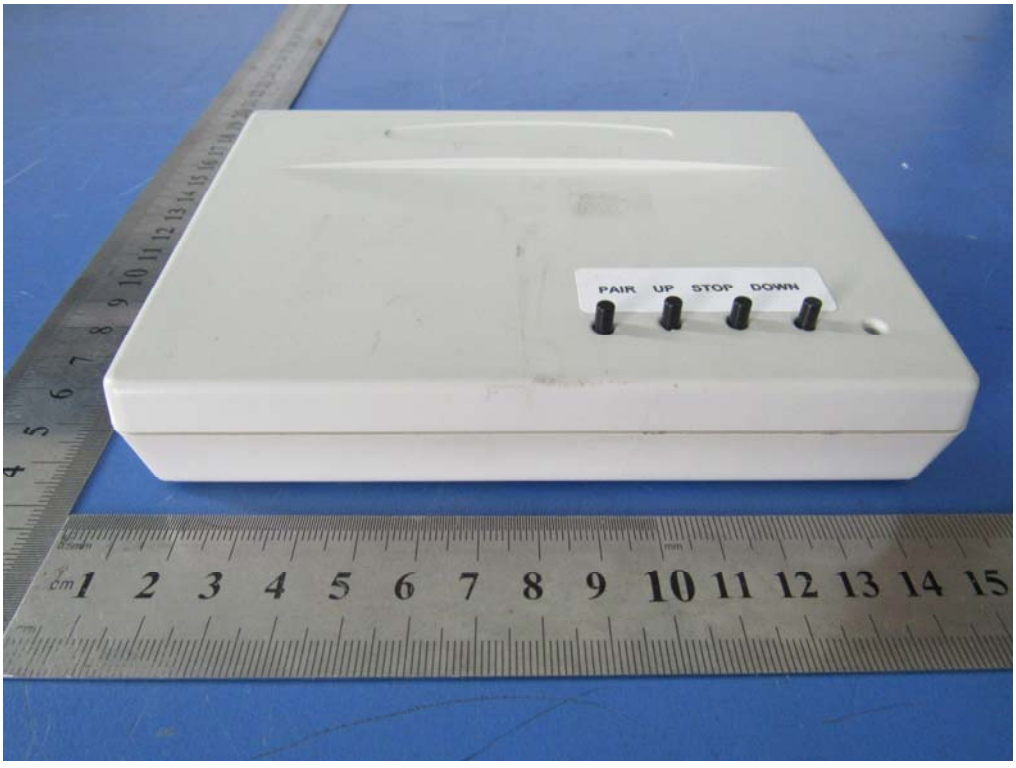

Top View of EUT

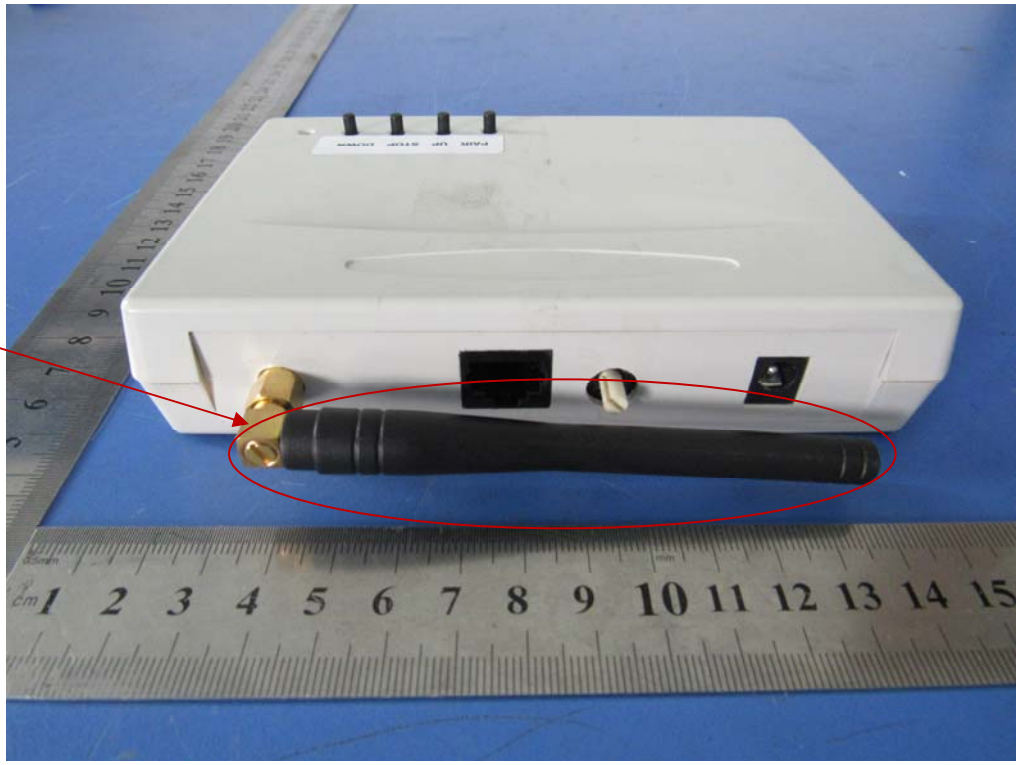

Bottom View of EUT

Left View of EUT

Right View of EUT

Annex B.ii. Photograph EUT Internal Photos

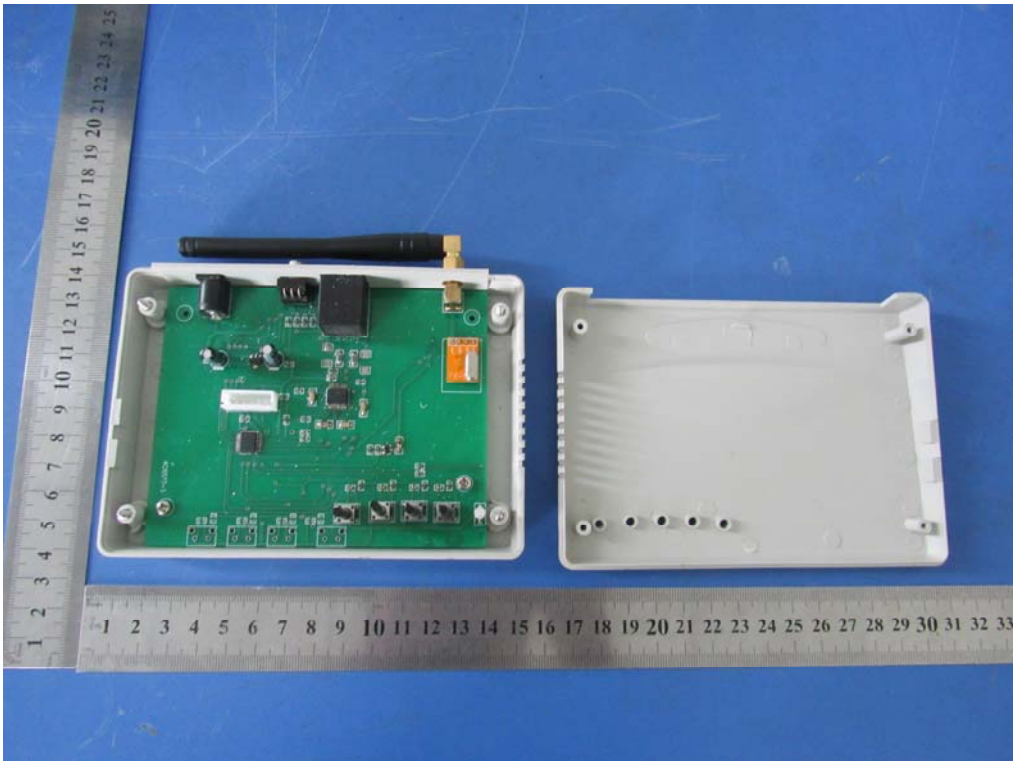

Uncover - Front View

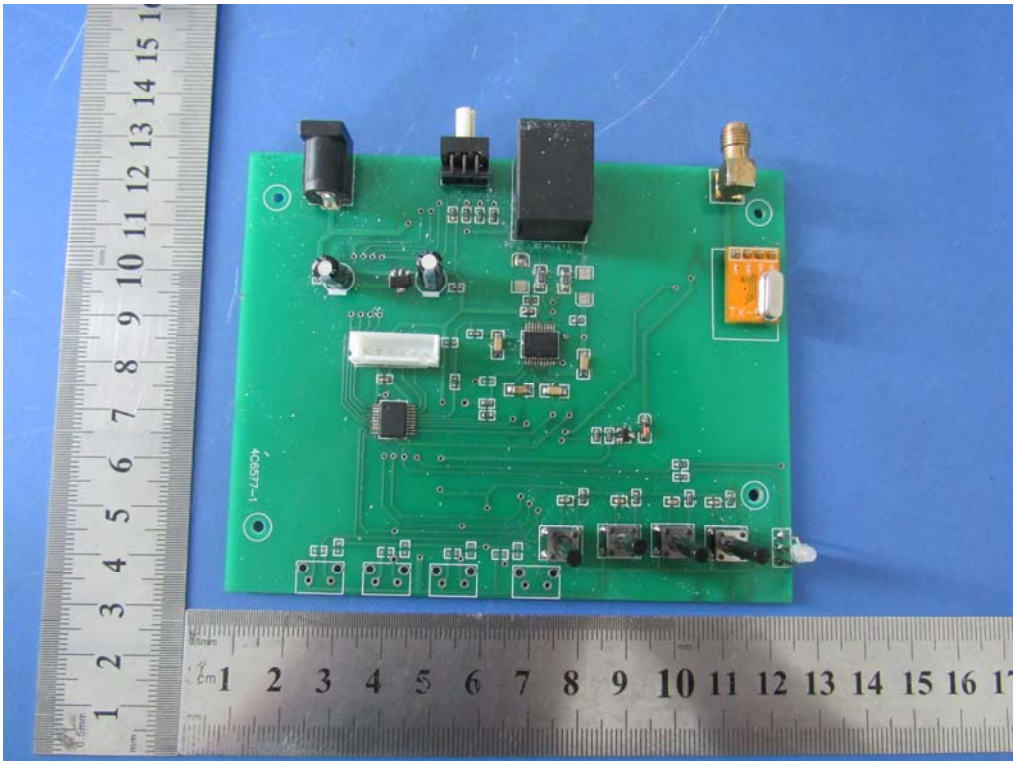

EUT PCBA – Front View

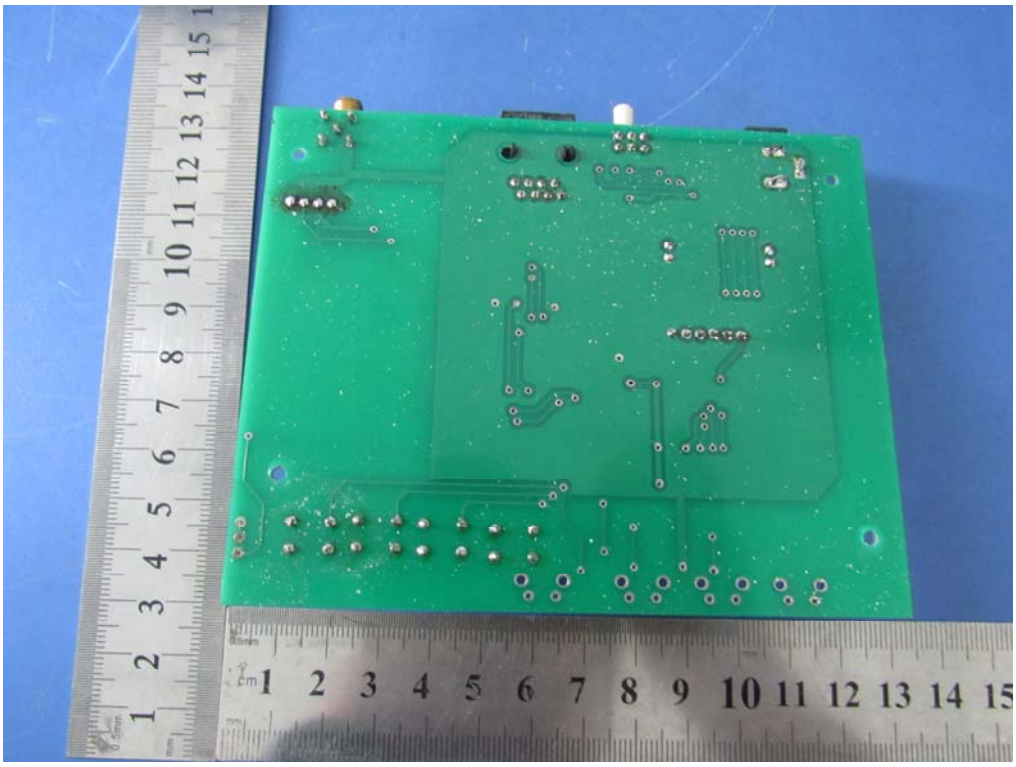

EUT PCBA – Rear View

Annex B.iii. Photograph: Test Setup Photo

Conducted Emissions Test Setup Front View

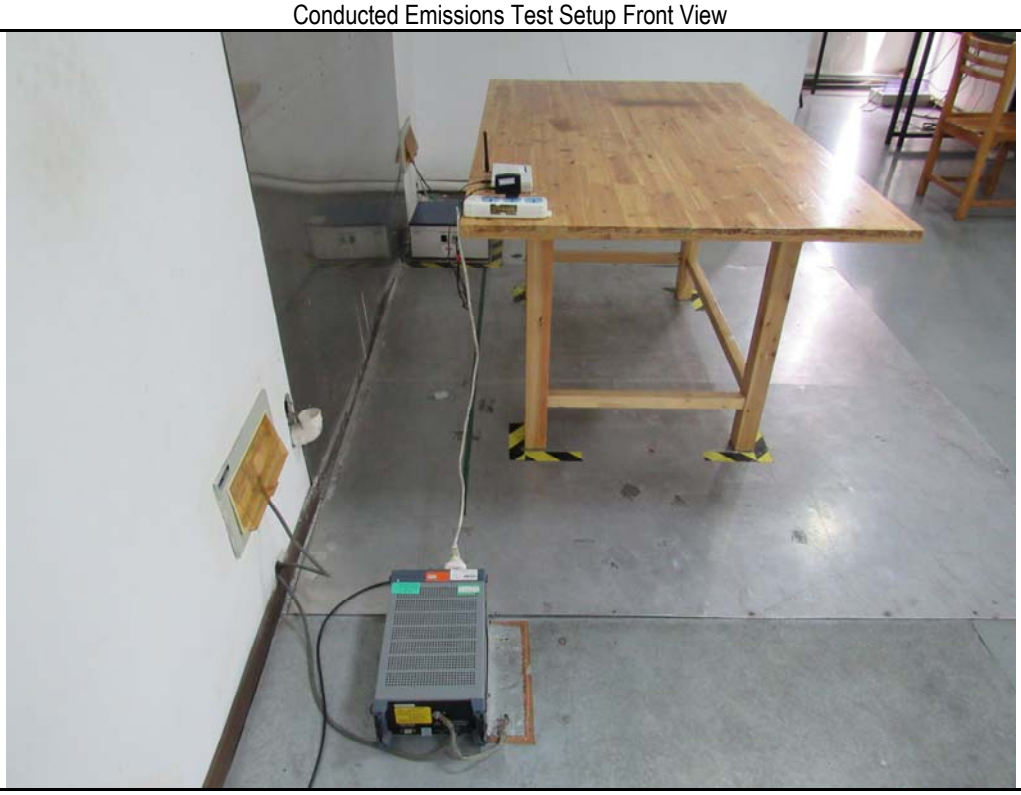

Conducted Emissions Test Setup Side View

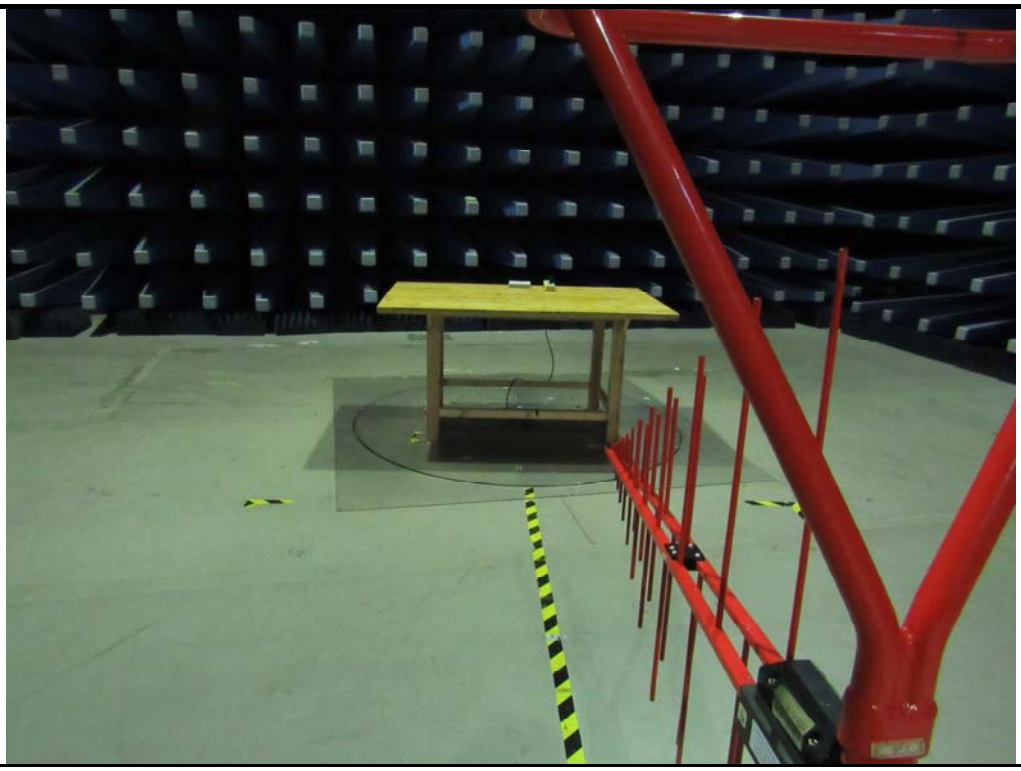

Radiated Spurious Emissions Test Setup Below 1GHz

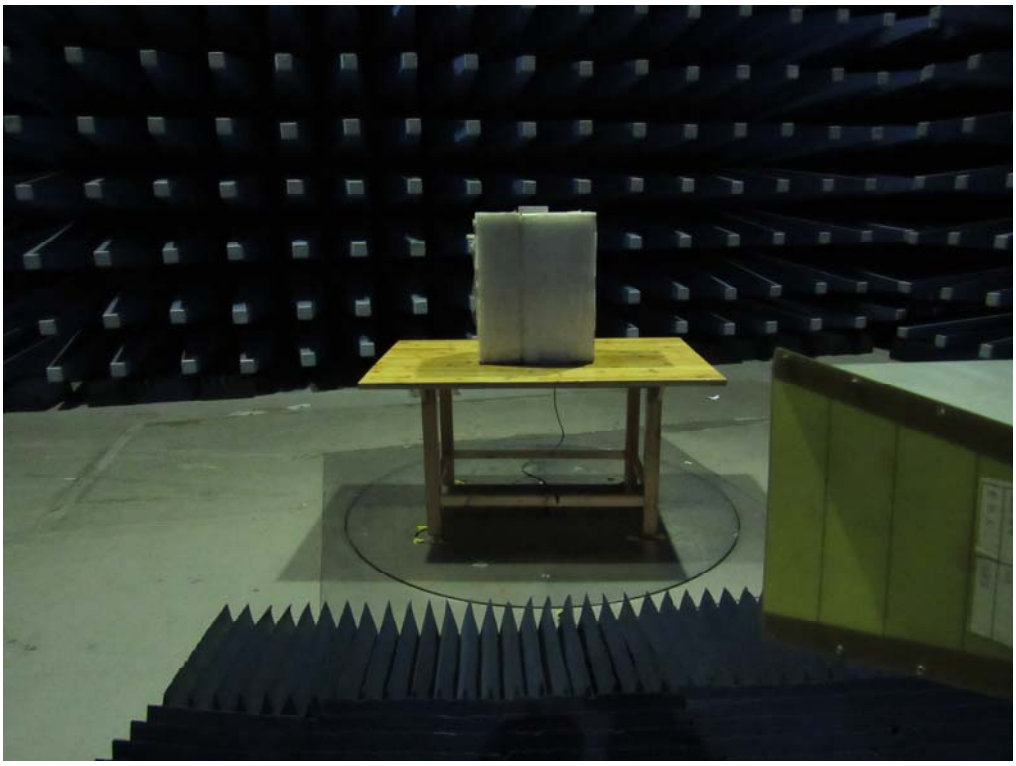

Radiated Spurious Emissions Test Setup Above 1GHz

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

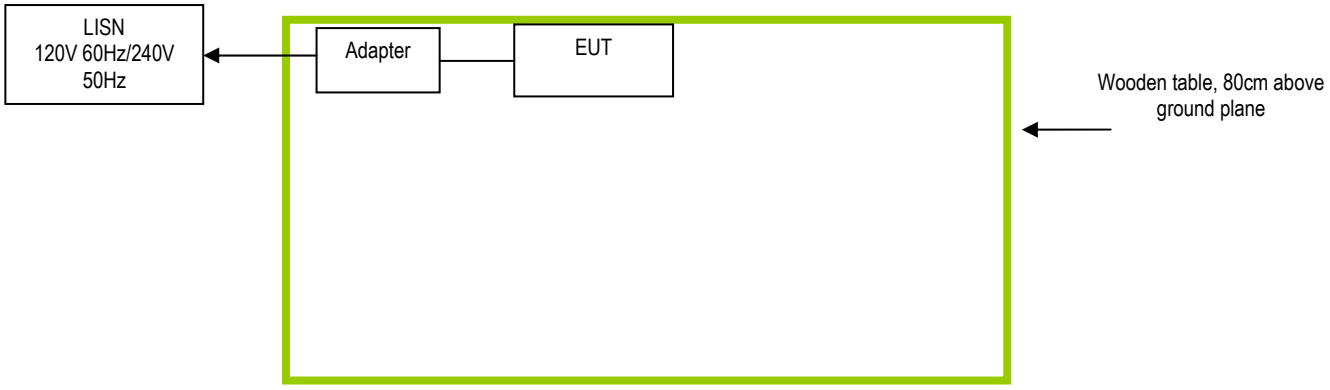

Block Configuration Diagram for Radiated Emissions

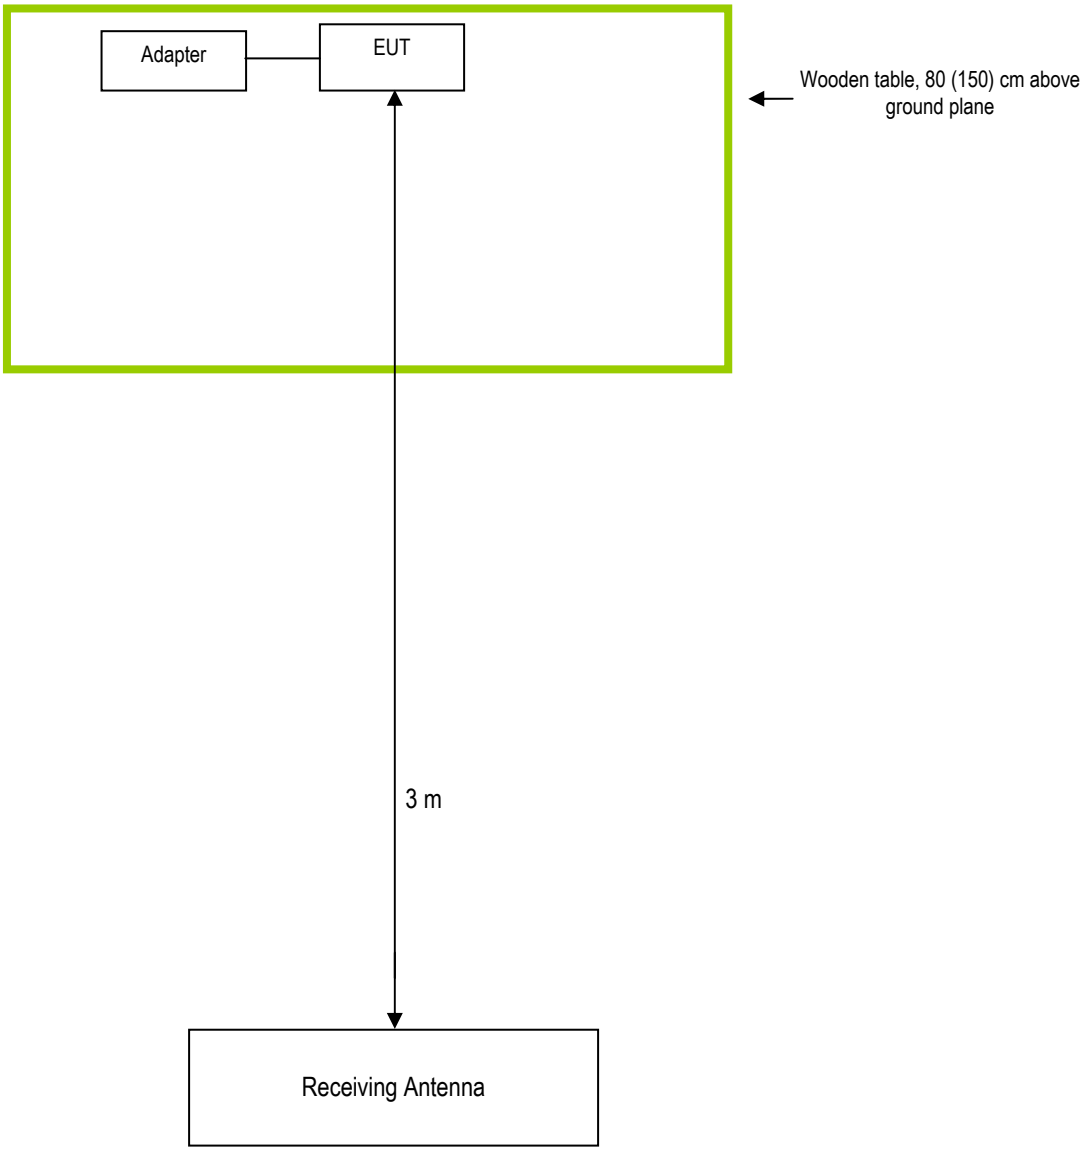

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
Power Cable	Un-shielding	No	0.8m	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

N/A