


# adomii

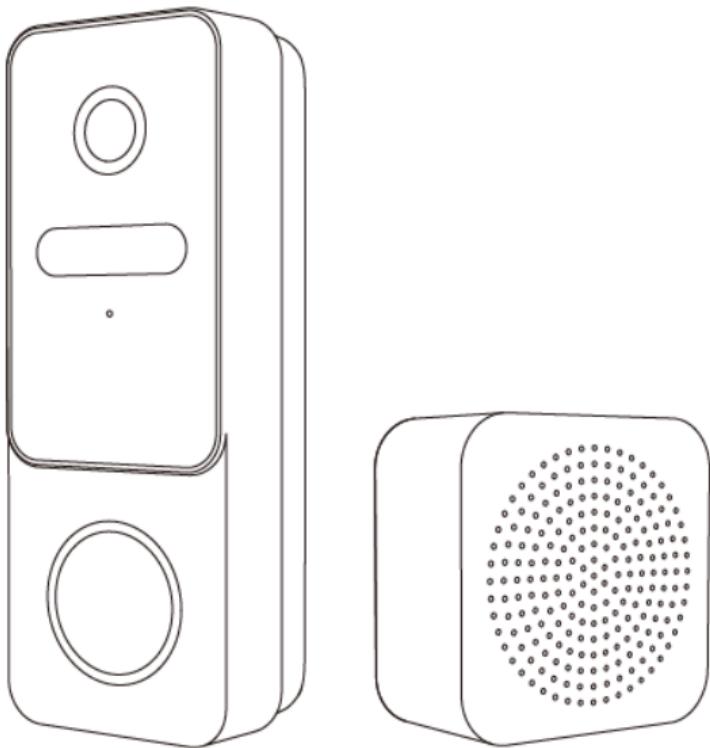

## Smart Doorbell

User Manual

# Table of Contents

1. Package Contents	02
2. Product Overview	03
3. Product Specification	03
4. Create an Account on the App	04
5. Add Device	04
6. Wi-Fi Connection and Scan QR Code	05
7. Doorbell Video Interface	06
8. 2-Way Audio	06
9. Choosing Smart Doorbell Location	07
10. Mount and Installation	08
11. Chime Overview	09
12. Reset the Smart Doorbell	09

Thank you for purchasing your new Adomii Smart Doorbell. This user manual will help provide you with all the information needed to get started. Please read this manual carefully before using the product and reference it for later use.

Enjoy your new product.

## 1. Package Contents



Smart Doorbell x 1



Screw Pack x 1



USB-C Cable x 1



Mounting Bracket x 1




Doorbell Chime x 1



User Manual x 1

## 2. Product Overview

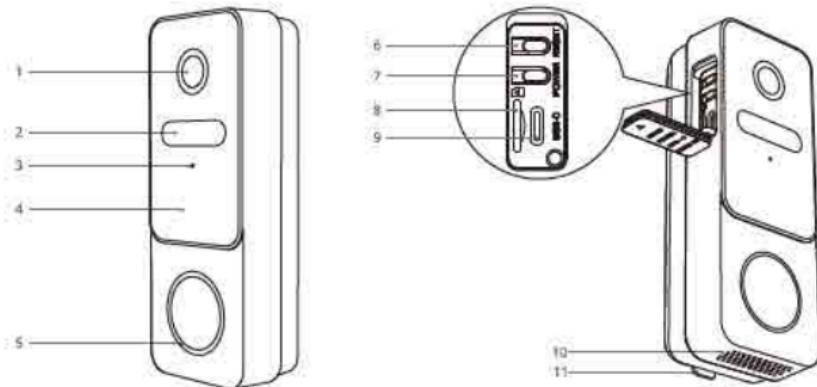

1. Camera Lens	6. Reset Button
2. PIR Motion Sensor	7. Power ON/OFF
3. Microphone	8. MicroSD Card Slot
4. Infrared LEDs	9. USB-C Port
5. Status LED	10. Speaker
	11. Release Clip

## 3. Product Specification

Audio	Internal Speaker and Microphone
Storage	Supports up to 256GB MicroSD Card (not included)
Wi-Fi	IEEE 802.11 ac/b/g/n/a, supports 2.4GHz

## 4. Create an Account on the App

Step 1:  
Scan the QR code to  
download the app from the  
App Store or Google Play.



Step 2:  
Enter your  
mobile phone  
number or  
email address.



Step 3:  
Enter the sent  
verification code  
and create a  
password.

Step 4:  
Follow the on-screen instruction in the app to finish setup.

## 5. Add Device



- Make sure Wi-Fi is available and connected to the Internet.
- Open the app, click "+" on the top right corner of the home page, then select "Add Device".
- Under "Camera & Lock", select "Smart Doorbell".
- Make sure the indicator light on the device is flashing quickly, then press "Next".
- Select your Wi-Fi Network and enter password. Click "OK" once complete.


## 6. Wi-Fi Connection and Scan QR Code




- Select the 2.4GHz Wi-Fi Network
- Enter Password



- Scan the QR Code on your phone using the security camera. Once you hear the prompt tone, click "I Heard a Prompt".
- When the indicator light on the camera turns from flashing to solid, the network configuration is complete.

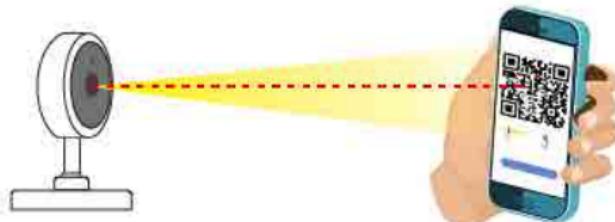


## 7. Doorbell Video Interface

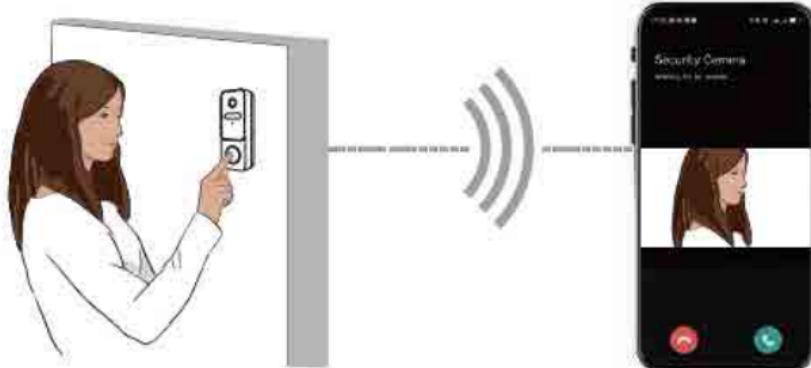

## 8. 2-Way Audio




## 9. Choosing Smart Doorbell Location

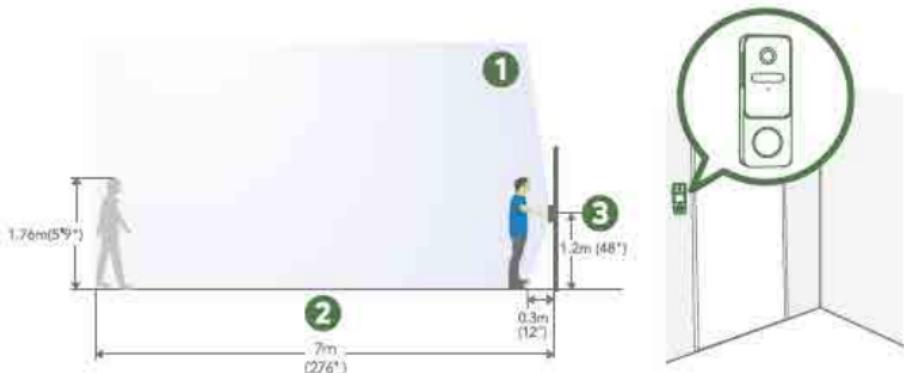

1. The doorbell camera field of view is approximately 170°.
2. The motion detection distance is approximately 23ft.
3. The doorbell must be installed at a height of 4ft to 5ft.

## 10. Mount and Installation

### 1 Bracket Installation

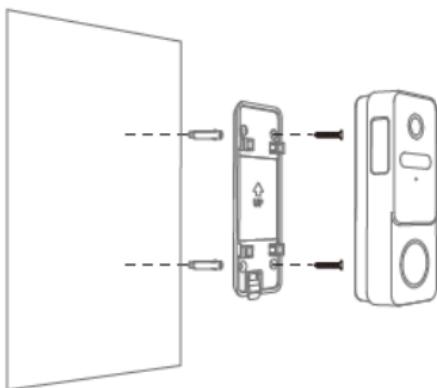


### 2 Mounting Doorbell




1. Once the location has been chosen, drill two holes into the surface, using the bracket as a guide.
2. Insert the included anchors until flush with the surface.
3. Attach the bracket to the surface using the included screws.
4. Align the doorbell with the tabs of the bracket.
5. Push the doorbell downwards to engage the locking tab.

### 3 Removing Doorbell

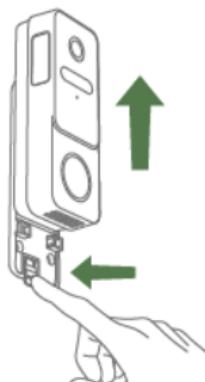

1. Press the locking tab with your finger.
2. Grasp the doorbell and pull upwards to remove doorbell.

## 11. Chime Overview

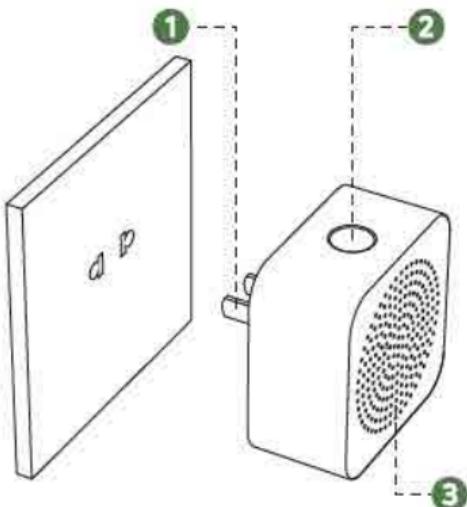

1. AC 110V-240V
2. Chime Button
3. Speaker

## 12. Reset the Smart Doorbell



1. Connect the USB-C Cable to the rear port of the smart camera.
2. Connect the USB-C Cable to the power adapter and plug in.
3. Long press the front button of the camera for 10 seconds until the camera starts to beep.

## Adomii Limited Warranty

### Warranty Coverage:

We stand behind our products with confidence, offering warranties designed to give you peace of mind and a worry-free experience. Our commitment covers most Adomii products with specific warranty periods based on product type such as cables, cases, wall chargers, and more. Either way, you're protected from defects in materials and workmanship.

#### • Consumer Electronics: 24 Months

#### 30-Day Money-Back Guarantee:

You may return undamaged products within 30 days for a full refund. Products must include all accessories and original packaging. Shipping costs for non-quality-related returns are the responsibility of the buyer.

#### Replacement Warranty:

If a defect arises within the warranty period, Adomii will repair, replace, or issue a credit for the product. Repaired or replacement products are covered for 90 days or the remainder of the original warranty, whichever is longer.

#### Need Assistance?

For more information or to file a warranty claim, please visit Adomii's Warranty Support.

(<https://www.Adomii.com/pages/warranty-information>)

(866) 686-1800

[support@Adomii.com](mailto:support@Adomii.com)

Mon – Fri: 9:00 AM – 5:30 PM (PST)

[www.Adomii.com](http://www.Adomii.com)

### FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/ TV technician for help.

### FCC Radio Frequency Exposure Statement

The device has been evaluated to meet general RF exposure requirements. The device can be used in fixed/mobile exposure condition. The min separation distance is 20cm.



**WARNING:** This product can expose you to chemicals

known to the State of California to cause cancer.

For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).