



Appendix A

RF Test Data for 915M (Conducted Measurement)

Product Name: PulsarLR

Test Model: PulsarLR

Environmental Conditions

Temperature:	23.9°C
Relative Humidity:	52.6%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng






A.1 20dB Emission Bandwidth

Test Result

Antenna	Channel[MHz]	20db EBW[kHz]	Limit[MHz]	Verdict
Ant1	902.750	71.24	---	PASS
	914.750	72.94	---	PASS
	927.250	71.98	---	PASS

Test Graphs

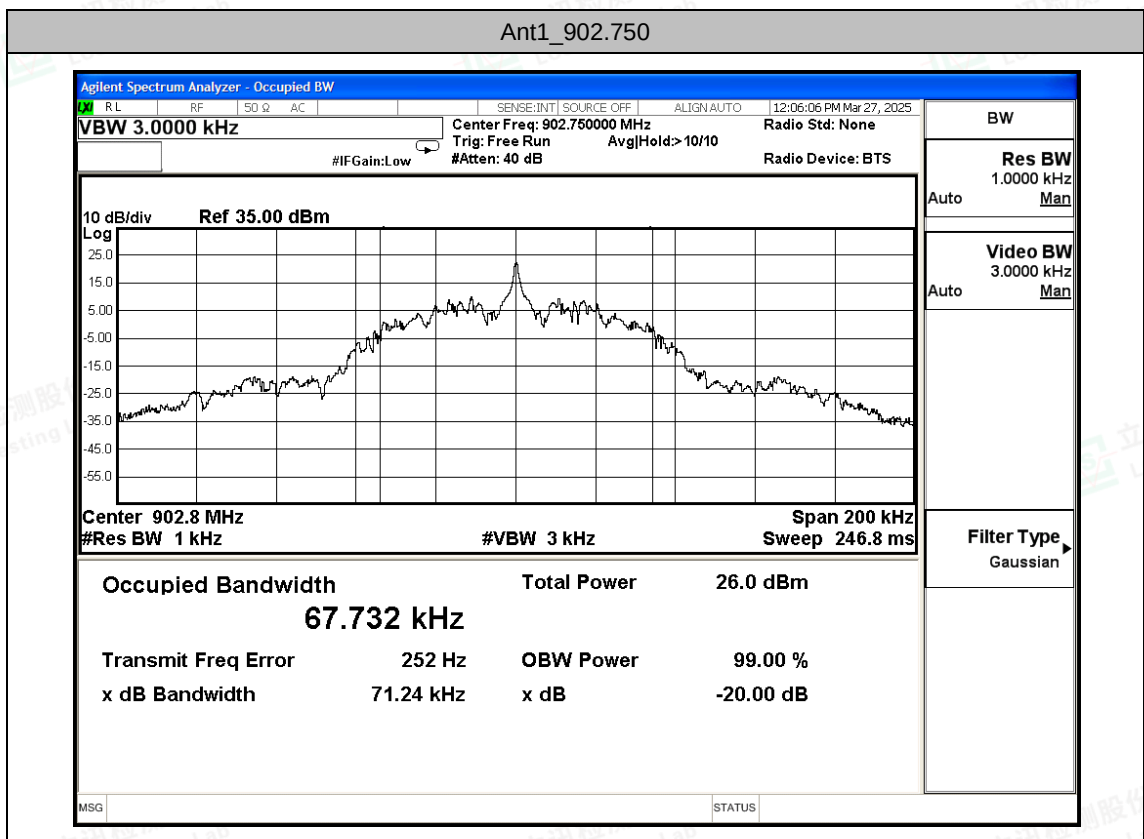

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Ant1_914.750

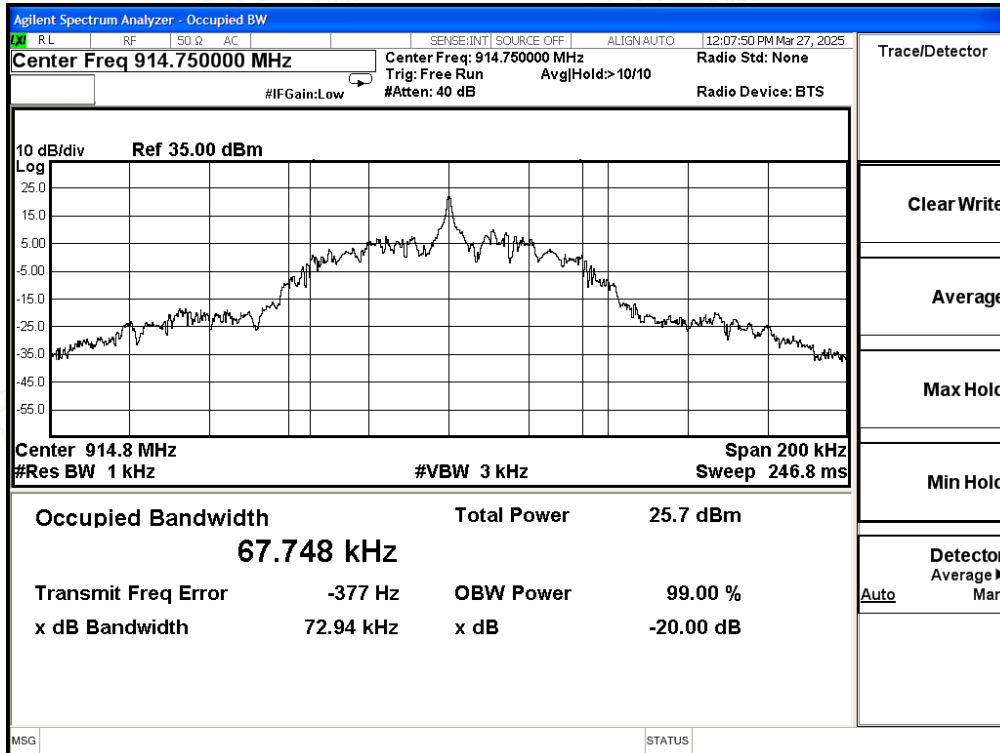

Ant1_927.250

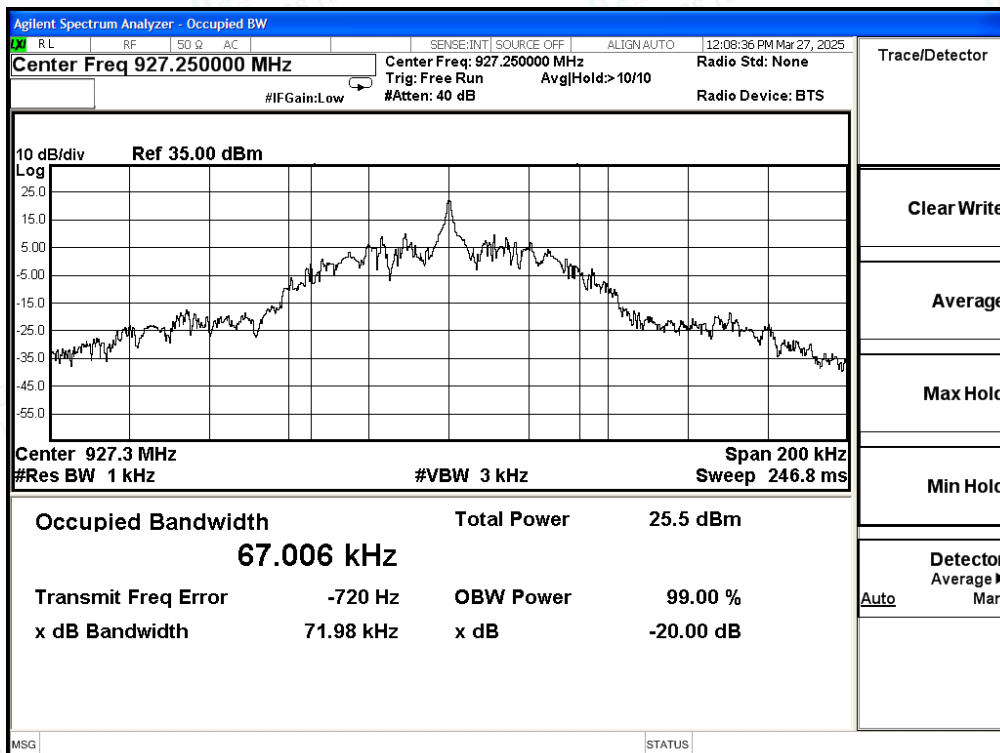

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




A.2 Maximum Peak Conducted Output Power

Test Result Peak


Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
Ant1	902.750	27.756	≤30	PASS
	914.750	27.602	≤30	PASS
	927.250	27.550	≤30	PASS

Test Graphs

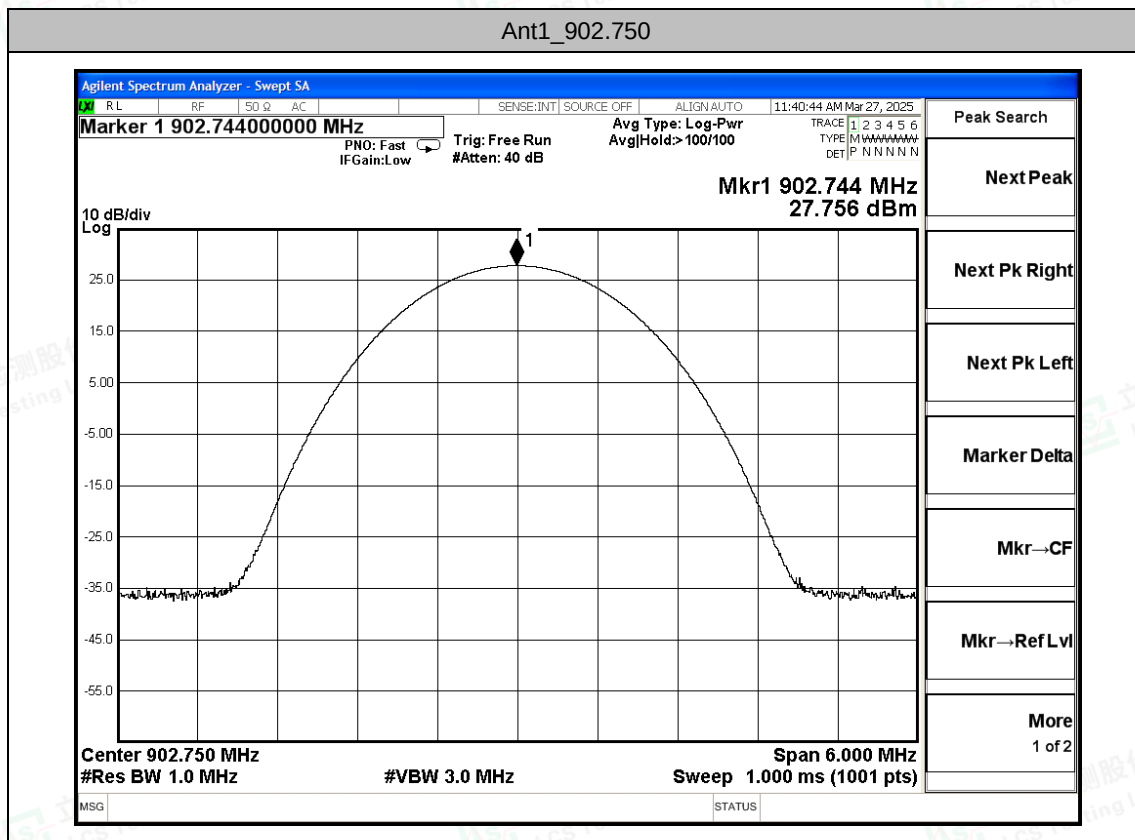




Ant1_914.750

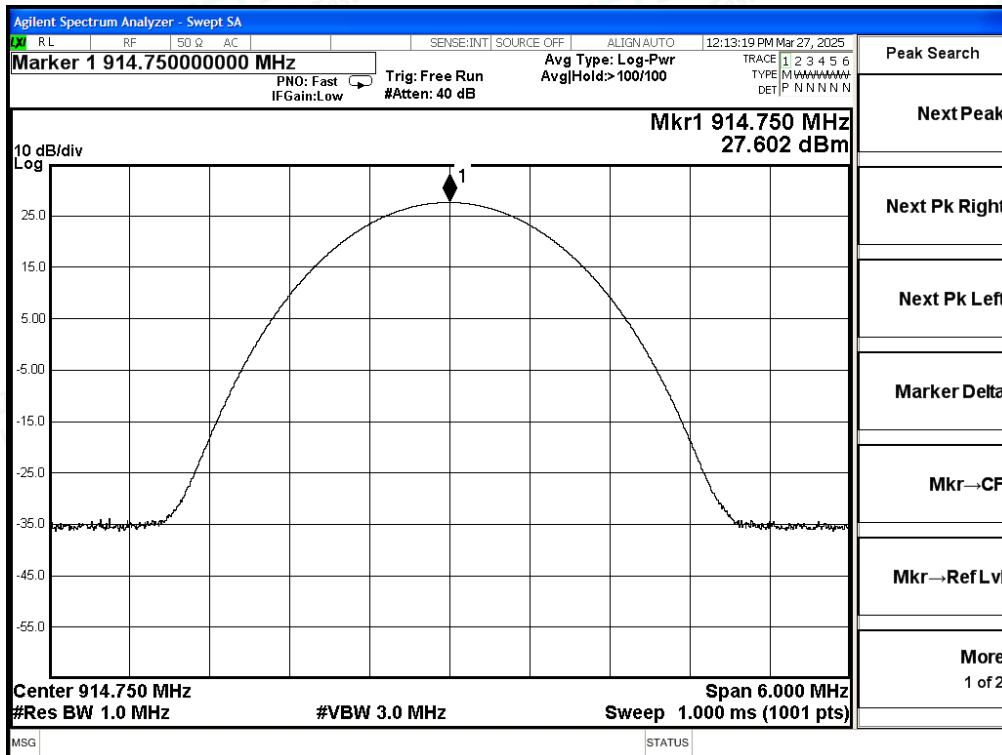

Ant1_927.250

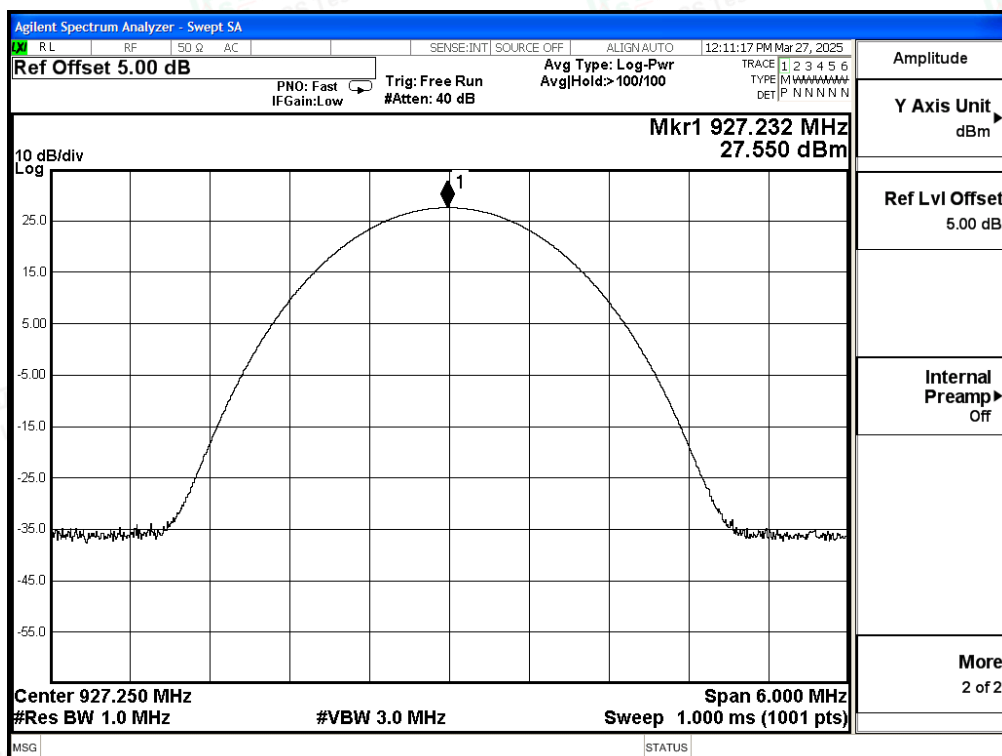

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




A.3 Carrier frequency separation

Test Result

Antenna	Channel[MHz]	Result[kHz]	Limit[kHz]	Verdict
Ant1	Hop	500	--	PASS

Test Graphs

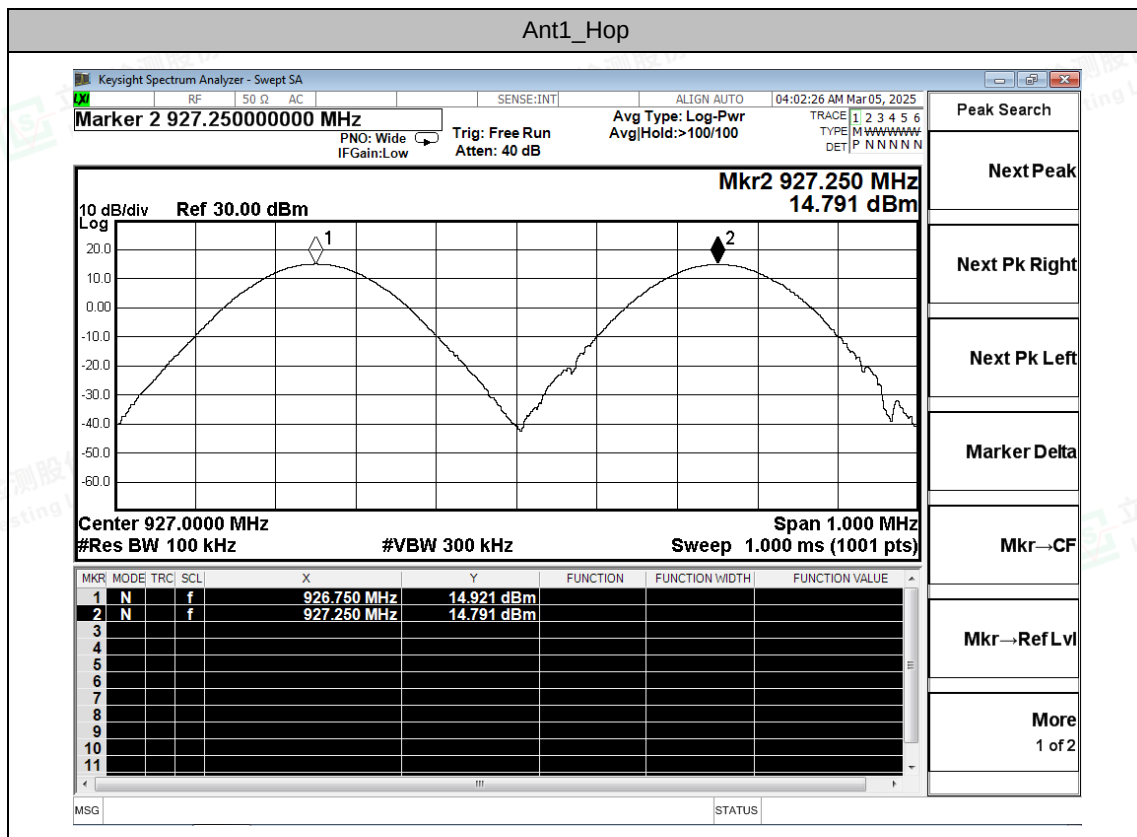



A.4 Time of occupancy

Test Result


Antenna	Channel[MHz]	Burst Width[ms]	Total Hops[Num]	Result[ms]	Limit[ms]	Verdict
Ant1	Hop	164	2	328	<=400	PASS






Test Graphs

Ant1_Hop

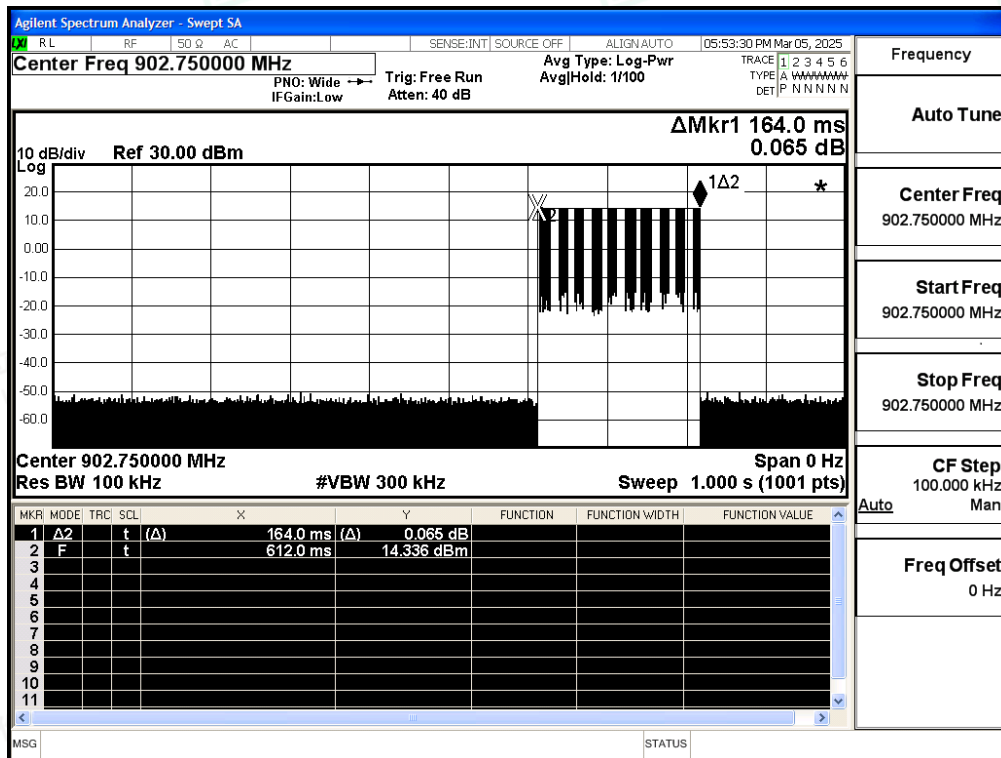

Ant1_Hop

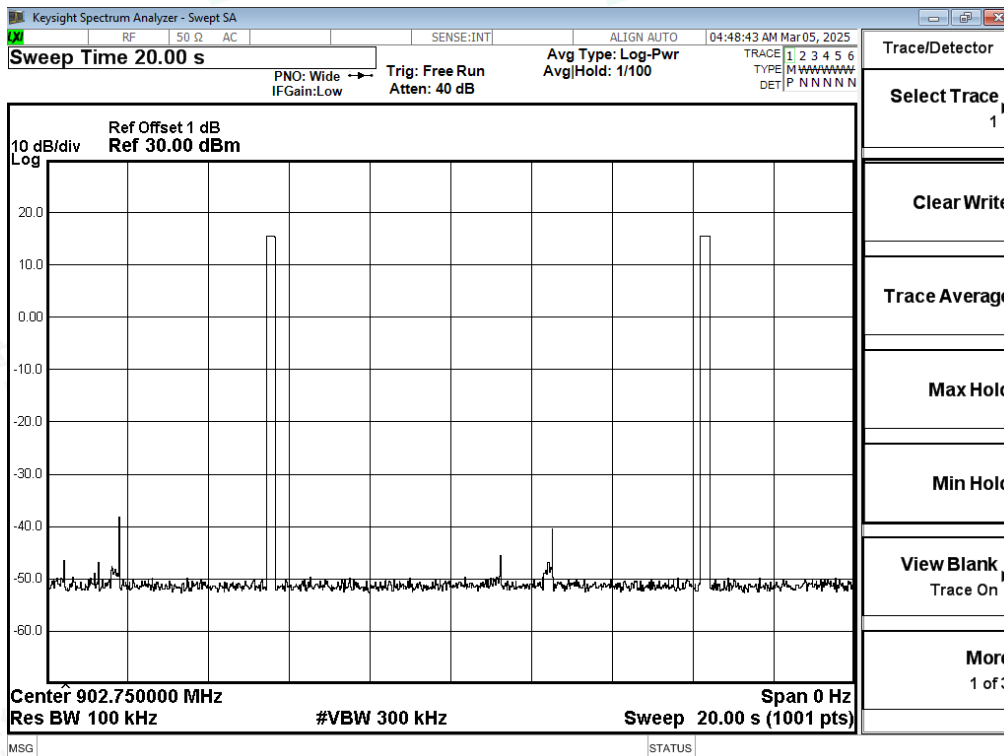




A.5 Number of hopping channels

Test Result

Antenna	Channel	Result[Num]	Limit[Num]	Verdict
Ant1	Hop	50	>=50	PASS

Test Graphs

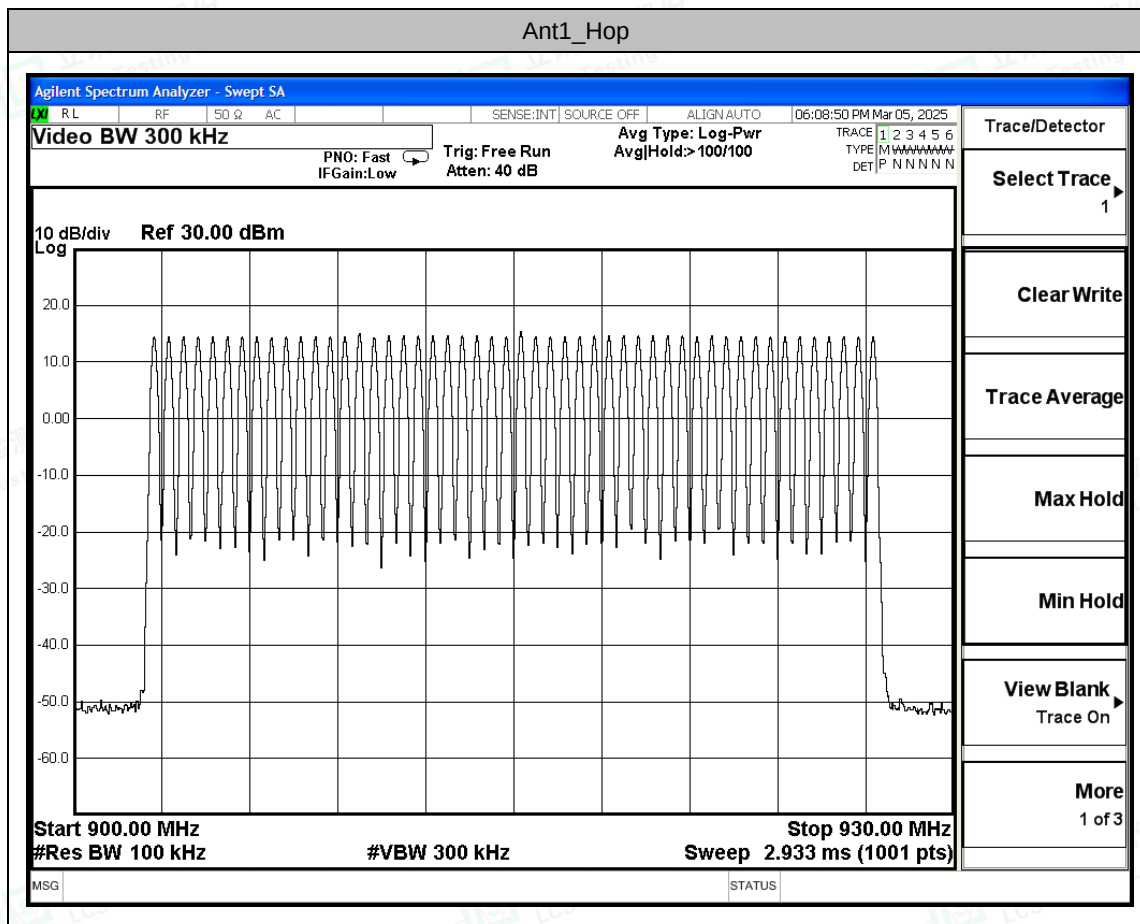




A.6 Band edge measurements

Test Result


Antenna	Ch Name	Channel[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
Ant1	Low	902.750	27.655	-41.935	<=7.66	PASS
	High	927.250	27.918	-42.130	<=7.92	PASS
	Low	Hop_902.750	14.719	-52.469	<=-5.28	PASS
	High	Hop_927.250	14.539	-53.657	<=-5.46	PASS

Test Graphs

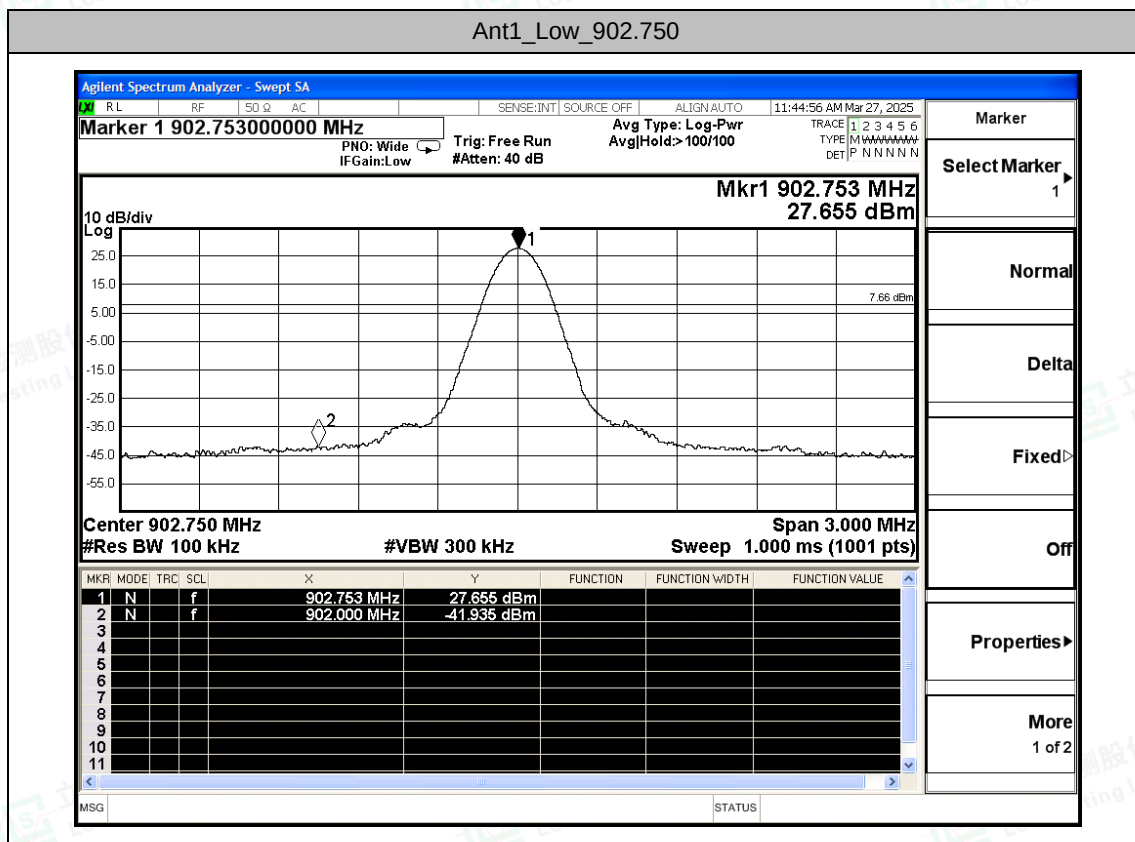




Ant1_High_927.250

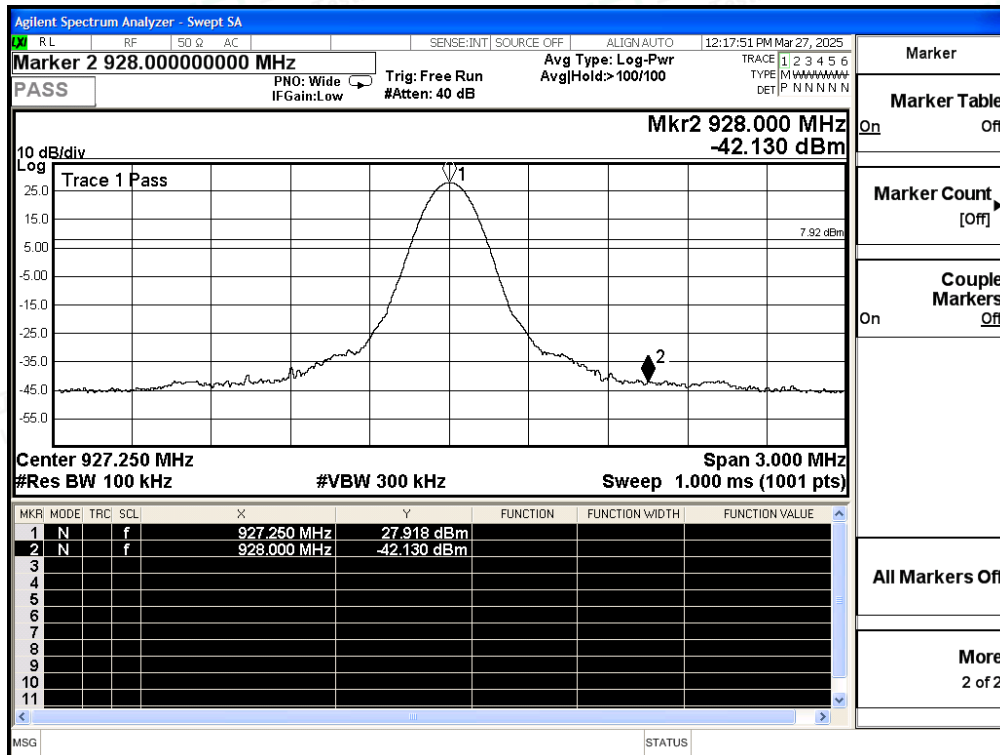

Ant1_Low_Hop_902.750

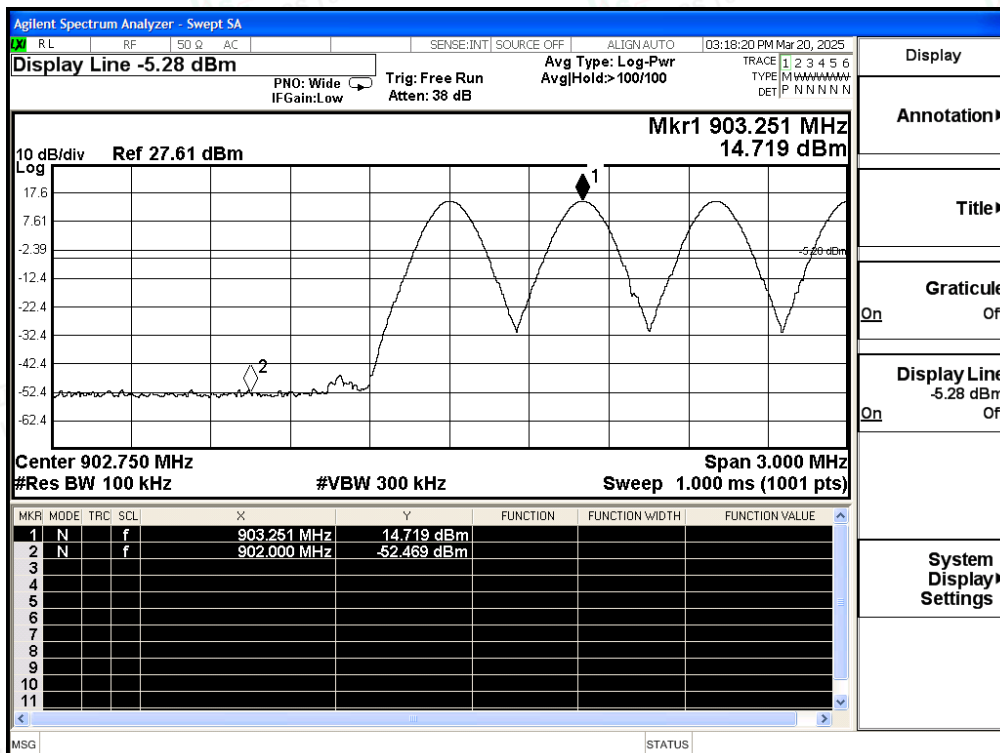

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Ant1_High_Hop_927.250

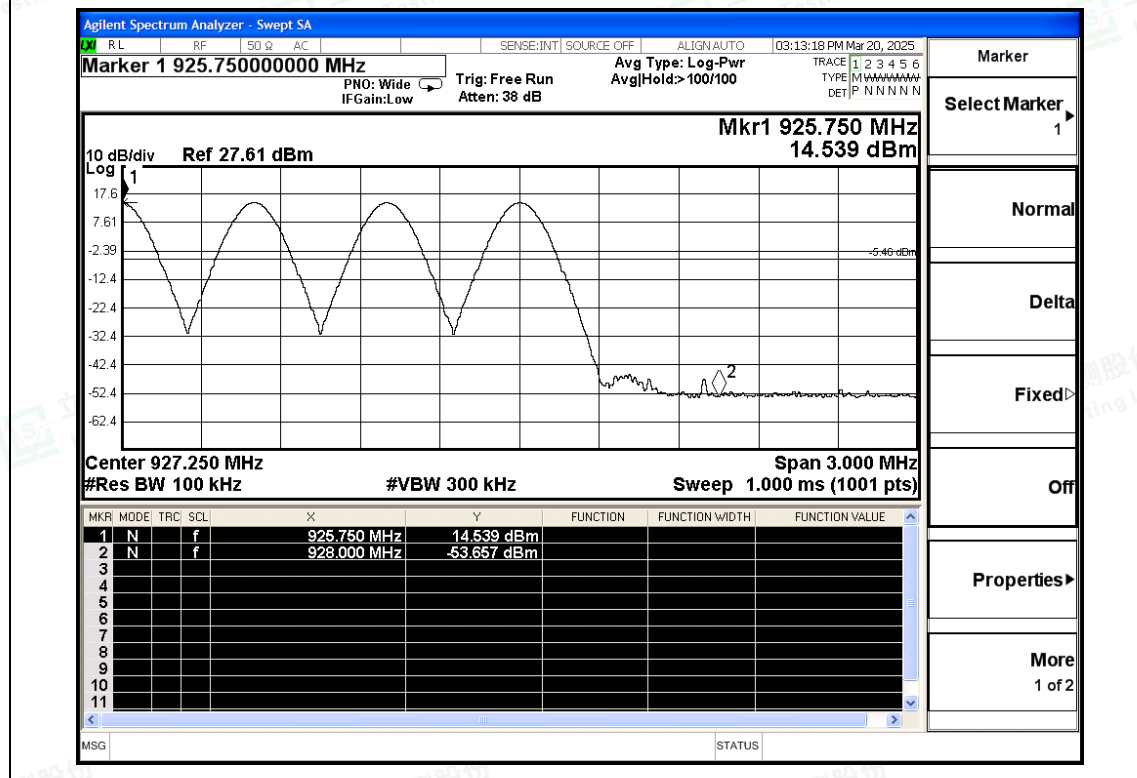

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.7 Conducted Spurious Emission

Test Result


Antenna	Channel[MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
Ant1	902.750	Reference	27.717	27.717	---	PASS
		30~26500	27.717	-31.704	≤ 7.72	PASS
	914.750	Reference	28.392	28.392	---	PASS
		30~26500	28.392	-32.218	≤ 8.39	PASS
	927.250	Reference	27.536	27.536	---	PASS
		30~26500	27.536	-30.651	≤ 7.54	PASS






Test Graphs

Ant1_902.750_0~Reference

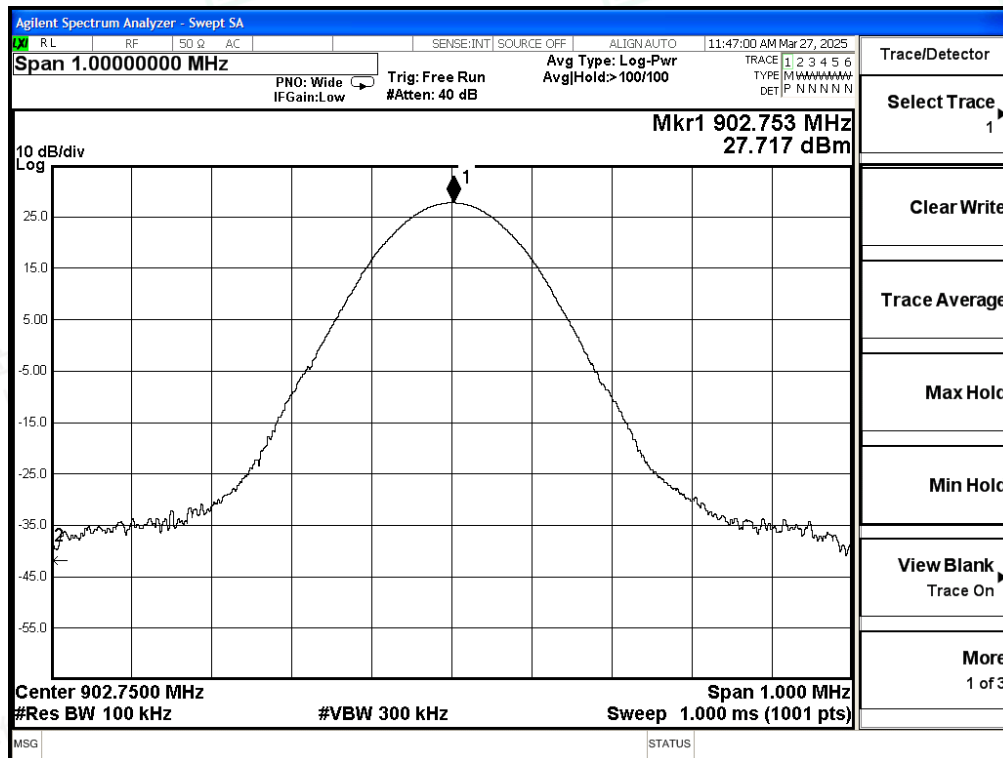

Ant1_902.750_30~26500

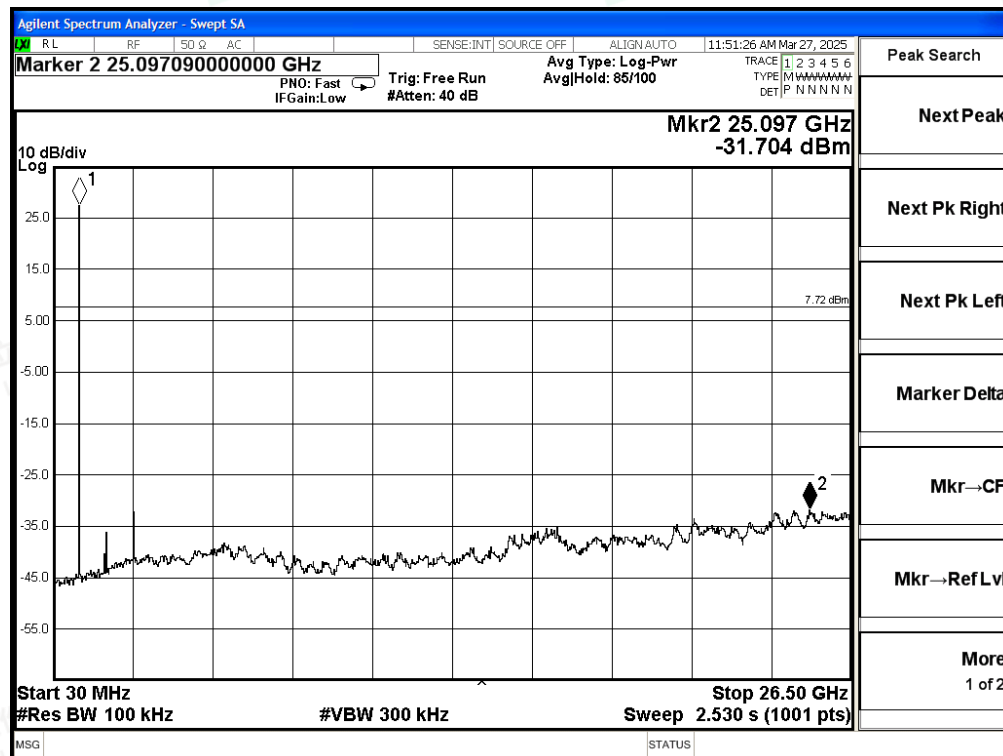

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Ant1_914.750_0~Reference

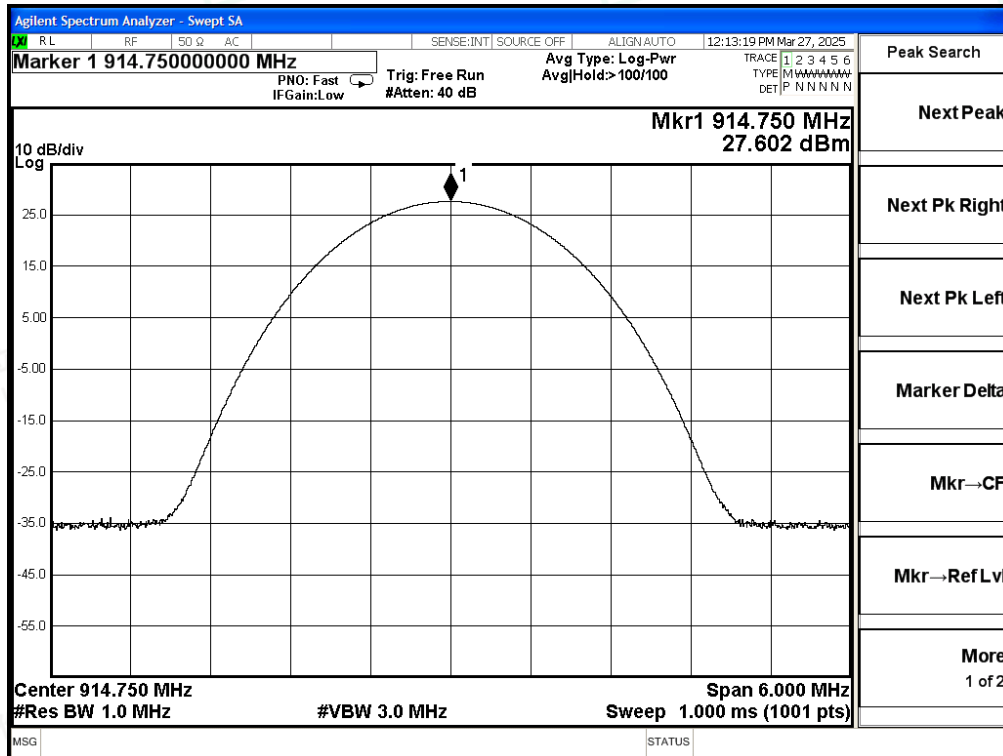


Ant1_914.750_30~26500

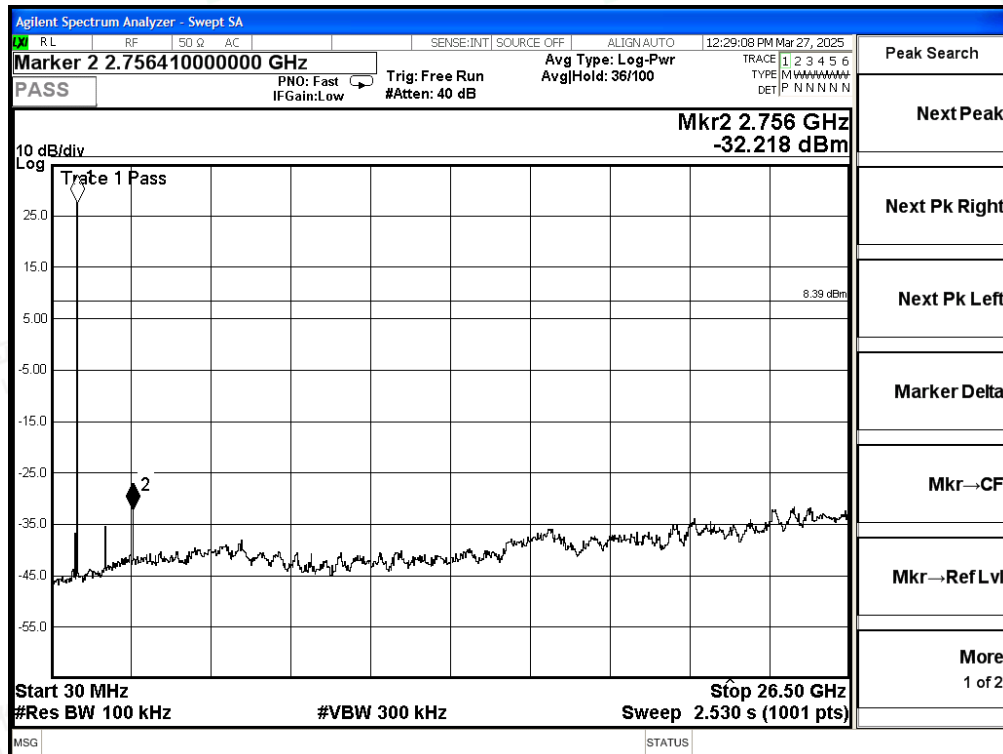




Ant1_927.250_0~Reference

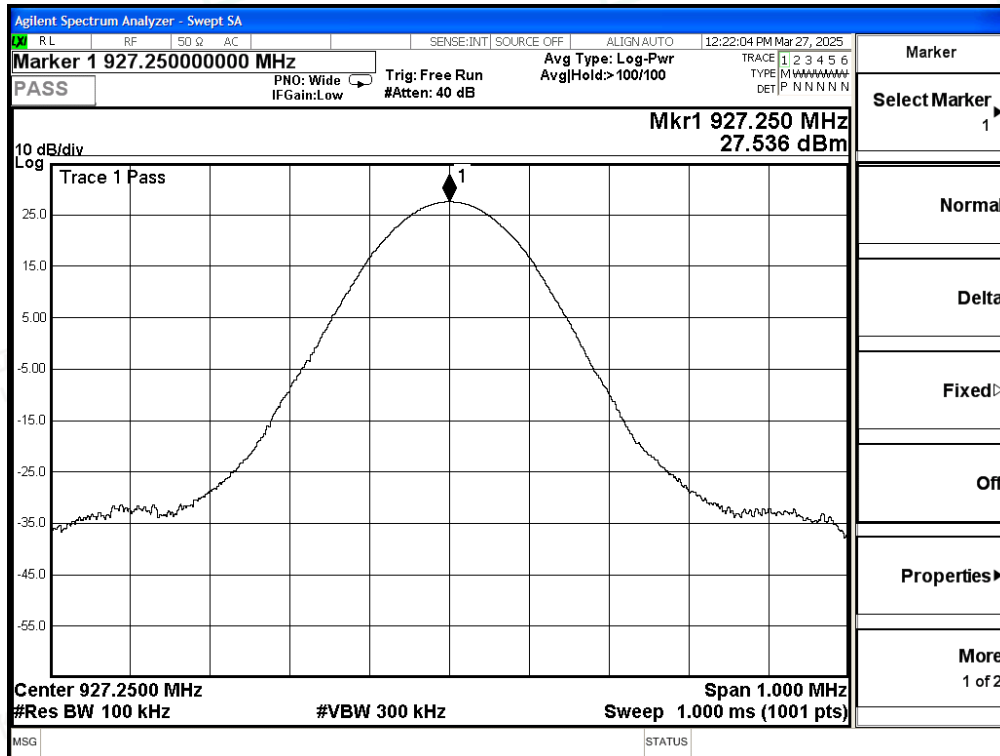

Ant1_927.250_30~26500

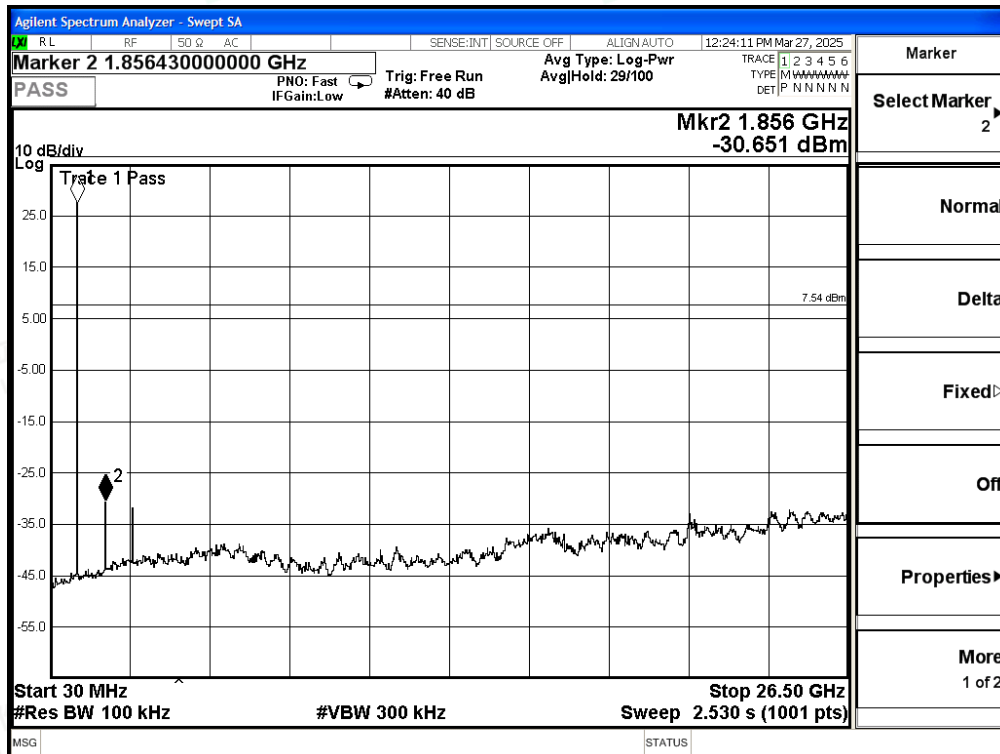




A.8 Duty Cycle

Test Result


Antenna	Channel[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Limit	Verdict
Ant1	902.750	100.0	0	100	---	PASS
	914.750	100.0	0	100	---	PASS
	927.250	100.0	0	100	---	PASS

Test Graphs

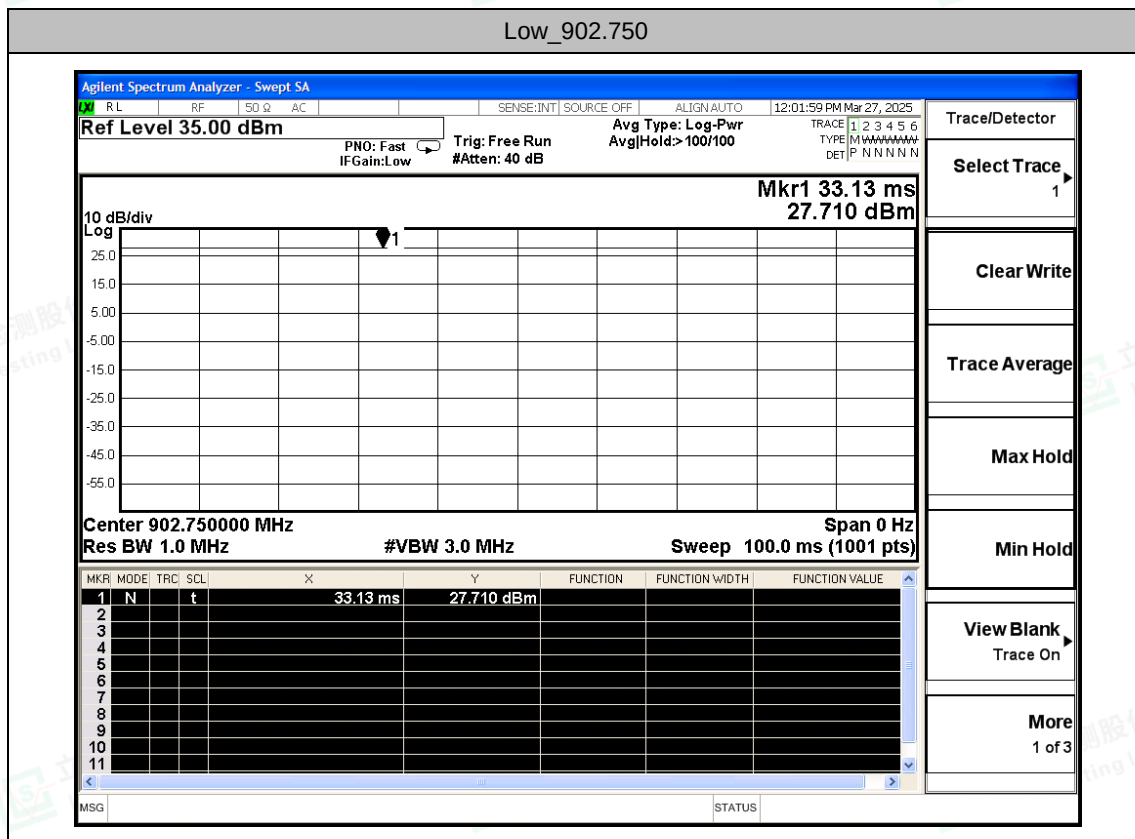




Ant1_914.750

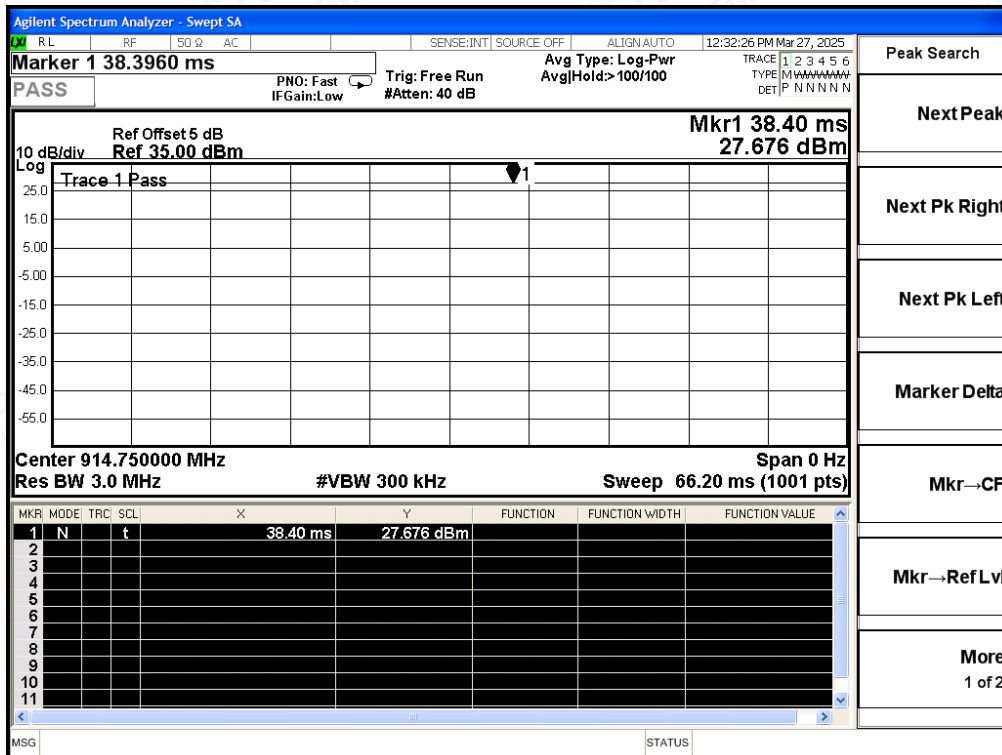

Ant1_927.250

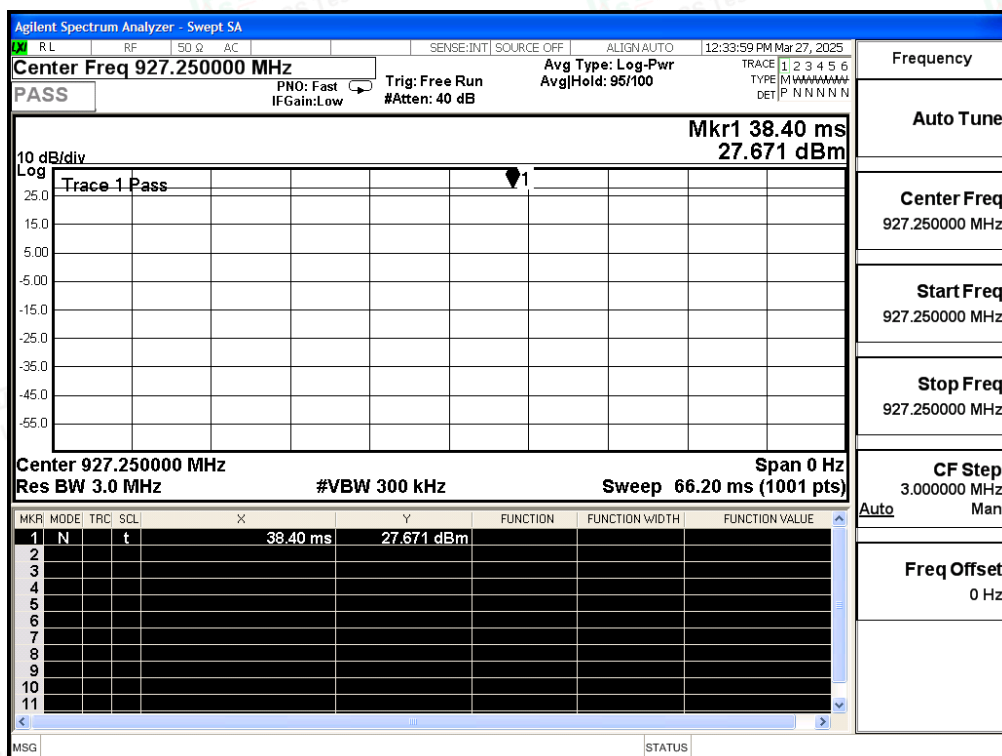

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity