

The following features are available in this PDF document.



Quick Keyword Search

Enter the keyword in the search box and hit the search button



Quick Jump between Chapters

Click the title of a specific chapter on the Contents to jump to it

*Reading software such as Adobe Reader is needed to support the functions above.



ZHIYUN MOLUS X60RGB COB Light

User Guide

Contents

- ☐ Brief Introduction
 - Brief Introduction 1
- ☐ Product List
 - Product List 3
- ☐ Get to Know ZHIYUN MOLUS X60RGB
 - Get to Know ZHIYUN MOLUS X60RGB 5
- ☐ Power Supply
 - Power Supply 6
- ☐ Installing and Removing ZHIYUN Mini Reflector
(hereinafter referred to as "reflector")
 - Installing the Reflector 8
 - Removing the Reflector 8
- ☐ Installing the Tripod
- ☐ Installing and Removing ZHIYUN Mini Softbox
(hereinafter referred to as "softbox")
 - Installing the Softbox 10
 - Removing the Softbox 11
- ☐ Installing and Removing ZHIYUN Dome Diffusion
(hereinafter referred to as "dome diffusion")
 - Installing Dome Diffusion 12
 - Installing Dome Diffusion 12

□ Installing and Removing ZHIYUN Mini Fresnel Lens (hereinafter referred to as "Fresnel lens")	
Installing Fresnel Lens	13
Removing Fresnel Lens	13
□ How to Use ZHIYUN MOLUS X60RGB	
Buttons and Dials	14
Operation Instruction	15
Power-on Settings	18
□ Firmware Upgrade	
□ Product Specifications	
□ Disclaimer and Warnings	
Reading Tips	23
Safe Operation Instructions	23
□ Warranty Card	
Warranty Period	24
Warranty Exclusions	24
Warranty Claim Procedure	24
□ Contact Card	

Brief Introduction

ZHIYUN MOLUS X60RGB is a high-power, portable, full-color fill light. It boasts a stylish appearance and compact size, and supports RGB adjustment functions. It also features a variety of creative light effects, making professional light effects easily achievable. The product has the following highlights:

1. Lightweight and portable with simple operation.
2. Adjustable brightness/color temperature/hue/saturation, suitable for a wide range of applications.
3. Features high color rendering performance for accurately restoring the original color of objects.
4. Equipped with DynaVort Cooling System™ for excellent heat dissipation.
5. Supports music mode for easily creating a music scene atmosphere.
6. Features rich RGB creative light effects for more creative shooting.
7. Supports Bluetooth mesh networking, APP remote dimming, for more efficient light control.
8. Offers multiple power supply methods, ensuring worry-free battery life.
9. Comes with a wealth of accessories for precise light control.

⚠ WARNING

- ⚠ This product is not waterproof. Prevent contact with any kind of liquid with the ZHIYUN MOLUS X60. Never use the product in the rain or a humid environment.
- ⚠ If water accidentally enters the device when using, please stop using it immediately and contact the company or authorized maintenance personnel for maintenance, and continue to use it only when the maintenance is finished.
- ⚠ Do not expose this product to corrosive chemicals, inflammable and explosive materials.
- ⚠ Please connect the device to a grounded outlet before using.
- ⚠ Do not touch the heating part when the product is working to avoid getting burned.
- ⚠ Do not wrap or block the fans to avoid cooling effect damage.
- ⚠ Do not turn the product directly to the eyes to avoid eyesight damage.
- ⚠ Do not expose this product to an environment above 40°C .

 Battery safety precautions:


- ① It is strictly prohibited to use batteries that are not provided by ZHIYUN.
If you need to replace the battery, please contact ZHIYUN or designated agents. ZHIYUN will not be responsible for any battery accidents or equipment malfunctions caused by using batteries that are not officially provided by ZHIYUN.
- ② If the battery bulges, leaks, or has other abnormalities, please stop using it immediately and contact ZHIYUN customer service or designated agents for further processing.
- ③ Do not completely discharge the battery and store it for a long time to prevent the battery from entering an over-discharged state and causing damage to the battery cell, which may make it impossible to recover and reuse.

BE CAREFUL

1. This product is a high-precision control device. Damage may be caused to the product if dropped or subject to external force, and this may result in malfunction.
2. Please keep your hands dry while using the product and use soft dry cloth for cleaning.
3. Keep this product out of the reach of children.
4. When not using this product, please disconnect the external power supply.
5. Do not place any other items on top of this product to avoid damage to this product.
6. Protect the product from dust and sand during use.
7. Before storing this product, please make sure it is completely cooled and store it in a dry and ventilated place.
8. Do not disassemble this product on your own. In the event of malfunctions, it should be repaired by ZHIYUN or authorized maintenance personnel.

Product List


Before using this product, please check carefully that all the following items are included in the product package. In case that any item is found missing, please contact ZHIYUN or your local selling agent.




Fill Light x1




DC Power Adapter x1




ZHIYUN Mini Reflector x1




ZHIYUN Silicone Diffusion Dome x1*




Power Adapter Organizer Bag x1




USB-C Cable x1*



智云功率王手柄电池 x1*




Storage Bag x1*



Fresnel Lens x1**

ZHIYUN Mini Softbox x1**




Quick Start Guide x1

Items marked “**” are included in the ZHIYUN MOLUS X60RGB COMBO and PRO package.
Items marked “***” are included in the ZHIYUN MOLUS X60RGB PRO package.




Get to Know ZHIYUN MOLUS X60RGB

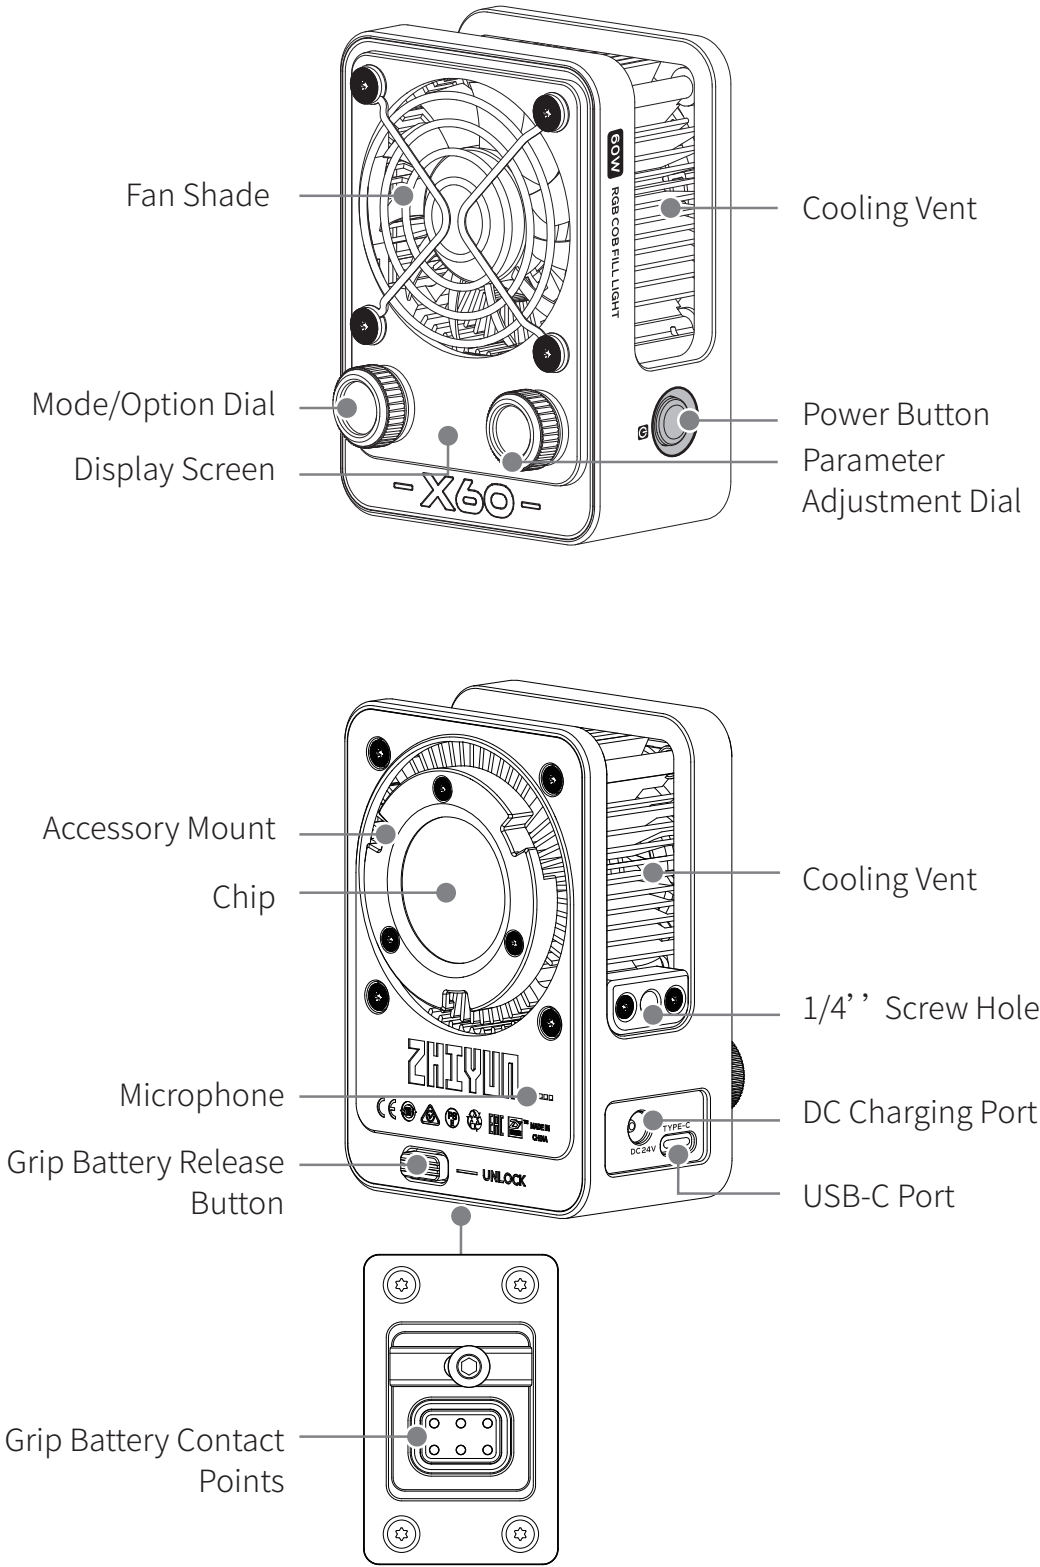


Power Supply

The battery is not included inside the device. For the ZHIYUN MOLUS X60RGB to work properly, please power the device using one of the following methods:

① **Power via USB adapter:** Use the USB Type-C charging cable to connect the USB adapter and the type-C power supply/firmware upgrade port of ZHIYUN MOLUS X60RGB. Plug the adapter into the AC socket to power ZHIYUN MOLUS X60RGB. It is recommended to use an adapter equal to or larger than 100W and supports PD fast charging protocol. The supply power will be displayed on the screen in real-time. When the input supply power is insufficient, it is unable to adjust the brightness of ZHIYUN MOLUS X60RGB to 100%.

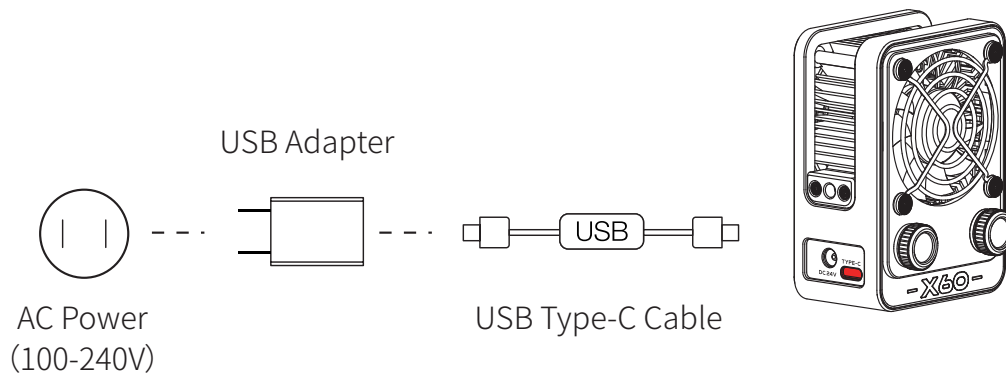


② **Power via DC power adapter:** Connect the DC power adapter to the DC power supply port and an AC socket to power ZHIYUN MOLUS X60RGB.

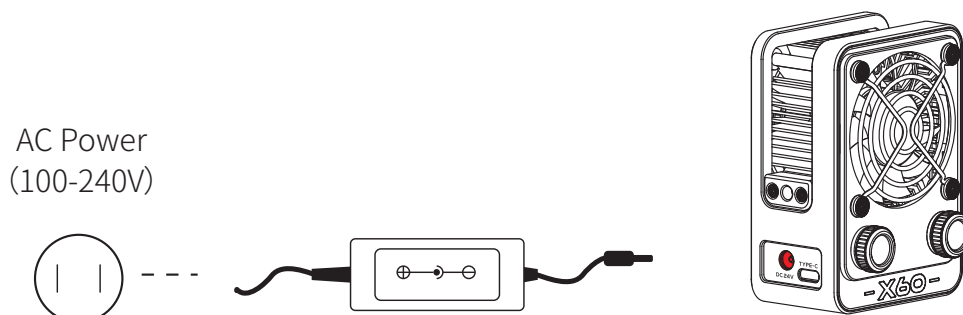


💡 You can use a power adapter organizer bag to organize the DC power adapter and hang at the proper location to avoid being stepped on.


③**智云功率王手柄电池供电:**将智云功率王手柄电池接触点处的硅胶罩取下,然后按照下图方法将手柄电池安装到智云功率王 X60RGB 灯体上,即可对智云功率王 X60RGB 影视灯进行供电。

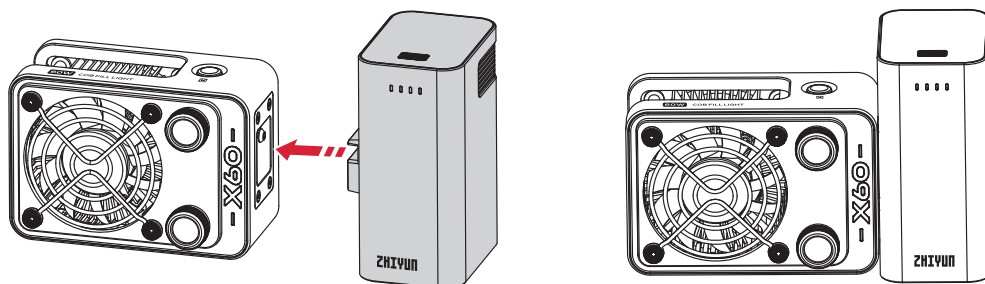

💡 拆卸智云功率王手柄电池时,请按住手柄电池解锁按钮不放,然后将手柄电池从智云功率王 X60RGB 影视灯上拆下。

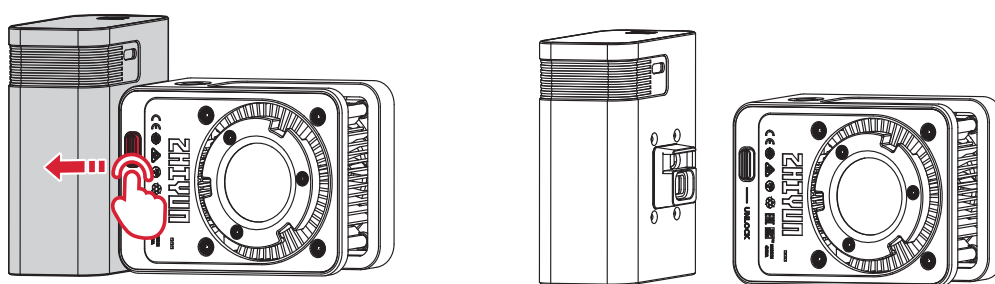


智云功率王手柄电池充电方法:使用 USB Type-C 充电线连接 USB 适配器和智云功率王手柄电池 USB-C 充放电接口,再将 USB 适配器插入交流电源插座,即可对手柄电池进行充电。推荐使用支持 PD 快充协议的 USB 适配器。

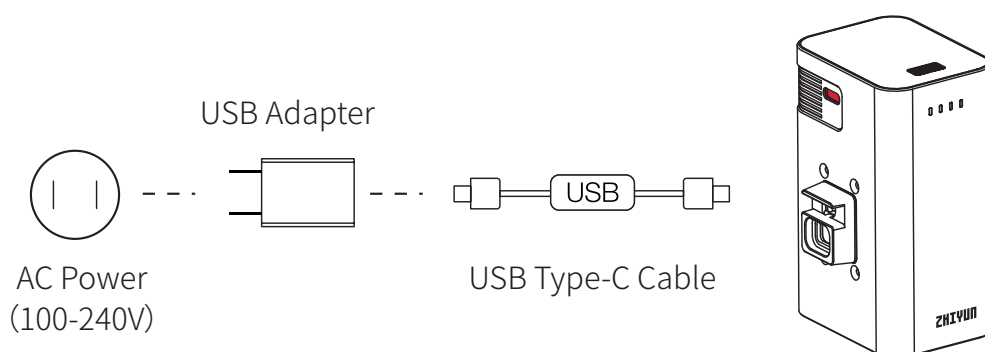

💡 Four solid battery level/charging indicator lights indicate the battery is fully charged.


Installing the Reflector

Align the reflector mount with the ZHIYUN MOLUS X60RGB accessory mount. Install the reflector to the ZHIYUN MOLUS X60RGB and rotate the reflector as shown in the image until you hear a click sound. The reflector is then installed.

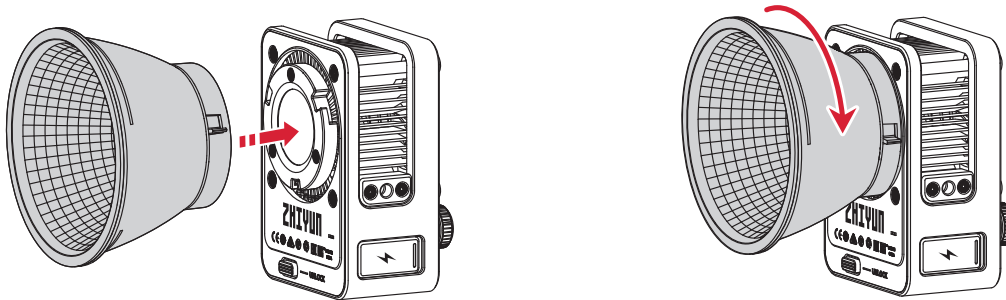


Removing the Reflector

Toggle the lock to another side ① and turn the reflector as shown in the image ②. Remove the reflector from the accessory mount ③.

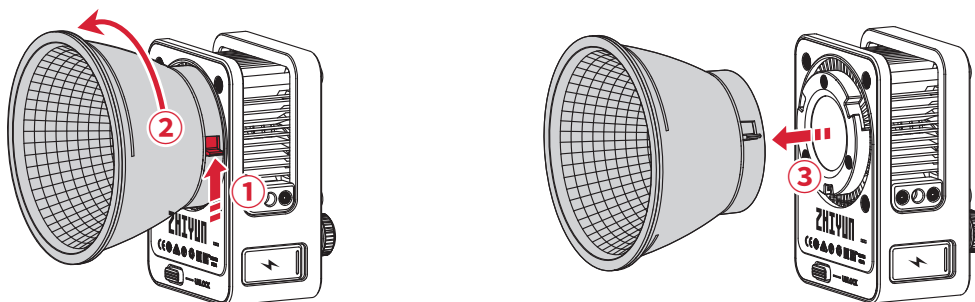

Installing the Tripod


Align the 1/4" screw of the tripod with the 1/4" threaded hole at the bottom of the ZHIYUN MOLUS X60RGB. Drive the screw firmly to finish the installation.

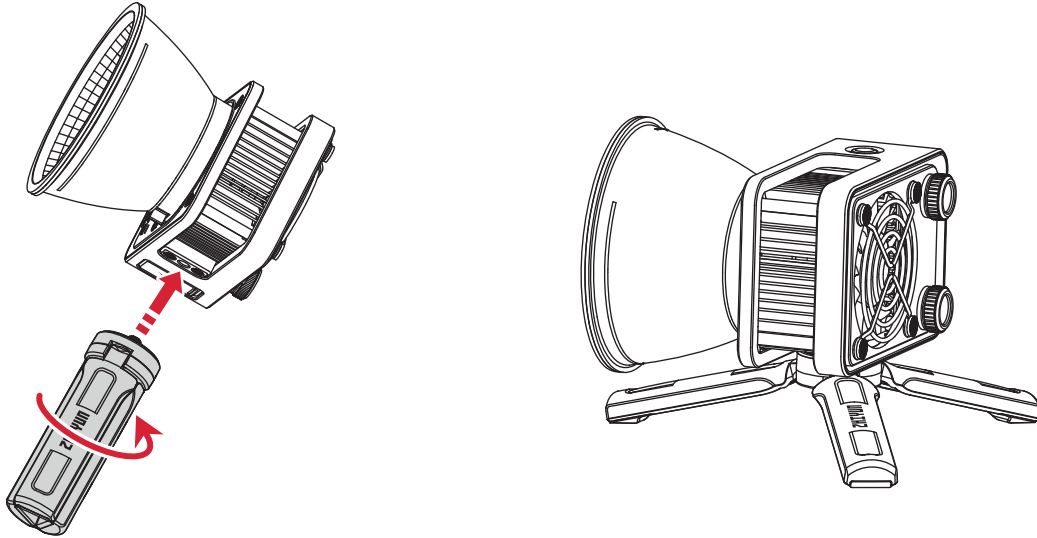

💡 Tripod is not provided.


Installing the Softbox

Align the softbox mount with the ZHIYUN MOLUS X60RGB accessory mount, install the softbox to the ZHIYUN MOLUS X60RGB ① and rotate the softbox as shown in the image until you hear a click sound ②. Loosen the softbox straps ③, push the axis to the right as shown in the image until the softbox expands and clicks into the mount ④. Expand the grid ⑤ and stick to the diffuser ⑥.

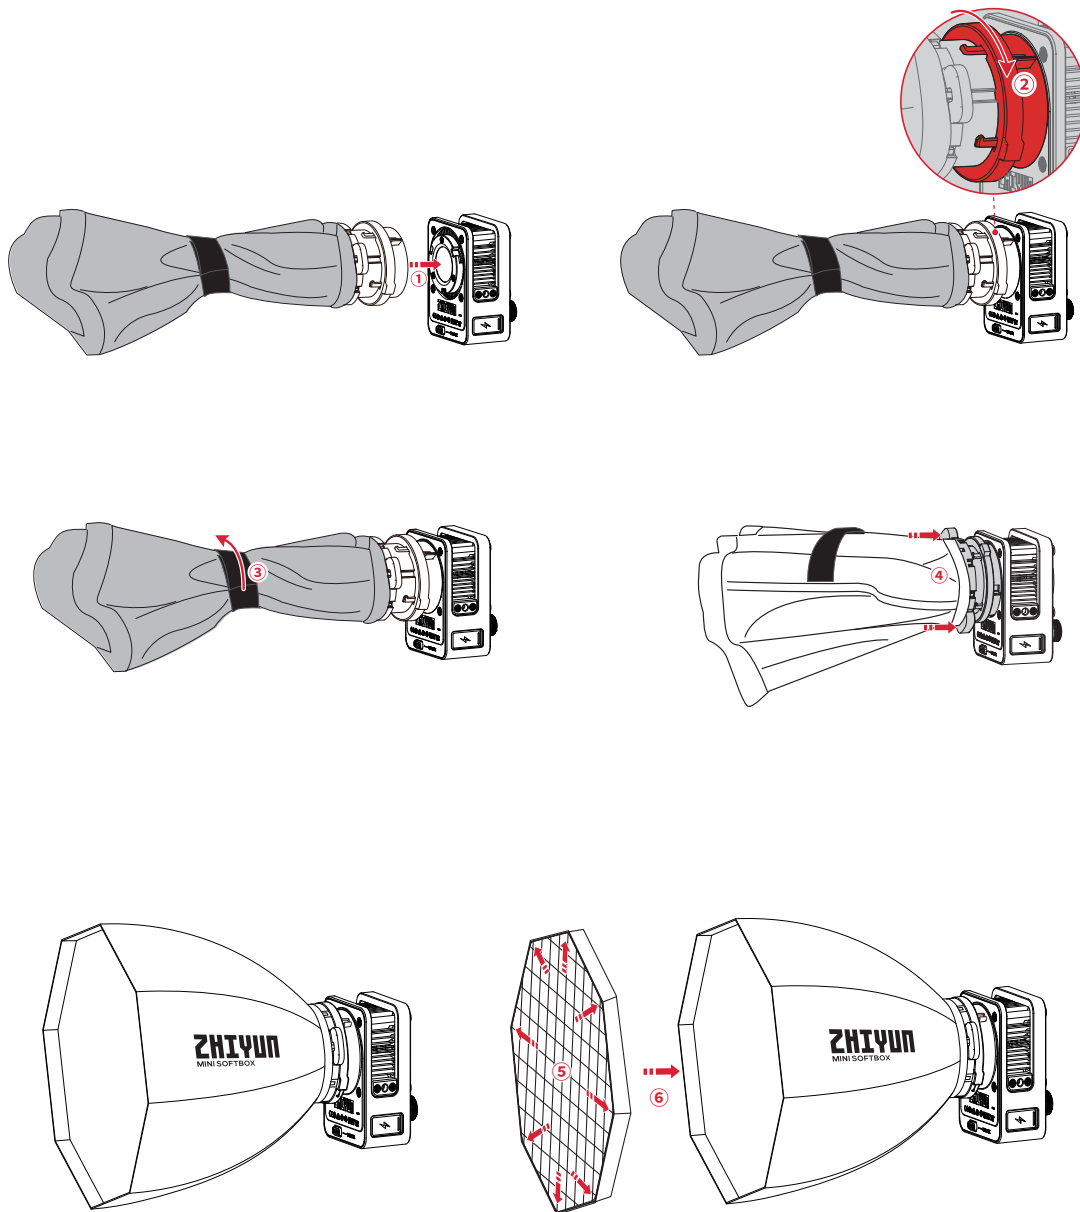


Removing the Softbox

Remove the grid from the softbox ① and rotate the softbox mount swivel as shown in the image ② . Toggle the lock to another side ③ while rotating the softbox as shown in the image ④ . Remove the softbox from the ZHIYUN MOLUS X60RGB accessory mount ⑤ . Pack the softbox and tie the straps.

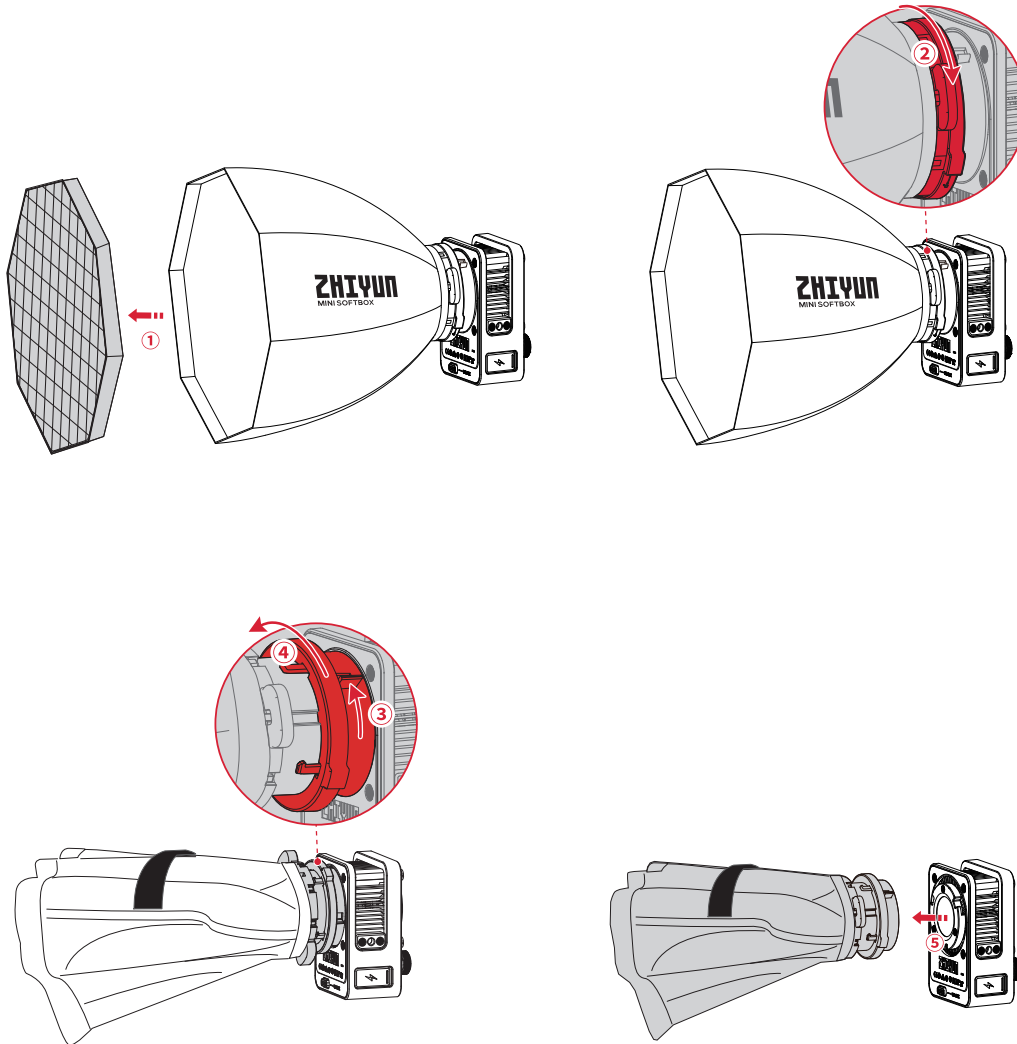


Installing Dome Diffusion

Install the reflector to ZHIYUN MOLUS X60RGB. Expand the dome diffusion as shown in the image, and align the opening of the dome diffusion with the reflector. Engage the groove ring of the dome diffusion in the reflector.

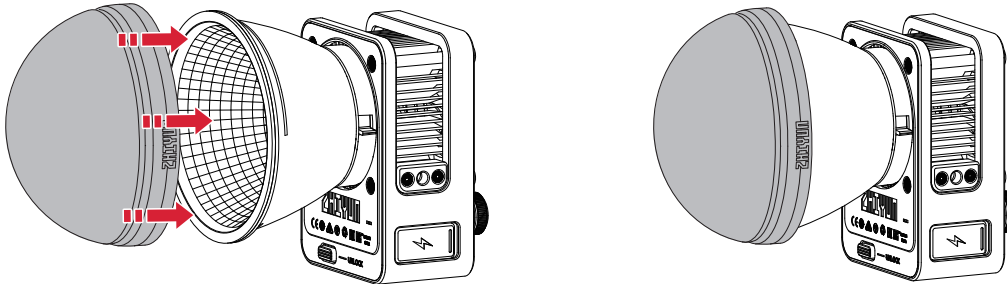

Installing Dome Diffusion

You can remove the dome diffusion from the reflector with your hand.

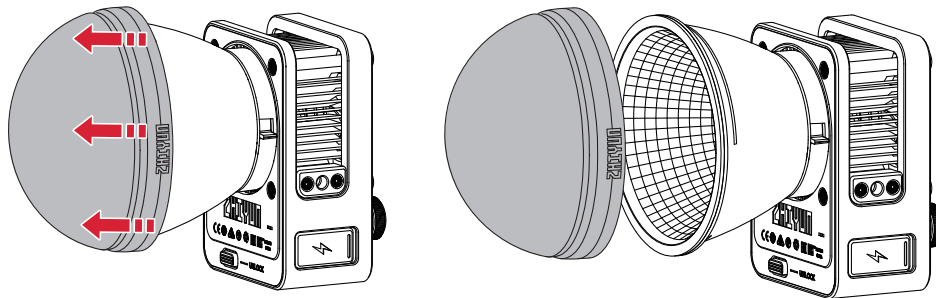




Installing Fresnel Lens

Removing Fresnel Lens

- ⚠ DO NOT stare at the chips when the device is operating.
- ⚠ The IP rating of the outer case is IP20.

Buttons and Dials

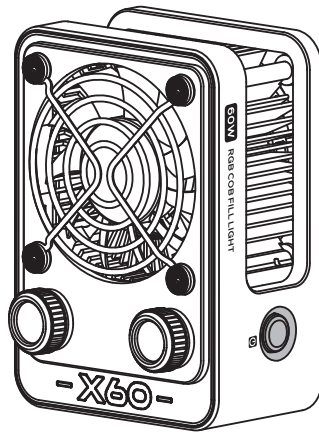

Long press the power button and turn the parameter adjustment dial or mode/option dial: Power on (grip battery powered).
Long press the power button: Power on (USB/DC powered)/Power off
Triple press the power button: Reset Bluetooth

Mode/Option Dial:

Single press: 切换影视灯工作模式
Double press: Switches to the previous mode.
Turn: Switches options (submenu).
Adjusts parameters (in CCT mode).

Parameter Adjustment Dial:

Single press: Quickly adjusts the current parameter.
Confirm (submenu).
Turn: Adjusts the current parameter.

Operation Instruction

1. CCT Mode Settings

In the CCT mode, you can freely adjust the brightness/color temperature of ZHIYUN MOLUS X60RGB. Power on the light, and use a single press or double press on the mode/option dial to switch to the CCT mode. Turn the mode/option dial switch to adjust color temperature. Single press on the parameter adjustment dial to quickly set the brightness value. Turn the parameter adjustment dial to finely adjust the brightness value. Please adjust the brightness/color temperature properly to suit your actual scenario.

CCT	PD60W
BRT:	100%
CCT:	5500k

2. HSI Mode Settings

In HSI mode, you can freely adjust parameters such as the intensity, hue, and saturation of the ZHIYUN MOLUS X60RGB to create full-color light effects. Power on the light. Single/double press mode/option dial to switch to HSI mode. Turn the mode/option dial to switch to hue/saturation/intensity options. Turn the parameter adjustment dial to finely adjust the hue/saturation/intensity value, or use a single press on the parameter adjustment dial to quickly set the hue/saturation/intensity value. Please adjust the hue/saturation/intensity values properly to suit your actual scenario.

HSI	PD60W
DIM:	100%
HUE:	120°
SAT:	100%

3. RGB Mode Settings

In RGB mode, you can freely adjust the values of the red, green, and blue color channels of the ZHIYUN MOLUS X60RGB to mix a variety of colorful light effects. Power on the light. Single/double press mode/option dial to switch to RGB mode. Turn the mode/option dial to switch to RGB options. Single press the parameter adjustment dial to quickly set the RGB/brightness value. Turn the parameter adjustment dial to finely adjust the RGB/brightness value. Please adjust the RGB/brightness values properly to suit your actual scenario.

RGB	PD60W
R:	100%
G:	30°
B:	50% ▼

4. FX Mode Settings

16 light effects in the FX mode can create a creative scene atmosphere for your shooting. The light effects are SOS, Paparazzi, Candlelight, Faulty Bulb, TV, Lightning, Strobe, Color Temperature Loop, Color Temperature Flash, Color Temperature Pulse, Police Car, Party, Fireworks, Color Loop, Color Flash, Color Pulse. To activate the FX mode on the ZHIYUN MOLUS X60RGB, power on the ZHIYUN MOLUS X60RGB, and press or double press the mode/option dial to switch to the FX mode. Use a single press or turn the parameter adjustment dial to select the desired light effect type. Turn the mode/option dial to switch among brightness/speed/color temperature options. Use a single press on the parameter adjustment dial to quickly set the brightness, speed, or color temperature value. Turn the parameter adjustment dial to finely adjust the brightness, speed, or color temperature value. Please adjust the brightness, speed, and color temperature values as needed to create the appropriate light effect for your specific usage scenario.

FX	PD60W
FX:	SOS
DIM:	100%
SPD:	5 ▼

- ① The adjustable parameters vary under different light effects and the operation steps are similar. The “SOS” effect is used as an example to demonstrate the operation steps above.
- ② The parameter values in a single light effect are only effective for that light effect.

5. Music Mode Settings

ZHIYUN MOLUS X60RGB can emit full-color lights in real-time following the rhythm of the music, making the music atmosphere more intense. Power on the light, single/double press mode/option dial to switch to music mode. Turn mode/option dial to switch to brightness/number of colors/colors options. Single press the parameter adjustment dial to quickly set the brightness/number of colors/colors value under the music mode. Turn the parameter adjustment dial to finely adjust the brightness/number of colors/colors value under the music mode. Please adjust the brightness/number of colors/colors values properly to suit your actual scenario.

Music	PD60W
DIM:	100%
CLN:	2
CL1:	120° ▼

6. Menu Settings

Turn on the ZHIYUN MOLUS X60RGB, and press or double press the mode/option dial to switch to "MENU." Turn the parameter adjustment dial to navigate to the "Language/Bluetooth Reset/Live Mode" option. Finally, press the parameter adjustment dial once to confirm your selection.

MENU	PD60W
language:	English
BT Rst:	NO
Live:	off ▼

 Under the "MENU" option, you can also check the firmware version information for the ZHIYUN MOLUS X60RGB.

Power-on Settings

In power-on settings, you can customize the way to power on the ZHIYUN MOLUS X60RGB. When entering the MENU interface, the Live mode is set by default. Turn the parameter adjustment dial to select to turn on/off the Live mode and press the parameter adjustment dial once to confirm.

MENU	PD60W
language:	English
BT Rst:	NO
Live:	off ▼

1. 智云功率王 X60RGB 影视灯通过 USB 适配器 / 智云功率王手柄电池供电时, 直播模式功能将失效:

①智云功率王手柄电池供电: Long press the power button and turn the parameter adjustment dial or mode/option dial to power on the light.

② USB adapter powered: Long press the power button to power on.

2. When the ZHIYUN MOLUS X60RGB is powered by a DC power adapter:




① When the Live mode is off: Long press the power button to power on the light.



② When the Live mode is on: After directly unplugging the ZHIYUN MOLUS X60 from the power source, simply plug it back in and the light will turn on immediately with no button press required.

💡 When the light is powered by a DC power adapter and the Live mode is on, if you use a long press at the power button to power off the ZHIYUN MOLUS X60RGB, you need to also use a long press to power on the light when you plug the power source back in again.

Method 1:

1. Visit the official website of ZHIYUN (www.zhiyun-tech.com), go to the ZHIYUN MOLUS X60RGB product page, click "Download", find the Zhiyun Led Tools and the firmware and download.
2. Unzip the firmware for the files with the ".ptz" file extension.
3. Connect the USB-C port of ZHIYUN MOLUS X60RGB to the USB port of the computer with the USB Type-C cable.
4. Open "Zhiyun Led Tools", click "Open", and click "Firmware Upgrade". Click "Browse" under "Path" to select the latest firmware downloaded (with the ".ptz" file extension), and click "Upgrade" at the bottom to upgrade firmware. ZHIYUN MOLUS X60C will automatically turn off when the upgrade is finished.

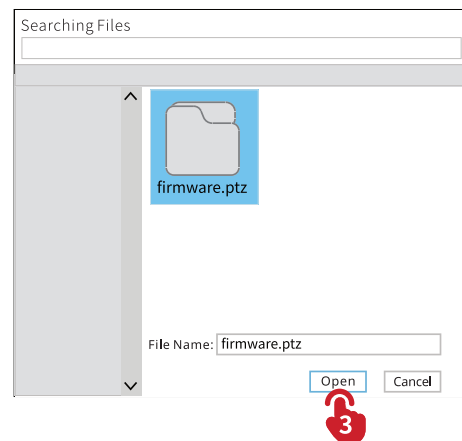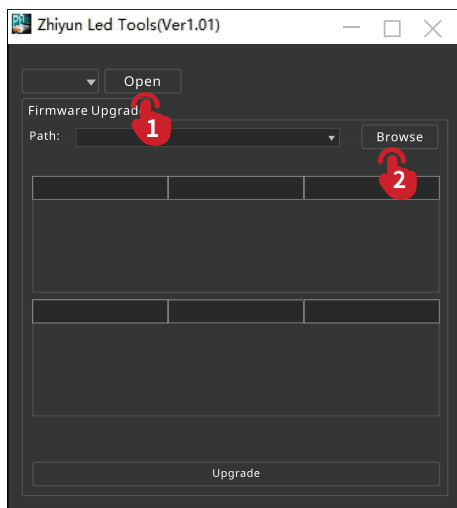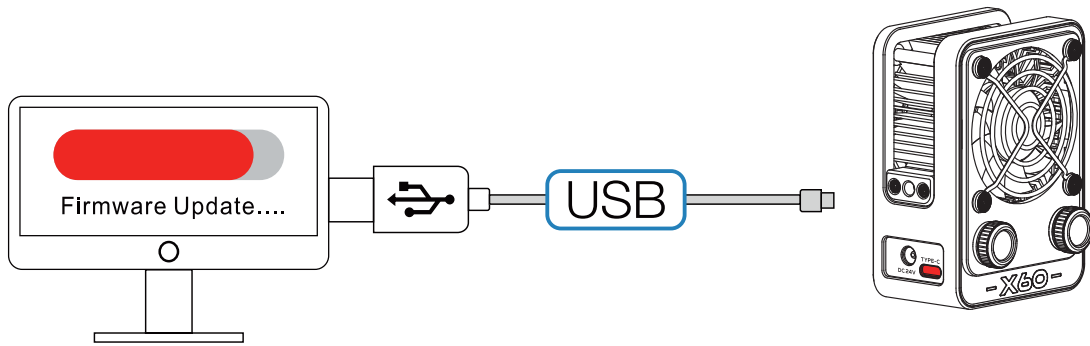

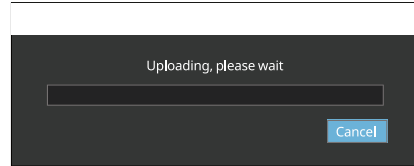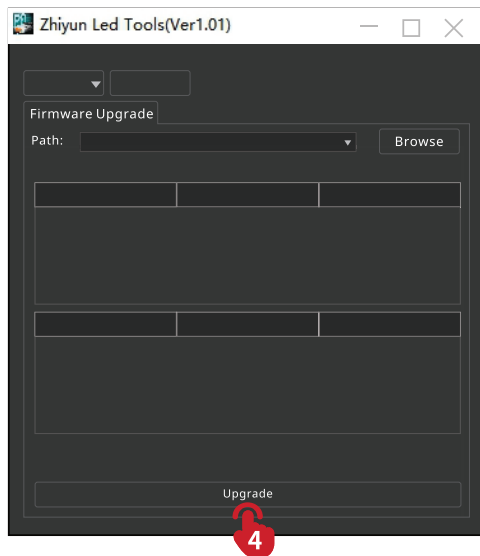

Method 2: The firmware of the ZHIYUN MOLUS X60RGB can be upgraded using the "ZY Vega" app. For more detailed instructions, please visit the ZHIYUN official website at www.zhiyun-tech.com and watch the related video tutorials for the ZHIYUN MOLUS X60RGB.

- ① When using Method 1 for the upgrade, please wait until the screen displays that the upgrade is finished, then you can plug out the USB Type-C cable.
- ② Before upgrading the firmware, please ensure that the ZHIYUN MOLUS X60RGB has more than 50% power remaining. You can not exit the app interface or access in the background during the upgrading process. Pay attention to the prompts on the app.

Product Model: PLX104

Maximum Output Power	60W	
Brightness Adjustment Range	0-100%	
Color Temperature Range	2700K-6500K	
CRI/TLCI	CRI ≥ TLCI ≥	
Illuminance (maximum power, without reflector)		Lab Data 1
Illuminance (maximum power, with reflector)		Lab Data 2
Red illuminance		
Green illumination		Lab Data 3
Blue illumination		
Zhiyun Power King handle battery capacity		
Zhiyun Power King Handle Battery life (maximum power)		Lab Data 4
Zhiyun Power King handle battery charging time		Lab Data 5
Zhiyun Power King handle battery USB-C port Maximum input/output power		
Power Adapter Rated Output Voltage/Current		
Operation Temperature	-10° C-40° C	
Product Size (without reflector and battery)		
Zhiyun Power King handle battery size		
Product Net Weight (without reflector and battery)		
Zhiyun Power King handle battery net weight		

Lab Data 1: The data is collected in the following conditions: No reflectors, 25°C temperature, indoor illuminance lower than 0.1lux, test distance 1m, and the color temperature is set at 4300K with 100% brightness. The illuminance is 3881 lux. The actual illuminance varies under different conditions.

Lab Data 2: The data is collected in the following conditions: Installed reflector, 25°C temperature, indoor illuminance lower than 0.1lux, test distance 1m, and the color temperature is set at 4300K with 100% brightness. The illuminance is 17317lux. The actual illuminance varies under different conditions.

Lab Data 3: With 25°C temperature, indoor illuminance lower than 0.1lux, and 1m test distance, set the product at 100% saturation and 100% brightness, and the red/green/blue illuminance is lux/ lux/ lux. The actual red/ green/blue illuminance varies under different conditions.

Lab Data 4: The data is collected in the following conditions 25°C temperature, ZHIYUN MOLUS X60RGB is fully-charged, and the color temperature is set at 4000K with 100% brightness. The battery runtime is 30 min. The actual grip battery runtime varies under different conditions: the longer the operating time, the higher the charge and discharge frequency, and the less the battery activity, leading to a shorter battery runtime.

Lab Data 5: The data is collected at a specified temperature of 25°C with 28W PD Fast Charging. The charging time is 2h 33 min. The actual charging time varies under different conditions: the lower the charging temperature, the lower the charging current, leading to a longer charging time.

Thank you for purchasing this product. The information contains herein affects your safety, legitimate rights and obligation. Please read this instruction carefully to ensure proper configuration before use. Failure to read and follow this instruction and warnings herein may result in serious injury to you or bystanders, or damage to your device or property. Guilin Zhishen Information Technology Co., Ltd (hereinafter referred to as "ZHIYUN") reserves all rights for final explanation of this instruction and other documents related to this product. The information is subject to update without notice. Please visit www.zhiyun-tech.com to obtain the latest product information.

By using this product, you hereby signify that you have read this document carefully and that you understand and agree to abide by the terms and conditions herein. You agree that you are solely responsible for your own conduct while using this product, and for any consequences thereof. You agree to use this product only for purposes that are proper and in accordance with all terms, precautions, practices, policies and guidelines ZHIYUN has made and may make available.

ZHIYUN accepts no liability for damage, injury or any legal responsibility incurred directly or indirectly from the use of this product. Users shall observe safe and lawful practices including, but not limited to, those set forth herein.

ZHIYUN™ is the trademark of Guilin Zhishen Information Technology Co., Ltd and its affiliates. All product names or trademarks referred to herein are trademarks or registered trademarks of their respective holders.

Reading Tips

Legends:  Hints and Tips  Important

Safe Operation Instructions

Read the ENTIRE User Guide to become familiar with the features of this product before operating. Failure to operate the product correctly can result in damage to the product or personal property and cause serious injury. This is a sophisticated product. It must be operated with caution and common sense and requires some basic mechanical ability. Failure to operate this product in a safe and responsible manner could result in injury or damage to the product or other property. This product is not intended for use by children without direct adult supervision.

DO NOT use with incompatible components or in any way otherwise as mentioned or instructed in the product documents provided by ZHIYUN. The safety guidelines herein contain instructions for safety, operation and maintenance. It is essential to read and follow all of the instructions and warnings in the User Guide, prior to assembly, setup or use, in order to operate the product correctly and avoid damage or serious injury.

Warranty Period

1. Customers are entitled to replacement or free repair service in case of quality deficits found in the product within 15 days upon receipt of the product.
2. Customers are entitled to free repair service from ZHIYUN for any product proven defective in material or workmanship that results in product failure during normal consumer usage and conditions within the valid warranty period, which is 12 months counting from the date of selling. However, warranty period varies by product component and country of purchase. Please contact our after-sales service team on ZHIYUN official website or your place of purchase for detailed warranty information.

Warranty Exclusions

1. Products subjected to unauthorized repair, misuse, collision, neglect, mishandling, soaking, accident, and unauthorized alteration.
2. Products subjected to improper use or whose labels or security tags have been torn off or altered.
3. Products whose warranty has expired.
4. Products damaged due to force majeure, such as fire, flood, lightning, etc.

Warranty Claim Procedure

1. If failure or any problem occurs to your product after purchase, please contact a local agent for assistance, or you can always contact ZHIYUN's customer service through email at info@zhiyun-tech.com or website at www.zhiyun-tech.com.
2. Your local agent or ZHIYUN's customer service will guide you through the whole service procedure regarding any product issue or problem you have encountered. ZHIYUN reserves the right to reexamine damaged or returned products.



Customer Information			
Customer Name:		Phone Number:	
Address:			
Sales Information			
Sales date:		Product Serial Number:	
Distributor Name:			
Distributor's Contact Number:			
First Maintenance Record			
Service Date:		Repairman Signature:	
Cause of Problem:			
Service Result:	☐ Solved	☐ Unsolved	☐ Refunded/Replaced



Website



Weibo



Vimeo



Google+



Facebook
(Zhiyun Support)



Facebook
(Zhiyun Tech)



Youku



Youtube



Wechat



Instagram

Tel: +86 400 900 6868

USA Hotline: +1 808-319-6137, 9:00-18:00 GMT-7, Mon-Fri

Europe Hotline: +49 (0) 61018132180, 10:00-17:00 GMT+1, Mon-Fri

Web: www.zhiyun-tech.com

E-mail: info@zhiyun-tech.com

Address: 09 Huangtong Road, Tieshan Industrial Zone, Qixing District, Guilin, 541004, Guangxi, China



For full product information, please visit ZHIYUN's official website: Content on www.zhiyun-tech.com is subject to update without notice.

ZHIYUN™ is a trademark of ZHISHEN

All product names or brands referred to hereunder may be trademarks or registered trademarks of their respective holders.

Copyright © 2023 ZHISHEN. All rights reserved.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of

the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee

that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct

the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Hereby, [Guilin Zhishen Information Technology Co., Ltd.] declares that the radio equipment type [PLX104] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.zhiyun-tech.com/compliances>.

- English:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and

(2) this device must accept any interference, including interference that may cause undesired operation of the device."

- French:"

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radio électrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

IC Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition au rayonnement IC:

Cet équipement est conforme aux limites d'exposition au rayonnement IC fixées pour un

Environnement non contrôlé. Cet équipement doit être installé et exploité Avec une distance minimale de 20cm entre le radiateur et votre corps.

ZHIYUN-TECH.COM