

FCC EMC Test Report

Applicant: Beike Technology Co., Ltd.

Address of Applicant: Room 708, Building A3, No.12, Nanhai Road, TEDA Tianjin, China

Equipment Under Test (EUT)

Product Name: Galois 3D Smart Camera

Model No.: RS41010, RS41025

Trade Mark: REALSEE

FCC ID: 2A26V-RS41010

Applicable Standards: FCC CFR Title 47 Part 15B

Date of Sample Receipt: 13 Sep., 2022

Date of Test: 14 Sep., to 16 Oct., 2022

Date of report Issued: 17 Oct., 2022


Test Result: PASS

Tested by:
Test Engineer**Date:**

17 Oct., 2022

Reviewed by:
Project Engineer**Date:**

17 Oct., 2022

Approved by:
Manager**Date:**

17 Oct., 2022

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	17 Oct., 2022	Original

2 Contents

	Page
Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode	4
3.4 Description of Test Auxiliary Equipment	5
3.5 Description of Cable Used.....	5
3.6 Measurement Uncertainty	5
3.7 Additions to, Deviations, or Exclusions from the Method	5
3.8 Laboratory Facility	5
3.9 Laboratory Location.....	5
3.10 Test Instruments List.....	6
4 Measurement Setup and Procedure	7
4.1 Test Setup	7
4.2 Test Procedure	8
5 Test Results.....	9
5.1 Summary	9
5.1.1 Clause and data summary	9
5.1.2 Test Limit.....	9
5.2 Conducted Emission	10
5.3 Radiated Emission	12

3 General Information

3.1 Client Information

Applicant:	Beike Technology Co., Ltd.
Address:	Room 708, Building A3, No.12, Nanhai Road, TEDA Tianjin, China
Manufacturer:	Beike Technology Co., Ltd.
Address:	Room 708, Building A3, No.12, Nanhai Road, TEDA Tianjin, China
Factory:	Hong Fu Tai Precision Electronics (Yantai) Co., Ltd.
Address:	No. 8 Jiaying Road, Yantai Economic & Technological Development Area, Shandong, P.R. China

3.2 General Description of E.U.T.

Product Name:	Galois 3D Smart Camera
Model No.:	RS41010, RS41025
Power Supply:	Rechargeable Li-ion Battery DC14.4V, 6400mAh
AC Adapter:	Model: ADP-65SD B Input: AC100-240V, 50/60Hz, 1.5A Output: DC 20V --- 3.25A or 15V--- 3A or 9V--- 3A or 5V--- 3A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Remark:	Model No.: RS41010, RS41025 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being the detection range of LIDAR.

3.3 Test Mode

Operating Mode	Detail Description
Data exchange mode	Keep the EUT connected with PC PING for data transmission (Worst case)
Working mode	Keep EUT in continuous shooting state.

The sample was placed 0.8m above the ground plane of 10m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.4 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ZHAOYANGK21-80	R3038NQX	DoC

3.5 Description of Cable Used

Cable Type	Description	Length	From	To
N/A	N/A	N/A	N/A	N/A

3.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.11 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.62 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	±4.45 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	±5.34 dB
Radiated Emission (30MHz ~ 1GHz) (10m SAC)	±4.32 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.7 Additions to, Deviations, or Exclusions from the Method

No

3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC - Designation No.: CN1211 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L15527 JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf
--

3.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd. Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China. Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info-JYTee@lets.com, Website: http://jyt.lets.com

3.10 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	03-08-2022	03-07-2023
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	03-08-2022	03-07-2023
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	01-20-2022	01-19-2023
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	01-20-2022	01-19-2023
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	03-05-2022	03-04-2023
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	01-20-2022	01-19-2023
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-20-2022	01-19-2023
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-20-2022	01-19-2023
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		


Radiated Emission(10m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
10m SAC	ETS	RFSD-100-F/A	WXJ090	04-28-2021	04-27-2024
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-1	04-01-2022	03-31-2023
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-2	03-31-2022	03-30-2023
EMI Test Receiver	R&S	ESR 3	WXJ090-3	03-30-2022	03-29-2023
EMI Test Receiver	R&S	ESR 3	WXJ090-4	03-30-2022	03-29-2023
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-6	01-20-2022	01-19-2023
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-7	01-20-2022	01-19-2023
Cable	Bost	JYT10M-1G-NN-10M	WXG002-7	01-20-2022	01-19-2023
Cable	Bost	JYT10M-1G-NN-10M	WXG002-8	01-20-2022	01-19-2023
Test Software	R&S	EMC32	Version: 10.50.40		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	10-21-2021	10-20-2022
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	02-24-2022	02-23-2023
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	03-30-2022	03-29-2023
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	02-24-2022	02-23-2023
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

4 Measurement Setup and Procedure

4.1 Test Setup


1) Conducted emission measurement:

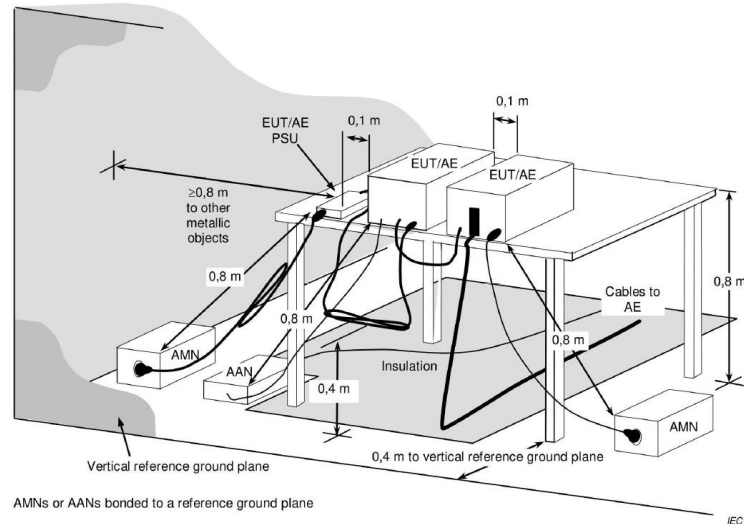


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:

Below 1GHz (10m SAC)

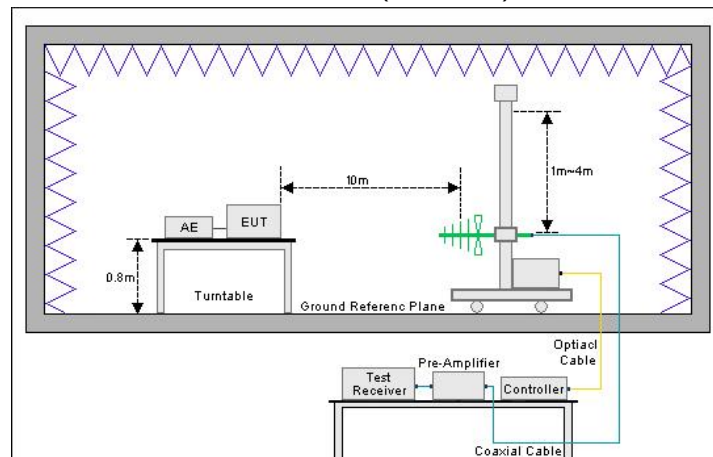

Above 1GHz (3m SAC)

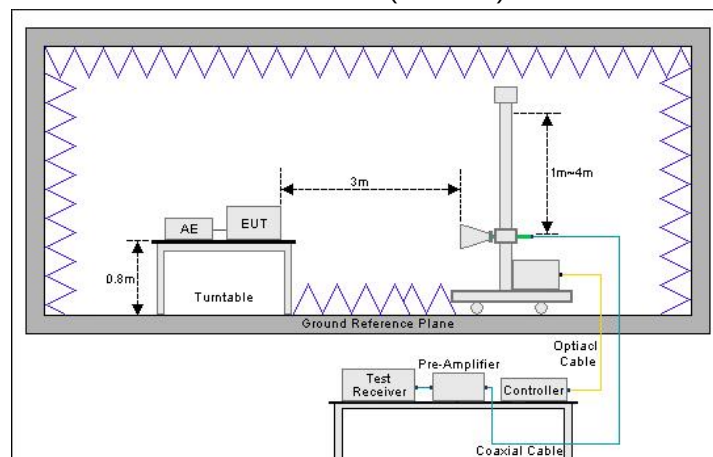


4.2 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 10 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 10 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

5.2 Conducted Emission

Product name:	Galois 3D Smart Camera	Product model:	RS41010
Test by:	Mike	Test mode:	Data exchange mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

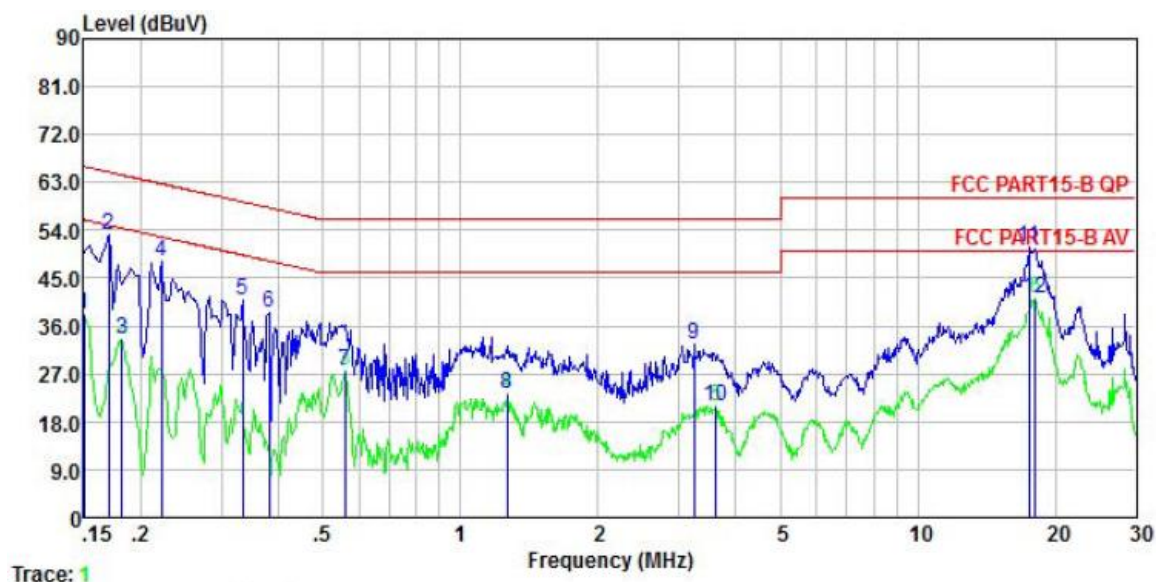


	Freq	Read Level	LISN Factor	Cable Loss	Aux2 Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	27.60	0.04	0.01	10.50	38.15	56.00	-17.85	Average
2	0.170	42.47	0.04	0.01	10.50	53.02	64.94	-11.92	QP
3	0.182	23.05	0.05	0.01	10.50	33.61	54.42	-20.81	Average
4	0.222	37.44	0.05	0.03	10.50	48.02	62.74	-14.72	QP
5	0.334	30.22	0.06	0.02	10.50	40.80	59.35	-18.55	QP
6	0.381	28.08	0.06	0.03	10.50	38.67	58.25	-19.58	QP
7	0.558	16.93	0.06	0.02	10.50	27.51	46.00	-18.49	Average
8	1.262	12.45	0.07	0.10	10.50	23.12	46.00	-22.88	Average
9	3.241	21.82	0.09	0.07	10.50	32.48	56.00	-23.52	QP
10	3.623	10.28	0.10	0.08	10.50	20.96	46.00	-25.04	Average
11	17.475	39.80	0.32	0.15	10.50	50.77	60.00	-9.23	QP
12	18.039	30.09	0.32	0.15	10.50	41.06	50.00	-8.94	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Galois 3D Smart Camera	Product model:	RS41010
Test by:	Mike	Test mode:	Data exchange mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

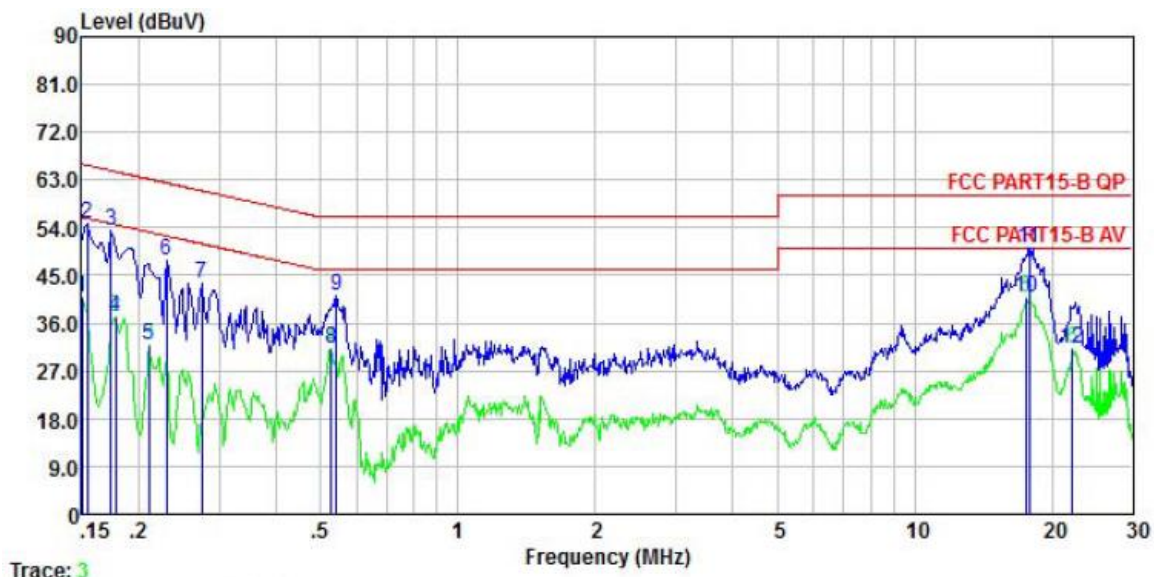

	Freq	Read Level	LISN Factor	Cable Loss	Aux2 Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	30.34	0.06	0.01	10.50	40.91	56.00	-15.09	Average
2	0.154	44.39	0.06	0.01	10.50	54.96	65.78	-10.82	QP
3	0.174	42.99	0.05	0.01	10.50	53.55	64.77	-11.22	QP
4	0.178	26.51	0.05	0.01	10.50	37.07	54.59	-17.52	Average
5	0.211	21.33	0.05	0.03	10.50	31.91	53.18	-21.27	Average
6	0.230	37.29	0.05	0.02	10.50	47.86	62.44	-14.58	QP
7	0.274	33.05	0.05	0.02	10.50	43.62	60.98	-17.36	QP
8	0.527	20.59	0.04	0.03	10.50	31.16	46.00	-14.84	Average
9	0.541	30.76	0.04	0.03	10.50	41.33	56.00	-14.67	QP
10	17.568	29.79	0.30	0.15	10.50	40.74	50.00	-9.26	Average
11	17.849	39.21	0.31	0.15	10.50	50.17	60.00	-9.83	QP
12	22.180	20.14	0.36	0.16	10.50	31.16	50.00	-18.84	Average


Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.3 Radiated Emission

Below 1GHz:

Product Name:	Galois 3D Smart Camera	Product Model:	RS41010
Test By:	Mike	Test mode:	Data exchange mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical & Horizontal
Test Voltage:	AC 120V/60Hz		

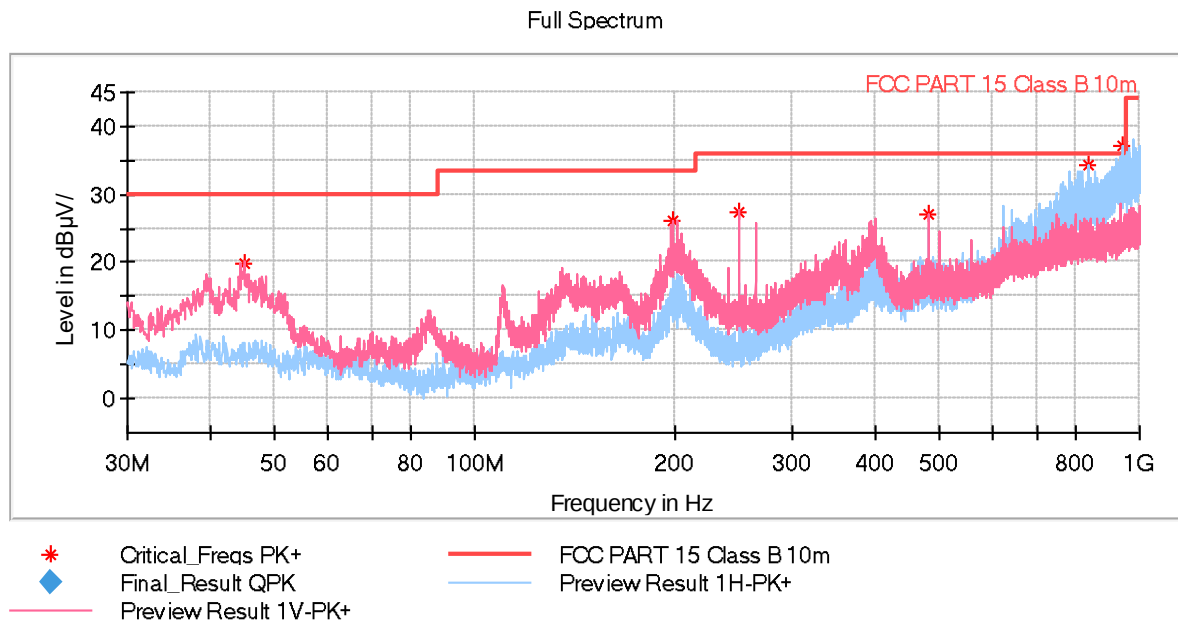


Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
44.889500	19.95	30.00	10.05	100.0	V	4.0	-16.0
197.955500	26.19	33.50	7.31	100.0	V	87.0	-17.9
249.947500	27.30	36.00	8.70	100.0	V	182.0	-16.8
480.031500	27.17	36.00	8.83	100.0	V	2.0	-9.7
839.513500	34.17	36.00	1.83	100.0	H	175.0	-2.7
941.024000	37.28	36.00	-1.28	100.0	H	295.0	-1.0
Frequency (MHz)	QuasiPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
941.544000	33.39	36.00	2.61	102.0	H	299.0	-1.0

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

Product Name:	Galois 3D Smart Camera	Product Model:	RS41010
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

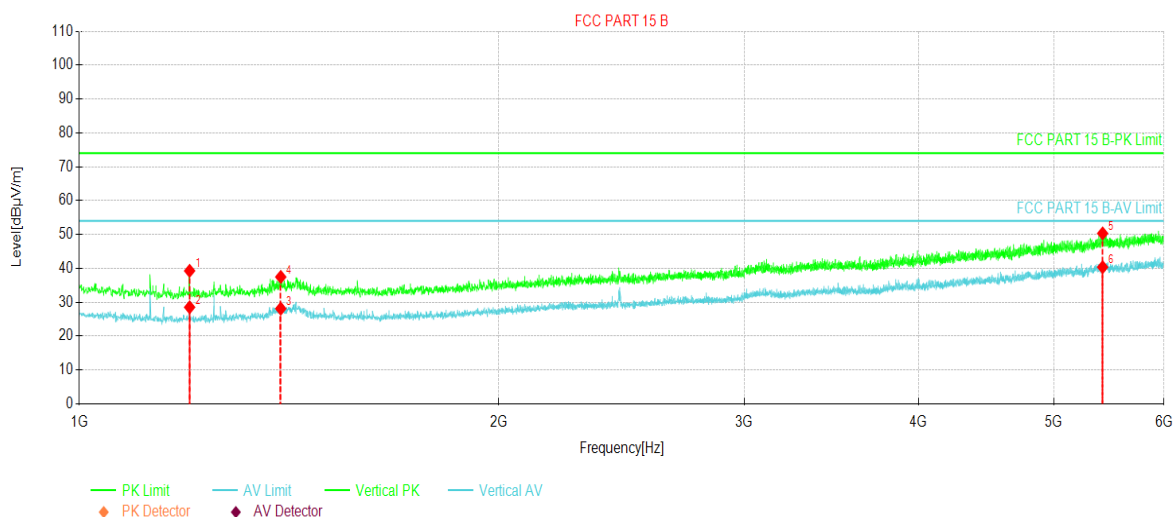


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1200.00	62.34	-23.06	39.28	74.00	34.72	PK	Vertical
2	1200.00	51.58	-23.06	28.52	54.00	25.48	AV	Vertical
3	1395.00	50.49	-22.38	28.11	54.00	25.89	AV	Vertical
4	1395.00	59.84	-22.38	37.46	74.00	36.54	PK	Vertical
5	5421.87	56.30	-5.98	50.32	74.00	23.68	PK	Vertical
6	5421.87	46.35	-5.98	40.37	54.00	13.63	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Galois 3D Smart Camera	Product Model:	RS41010
Test By:	Mike	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

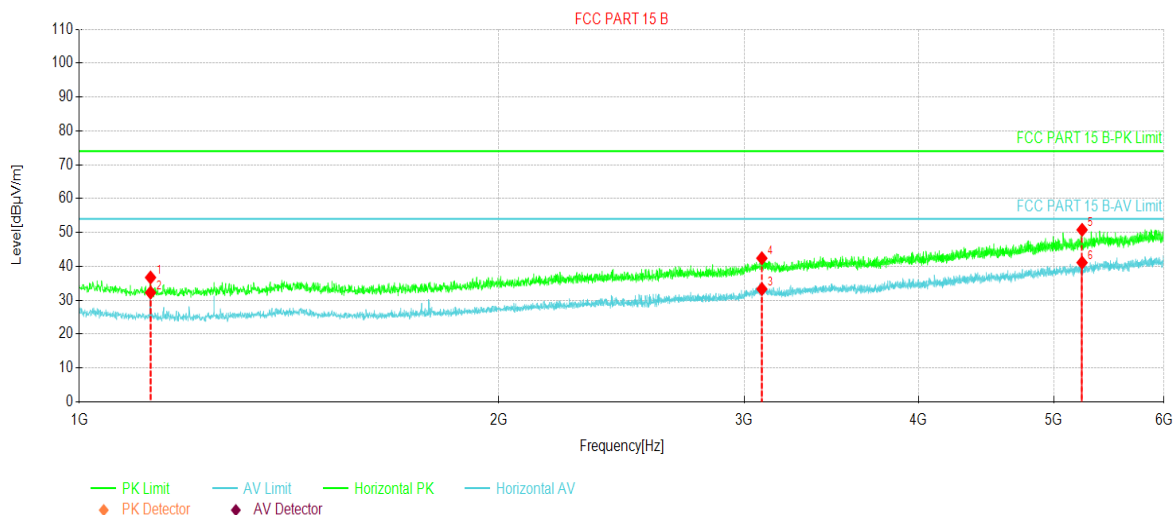

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1125.00	59.56	-22.84	36.72	74.00	37.28	PK	Horizontal
2	1125.00	55.10	-22.84	32.26	54.00	21.74	AV	Horizontal
3	3088.12	49.16	-15.86	33.30	54.00	20.70	AV	Horizontal
4	3088.12	58.26	-15.86	42.40	74.00	31.60	PK	Horizontal
5	5240.62	57.71	-6.92	50.79	74.00	23.21	PK	Horizontal
6	5240.62	48.03	-6.92	41.11	54.00	12.89	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----