


# Shenzhen Boantong Technoloy Co., Ltd PRODUCT SPECIFICATION

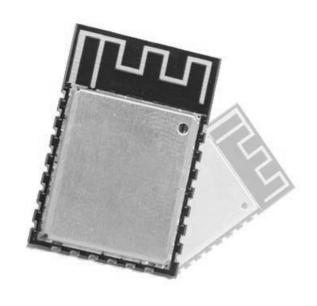

RTL00 WiFi Module

Revision 1.1

Release Date: 2016/5/12

#### Disclaimer and Copyright notice

The information in this document, including the URL for reference, if there is any change, without prior notice.

The document is provided "as is" without any guarantee responsibility, including merchantability, suitable for any particular purpose or non-infringement guarantees, and any proposal, specification, or sample mentioned elsewhere any guarantees. The document has no any responsibility, including the infringement of any patent right by using information within this document produced. This document in this, by estoppel or otherwise, grant no any intellectual property licensing, whether express or implied license.

The wi-fi alliance marks shall be owned by The WIFI Alliance.

All brand names, trademarks and registered trademarks mentioned in the document are the property of their respective owners, and hereby declare.

# **Contents**

1.	PRODUCT PROFILE	4
2.	INTERFACE DEFINITION	7
3.	SHAPE AND SIZE	9
4.	FUNCTION DESCRIPTION	10
5.	RF PARAMETERS	12
6.	POWER CONSUMPTION	12
7.	TEMPERATURE DRIFT	14
8.	MODULE INSTALLATION NOTES	15
9.	THE REFERENCE CIRCUIT	16

#### Product Profile

Realtek intelligent platform of the Internet **and** Realtek 8710 high performance wireless SOC bring the blessedness for mobile platform designers with maximum availability at the lowest cost, which provides endless possibilities for WiFi function embedded into other systems.

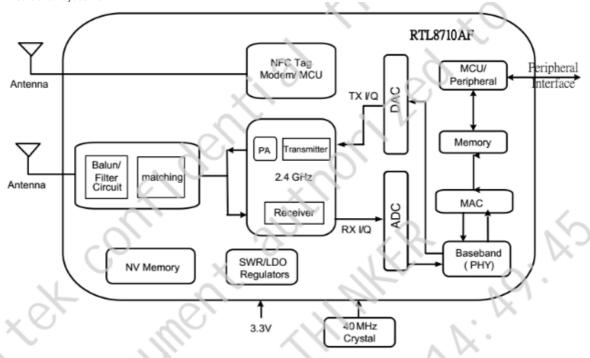


Figure 2. Single-Band 11n (1x1) and NFC Tag Solution

Realtek 8710 can run independently as a complete and self-contained WiFi network solution, which also be used to running as slave machine embark on other host MCU.Realtek 8710 with applications can directly start from an external flash memory as the only application processor of the equipment. Its built-in cache improves system performance and reduce memory requirements.

There is another situation that Realtek 8710 is responsible for wireless Internet access, undertaking the task of the WiFi adapter, which can be added to any design based on microcontroller just through simple connection with SPI/SDIO interface or I2C/UART port.

Realtek 8710 powerful processing and storage capacity on chip, make it can integrate sensors through the GPIO ports and other application with specific equipment, which realizes the lowest cost in preliminary development and the leastest occupation of system resources.

Realtek 8710 integrates highly on chip, including antenna switch ,balun , power management converter, so that it takes only a few external circuit,which minimizes the space when engineer designs PCB on the whole solution, including front-end module.

#### 1.1 Characteristics

- 802.11 b/g/n , CMOS MAC , Baseband PHY
- Internal low power 32 位 CPU: as application processor
- Internal TCP/IP protocol stack
- Internal TR Switch, balun, LNA, Power Amplifier and Matching Network
- Internal PLL, VLDO and Power Management Components
- MO、2x1 MIMO
- A-MPDU \ A-MSDU aggregation and 0.4 s Guard Interval
- WiFi @ 2.4 GHz , Support WPA/WPA2 Security Mode
- Support STA/AP/STA+AP Module
- Support Smart Config function (include Android 和 iOS devices)
- HSPI 、UART、I2C、I2S、IR Remote Control、PWM、GPIO
- Deep Sleep Current 10 uA , Shutdown Current below 5 uA
- Wake up, connect and transfer data packets within 2 ms
- 802.11b modle+ 17 dBm Output Power
- Stand down Power below 1.0 mW (DTIM3)
- Operating Temperature Range: -20°C 85°C

## 1.2 Main Parameters

Table 1 Introduction of Main parameters of the Module

Table 1

Category	Arguments	Statements
	wireless standards	802.11 b/g/n
Wireless Parameter	frequency range	2.4GHz-2.5GHz (2412M-2462M)
	data interface	UART/HSPI/I2C/I2S/Ir Remote Contorl
		GPIO
	operating voltage	3.0~3.6V ( suggested :3.3V )
	operating current	averge: 80mA
Hardware	operating temperature	-20°~85°
Paramaters	Storage Temp	normal
	Package Size	24mm*16mm*0.8mm
	external interface	N/A
	Wireless Network Mode	station/softAP/SoftAP+station
	security mechanism	WPA/WPA2
	encryption type	WEP/TKIP/AES
	Upgrade Firmware	local uart burning / OTA / master download burning
Software	software development	Support user-defined server
Parameters		secondary development with SDK
	network protocols	IPv4, TCP/UDP/HTTP/FTP
	User config	AT+ instruction set, Cloud Server, Android/iOS APP

## 2. Interface definition

Figure 2 Definition of the Interface



Figure 2

Note: The default naming rules for GC2 means GPIOC second pin

Table 2 Function Definition of the RTL00 GPIO

NO	Pin name	Description	
1	GC2	UART0_RTS,SPI0_MOSI,I2S1_SD_TX,PCM1_OUT,PWM2,ETE2	
2	GC5	I2C1_SCL,SPIO_CS2,GPIO_INT	
3	CHIP_EN	Enable chip 1: enable chip;	
		0: shutdown chip	
4	GE4	JTAG_CLK , SPIOO_CS1	
5	GE1	JTAG_TDI,UART0_RTS,I2C2_SDA,SPI0_CLK,PCM0_CLK,PWM1,GPI0_INT	
6	GE3	JATG_TMS,UART0_IN,I2C3_SDA,SPI0_MISO,PCM0_IN,PWM3,WKDT3,GPIO_INT	
7	GE2	JATG_TDO,UART0_CTS,I2C3_SCL,SPI0_MOSI,PCM_OUT,PWM2, GPIO_INT,WKDT3	
8	VDD33	3.3V	
9	GA2	SD_CMD,UART2_RTS,SPI1_CLK	
10	GC4	I2C1_SDA,SPI0_CS1,I2S1_SD_RX, GPIO_INT	
11	GA5	SD_D1,WKDT0	
12	GA1	SD_D3,UART2_CTS,SPI1_MOSI,GPIO_INT	
13	GA0	SD_D2,UART2_IN,SPI1_MISO,GPIO_INT	
14	GA3	SD_CLK	
15	GND	GND	
16	GE0	JTAG_TRST,UART0_OUT,I2C2_SCL,SPI0_CS0,PCM0_SYNC,PWM0	
17	GA4	SD_D0 , UART2_OUT,SPI1_CS	
18	GC0	UARTO_IN,SPIO_CS0 , I2S1_WS,PCM1_SYNC,PWM0,ETE0	
19	GC3	UARTO_OUT,SPIO_MISO,I2S1_MCK,PCM1_IN,PWM3,ETE3,GPIO_INT	
20	GC1	UART0_CTS,SPI0_CLK,I2S1_CLK,PCM1_CLK,PWM1,ETE1, GPIO_INT	
21	GB1	UART_LOG_IN,ETE1,WKDT0	
22	GB0	UART_LOG_OUT,ETE0	

## 3. Shape and size

RTL00 patch type module size 24mm \* 16mm \* 3mm ( As shown in figure 3 ) . The module uses 3 DBi PCB On-board antenna.

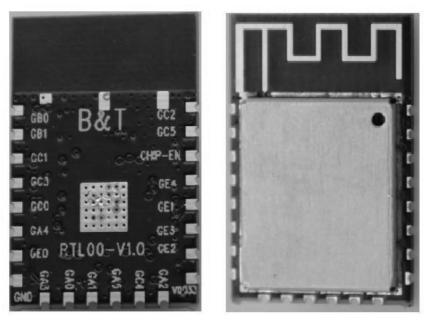


Figure 3 RTL00 module appearance

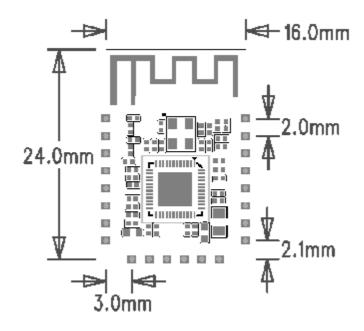


Figure 4 RTL00 module size plan

Table 5 RTL00 module size table

length	width	heigh	PAD szie ( bottom )	Pin distance
24mm	16mm	3 mm	0.9 mm x 1.0 mm	2.0mm

## 4. Function description

#### 4.1 MCU

Realtek rtl8710af is a low power single chip.lt integrates a ARM-CM3 MCU, 802.11 n wireless network controller.lt also provides some peripherals with configurable GPIO.

### 4.2. storage description

#### 4.2.1. built in SRAM and ROM

Realtek 8710 has internal memory controller including ROM and SRAM.MCU can access memory controller by iBus, dBus and AHB interface. These interfaces can access ROM or RAM unit as memory arbitrator determines the running order according to arrival sequence. Given the SRAM used by our Demo SDK in current situation, the user can use the remaining SRAM size > 48 KB.

#### 4.2.2. SPI Flash

Now the module internal integrate 1 MB of SPI Flash, which does not support external SPI Flash.

## 4.3. Maximum Ratings

Table 7 Maximum Ratings

Ratings	condition	value	units
Storage Temperature		-40 to 125	℃
maximum welding temperature		260	℃
Voltage supply	IPC/JEDEC J-STD-020	+3.0 to +3.6	V

## 4.4. Recommended Working Environment

**Table 8 Recommended Working Environment** 

Working Environment	Name	Min	Тур	Max	units
Operating Temp		-20	20	85	℃
Voltage supply	VDD	3.0	3.3	3.6	V

# 4.5. Digital Port Characteristics

 Table 9
 Digital Port Characteristics

port	Тур	Min	Тур	Max	units
Input logic level low	VıL	-0.3		0.25VDD	V
Input logic level high	Vıн	0.75VDD		VDD+0.3	V
Input logic level low	Vol	N		0.1VDD	V
Input logic level high	Vон	0.8VDD		N	V

Note:If no special instructions, test condition is: VDD = 3.3 V, temperature = 20 °C.

## 5. RF Parameters

Parameters	Ту	units	
Input Frequency	2412-2	2483.5	MHz
Input resistance	5	0	Ω
	802.11b	>17	dBm
	802.11g	>15	dBm
Output Power	802.11n(HT20)	>14	dBm
	802.11n(HT40)	>14	dBm
	11M	≤-76	dBm
D	54M	≤-65	dBm
Rx sensitivity	65M(HT20)	≤-64	dBm
	150M(HT40)	≤-61	dBm

## 6. Power Consumption

The following data is based on the 3.3 V power supply,  $\,$  around 25  $\,^\circ$  C temperature, measured by the internal voltage regulator.

All measurements in the absence of SAW filter, completed in the antenna interface.

All emission data is based on 90% of the duty ratio, measured in continuous emission mode.

Model	Min	Tye	Max	unit
Transmit 802.11b, CCK 11Mbps, Pouτ=+17dBm		87		mA
Transmit 802.11g, OFDM 54Mbps, Pout=+15dBm		180		mA
Transmit 802.11n(HT20), MCS7, Роит =+14dBm		168		mA
Transmit 802.11n(HT40), MCS7, Роит =+14dBm		148		mA

Receive 802.11b, packet length 1024 bytes, -76dBm	68	mA
Receive 802.11g, packet length 1024 bytes, -65dBm	68	mA
Receive 802.11n, packet length 1024 bytes, -64dBm	68	mA
Modem-Sleep①	15	mA
Light-Sleep②	0.9	mA
Deep-Sleep③	10	uA
Normal stand down	30	mA

Note 1: Modem - Sleep is applied to the CPU in the continuous working condition Such as PWM or I2S application, etc.With keeping the WiFi connection, if there is no data transfer, close the WiFi Modem circuit to save electricity according to 802.11 standard (such as U - APSD). For example, When DTIM3, 300 ms sleep time includes awaking time 3 ms to receive AP Beacon packets and so on, the overall average current is about 15 ma.

Note 2:Light - Sleep is applied to the CPU which suspend the application of such as WiFi switch. With keeping the WiFi connection, if there is no data transfer, close the WiFi Modem circuit to save electricity according to 802.11 standard (such as U - APSD). For example, When DTIM3, 300 ms sleep time includes awaking time 3 ms to receive AP Beacon packets and so on, the overall average current is about 0.9 ma.


Note 3:Deep-Sleep without keeping WiFi connection, is applied to the application which sends a packet with long time interval, such as measurement temperature sensor works once every 100 seconds. For example, 300 ms sleep time including awaking time 0.3~1s to connect AP, the overall average current can be far less than 1 mA.


# 7. Temperature Drift

Temperature Drift T <sub>S</sub> Max - T <sub>L</sub>	Max 3°C/sec
preheating	
T <sub>S</sub> Min.	150℃
T <sub>S</sub> Typ.	175℃
T <sub>S</sub> Max.	200℃
Т	60~180 sec
Drift up (T <sub>L</sub> to T <sub>P</sub> )	Max 3°C/sec
Lasting time / Temp (T <sub>L</sub> ) / time (T <sub>L</sub> )	217°C/60~150 sec
Temp peak (T <sub>P</sub> )	Max Temp 260°C , lasting 10 sec
target Temp peak (T <sub>P</sub> target)	260°C +0/-5°C
Actual (t <sub>P</sub> ) 5°C lasting time	20~40 sec
Drift down	Max 6°C/sec
From 25°C to Temp peak time (t)	Max 8 minutes


#### 8. Module Installation notes

Antenna radiation space is very important, the environment good or bad will affect the transmission distance. Metal or other such as motors, cameras, speakers such as components will directly affect the performance of the antenna, which is equivalent to add a layer mask. RTL00 using on-board PCB antenna, the module has surrounding environment requirements. Are as follows: as shown in figure 5, don't put influential components to antenna surrounding within 5-10 mm; As shown in figure 6, don't place influential components t below the antenna within 3 to 5 mm, if there is need to lay the ground that clear treatment is vital. Under modules, it has no high frequency signal lines and components as far as possible.

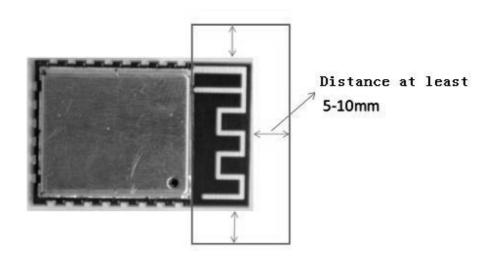

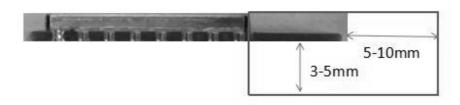

## 9. The Reference Circuit

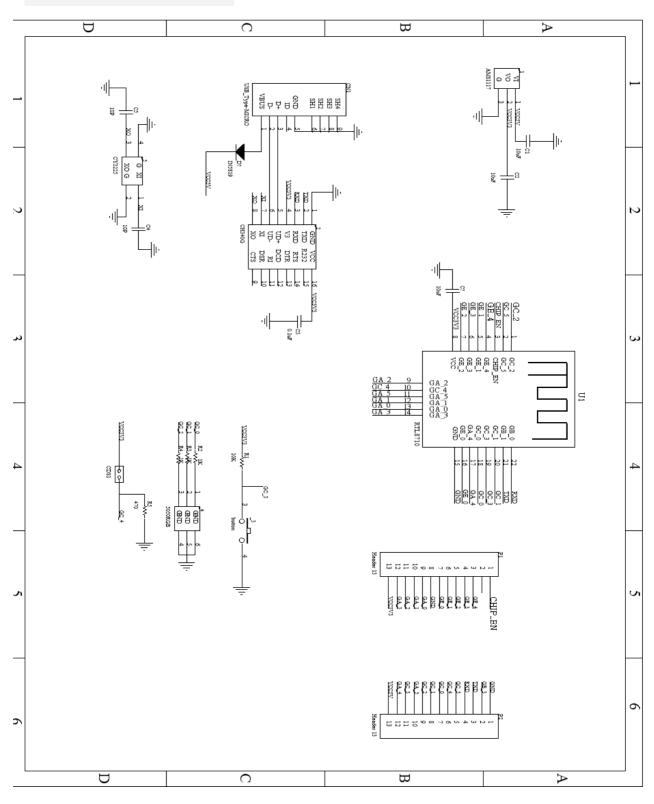

## Warning:

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help.

NOTE: This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.