


RFM-CSB-3

EULUM
DESIGN

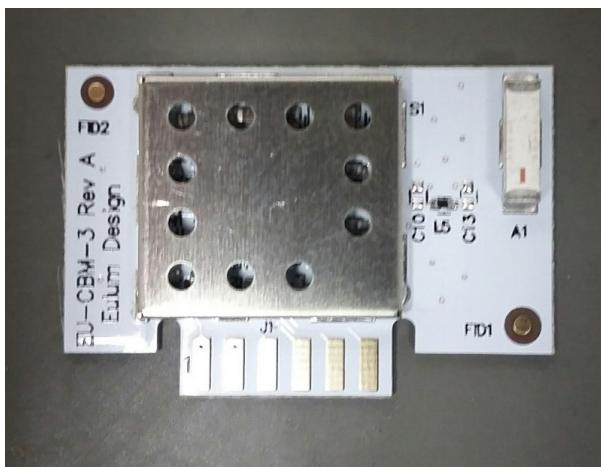

The RFM-CSB-3 module

The RFM-CSB-3 is a class 2 Bluetooth 4.0 module for integration into lighting fixtures, LED drivers or other lighting controls. The module contains a powerful 32 bit ARM® CortexTM microcontroller and 2.4GHz transceiver with on-board antenna. Four logic level control signals are available on the 6-pin card edge connector. The module operates exclusively through the Casambi app (free on iOS and Android).

Features of the Module include:

- Wireless Bluetooth 4.0 Mesh Network
- Free Casambi lighting control app
- Four programmable control lines
- Easy integration with card-edge SMT connector interface
- FCC & CE certified

The BLE mesh Network

The Bluetooth 4.0 mesh network operates without the need for additional controllers or gateway units. The 200ft (60m) open air functioning distance enables a wide range of lighting arrangements while the exclusive Casambi-Bluetooth connection prevents the lighting system from interfering with other Bluetooth networks.

CASAMBI
READY

EULUM DESIGN LLC 6131 • Kellers Church Road • Pipersville • PA • 18947 • USA

EULUM DESIGN LTD Unit 4 • Zone D • Chelmsford Road Ind. Est • Dunmow • CM6 1XG • UK



www.eulum.com



info@eulum.com



USA: +1 215 622 2652
UK: +44(0)1371238523

RFM-CSB-3

EULUM
DESIGN

TABLE OF CONTENTS

1	<i>Operation</i>	3
2	<i>Block Diagram</i>	3
3	<i>Peripheral Blocks</i>	4
4	<i>Zero Cross Detection</i>	6
5	<i>Specifications</i>	7
6	<i>Dimensions</i>	10
7	<i>Regulatory Statements</i>	11



RFM-CSB-3

EULUM
DESIGN


1. OPERATION

The RFM-CSB-3 is an embedded wireless module intended to operate in conjunction with the Casambi Lighting control app. Four configurable I/O lines interface to the host device for control of up to 4 independent lighting channels.

A highly integrate SOC (system on chip) contains a 32 bit ARM® Cortex™ microcontroller, 2.4GHz transceiver and several peripheral blocks. These blocks include PWM, SPI, I2C, UART and GPIO (i.e. pushbutton, relay control). These can be configured in Casambi Admin webpages and taken into use without a need to re-program the module.

The default factory configuration for the I/O is four PWM outputs @ 1.2kHz

2. BLOCK DIAGRAM

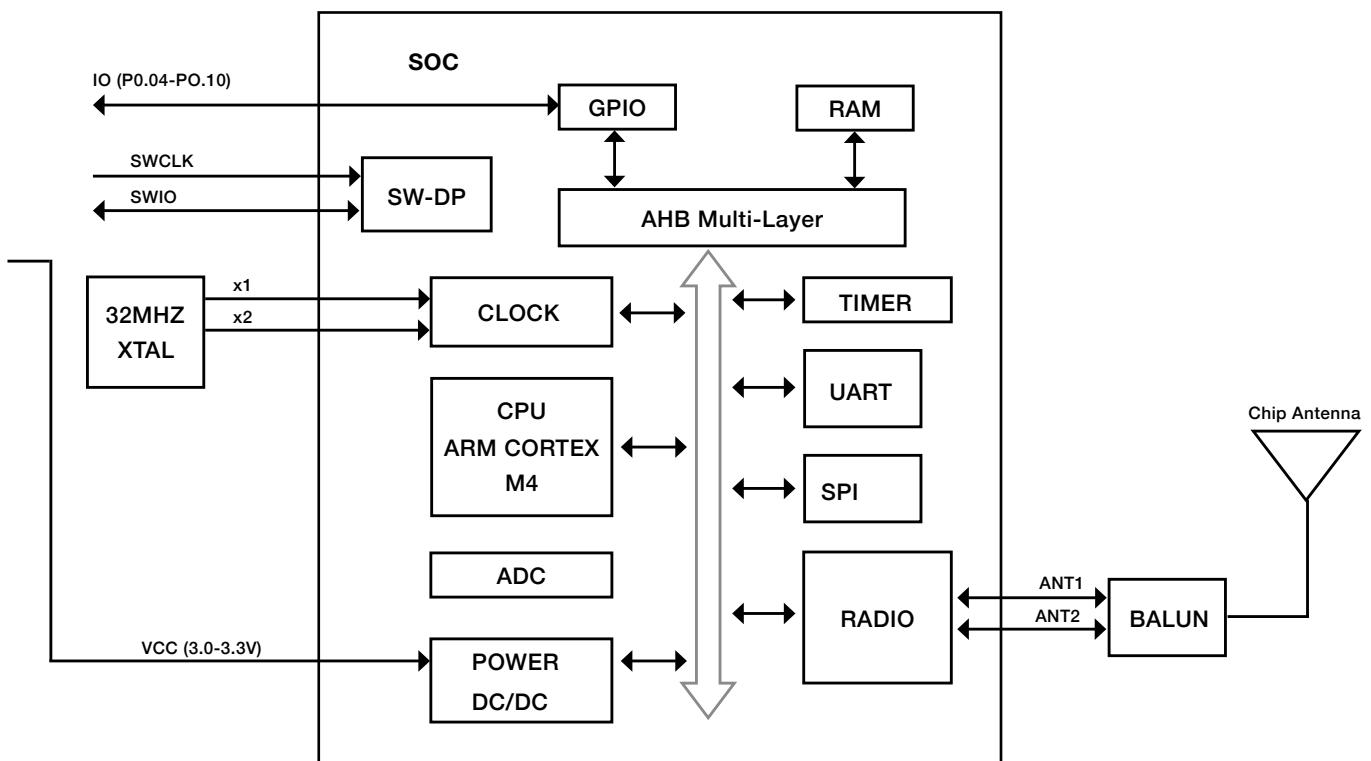

RFM-CSB-3

EULUM
DESIGN

3. PERIPHERAL BLOCKS

a. PWM

Any GPIO pin can be configured to output a PWM signal. Up to 4 PWM channels can be used simultaneously. PWM frequency can be determined freely up to 40 kHz. By default the PWM frequency is the same for all PWM channels. The maximum resolution is 400-1600 steps and it depends on the PWM frequency. The PWM signal is logic level (max. VCC) and it has driving capacity from 0,5 mA (standard) up to 15 mA (high-drive).

b. SPI

RFM-CSB-3 supports a 3-wire (SCK, MISO, MOSI) bidirectional SPI bus with fast data transfers to and from multiple slaves. RFM-CSB-2 acts as a master and it provides a simple CPU interface which includes a TXD register for sending data and an RXD register for receiving data. These registers are double buffered to enable some degree of uninterrupted data flow in and out of the SPI master.

Each of the slave devices requires an individual chip select signal which can be connected to any available GPIO pin. The SPI master does not implement support for chip select directly. Therefore the correct slave must be selected independently of the SPI master.

The GPIOs used for each SPI interface line can be chosen from any GPIO on the module and are independently configurable. This enables great flexibility in module pinout and enables efficient use of printed circuit board space and signal routing.

The SPI peripheral supports SPI modes 0, 1, 2, and 3.

RFM-CSB-3

EULUM
DESIGN

c. I2C

This two-wire interface uses clock (SCL) and bidirectional data (SDA). The protocol makes it possible to interconnect up to 128 individually addressable devices. The interface is capable of clock stretching and data rates of 100 kbps and 400 kbps are supported.

The GPIOs used for each Two-Wire Interface line can be chosen from any GPIO on the module and are independently configurable.

d. UART

The Universal Asynchronous Receiver/Transmitter offers fast, full-duplex, asynchronous serial communication with built-in flow control (CTS, RTS) support in HW up to 1 Mbps baud. Parity checking and generation for the 9th data bit are supported.

The GPIOs used for each UART interface line can be chosen from any GPIO on the module and are independently configurable.

e. GPIO

Each of the four I/O can also be configured for alternate input/output functions. Casambi supported functions include:

- Pushbutton input
- Relay control output
- Zero Detect Input
- Fixed “idle” state output

The I/O can be further tailored using options such as:

- Input/output polarity
- Output drive strength
- Internal pull-up and pull-down resistors

RFM-CSB-3

EULUM
DESIGN

4. ZERO CROSS DETECTION (ZD)


The RFM-CSB-3 can be configured to detect the zero crossing point of an AC signal. This is necessary to take advantage of Casambi's "Smart Switching" feature. This looks for a pattern of on-off cycles (quickly switching AC source on & off) in order to implement specific modes or settings.

For proper Smart Switch operation, local VCC of the module must be kept alive during loss of AC for 1.5 seconds. A 1200uf cap on VCC is typically recommended.

It is the responsibility of the host system designer to create the zero detection circuit and it's output needs to be compatible with logic level inputs of the RFM-CSB-1 (see specifications section). ZD polarity and phase are adjustable in the Casambi admin webpages.

If Smart switching is not required, it is suggested to configure the ZD input for online/offline detection. This allows the module to notify the network when it goes offline. This reduces network bandwidth as it will not be repeatedly polling for a device that is no longer responding. Local VCC must be kept alive for at least 500ms to support this feature.

ZERO DETECT CHARACTERISTICS	MIN	TYPICAL	MAX	UNITS
ZERO DETECT FREQUENCY, FMAINS		60		Hz
ZERO DETECT HIGH TIME, TZD_H	1		20	ms
ZERO DETECT LOW TIME, TZD_L	1		20	ms

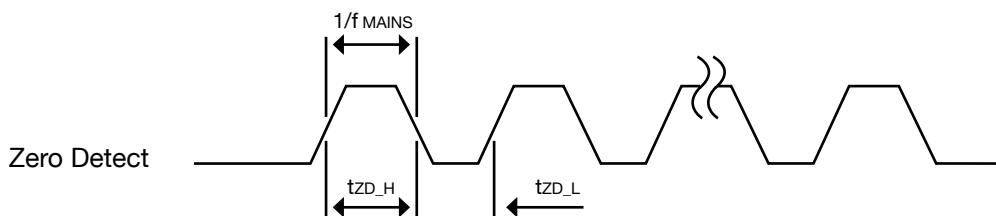

RFM-CSB-3

EULUM
DESIGN

5. SPECIFICATIONS

MAXIMUM RATINGS	MIN	MAX	UNITS
SUPPLY VOLTAGE, V_{cc}	-0.3	+3.6	V
I/O PIN VOLTAGE	-0.3	$V_{cc} + 0.3$	V
STORAGE TEMPERATURE	-40	+125	°C
OPERATING TEMPERATURE	-25	+70	°C

POWER SUPPLY SPECIFICATIONS	MIN	TYPICAL	MAX	UNITS
SUPPLY VOLTAGE, V_{cc}	+2.5	+3.0	+3.3	V
SUPPLY CURRENT, I_{cc}				
TX/RX ACTIVE		15	21	mA
IDLE		1.5	2	mA

RADIO SPECIFICATIONS	MIN	TYPICAL	MAX	UNITS
OPERATING FREQUENCIES, f_{op}, 1MHz Channel Spacing	2400		2483	MHz
PLL PROGRAMMING RESOLUTION, PLL_{res}		1		MHz
FREQUENCY DEVIATION, Δf_{DEV}	±225	±250	±275	kHz
ON-AIR DATA RATE, $bpsFSK$	250		2000	kbps
MAXIMUM OUTPUT POWER, PRF		4		dBm
SENSITIVITY, $PSENS$	-89		-93	dBm



RFM-CSB-3

EULUM
DESIGN

GPIO SPECIFICATIONS	MIN	TYPICAL	MAX	UNITS
INPUT HIGH VOLTAGE, VLH	0.7 V _{cc}		V _{cc}	V
INPUT LOW VOLTAGE, VIL	0		0.3V _{cc}	V
OUTPUT HIGH VOLTAGE, VOH	V _{cc} -0.3		V _{cc}	V
OUTPUT LOW VOLTAGE, VOL	0		0.3V _{cc}	V
SOURCE CURRENT, IGPIO_IN		2	14	mA
SINK CURRENT, IGPIO_OUT		2	15	mA
PULL-UP RESISTANCE, RPU	1	13	16	kΩ
PULL DOWN RESISTANCE, RPD	1	13	16	kΩ


*Total source/ sink current of all GPIO pins combined is 15mA. If required source/ sink current for any GPIO pin exceeds 0.5mA, that GPIO pin must be configured for high-drive.

PWM SPECIFICATIONS	MIN	TYPICAL	MAX	UNITS
PWM FREQUENCY, fPWM			40	kHz
PWM RESOLUTION @ fPWM 10kHz			1600	steps
PWM RESOLUTION @ fPWM 20kHz			800	steps
PWM RESOLUTION @ fPWM 40kHz			400	steps

RFM-CSB-3

EULUM
DESIGN

SPI TIMING PARAMETERS	MIN	TYPICAL	MAX	UNITS
BIT RATES FOR SPI, f_{SPI}	0.125		8	MBPS
DATA TO SCK SETUP, t_{DC}	10			ns
SCK TO DATA HOLD, t_{DH}	10			ns
SCK TO DATA VALID, t_{CD}	60		80	ns
SCK HIGH TIME, t_{CH}	40			ns
SCK LOW TIME, t_{CL}	40			ns
SCK FREQUENCY, f_{SCK}	0.125		8	MHZ
SCK RISE AND FALL TIME, t_R, t_F			100	ns

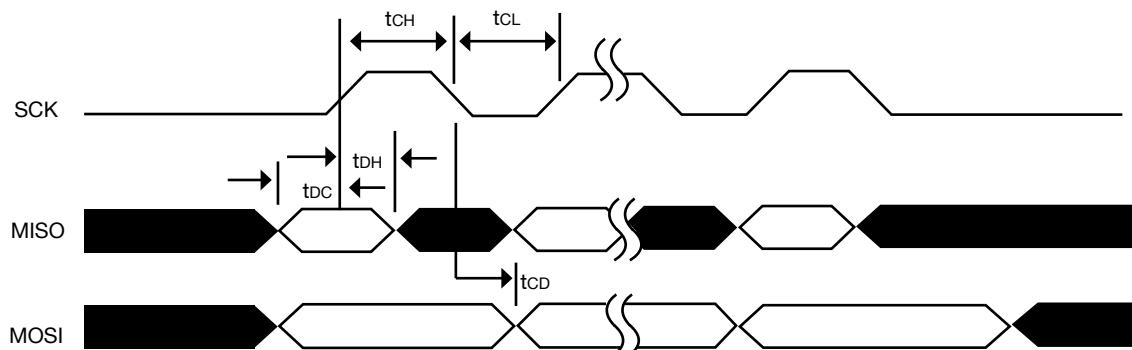


SPI Timing Diagram, One Byte Transmission, SPI Mode 0

RFM-CSB-3

EULUM
DESIGN

UART SPECIFICATIONS	MIN	TYPICAL	MAX	UNITS
RUN CURRENT @ MAX BAUD RATE		230		μ A
RUN CURRENT @ 115200 bps		220		μ A
RUN CURRENT @ 1200 bps		210		μ A
BAUD RATE FOR UART	1.2		1000	kbps

I2C TIMING PARAMETERS	STANDARD		FAST		UNITS
	MIN	MAX	MIN	MAX	
SCL CLOCK FREQUENCY, fSCL		100		400	kHz
Hold time for START and repeated START condition, tHD_STA	5200		1300		ns
Data setup time before positive edge on SCL, tSU_DAT	300		300		ns
Data hold time after negative edge on SCL, tHD_DAT	300		300		ns
Setup time from SCL goes high to STOP condition, tSU_STO	5200		1300		ns
Bus free time between STOP and START conditions, tBUF	4700		1300		ns

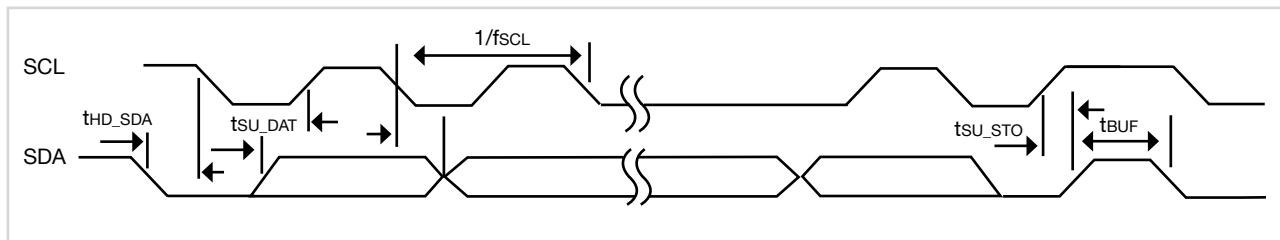


I2C Timing Diagram

RFM-CSB-3

EULUM
DESIGN

6. DIMENSIONS

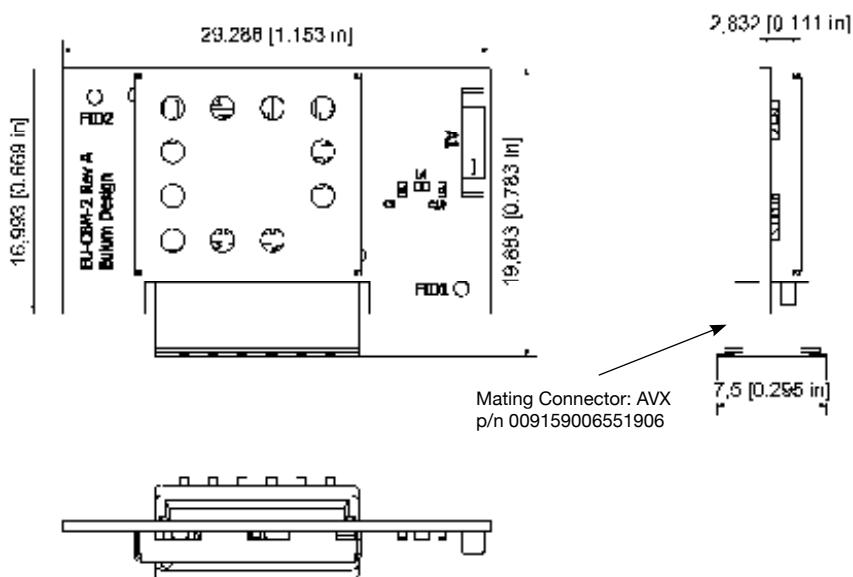

PINOUT		
PIN	LABEL	DESCRIPTION
1	VCC	POWER
2	GND	GROUND
3	P0.05	PWM1*
4	P0.06	PWM2*
5	P0.09	PWM3*
6	P0.10	PWM4*

*Factory Default. GPIO can be configured for alternate input/ output functionality. Please contact Eulum Design for more information.

RFM-CSB-3

EULUM
DESIGN

7. REGULATORY STATEMENTS

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RFM-CSB-3

EULUM
DESIGN

FCC Important Notes

1. Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

2. OEM Integrated Instructions

This device is intended only for OEM integrators under the following conditions:

- The antenna and transmitter must not be co-located with any other transmitter or antenna. The module shall be only used with the integral antenna(s) that has been originally tested and certified with this module.
- As long as the two (2) conditions above are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements with this module installed (for example, digital device emission, PC peripheral requirements, etc.)
- In the event that these conditions cannot be met (for example certain laptop configuration or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these and circumstance, the OEM integrator will be responsible for re-evaluating. The end product (including the transmitter) and obtaining a separate FCC authorization.
- The module is limited to installation in mobile or fixed applications.
- The separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093 and different antenna configurations.
- The OEM is still responsible for verifying compliance with FCC Part 15, subpart B limits for unintentional radiators through an accredited test facility.



RFM-CSB-3

EULUM
DESIGN

3. End Product Labelling

The final end product must be labeled in a visible area with the following:

RFM-CSB-3: "Contains FCC ID: 2AJML- EUCSBM"

Any similar wording that expresses the same meaning may be used.

The FCC Statement below should also be included on the label. When not possible, the FCC Statement should be included in the User Manual of the host device.

"This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation."

4. Information regarding the end user manual

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as shown in this manual.

CE Regulatory

This device is tested and compliant against the following standards. OEM integrators should consult with qualified test house to verify all regulatory requirements have been met for their complete device.

- EN 50663:2017
- EN62368-1:2014/A11:2017
- ETSI EN 201-489-1 V2.2.3
- ESTI EN 301 489-17 V3.2.2
- ESTI EN 300 328 V2.2.2

FCC Statement

FCC standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Integral antenna with antenna gain 1.3dBi

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

If any hardware modify or RF control software modify will be made by host manufacturer,C2PC or new certificate should be apply to get approval,if those change and modification made by host manufacturer not expressly approved by the party responsible for compliance ,then it is illegal.

FCC Radiation Exposure Statement

This modular complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

If the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: "Contains Transmitter Module FCC ID: 2AJMLEUCSB4 Or Contains FCC ID: 2AJMLEUCSB4"

When the module is installed inside another device, the user manual of the host must contain below warning statements;

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product.

Any company of the host device which install this modular with limit modular approval should perform the test of radiated & conducted emission and spurious emission,etc. according to FCC part 15C : 15.247 and 15.209 & 15.207 ,15B Class B requirement, Only if the test result comply with FCC part 15C : 15.247 and 15.209 & 15.207 ,15B Class B requirement , then the host can be sold legally.

ISED Warning

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

- (1) Cet appareil ne doit pas causer d'interférences.
- (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

IC Radiation Exposure Statement

The modular can be installed or integrated in mobile or fix devices only. This modular cannot be installed in any portable device .

This modular complies with IC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

If the IC number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following:

“Contains IC: 25884-EUCSB4”

when the module is installed inside another device, the user manual of this device must contain below warning statements;

1. This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

2. Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes :

- (1) Cet appareil ne doit pas causer d'interférences.
- (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

The devices must be installed and used in strict accordance with the manufacturer's instructions as described in the user documentation that comes with the product