

⚠ WARNING: May result in serious injury or death. Turn off power at circuit breaker before installing the unit.

Attention: pour éviter un incendie, un choc électrique ou la mort. Coupez l'alimentation au disjoncteur ou au fusible et testez que l'alimentation est coupée avant le câblage



FEATURES

- Network technology for Bluetooth enabled IOS or Android smartphone. Linkable with light groups.
- Manual On/Off/Dim & 4 scenes control of any connected load.
- Compatible with Keilton devices.


SPECIFICATIONS

Voltage	120/277VAC, 50/60Hz
Wattage	0.07W
Wire Strip Length	16mm(5/8 in.)
Transmit Line distance	100ft
Operating Temperature	32°F-104°F

WIRING


1. Remove wall plate, switch mounting screws.
2. Carefully remove the switch from the switch box. DO NOT disconnect the wires.
3. There are three wiring connections on the switch, these are marked HOT, NEUTRAL, GROUND.
4. Disconnect the wires from the existing switch.
5. Connect the green wire to the GROUND terminal.
6. Connect the white wire to the terminal marked NEUTRAL.
7. Connect the black wire to the terminal marked HOT.
8. Check connections to be sure they are tight and no bare conductors are exposed.
9. Insert the switch into the outlet box carefully.
10. Make sure the switch to the box using the supplied screws.
11. Attach the wall plate.
12. Restore power to the circuit breaker and test the system.

TIPS: This Bluetooth device is compatible with Keilton lighting control system only.

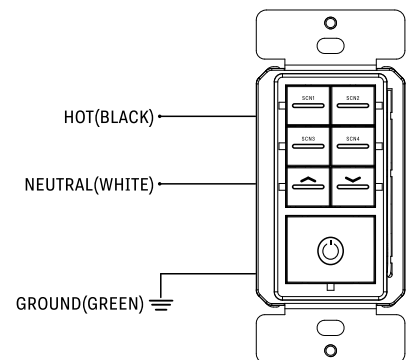

- Wire Strip Length; 16 mm (5/8 in.)
- The device shall install in a standard outlet box.

COMMISSIONING

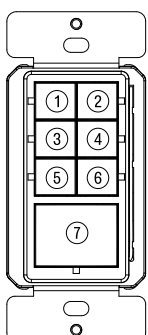

- ① SCN 1
- ② SCN 2
- ③ SCN 3
- ④ SCN 4
- ⑤ DIM+
- ⑥ DIM-
- ⑦ ON/OFF

1. Follow the instruction to connect Bluetooth Wall Switch to the lights.
2. Press button ⑤ and ⑥ over 3 seconds to enter pairing mode and achieve reset function. This switch can be scanned in next 30 seconds.
3. In Keilton App "Switch" page, click to add the switch.
4. Select the light/light group to be controlled by this switch.
5. Detail operation please refer Keilton APP instruction.

How to Install Keilton APP?

Scan below QR code for downloading the APP.



How to Control Lights with a Phone?

Scan to download Keilton APP instruction



WARRANTY INFORMATION

Our company warrants this product to be free of defects in materials and workmanship for a period of five(5) years. There are no obligations or liabilities on the part of our company for consequential damages arising out of, or in connection with, the use or performance of this product or other indirect damages with respect to loss of property, revenue or profit, or cost of removal, installation or reinstallation.

Contact: sales@litetrace.com

FCC STATEMENT This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures: Reorient the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into and outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment. The distance between user and products should be no less than 20cm