



[www.kipor.com](http://www.kipor.com)



WUXI KIPOR POWER CO., LTD.  
312 National Highway & Xinhua Road  
Crossing, Industry Kit Park Wangzhuang,  
National High & New Technique Industry  
Development Area, Wuxi, Jiangsu, China  
214028

T 86-510-86205041 F 86-510-86203796

KIPOR POWER EQUIPMENT INC.  
13009 SE Jennifer Street, Suite 105  
Clackamas, Oregon 97015  
[www.kiporpowerequipment.com](http://www.kiporpowerequipment.com)

T 503-445-0197



## OPERATION MANUAL

PLEASE READ THIS  
MANUAL CAREFULLY.  
IT CONTAINS IMPORTANT  
SAFETY INFORMATION.

**SINEMASTER®**  
DIGITAL GENERATOR

■ IG2000i

## PREFACE

Thank you for purchasing a Kipor generator.

This manual covers operation and maintenance of the IG2000i generators including parallel versions.

All information in this publication is based on the latest product information available at the time of approval for printing.

We reserve the right to make changes at any time without notice and without incurring any obligation.

No part of this publication may be reproduced without written permission.

This manual should be considered a permanent part of the generator and should remain with it if it is resold.

Pay special attention to statements preceded by the following words:



Failure to properly follow these precautions can result in property damage, serious injury or DEATH!

Read all labels and the owner's manual before operating this generator.

Generators produce carbon monoxide, a poisonous, colorless, odorless gas that can cause death or serious injury.

Indoor use of a generator can kill quickly. Generators should be used outdoors only

Generators should be used outdoors only and away from garages and open windows and protected from rain and snow.

Check for spilled fuel or leaks. Clean and/or repair before use.

Always stop engine before refueling. Wait 5 minutes before restarting.

Keep any source of ignition away from fuel tank, at all times.

The portable generator is not meant to be used as a permanent back-up power system for the home. A permanently installed stationary generator is designed to be safely used for this specific purpose.

 **WARNING**

Indicates a strong possibility of severe personal injury or death if instructions are not followed.

 **NOTE**

Gives helpful information.

If a problem should arise, or if you have any questions about the generator, consult an authorized dealer.

Our generators are designed to give safe and dependable service if operated according to instructions. Read and understand the Owner's Manual before operating the generator. Failure to do so could result in personal injury or equipment damage.

The Environmental Protection Agency (EPA) recently gave approval for gas stations to start selling 15% ethanol-blended fuel (E15). E15 gas is now legal for use in cars, pickups, and SUVs manufactured since 2001. However, E15 **IS NOT** approved for off-road engines. This includes engines used in portable generators. Utilizing E15 in outdoor power equipment can cause permanent, irreversible damage, and void warranties.

The following guidelines will help consumers properly fuel their outdoor power equipment:

- Read and follow your owner's manual. The manual will clearly explain what fuels can be used to ensure a properly functioning product.
- Don't put any fuel containing more than 10 percent ethanol (E10) into small gas engine products.
- Check the gas pump to be sure that it is dispensing E10. Some pumps at local gas stations may offer both E10 and E15, or have blender pumps that dispense mid-level ethanol fuels for "flex-fuel" automobiles.
- Higher ethanol fuel (E15) may be less expensive than regular (E10) fuel, but putting E15 into an E10 approved product could cause product failure and void its warranty.
- Ethanol fuel will go through phase separation if not used immediately, (wicking moisture from the air) so always keep your extra fuel in an airtight container and try to avoid storing it in a place that is subject to temperature swings.
- Use a fuel stabilizer if the engine will sit for more than a week without use; this will help to reduce the ethanol–water separation and potential gumming issues. It is best to run the engine for at least 20 minutes, under a 50% or more load every 3-4 weeks.

## CONTENTS

PREFACE .....	1
1. SAFETY INSTRUCTIONS .....	4
2. SAFETY LABEL LOCATIONS .....	6
3. COMPONENT IDENTIFICATION .....	7
4. PRE-OPERATION CHECK .....	10
5. STARTING THE ENGINE.....	14
6. GENERATOR USE .....	16
7. STOPPING THE ENGINE.....	25
8. PARALLEL GENERATOR OPERATION.....	27
9. MAINTENANCE .....	31
10. TRANSPORTING/STORAGE.....	38
11. TROUBLESHOOTING .....	40
12. SPECIFICATIONS .....	42
13. WIRING DIAGRAMS.....	43
14. WARRANTY.....	44

---

## 1. SAFETY INSTRUCTIONS

---



- This generator is designed to give safe and dependable service if operated according to instructions. Read and understand the Owner's Manual before operating the generator. Failure to do so could result in personal injury or equipment damage.



- Exhaust gas contains poisonous carbon monoxide. Never run the generator in an enclosed area. Never run the generator near a building or open window.

Be sure to provide adequate ventilation.



- The muffler becomes very hot during operation and remains hot for several minutes after stopping the engine.

Be careful not to touch the muffler while it is hot.

Let the engine cool before storing the generator indoors.

- The engine exhaust system will be heated during operation and remain hot immediately after stopping the engine.

To prevent scalding, pay attention to the warning marks attached to the generator.



- Gasoline is extremely flammable and explosive under certain conditions. Refuel in a well ventilated area with the engine stopped.
- Keep away from smoking materials, sparks and other sources of combustion when refueling the generator. Always refuel in a well-ventilated location.
- Wipe up spilled gasoline immediately.

## **⚠ WARNING**

- Always make a pre-operation inspection before you start the engine. You may prevent an accident or equipment damage.
- Place the generator at least three feet or one meter away from buildings or other equipment during operation.
- Operate the generator on a level surface to prevent fuel spillage or oil starvation.
- Know how to stop the generator quickly and understand operation of all controls. Never permit anyone to operate the generator without proper instructions.
- Keep children and pets away from the generator when it is in operation.
- Keep away from rotating parts while the generator is running.
- The generator is a potential source of electrical shock when misused; do not operate with wet hands.
- Do not operate the generator in rain or snow and do not let it get wet.

## **⚠ WARNING**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:



- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

---

## 2. SAFETY LABEL LOCATIONS

---



These labels warn you potential hazards that can cause serious injury. Read the labels and safety notes and precautions described in manual carefully.  
If a label comes off or becomes hard to read, contact your dealer for a replacement.

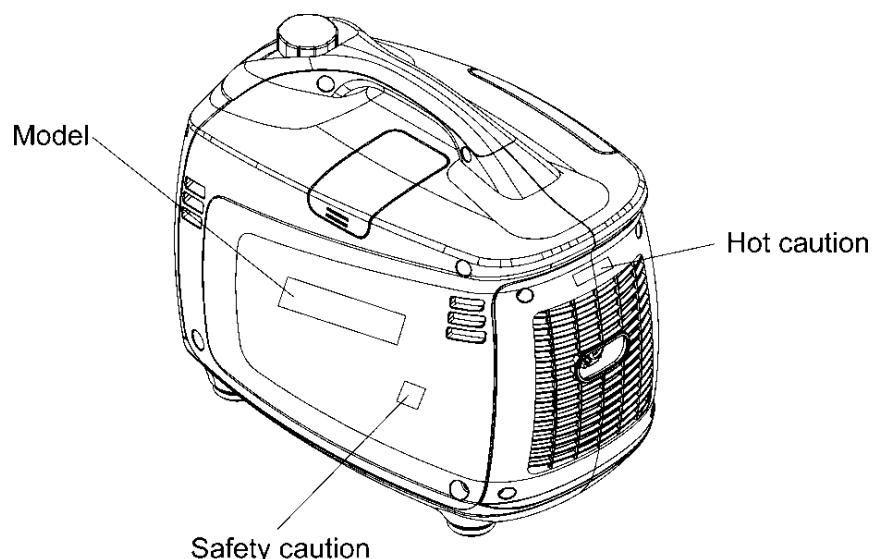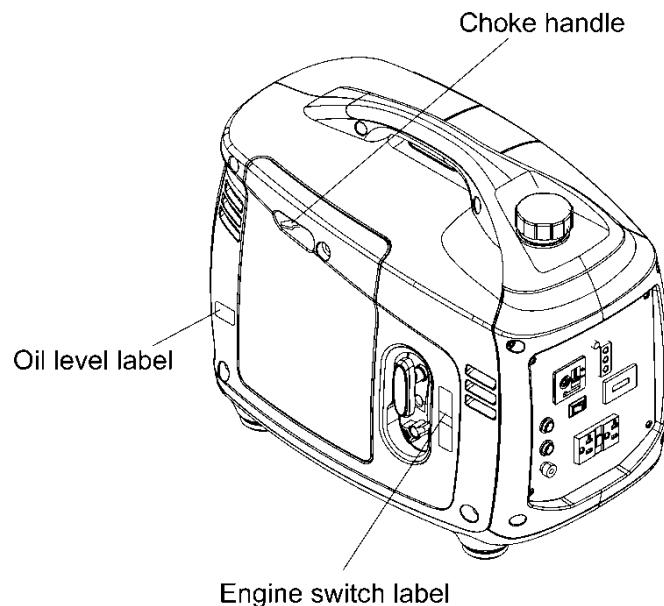


---

### 3. COMPONENT IDENTIFICATION

---

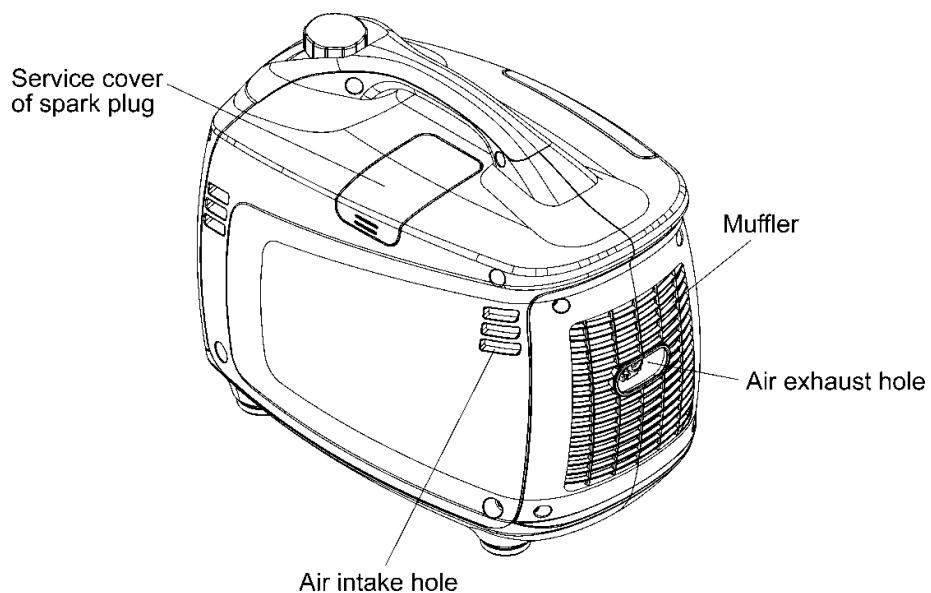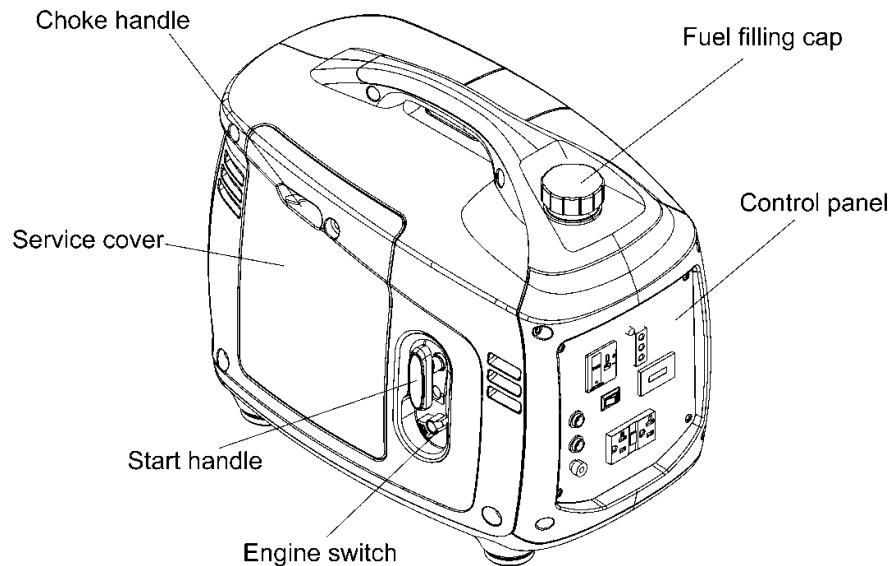

## Control panel

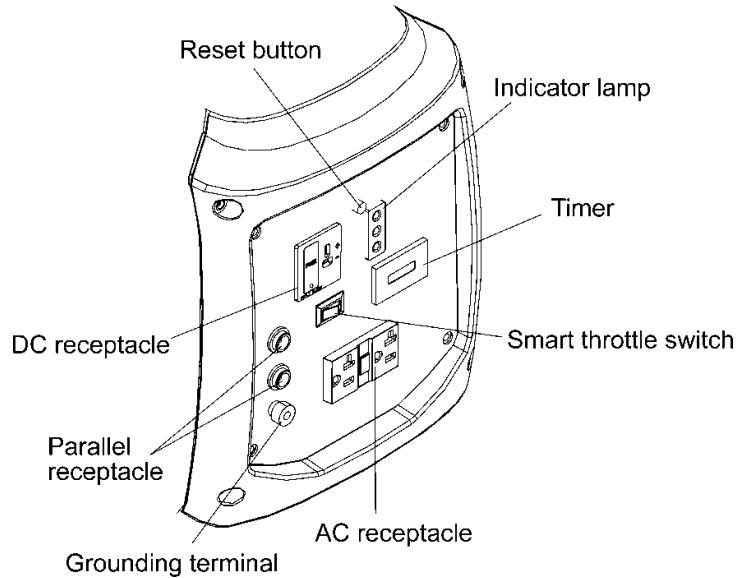

## Serial number identification and location

The generator serial number identifies your particular unit and is important when ordering parts and accessories. The number is found on a sticker on the carton and on the quality certificate in the carton along with the accessories and owner's manual. It is also stamped on the engine block visible when the service door is removed. Product registration is required for any future warranty claims. Register your product at [www.kiporpowerequipment.com](http://www.kiporpowerequipment.com)



IG2000i: above right of the dipstick

Please record this information below and keep this manual in a safe place along with the bill of sale.

Serial Number \_\_\_\_\_

Date and Place of Purchase \_\_\_\_\_

Proof of purchase is required for any future warranty repair. The customer must supply a copy of the proof of purchase to the qualified Kipor service center when requesting warranty.

---

## 4. PRE-OPERATION CHECK

---

### **⚠ WARNING**

- Be sure to check the generator on a level surface with the engine stopped.

#### 1. Check the engine oil level.


### **⚠ WARNING**

- Using non detergent oil or 2 cycle engine oil could shorten the engine's service life.

Use a high-detergent, premium quality 4-stroke engine oil, certified to meet or exceed U.S. automobile manufacturer's requirements for API Service Classification SG/SF. Select the appropriate viscosity for the average temperature in your area. A 10W – 30 or 10W – 40 should be an acceptable oil for most climates.

**DO NOT** use synthetic oil or semi-synthetic oil, use only petroleum based oil in your generator engine. The reasons for this are many, but may include: not allowing the engine to properly "break-in" when new, excessive oil use, oil burning, fouled spark plugs, etc. Engine issues that are caused by the use of synthetic oil may not be covered under the warranty.

SAE Viscosity Grades

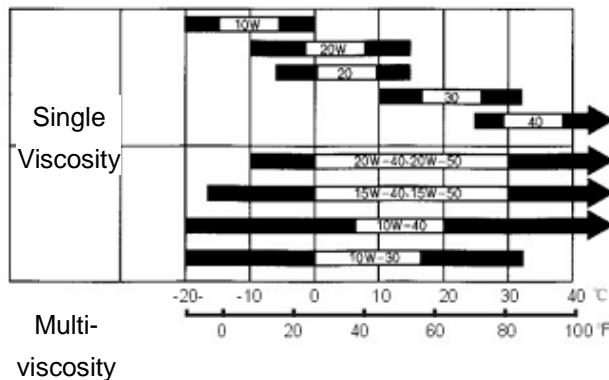

AMBIENT TEMPERATURE

Loosen the cover screw and remove the left side maintenance cover. Remove the oil filler cap, and wipe the dipstick with a clean rag. Check the oil level by inserting the dipstick in the filler hole without screwing it in.


If the oil level is below the end of the dipstick, refill the recommended oil up to the top of the oil filler neck.

### **⚠️ WARNING**

- Running the engine with insufficient oil can cause serious engine damage.

**NOTE:** The Low Oil Alarm System will automatically stop the engine before the oil level falls below the safe limit. However, to avoid the inconvenience of an unexpected shutdown, it is still advisable to visually inspect the oil level before operation.

You must screw down the dipstick completely to measure the oil level.

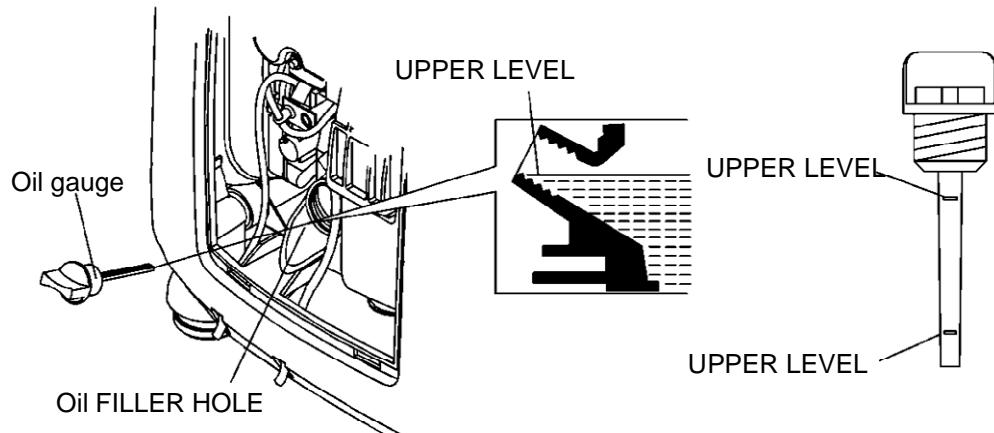

### **2. Check the fuel level.**

Use automotive unleaded regular gasoline only with an octane level no higher than 87 and with no more than 10 % ethanol. A fuel preservative and stabilizer should be added to any container of stored fuel.

If the fuel level is low, refill the fuel tank until the level reaches the specified mark.


Never use an oil/gasoline mixture or dirty gasoline.

Avoid getting dirt, dust or water in the fuel tank.

After refueling, tighten the fuel filler cap securely.

## ⚠ WARNING

- Gasoline is extremely flammable and is explosive under certain conditions.
- Refuel in a well-ventilated area with the engine stopped. Keep all smoking materials, sparks, and any other source of combustion away from the generator during refueling.
- Do not overfill the fuel tank (there should be no fuel above the upper limit mark). After refueling, make sure the tank cap is closed properly and securely.
- Be careful not to spill fuel when refueling. Spilled fuel or fuel vapor may ignite. If any fuel is spilled, make sure the area is dry before starting the engine.
- Avoid repeated or prolonged contact with skin or breathing of vapor. KEEP OUT OF REACH OF CHILDREN.

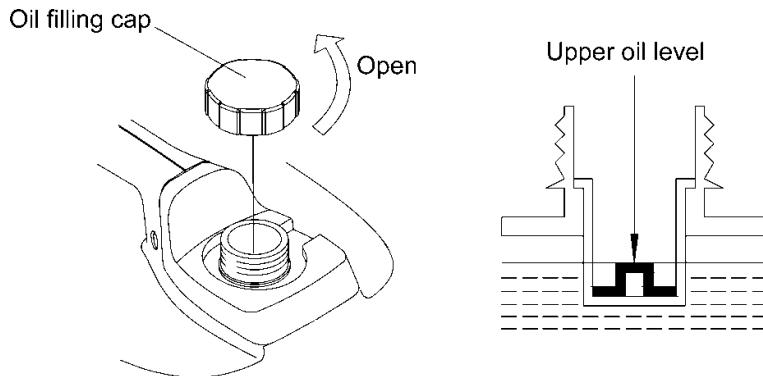

### Gasoline containing alternate fuels

If you decide to use a gasoline containing ethanol, be sure its octane rating is no lower than the specification. Do not use a blend that contains more than 10% ethanol. Do not use gasoline containing methanol.

## ⚠ NOTE

- Fuel system damage or engine performance problems resulting from the use of fuels that contain an improper alcohol blend are not covered under warranty.
- Before buying fuel from an unfamiliar station, Determine if the fuel contains ethanol and if it does, confirm the type and percentage of ethanol used. If you notice any undesirable operating symptoms while using a gasoline that contains ethanol, or one that you think contains ethanol, replace it by a gasoline that you

know has the proper blend.

### 3. Check the air cleaner



Check the air cleaner element to be sure it is clean and in good condition.

Loosen the cover screw and remove the left side maintenance cover.

Press the latch tab on the top of the air cleaner body, remove the air cleaner cover, check the element. Clean or replace the element if necessary. Picture of foam air filter cleaning process needed here.

#### CAUTION

- Never run the engine without the air cleaner. Rapid engine wear will result from contaminants, such as dust and dirt, being drawn through the carburetor, into the engine.

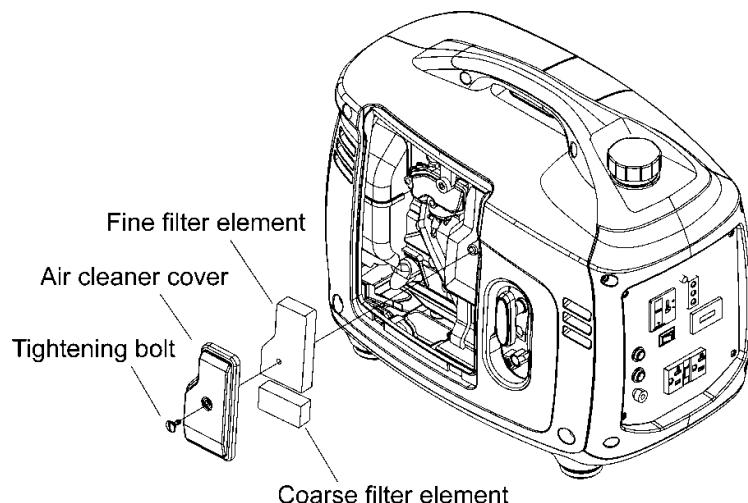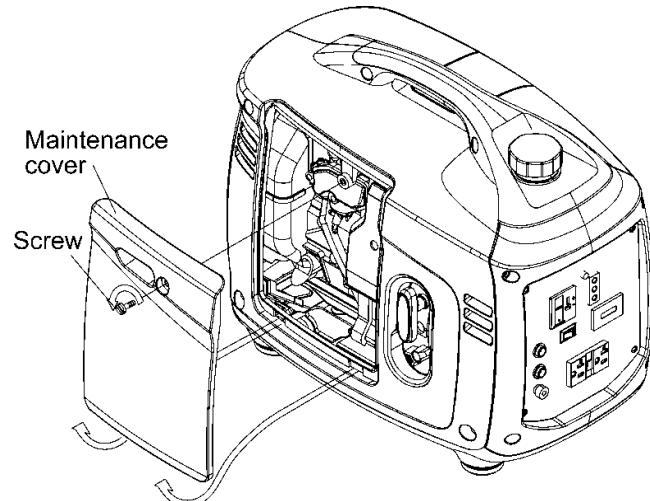


---

## 5. STARTING THE ENGINE

---

Before starting the engine, disconnect any load from the AC receptacle.


**1. Turn the engine switch to the ON position.**

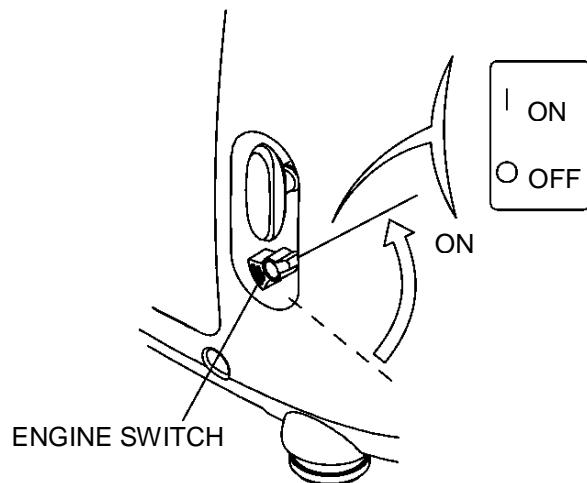

**2. Move the choke lever to the START position.**

NOTE:


Do not use the choke when the engine is warm or the ambient air temperature is high.

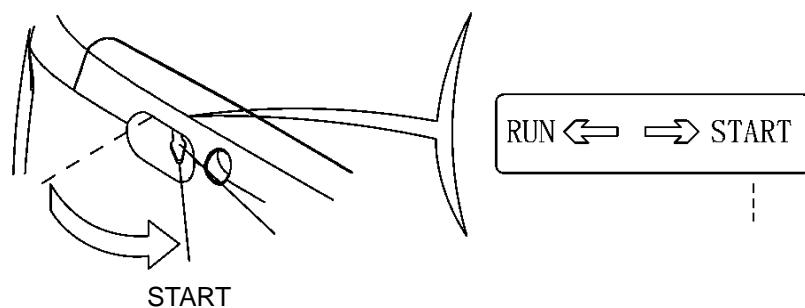


**3. Pull the starter grip until resistance is felt then pull the starter grip briskly toward the arrow as shown below.**

## ⚠ CAUTION

- Do not allow the starter grip to snap back. Return it slowly by hand.

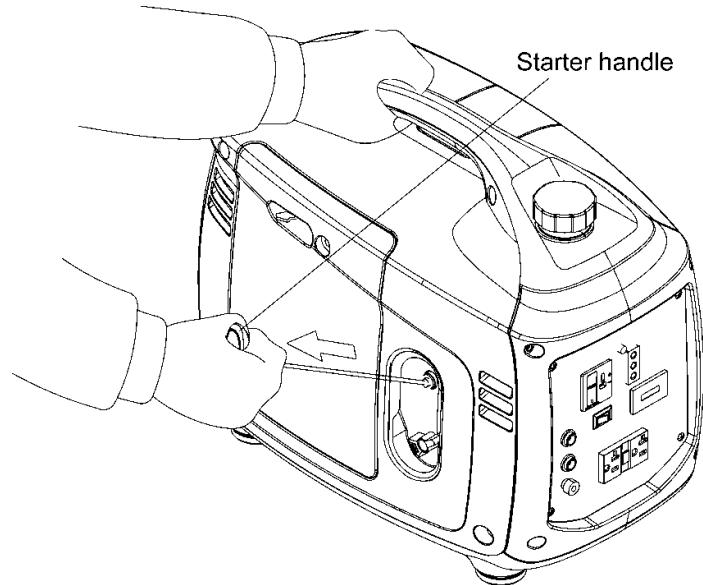

#### 4. Move the choke lever to the RUN position after the engine warms up.

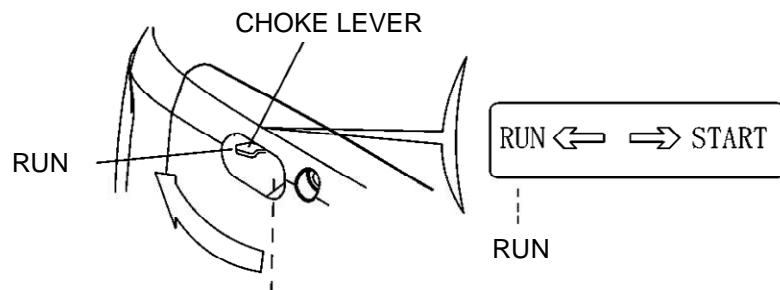

## ⚠ NOTE

- If the engine stops and will not restart, check the engine oil level before further troubleshooting.

---


## 6. GENERATOR USE

---

Be sure to ground the generator when loads are connected.

**⚠ WARNING**

- To prevent electrical shock from faulty appliances, the generator should be grounded. Connect a length of heavy cable between the generator's ground terminal and an external ground source.
- Connections for standby power to a building's electrical system must be made by a qualified electrician and must comply with all applicable laws and electrical codes. Improper connections can allow electrical current from the generator to back feed into the utility lines. Such back feed may electrocute utility company workers or others who contact the lines during a power outage. When utility power is restored the generator may explode, burn, or cause fires in the building's electrical system.
- Do not connect the generator to an automatic transfer device. Severe damage to the inverter module may result.

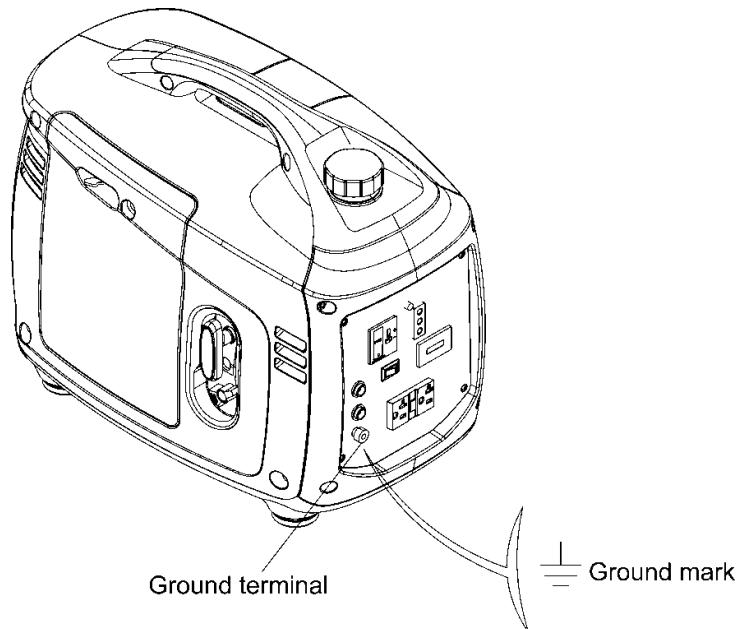

## **⚠ CAUTION**


- The total wattage of all appliances connected must be considered.
- Do not exceed the current limit specified for any one receptacle.
- Do not connect the generator to a household circuit. This could cause damage to the generator or to electrical appliances in the house.
- Do not modify or use the generator for other purpose than it is intended for. Also observe the following when using the generator.
- Do not connect an extension to exhaust pipe.
- When an extension cable is required, be sure to use a rubber sheathed flexible cable (IEC 245 or equivalent).
- Only use an extension cord that meets these specifications: 12 gauge no more than 100 feet.
- Keep the generator away from other electric cables or wires such as commercial power supply lines.

## **⚠ NOTE**

- The DC receptacle can be used while the AC power is in use. If you use both at the same time, be sure not to exceed the total power for AC and DC.
- Most appliance motors require more than their rated wattage for start-up. Motor start up can be as much as 50% higher of the rated amperage found on the UL tag. Kipor recommends that this value be calculated into the overall amperage requirements of the customer.

### **AC application**

1. Start the engine and make sure only the output indicator light (green) comes on.
2. Confirm that the appliance to be used is switched off, and plug in the appliance.

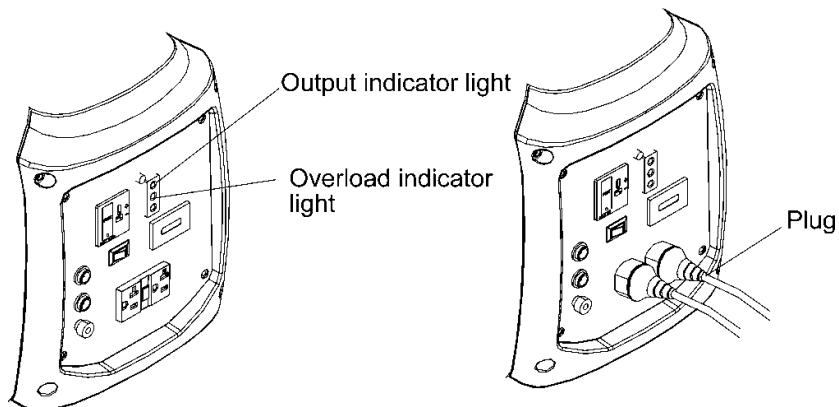

## **⚠ CAUTION**


- Substantial overloading that continuously lights the overload indicator light (red) may damage the generator. Marginal overloading that temporarily lights the overload indicator light (red) may shorten the service life of the generator.
  - Be sure that all appliances are in good working order before connecting them to the generator. If an appliance begins to operate abnormally, becomes sluggish, or stops suddenly, turn off the generator engine switch immediately. Disconnect the appliance and examine it for signs of malfunction.
3. In order to insure the optimum output and the maximum service life of the generator, the generator should run at a 50% load for the first 20 hours.

### **Output and Overload Indicators**

The output indicator light (green) will remain on during normal operating conditions. If the generator is overloaded or if there is a short in the connected appliance, the output indicator light (green) will go out, the overload indicator light (red) will illuminate and current to the connected appliance will be shut off.

Stop the engine if the overload indicator light (red) comes on and investigate the overload source

- Before connecting an appliance to the generator, check that it is in good order and that its electrical rating does not exceed that of the generator. Connect the power cord of the appliance and start the engine.

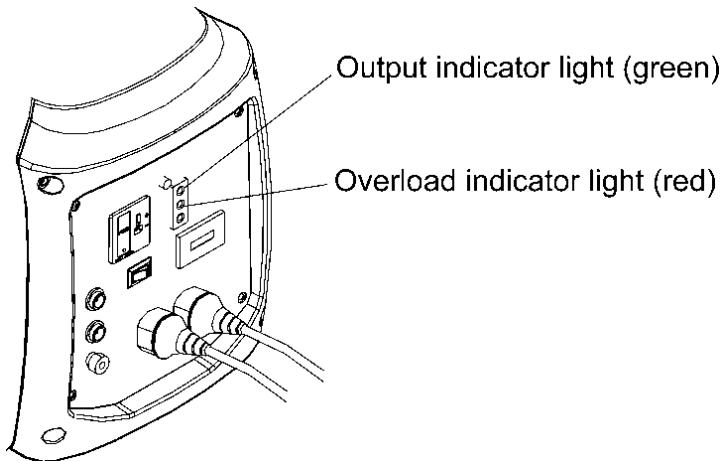


## **⚠ NOTE**

- When an electric motor is started, both the overload indicator light (red) and the output indicator light (green) may go on simultaneously. This is normal if the overload indicator light (red) goes off after about four (4) seconds. If the overload indicator light (red) stays on, consult your generator dealer.

### **Overload Reset Switch**

Should the generator overload, AC power will be cut off but the engine will stay running. Correct the overload condition and then press the overload reset switch on the front panel. AC power will be restored immediately.

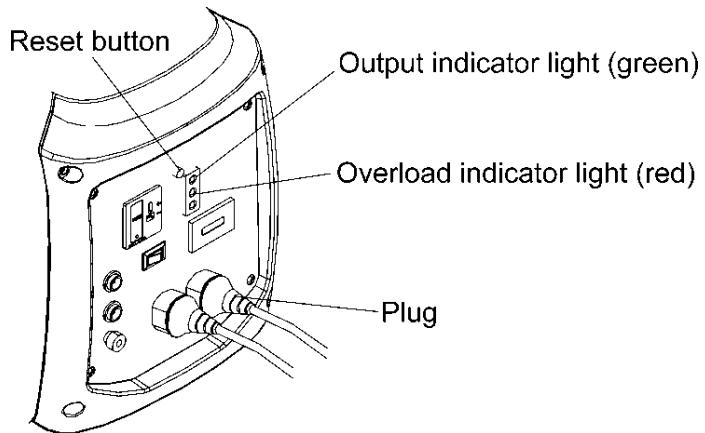


### **DC Operation**

The DC receptacle may be used for charging 12 volt automotive style batteries only, the no load voltage is 15V-30V.

## **⚠ NOTE**

- In DC operation, turn the Smart-throttle switch to the OFF position.

Connect the charging cables to the DC receptacle of the generator and then to the battery terminals.

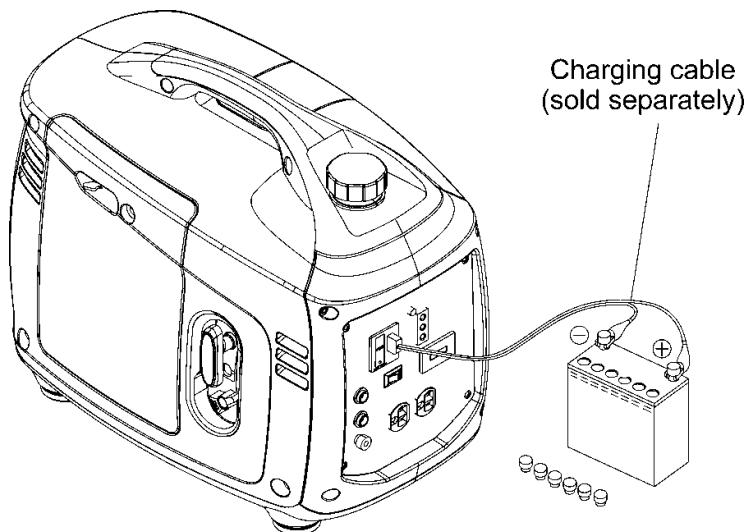

### **⚠️ WARNING**

- To prevent the possibility of creating a spark near the battery, connect the charging cable first to the generator then to the battery. Disconnect the cable first at the battery.
- Before connecting charging cables to a battery that is installed in a vehicle, disconnect the vehicle's ground battery cable. Reconnect the vehicle's ground battery cable after the charging cables are removed. This procedure will prevent the possibility of a short circuit and sparks if you make accidental contact between a battery terminal and the vehicle's frame or body.

### **⚠️ CAUTION**

- Do not attempt to start an automobile engine with the generator still connected to the battery. The generator may be damaged.
- Connect the positive battery terminal to the positive charging cord. Do not reverse the charging cables, or serious damage to the generator and/or battery may occur.

### **⚠️ WARNING**

- The battery gives off explosive gases; keep spark, flames and cigarettes away. Provide adequate ventilation when charging.

- The battery contains sulfuric acid (electrolyte). Contact with skin or eyes may cause severe burns. Wear protective clothing and a face shield.
  - If electrolyte gets on your skin, flush with water.
- If electrolyte gets in your eyes, flush with water for at least 15 minutes and call a physician.
- Electrolyte is poisonous.
  - If swallowed, drink large quantities of water or milk and follow with milk of magnesia or vegetable oil and call a physician.
- **KEEP OUT OF REACH OF CHILDREN.**


2. Start the engine

**⚠ NOTE**

- The DC receptacle may be used while the AC power is in use.
- An overloaded DC circuit will trip the DC circuit fuse. The fuse must be replaced before the DC receptacle is operative.

**⚠ CAUTION**


Replace the fuse with one of the same size and rating (5A). Exceeding the current rating may lead to alternator damage.

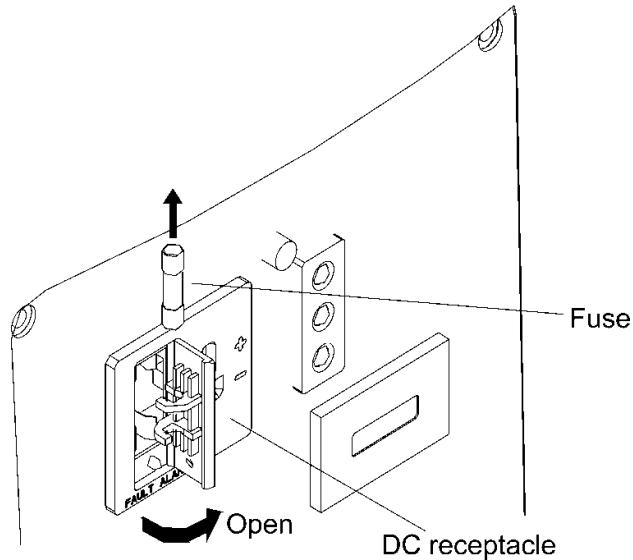

### Low oil alarm system

The low oil alarm system is designed to prevent engine damage caused by an insufficient amount of oil in the crankcase. Before the oil level in the crankcase falls below a safe limit, the low oil alarm system will automatically shut down the engine (the engine switch will remain in the ON position).

If the low oil alarm system shuts down the engine, the low oil alarm indicator light (red) will come on when you operate the starter and the engine will not run. If this occurs add engine oil.

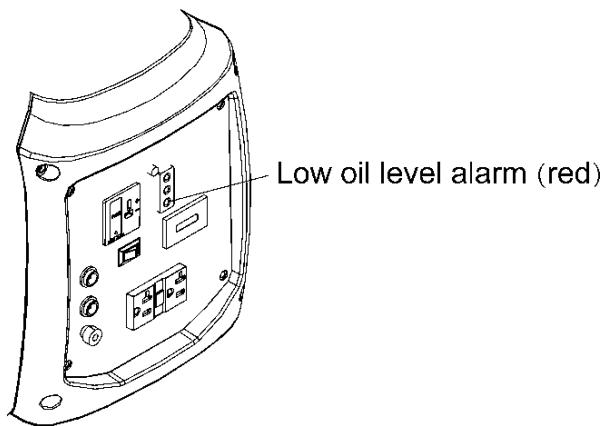

### Air Conditioning Operation

When running in parallel (see section 8) the combination of an IG2000i model can start and run most 13,500 BTU Air conditioners. An IG2000i models will start and run most 15000 BTU units. For best results, the SMART throttle switches should be in the off position. Bring the generators to normal operating temperatures before applying the air conditioning load. Always allow a 2 minute wait period when manually cycling an air conditioner off and on. A longer wait period may be required under unusually hot weather conditions. Additionally, all other loads should be turned off until the air conditioner has started and is performing normally. It is also important to follow the air conditioner manufacturer's instructions for starting and restarting for proper operation. Some air conditioner manufacturers offer a start capacitor or rapid start kit as an extra cost option. The lack of a start capacitor can cause the air conditioner to draw too high a starting current and overload the generators. Contact your air conditioner dealer if you consistently have problems starting your air conditioner with the generators in parallel.

### Smart Throttle System

When the smart throttle switch is placed in the on position, engine speed is kept at idle automatically when the electrical load is disconnected and returns to the proper speed to match the power of the electrical load when the load is reconnected. This position is recommended to minimize fuel consumption while in operation.


If running the generator at full output, turn the smart throttle switch to the "off" position.

#### **⚠ WARNING**

- The Smart throttle system does not operate effectively if the electrical appliance requires constant fluctuations in power.
- When high electrical loads are connected simultaneously, turn the Smart throttle switch to the OFF position to reduce voltage fluctuation or shutdown.
- In DC operation, turn the Smart throttle switch to the OFF position.

OFF:

Smart throttle system does not operate. Engine speed varies with the load.

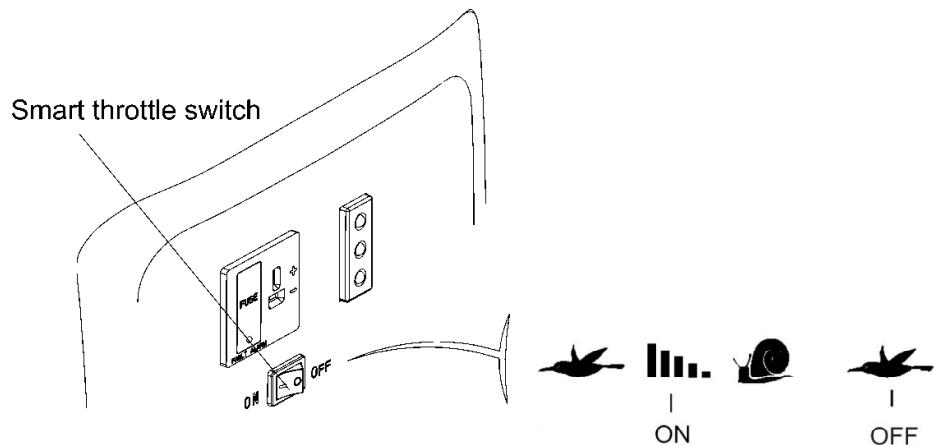

### **High altitude operation**

At higher altitudes, the standard carburetor air-fuel mixture will be excessively rich. Performance will decrease, and fuel consumption will increase. Power output will decrease 3.5% for each 1000 feet (305 meters) above sea level.

High altitude performance can be improved by installing a smaller diameter main fuel jet in the carburetor. If you always operate the generator at altitudes higher than 5000 feet or 1500 meters above sea level, have your authorized dealer install a high altitude main jet.

Even with suitable carburetor jetting, engine horsepower will decrease approximately 3.5% for each 1000 feet or 305 meter increase in altitude. The affect of altitude on the horsepower will be greater than this if no carburetor modification is made.

#### **⚠ CAUTION**

- Operation of the generator at an altitude lower than the carburetor is jetted for may result in reduced performance, overheating, and serious engine damage caused by an excessively lean air/fuel mixture.
- Be sure to have any modification reversed at lower altitudes.

### **Temperature**

High temperature adversely affects generator operation. Generator performance will decrease 1% for each 10°F (5.5°C) increase in temperature above 85°F (29°C) The normal operating range of this generator is -20° to 113° F (-29° to 45°C)

#### **⚠ WARNING**

- Do not operate the generator when the ambient temperature is below -20°F (-29°C)
- Do not operate the generator when the ambient temperature exceeds 113°F (45°C)

---


## 7. STOPPING THE ENGINE

---


To stop the engine in an emergency, turn the engine switch to the OFF position.

**IN NORMAL USE:**

1. Switch off the connected equipment and pull the inserted plug out.

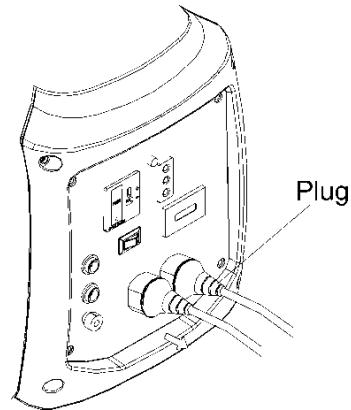

2. Turn the engine switch to the OFF position

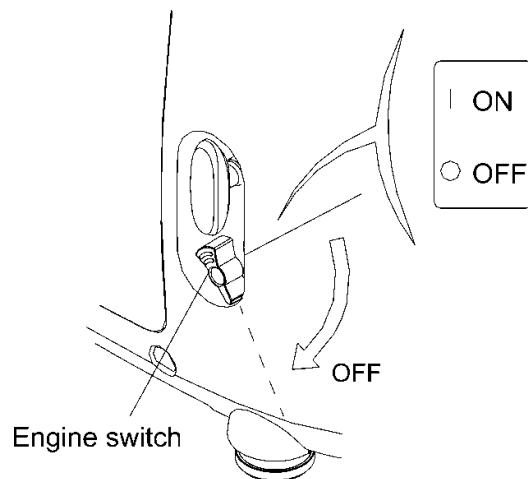




Optional Remote stop:

Shut off the connected equipment, press stop button, the genset will be stopped.


The max. remote control distance:65feet.

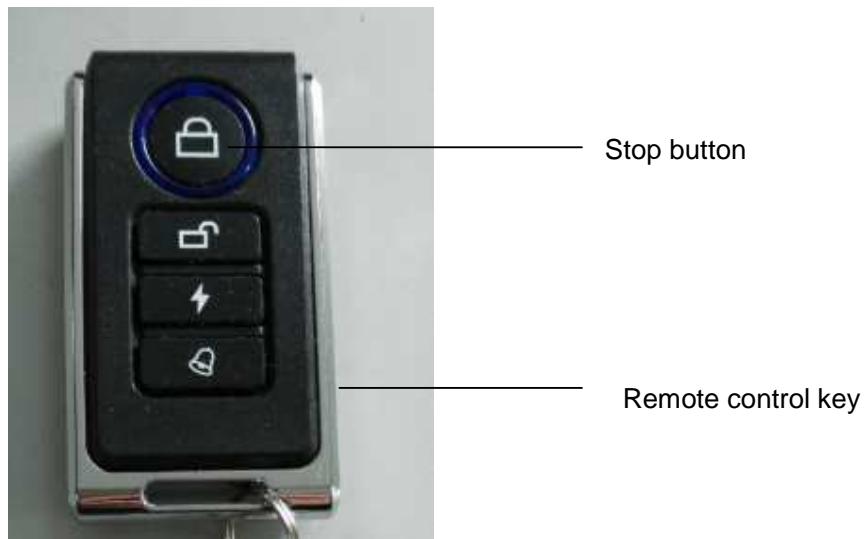

---

## 8. Operating two generators in parallel

---

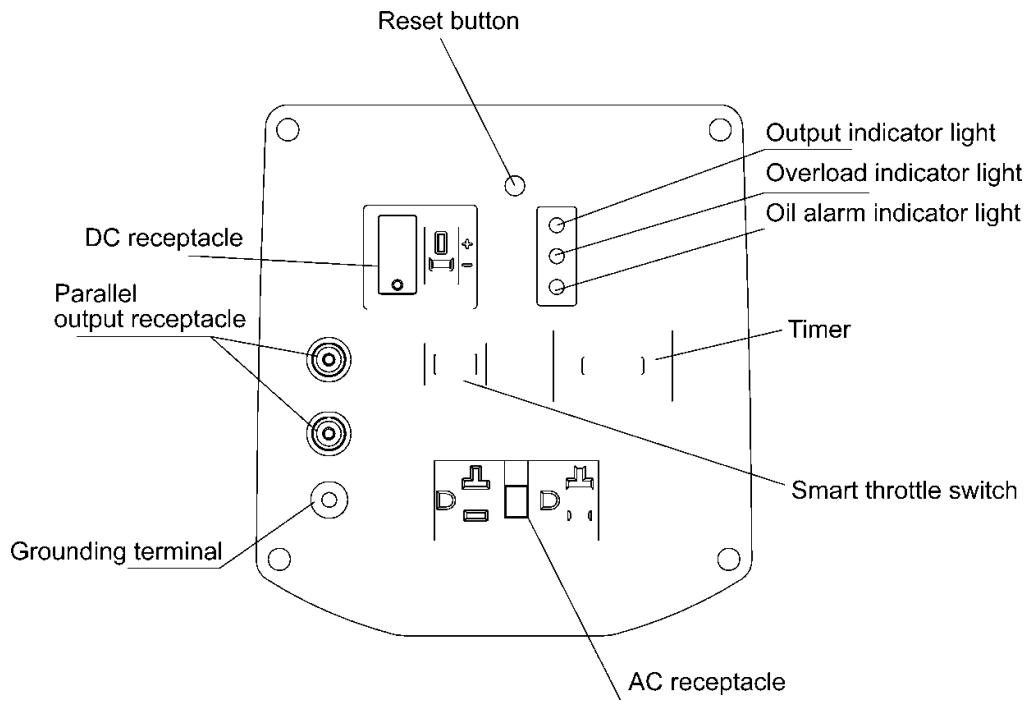

Two generators run in parallel:  
Two IG2000i digital generators running in parallel can increase the output power of generators.




Figure 1

Procedures to run 2 generators with a parallel box:

1. Prepare two KIPOR IG2000 I digital generators.

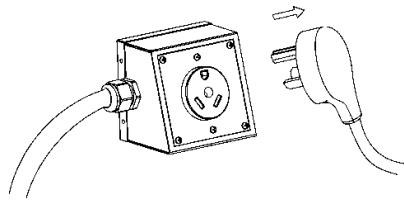


Figure 2

Note:

Be sure the two generators are shut off.

2. Insert the connecting plug ② of the parallel cable ① to PARALLEL OUTPUT receptacle ③ on the controller panel of each generator (See figure 3)
3. Connect the grounding terminal ④ of the parallel cable to the grounding terminal ⑤ of each generator (See figure 3)

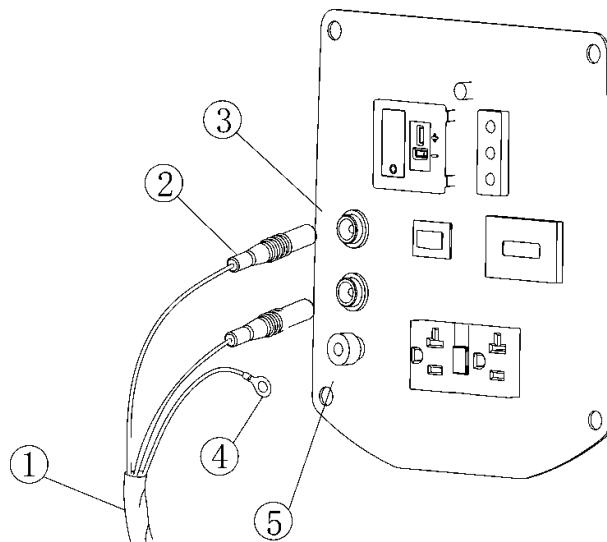


Figure 3

### **! CAUTION**

- Be sure all the electrical equipment is grounded. See ⑧.
- Be sure each generator is on a stable level surface.

4. Start the two generators:

The start procedure is the same as normal start procedure. (Refer to the section introducing how to start the engine in this manual)

## **⚠ CAUTION**

- Before starting, make sure that the PARALLEL OUTPUT on each controller panel has been inserted to the parallel cable. Otherwise, damage to the generator may occur.

5. Insert the electrical equipment plug ⑦ into the parallel cable receptacle ⑥ and turn the power switch of the electrical equipment to the on position. (See figure 4)

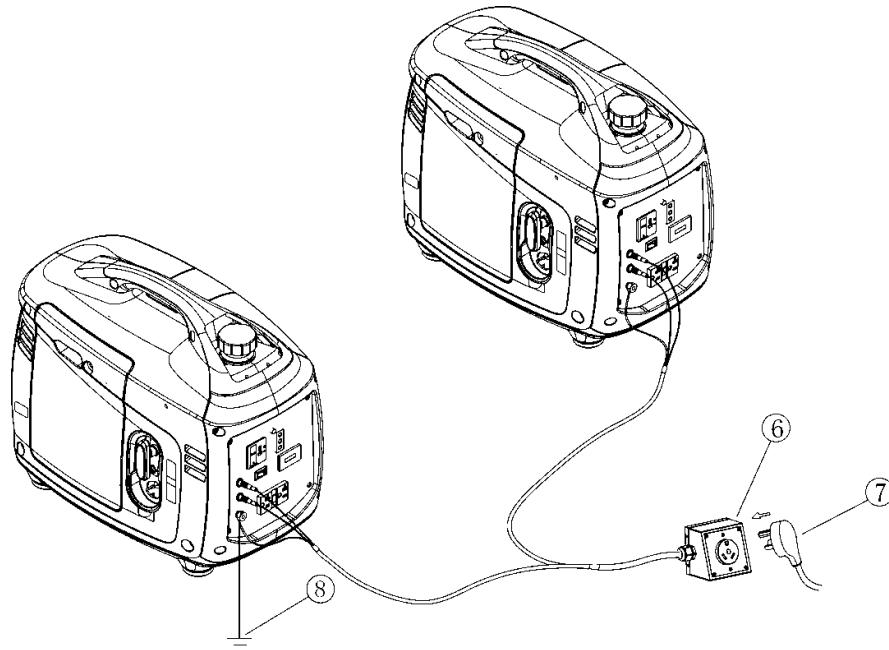


Figure 4

## **⚠ CAUTION**

- The power of electrical equipment shall not exceed the rated output of the parallel receptacle.
- The parallel receptacles used in different area are different. Refer to Parallel receptacle usage manual.

Shut off the generator:

1. Turn off the power switch of the electrical equipment; pull the plug out of the parallel receptacle.
2. Shut off the two generators.
3. If two generators parallel are not used, be sure to remove the cable from PARALLEL OUTPUT.

### **WARNING**

- Kipor IG2000i parallel cable is only suitable for two KIPOR IG2000i generators being run simultaneously.
- Always use Kipor parallel output cable on IG2000i.
- When using the parallel cable, safely insert the plug into the receptacle.
- When running two generators in parallel, DO USE the receptacle of parallel cable for power output, Do not use the receptacle on the control panel.
- Before starting the generator, connect the parallel output cable, after the generators stopped, disconnect the parallel output cable. Never connect or disconnect the parallel output cable when the generators are running.
- If the parallel output cable is still connected when one generator has stopped running, stop the running generator and remove the parallel box.
- If only one generator is operated, make sure the parallel output cable is disconnected.
- When the two generators are running separately, make sure the parallel output cable is disconnected.
- Before operating the generator, read the manual carefully.

---

## 9. MAINTENANCE

---

The purpose of the maintenance and adjustment schedule is to keep the generator in the best operating condition.

Inspect or service as scheduled in the table below.

### **WARNING**

- Shut off the engine before performing any maintenance. If the engine must be run, make sure the area is well ventilated. The exhaust contains poisonous carbon monoxide gas.

### **CAUTION**

- Use genuine our parts or their equivalent. The use of replacement parts which are not of equivalent quality may damage the generator.
- When repairing or replacing the accessories of emission control system, make sure to use the EPA standard accessories.

### **Emission control system**

#### **Emission source**

Exhaust gas contains carbon monoxide, nitrous oxide (NO<sub>x</sub>), and hydrocarbons. It is very important to control the emissions of NO<sub>x</sub> and hydrocarbons as they are a major contributor to air pollution. Carbon monoxide is a poisonous gas. The emission of fuel vapors is a source of pollution as well. The Kipor generator engine utilizes a precise air-fuel ratio and emission control system to reduce the emissions of carbon monoxide, NO<sub>x</sub>, hydrocarbons, and evaporative fuel emissions.

#### **Regulation**

Your engine has been designed to meet current Environmental Protection Agency (EPA) and the California Air Resources Board (CARB) clean air standards if so equipped and designated. The regulations dictate that the manufacturer provide operation and maintenance standards regarding the emission control system. Tune up specifications are provided in the Specifications section and a description of the emission control system may be found in an appendix to this manual. Adherence to

the following instructions will ensure your engine meets the emission control standards.

### **Modification**

Modification of the emission control system may lead to increased emissions.

Modification is defined as the following:

- Disassemble or modify the function or parts of the intake, fuel or exhaust system.
- Modify or destroy the speed governing function of the generator.

### **Engine faults that may affect emission**

Any of the following faults must be repaired immediately. Consult with your authorized Kipor service center for diagnosis and repair:

- Hard starting or shut down after starting
- Unstable idle speed
- Shut down or backfire after applying an electrical load
- Backfire-
- Black smoke and/or excessive fuel consumption

### **Replacement parts and accessories**

The parts making up the emission control system applied to Kipor engine have been specifically approved and certified by the regulatory agencies. You can trust the replacement parts supplied by Kipor have been manufactured to the same production standard as the original parts. The use of replacement parts or accessories which are not designed by Kipor may affect the engine emission performance. The manufacturers of replacement parts and accessories have the responsibility to guarantee that their replacement products will not adversely affect emission performance.


### **Maintenance**

Maintain the generator according to the maintenance schedule in this section. Service items more frequently when used in dusty areas, or under conditions of high load, temperature, and humidity.

### **Air Quality Index (only for California certified models)**

CARB requires that an air quality index label be attached to every certified engine showing the engine emission information for the emission duration period. The label is provided for the user to compare the emission performance of different engines.

The lower the air index, the better the engine emission performance. The description of durability is helpful for the user to learn the engine emission duration period and the service life of emission control system. Refer to the warranty section of this owner's manual for more information.

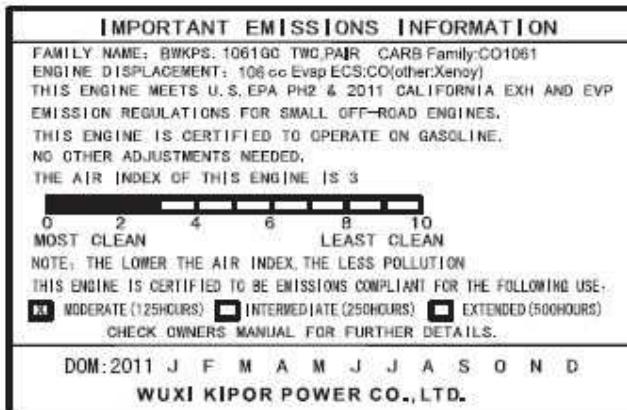

The air quality index label is designed to be permanently affixed to the generator and removal should not be attempted.

### Maintenance Schedule

REGULAR SERVICE PERIOD(1)		ITEM	EACH USE	FIRST MONTH	EVERY 3 MONTHS	EVERY 6 MONTHS	EVERY YEAR
Perform at every indicated month or operating hour interval, whichever comes first.				OR 20HRS	OR 50HRS	OR 100 HRS	OR 200 HRS
Engine oil	Check level		○				
	Change			○		○	
Air cleaner	Check		○				
	Clean				○(1)		
Spark plug	Clean-adjust					○	
	Replace						○
Combustion chamber	Clean			○ Every 300Hrs. (2)			
Valve clearance	Clean-adjust					○(2)	
Fuel tank and filter	Clean				○(2)		
Fuel lines	Check			Every 2 years (Replace if necessary) (2)			

- NOTE: (1) Service more frequently when used in dusty areas.  
 (2) These items should be serviced by your servicing dealer unless you have the proper tools and are mechanically proficient. Refer to the shop manual for service procedures.  
 (3) For commercial use, log hours of operation to determine proper maintenance intervals.

## 1. CHANGING OIL


Drain the oil while the engine is still warm to assure rapid and complete draining.

### ⚠ CAUTION

- Make sure to turn the engine switch and the fuel cap vent lever OFF before draining.

1. Loosen the cover screw and remove the left side maintenance cover.
2. Remove the oil filler cap.
3. Drain dirty oil into a container thoroughly. See note below concerning proper disposal.
4. Refill with the recommended oil, and check the oil level.
5. Reinstall the left side maintenance cover and tighten the cover screw securely.

Engine oil capacity: 0.42 qt. (0.4L)

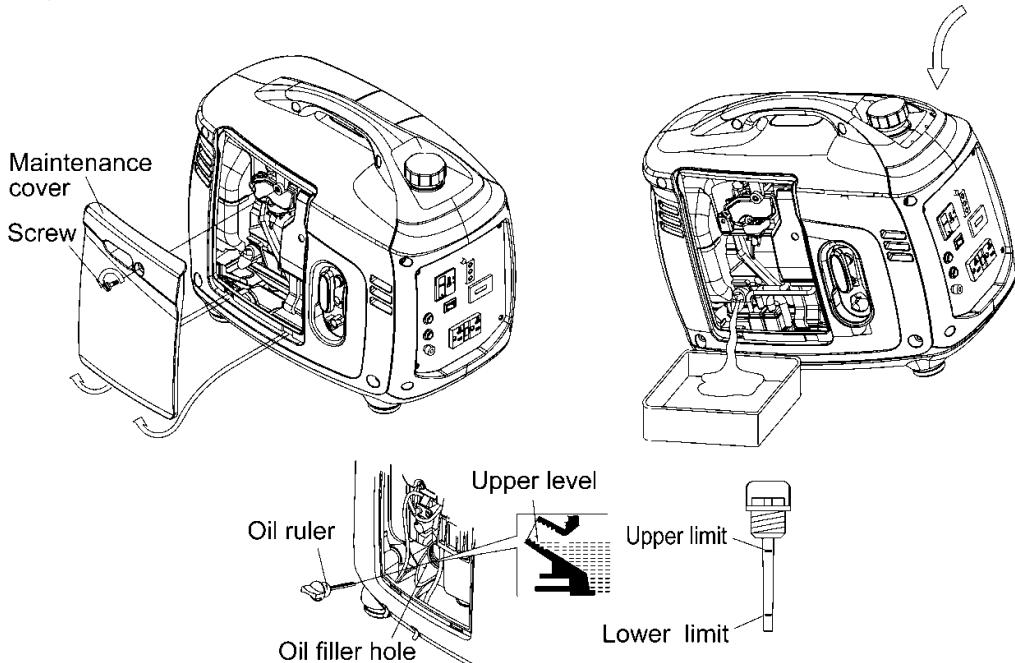

### ⚠ NOTE

- Please dispose of used motor oil in a manner that is compatible with the environment and local disposal regulations. Do not throw it in the trash or pour it on the ground.

## 2. AIR CLEANER SERVICE IG2000i

A dirty air cleaner will restrict air flow to the carburetor. To prevent carburetor malfunctioning, service the air cleaner regularly. Service more frequently when operating the generator in extremely dirty areas.


### ⚠ WARNING

■Do not use gasoline or low flash point solvents for cleaning. They are flammable and explosive under certain conditions.

### ⚠ CAUTION

■Never run the generator without the air cleaner, otherwise rapid engine wear may result.


1. Loosen the cover screw and remove the left side maintenance cover.
2. Remove the air cleaner cover and remove the fine and filter coarse elements.
3. Wash the filter elements in a non-flammable or high flash point solvent and dry it thoroughly.
4. Soak the filter elements in clean engine oil and squeeze out the excess oil.
5. Reinstall the coarse and fine air cleaner filter elements and the air cleaner cover. Tighten the cover screw securely.
6. Reinstall the maintenance cover and tighten the cover screw securely.

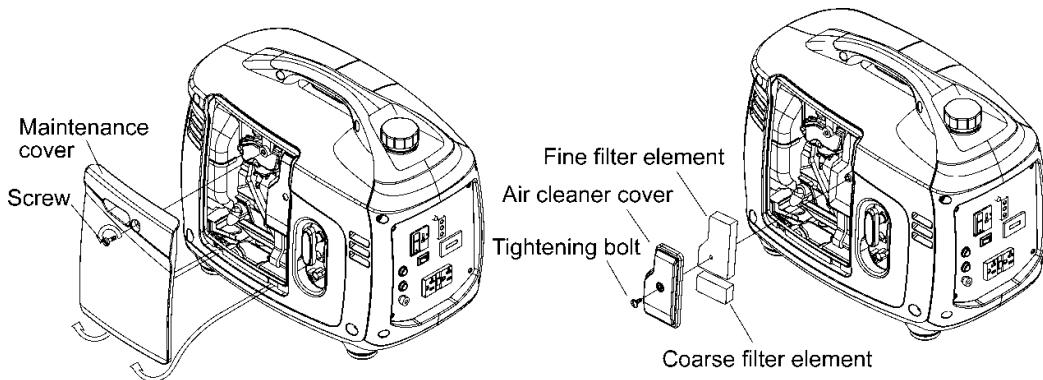


### 3. SPARK PLUG MAINTENANCE

To ensure proper engine operation, the spark plug must be properly gapped and free of deposits.


1. Remove the spark plug maintenance cover.

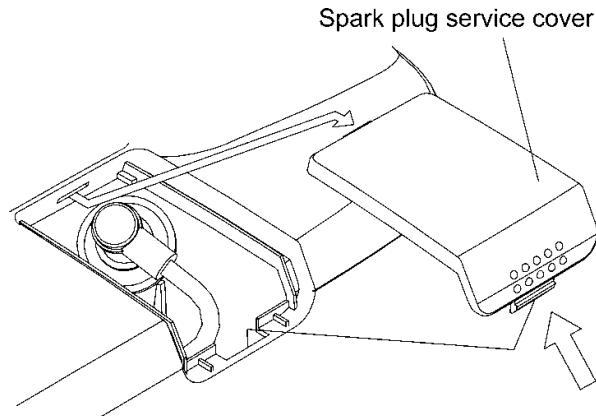

2. Remove the spark plug cap.
3. Clean any dirt from around the spark plug base.
4. Use the wrench provided to remove the spark plug

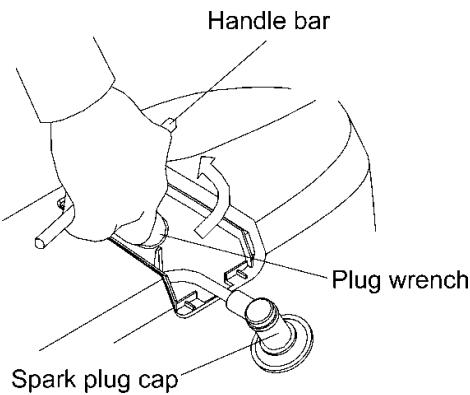

5. Visually inspect the spark plug. Discard it if the insulator is cracked or chipped. Clean the spark plug with a wire brush if it is to be reused.
6. Measure the plug gap with a feeler gauge.  
The gap should be 0.024-0.028in (0.6-0.7mm). Correct as necessary by carefully bending the side electrode.

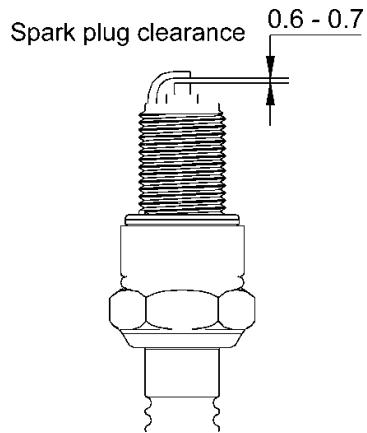

7. Install the spark plug carefully, by hand, to avoid cross-threading.
8. After a new spark plug has been seated by hand, it should be tightened 1/2 turn with a wrench to compress its washer. If a used plug is being reinstalled, it should only require 1/8 to 1/4 turn after being seated.
9. Reinstall the spark plug cap on the spark plug securely.
10. Reinstall the spark plug maintenance cover.

**⚠ CAUTION**

- The spark plug must be securely tightened. An improperly tightened plug can become very hot and possibly damage the generator.
- Never use a spark plug with an improper heat range.

---

## 10. TRANSPORTING and STORAGE

---

To prevent fuel spillage when transporting or during temporary storage, the generator should be secured upright in its normal operating position with the engine switch placed in the OFF position.

When transporting the generator:

**⚠ WARNING**


- If you must transport the generator in a vehicle, drain all fuel from the generator.
- Do not operate the generator while it is on or in a vehicle. Take the generator out of the vehicle and use it in a well ventilated area.
- Avoid a storage area exposed to direct sunlight when putting the generator on a vehicle. If the generator is left in an enclosed vehicle for many hours, high temperature inside the vehicle could cause residual fuel to vaporize resulting in a possible explosion.
- Do not drive on a rough road for an extended period with the generator on board.

Before storing the unit for an extended period:

1. Be sure the storage area is free of excessive humidity and dust.
2. Drain the fuel.

**⚠ WARNING**

- Gasoline is extremely flammable and explosive under certain conditions.
- Do not smoke or allow flames or sparks in the area.

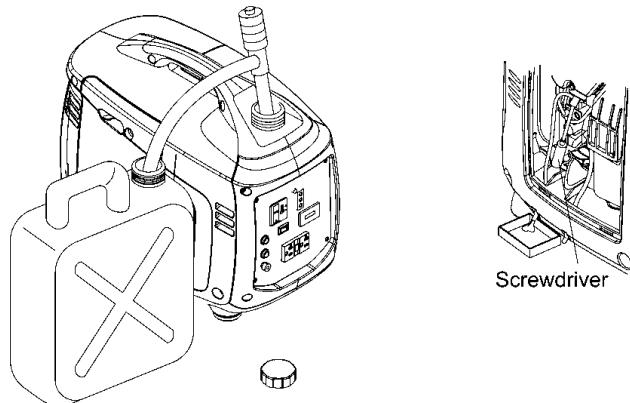


### **Periodic running of the Generator**

It is essential that the generator be periodically run on a regular basis. This will prevent the accumulation of varnish or sludge in the fuel system and also remove moisture from the generator windings. Additionally the engine seals and moving components are lubricated. Periodically running the generator at least at 1/2 the load for 60 minutes each month. Gasoline fuel treatments to prevent contamination of your fuel supply are available from your dealer. Fuel varnishing necessitating replacement of the carburetor is not a warrantable failure.


### **Storage**

- a. Drain all gasoline from the fuel tank into an approved gasoline container.
- b. Turn the engine switch ON, and loosen the carburetor drain screw and drain the gasoline from the carburetor into a suitable container. Dispose of properly.
- c. With the drain screw loosened remove the spark plug cap and pull the starter grip 3 to 4 times to drain the gasoline from the fuel pump.
- d. Turn the engine switch to the OFF position, and tighten the drain screw securely.
- e. Reinstall the spark plug cap on the spark plug securely.
- f. Change the engine oil.
- g. Remove the spark plug and pour about a tablespoon of clean engine oil into the cylinder. Crank the engine several revolutions to distribute the oil and then reinstall the spark plug.
5. Slowly pull the starter grip until resistance is felt. At this point, the piston is coming up on its compression stroke and both the intake and exhaust valves are closed. Storing the engine in this position will help to protect it from internal corrosion.

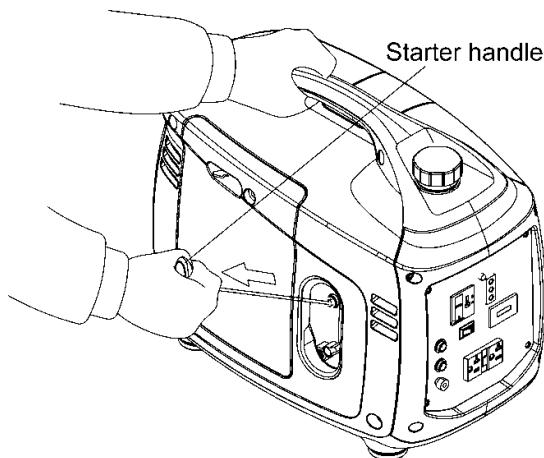

## 11. TROUBLESHOOTING

**Engine will not start:**

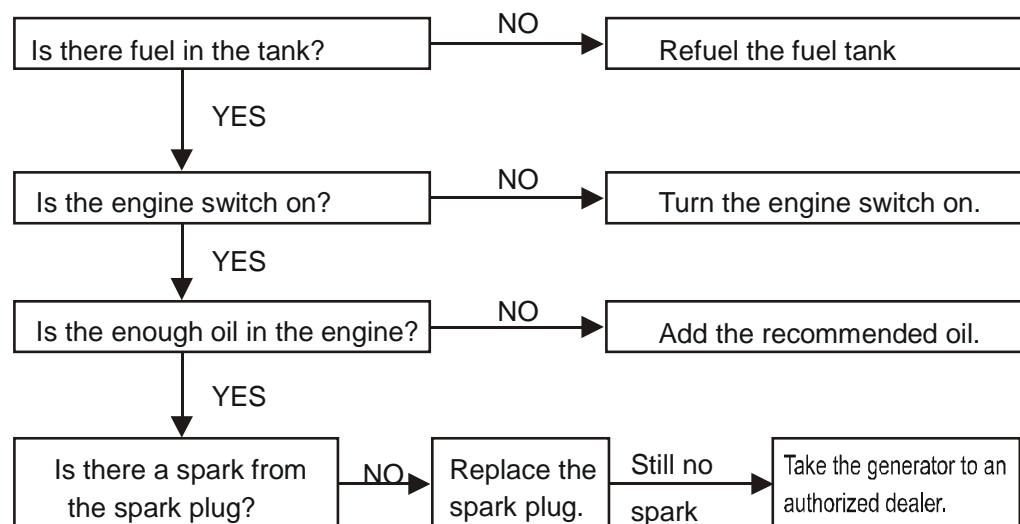

### ! WARNING


- Be sure there is no spilled fuel around the spark plug. Spilled fuel may ignite.

If the engine still does not start, take the generator to an authorized dealer.

To check:


- 1) Remove the spark plug cap and clean any dirt from around the spark plug.
- 2) Remove the spark plug and install the spark plug in the plug cap.
- 3) Set the plug side electrode on the cylinder head to ground.
- 4) Pull the recoil starter, sparks should jump across the gap.

**Appliance does not operate:**

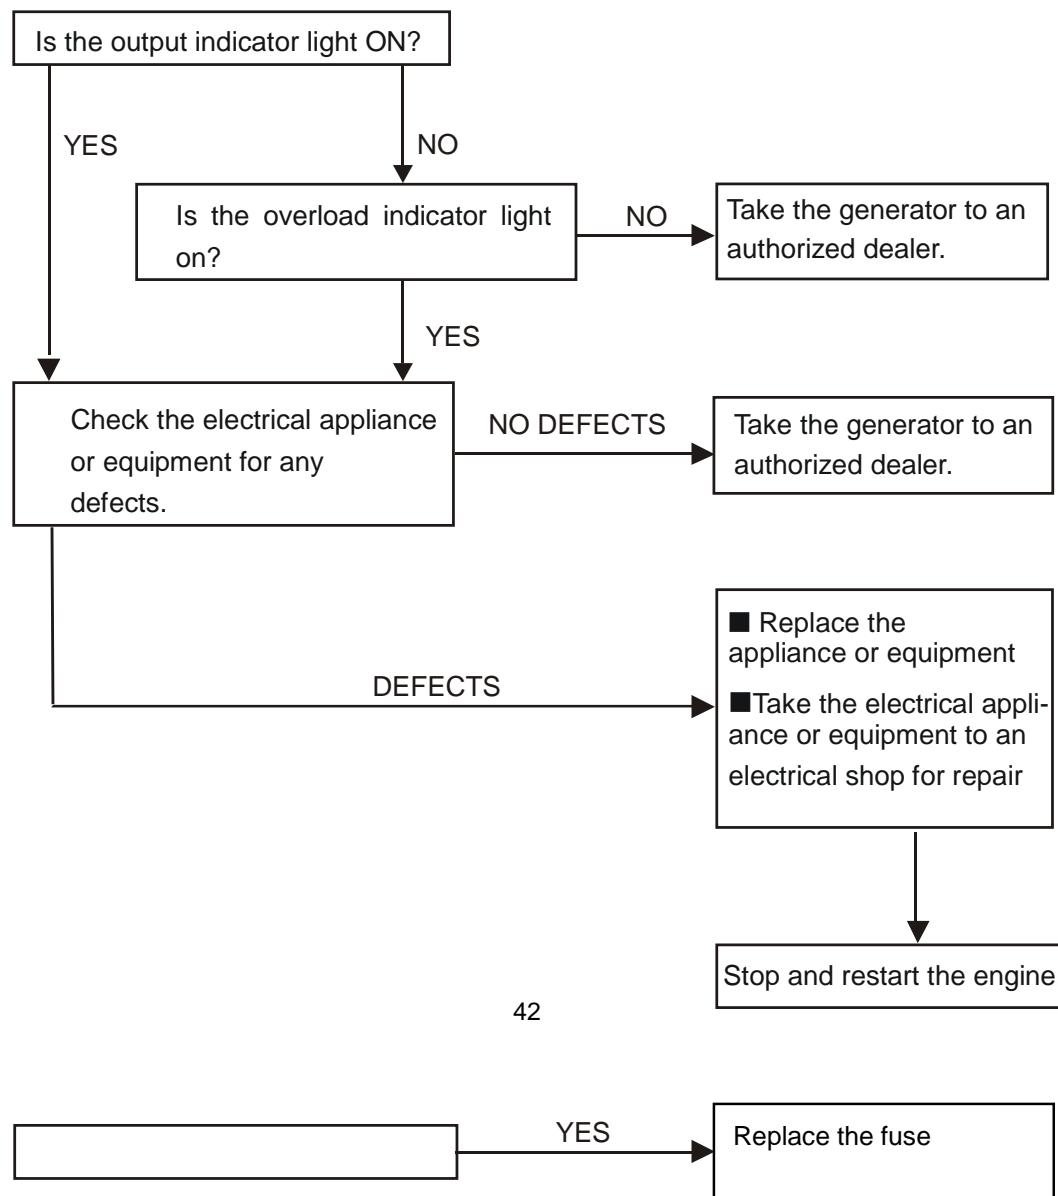

No electricity at the DC receptacle:

Is the DC circuit fuse blown?

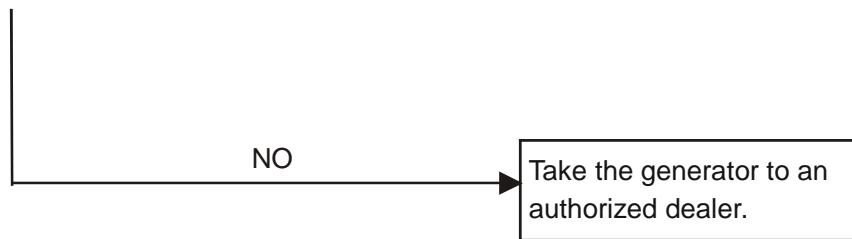

---

## 12. SPECIFICATIONS

---

Genset model	IG2000i
Rated frequency (Hz)	60
Rated voltage (V)	120
Rated current (A)	13.3
Rated speed (r/min)	4500
Rated output power (kVA)	1.6
Max. output power (kVA)	2.0

### DC output

DC output	12V-5.0A
Fuse	Equipped
No. of phases	Single phase

### Engine


Engine model	KG158
Engine structure	Single cylinder, air-cooled, 4-stroke, in-line arrangement, OHV, gasoline engine
Displacement (bore x stroke)	105ml (58x40 mm)
Compression ratio	8.5:1
Rated frequency [kW/(r/min)]	2.2/4500
Rated speed (rpm)	4500
Ignition system	Transistor electrical ignition
Spark plug	UR5/A7RTC
Start mode	Recoil start
Fuel type	Automotive unleaded gasoline
Fuel consumption (g/Kw.h)	420
Lube oil type	SAE 10W30 (above CCgrade)

Capacity of fuel tank (L)	3.7
Running lasting time (hrs) (under rated output power)	3.5
Noize (d BA/at 7m) (0-load~full-load)	61-73
Dimension (LxWxH) [(mm)]	530x310x430
Net weight [kg]	23

\*The declared values shall consider uncertainties due to production variation and measurement procedures.

## 13. WIRING DIAGRAM

IG2000i Wiring Diagram

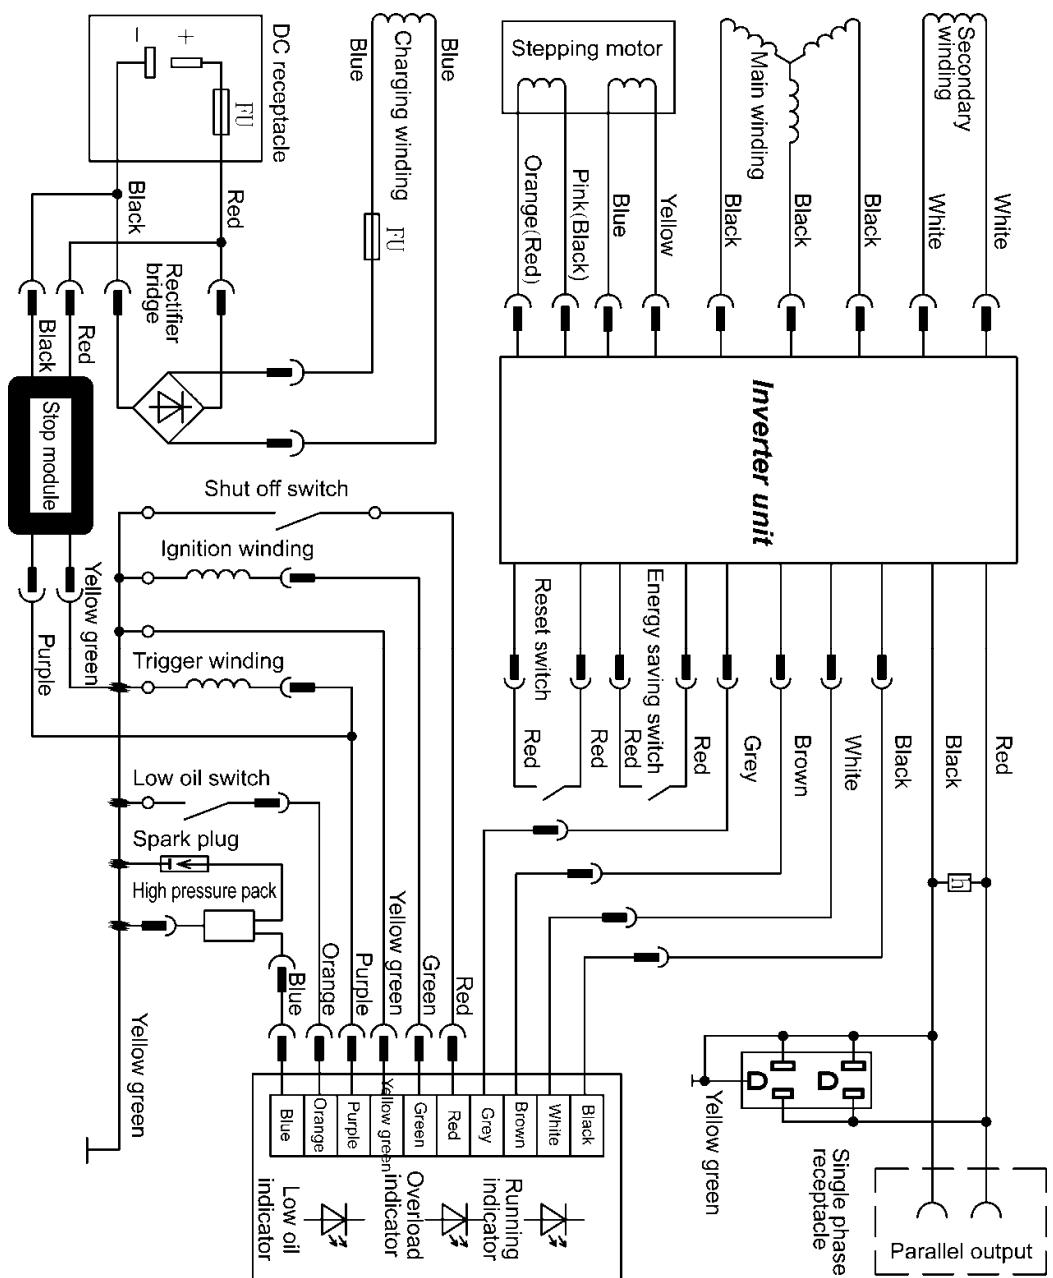

---

## 14. WARRANTY

---

### **Kipor Power Equipment, Inc. Warranty**

**Product registration:** Registration is required for warranty coverage, register your product by completing the registration form found with the owner's manual or go to [www.kiporpowerequipment.com](http://www.kiporpowerequipment.com)

#### **LENGTH OF WARRANTY**

Kipor Products are covered by this warranty from the date of original retail purchase for a period of three (3) years or 300 hours for residential use and for one (1) year or 300 hours for commercial and rental applications. If batteries are shipped with generators, they are warranted by the manufacturer. The warranty coverage is continual from the original date of purchase, and does not restart upon the replacement of any part or complete unit. Individual parts replaced at any point during the warranty period are only eligible for warranty coverage for the balance of the original warranty period and owner.

#### **ELIGIBILITY**

To be eligible for warranty service, the product must be purchased in the United States or Canada from an authorized dealer. This warranty applies to the original retail purchaser only and is not transferable. Proof of purchase is required. Goods exported from North America as well as goods sold at auction are excluded from warranty coverage. Warranty coverage will only be provided by authorized dealers in the United States and Canada.

#### **COVERAGE**

Parts and labor will be covered for any failure that is proven to be a failure of material or workmanship under normal use during the applicable warranty time period. It is the responsibility of the end user to return the product to the nearest authorized repair center as directed by the warranty administration center. In the event that the generator is deemed not repairable or the necessary repair would be economically unfeasible, the Kipor distributor will pay for shipping of the unit from the repair center to the designated distributor facility and the shipping of a replacement unit. Kipor or its distributor reserves the right to repair or replace these parts at its option. The return of defective parts may be requested. Anything replaced under warranty becomes the property of Kipor.

#### **TO OBTAIN WARRANTY SERVICE**

**Contact any authorized dealer** or contact our national customer service center at:

Phone: 888-645-0197      E-mail: [service@kiporpowerequipment.com](mailto:service@kiporpowerequipment.com)

If contacting us by e-mail, be sure to include a description of the problem as well as all return contact information such as address, phone number, fax number, e-mail, etc.

Engine serial number and proof of purchase are required.

### **EXCLUSIONS**

This warranty does not extend to parts affected or damaged by accident and/or collision, normal wear, fuel contamination or degradation, use in an application for which the product was not designed or any other misuse, neglect, incorporation or use of unsuitable attachments or parts, unauthorized alteration, or any causes other than defects in material or workmanship. This warranty does not extend to normal maintenance items such as belts, hoses, spark plugs and filters past the first scheduled replacement or service interval for these items, whichever comes first. Kipor will pay for minor adjustments for a period of ninety days from the purchase date of the generator.

### **DISCLAIMER OF CONSEQUENTIAL DAMAGE AND LIMITATION OF IMPLIED WARRANTIES**

Kipor denies any responsibility for loss of time or use of the product, transportation, commercial loss, or any other incidental or consequential damage. Any implied warranties are limited to the duration of this written limited warranty.

Some states do not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above exclusions and limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

### **Emission Control System Warranty**

In the United States and California, new small off-road engines must be designed, built and equipped to meet stringent emission standards. Kipor must warrant the emission control system on your generator engine for the periods of time listed below provided there has been no abuse, neglect, improper maintenance, or unauthorized application of your small off-road engine.

If a warrantable condition is determined, Kipor Power Equipment will repair your small off-road engine at no cost to you including diagnosis, parts, and labor.

#### **Coverage**

Emissions control parts on the engine are warranted for a period of two years, subject to provisions set below. If any covered part on your engine is defective, the part will be repaired or replaced by Kipor Power Equipment.

#### **Owner's Responsibilities**

You are responsible to maintain the engine as defined in your Kipor Generator Owner's Manual. Kipor recommends that you retain all record/receipts covering maintenance on

your engine, but Kipor Power Equipment cannot deny warranty claims based on a lack of receipts or for your failure to perform all scheduled maintenance. You may be denied warranty coverage if a part has failed due to abuse, neglect, improper maintenance, or unapproved applications.

You are required to bring your generator to an authorized Kipor generator dealer for repairs as soon as a problem exists. For emissions warranty service, contact your nearest dealer. For a listing visit [www.kiporpowerequipment.com](http://www.kiporpowerequipment.com) or by calling 888-645-0197.

### **Emission Control System Parts**

Coverage under this warranty extends only to the emissions control parts listed below:

1. Fuel System
  - A. Carburetor gaskets
  - B. Fuel lines, fittings, and clamps
  - C. Fuel filter (if equipped)
  - D. Fuel pump (if equipped)
  - E. Carburetor
2. Intake System
  - A. Air cleaner assembly
  - B. Intake manifold
3. Ignition System
  - A. Ignition coil
  - B. Spark plug
4. Exhaust System
  - A. Catalytic converter (if equipped)
  - B. Exhaust manifold
  - C. Gaskets
5. Crankcase Breather System
  - A. Breather assembly
  - B. Breather tube
6. Air Injection System
  - A. Secondary air injection valve
7. Fuel Tank Evaporative Emissions Control System
  - A. Fuel tank
  - B. Fuel cap
  - C. Carbon canister and brackets
8. Miscellaneous Items used in above
  - A. Hoses, connectors, and fittings
  - B. Electrical switches

### **Warranty Provisions**

- 1. Claims** Warranty claims shall be filed in accordance with the provisions of the Kipor warranty and policies established with the authorized repair center network.
- 2. Exclusions** Warranty coverage shall be denied for failure of an emissions control system part caused by abuse, neglect, improper maintenance or application as described in the Kipor Generator Owner's Manual. Additionally, coverage may be denied for the use of add-on parts, modified parts, or parts that are not equivalent to original Kipor generator parts in performance and durability.
- 3. Length of Coverage** Kipor Power Equipment warrants to the original retail purchaser and each subsequent owner that the emissions control system shall be free of defects in materials and workmanship for a period of two years from the date of the original retail customer.
- 4. Repair or Replacement Cost** Repair or replacement of any emissions control system part will be repaired at no charge to the owner including diagnostic labor which would determine an emissions control system defect exists if the repair is performed at an authorized Kipor repair service center.
- 5. Consequential Damage** Repairs will extend to any other engine part damaged by the failure of any emission control system part.
- 6. Maintenance** The emissions control system and associated parts are warranted for defects during the warranty period only. The warranty does not cover any replacement of parts that are replaced as required by the maintenance schedule in the Kipor Generator Owner's Manual. Any replacement part that is equivalent in function and durability may be used for maintenance or repairs.

#### Questions


If you have any questions regarding your rights and responsibilities under this emissions system warranty, you may contact Kipor Aftermarket Support Service Center.

By email: [service@kiporpowerequipment.com](mailto:service@kiporpowerequipment.com)


By phone: 888-645-0197

By mail: Kipor Power Equipment, 13009 SE Jennifer St. #105 Clackamas, OR 97015



## Intake System and Carburetor

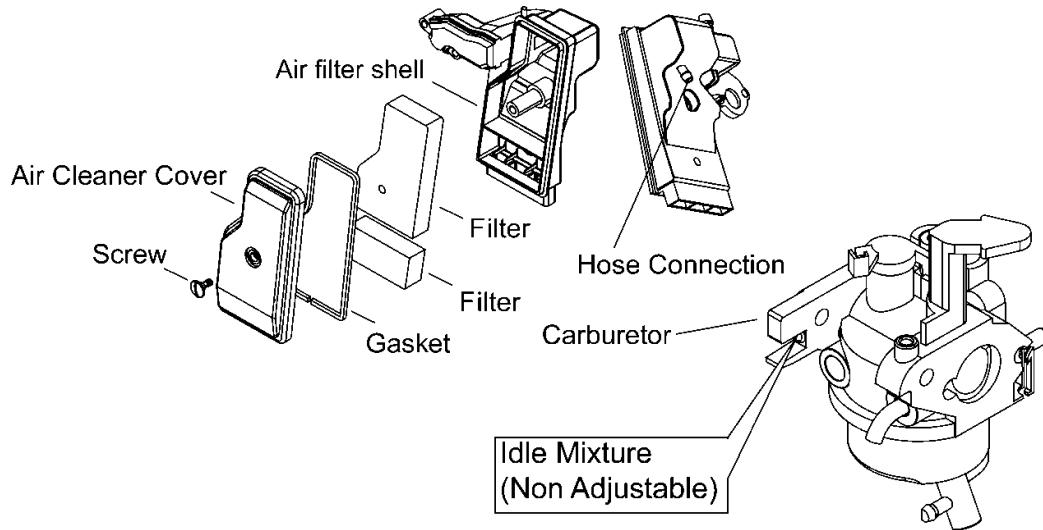

## Exhaust System

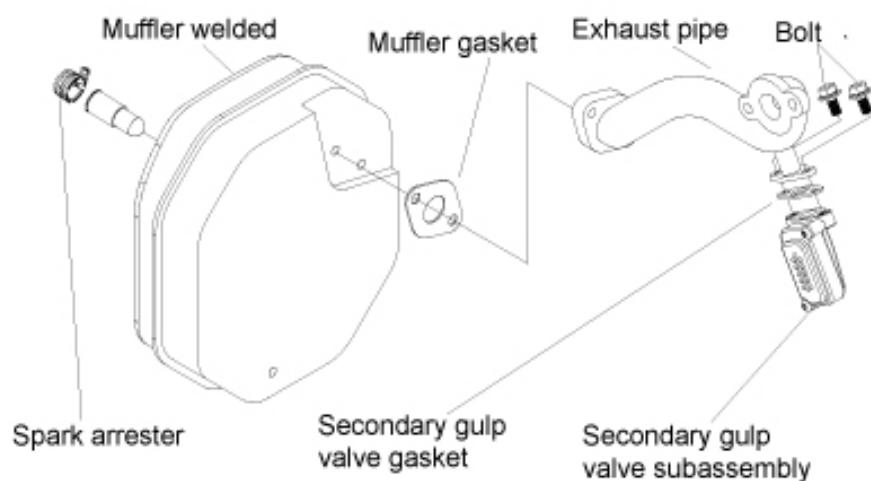

## Fuel System

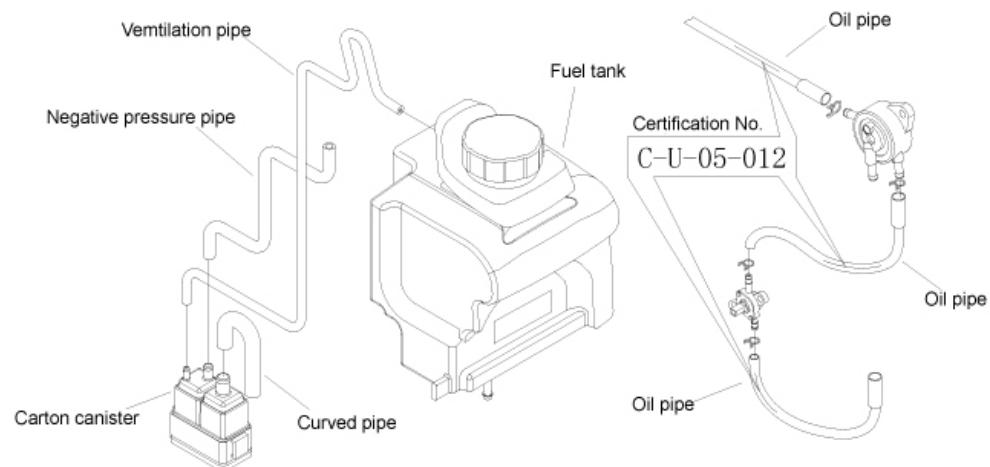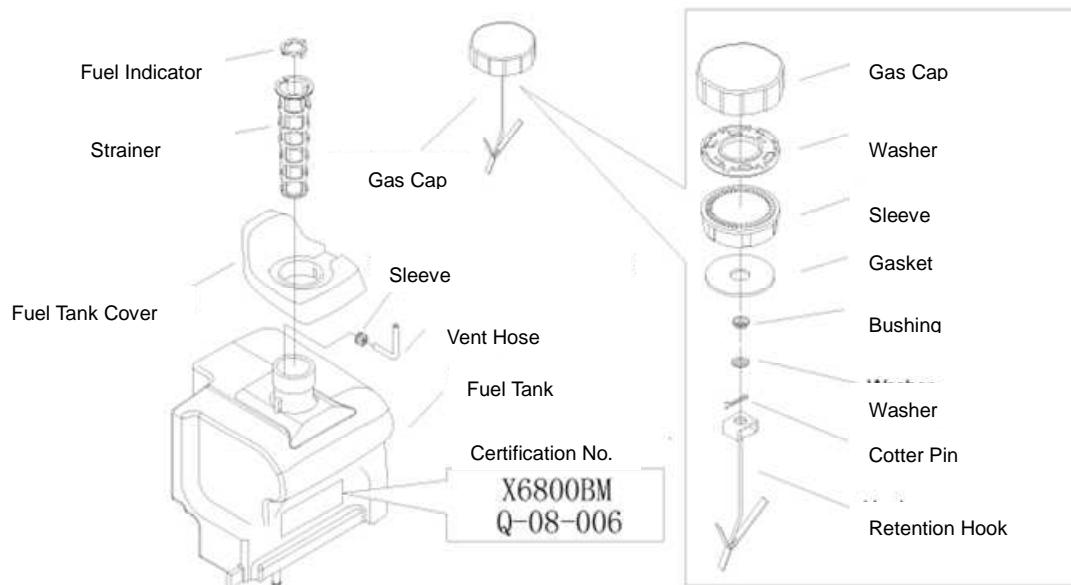




[www.kipor.com](http://www.kipor.com)



WUXI KIPOR POWER CO., LTD.  
312 National Highway & Xinhua Road  
Crossing, Industry Kit Park Wangzhuang,  
National High & New Technique Industry  
Development Area, Wuxi, Jiangsu, China  
214028  
T 86-510-85205041 F 86-510-85203798

KIPOR POWER EQUIPMENT INC.  
13009 SE Jenifer Street, Suite 105  
Clackamas, Oregon 97015  
[www.kiporpowerequipment.com](http://www.kiporpowerequipment.com)  
T 503-445-0197

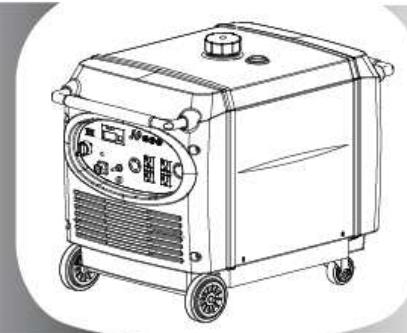

## OPERATION MANUAL

PLEASE READ THIS  
MANUAL CAREFULLY.  
IT CONTAINS IMPORTANT  
SAFETY INFORMATION.

**SINEMASTER®**  
DIGITAL GENERATOR

IG7000e



## PREFACE

Thank you for purchasing our generators.

This manual covers operation and maintenance of the IG7000e generator.

All information in this publication is based on the latest product information available at the time of approval for printing.

We reserve the right to make changes at any time without notice and without incurring any obligation.

No part of this publication may be reproduced without written permission.

This manual should be considered a permanent part of the generator and should remain with it if it is resold.



Pay special attention to statements preceded by the following words;

Failure to properly follow these precautions can result in property damage, serious injury or DEATH!

Read all labels and the owner's manual before operating this generator.

Operate only in well ventilated areas. Exhaust gas contains poisonous carbon monoxide, and can be deadly. Always stop engine before refueling. Wait 5 minutes before restarting.

Check for spilled fuel or leaks. Clean and/or repair before use.

Keep any sources of ignition away from fuel tank, at all times.

Indicates a strong possibility of severe personal injury or death if instructions are not followed.

Indicates a possibility of personal injury or equipment damage if instructions are not followed.



NOTE: Gives helpful information.

If a problem should arise, or if you have any questions about the generator, consult an authorized dealer.



The generators are designed to give safe and dependable service if operated according to instructions.

Read and understand the Owner's Manual before operating the generator. Failure to do so could result in personal injury or equipment damage

## Contents

1. SAFETY INSTRUCTIONS .....	1
2. COMPONENT IDENTIFICATION.....	4
3. PRE-OPERATION CHECK.....	8
4. STARTING THE ENGINE .....	12
5. GENERATOR USE .....	14
6. STOPPING THE ENGINE.....	20
7. MAINTENANCE.....	21
8. TRANSPORTING & STORAGE .....	26
9. TROUBLE SHOOTING .....	27
10. SPECIFICATIONS .....	29
11. ELECTRICAL PRINCIPLE DIAGRAM .....	30
12. TRUNDLE INSTALLATION .....	31
13. APPENDIX.....	32

---

## 1. SAFETY INSTRUCTIONS


---



Operate carefully and make sure users and others safety.



The generators are designed to give safe and dependable service if operated according to instructions. Read and understand the Owner's Manual before operating the generator. Failure to do so could result in personal injury or equipment damage.



Exhaust gas contains poisonous carbon monoxide. Never run the generator in an enclosed area. Be sure to provide adequate ventilation.



The muffler becomes very hot during operation and remains hot for a while after stopping the engine.

Be careful not to touch the muffler while it is hot. Let the engine cool before storing the generator indoors. The engine exhaust system will be heated during operation and remain hot immediately after stopping the engine. To prevent scalding, pay attention to the warning marks attached to the generator.

Gasoline is extremely flammable and explosive under certain conditions. Refuel in a well ventilated area with the engine stopped.

Keep away from cigarette, smoke and sparks when refueling the generator. Always refuel in a well-ventilated location.

Wipe up spilled gasoline at once.

Restrict application of generator in high-hazard risk to causing fire area.

** **WARNING****

Connections for standby power to a building's electrical system must be made by a qualified electrician and must comply with all applicable laws and electrical codes. Improper connections can allow electrical current from the generator to back feed into the utility lines. Such back feed may electrocute utility company workers or others who contact the lines during a power outage, and when utility power is restored, the generator may explode, burn, or cause fires in the building's electrical system.

** **WARNING****

Always make a pre-operation inspection (page 9) before you start the engine. You may prevent an accident or equipment damage.

Place the generator at least 1m (3ft) away from buildings or other equipment during operation.

Operate the generator on a level surface. If the generator is tiled, fuel spillage may result.

Know how to stop the generator quickly and understand operation of all the controls. Never permit anyone to operate the generator without proper instructions.

Keep children and pets away from the generator when it is in operation.

Keep away from rotating parts while the generator is running.

The generator is a potential source of electrical shocks when misused; do not operate with wet hands.

Do not operate the generator in rain or snow and do not let it get wet.

** **WARNING****

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

---

## 2. COMPONENT IDENTIFICATION

---

### 2.1 Outline drawing (Figure 1)

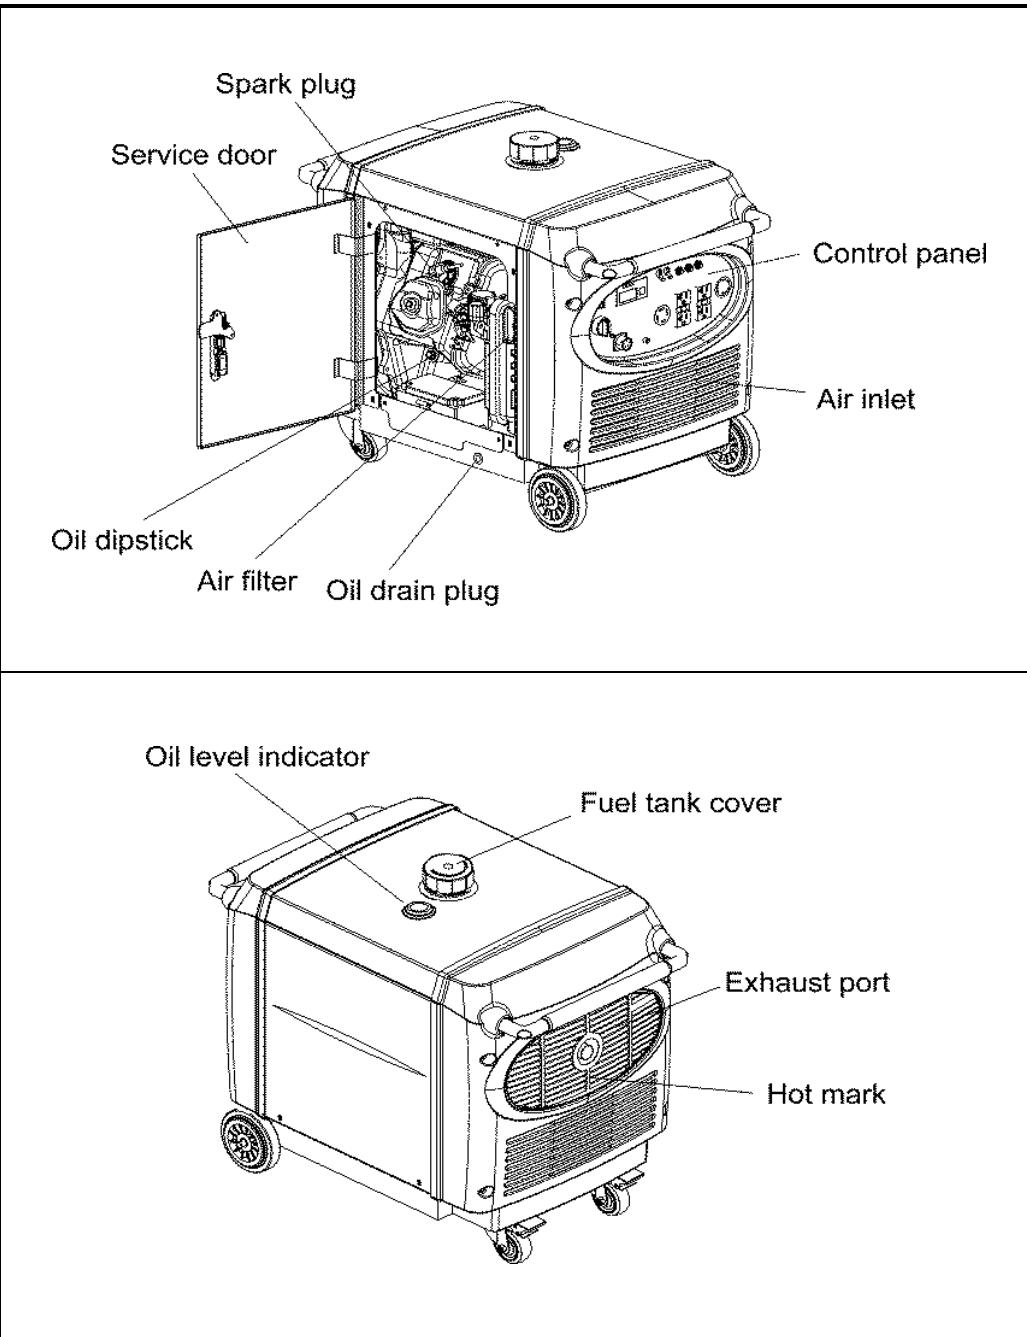


Figure 1 Outline drawing

## 2.2 Inlet System

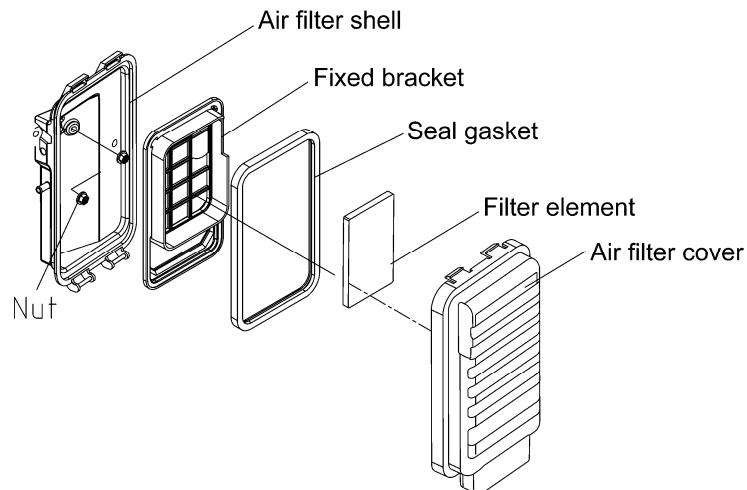


Figure 2

## 2.3 CARB Evaporative Control System

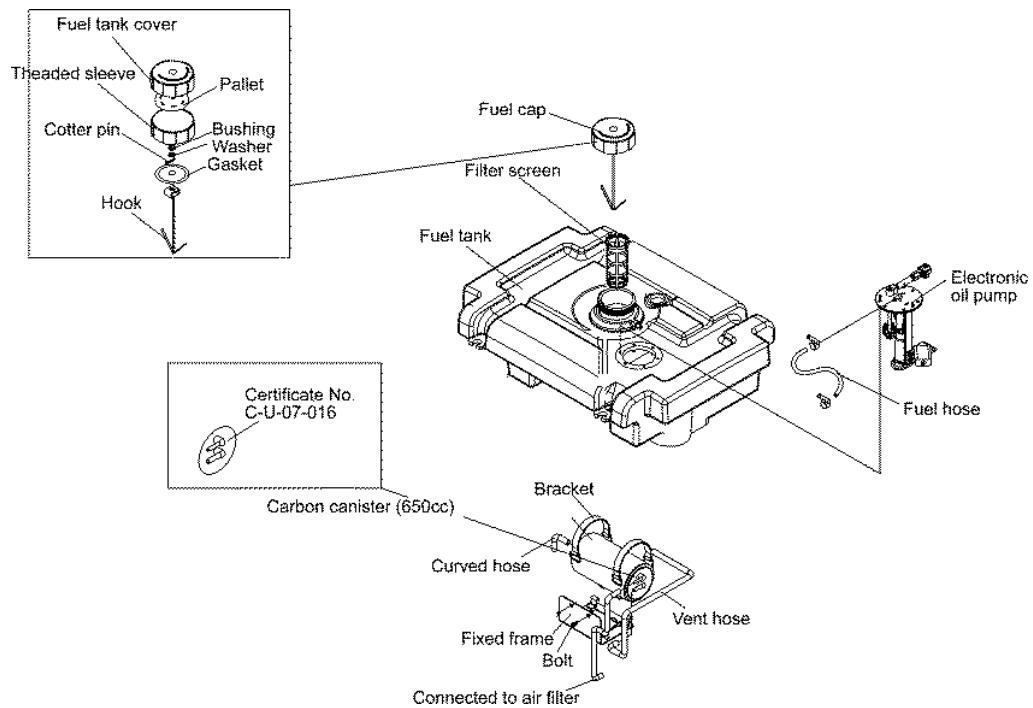


Figure 3

## 2.4 Carbon Canister Location (CARB only)

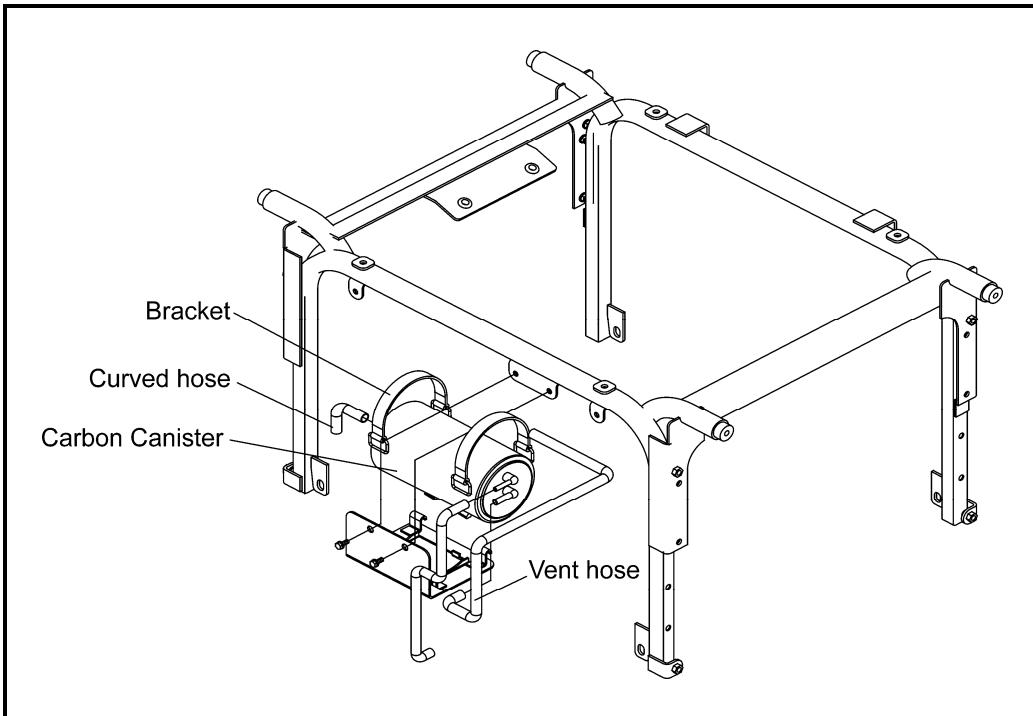


Figure 4

## 2.5 Control panel (See figure 5)

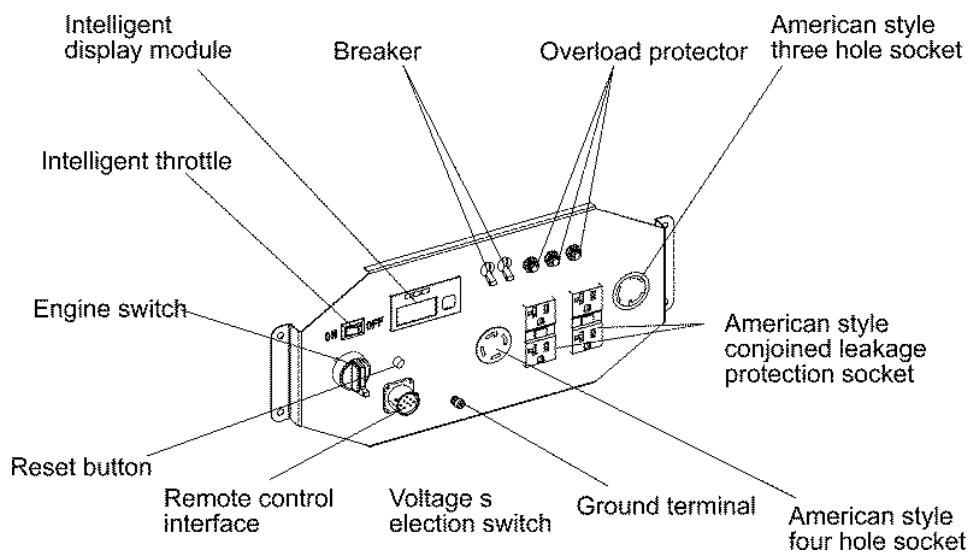


Figure 5

### Smart throttle

Engine speed is kept at idle automatically when the electrical appliance is disconnected and it returns to the proper speed to power of the electrical load when electrical appliance is connected. This position is recommended to minimize the fuel consumption while in operation.



Smart throttle system does not operate effectively, if the electrical appliance requires big momentary electric power.

When high electrical loads are connected simultaneously, turn the Smart-throttle switch to the OFF position to reduce voltage vibration.

#### OFF:

Smart-throttle system does not operate. Engine speed is kept at high-speed level.  
(Figure 6))

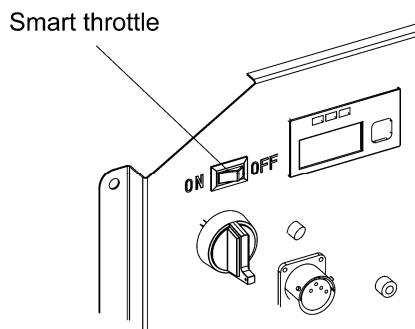


Figure 6

Remote control interface ((figure 7)

This interface can be connected with remote control box to realize wired remote start and stop for the generator.

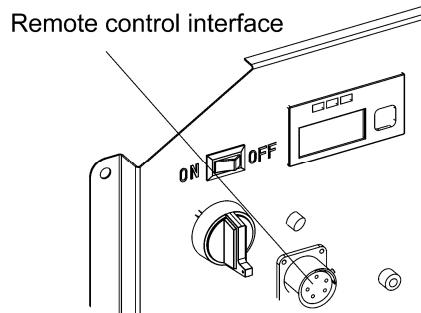


Figure 7 Remote control interface

### 3. PRE-OPERATION CHECK

#### **WARNING**

Be sure to check the generator on a level surface with the engine stopped.

#### 3.1 Check the engine oil level.

#### **WARNING**

Using nondetergent oil or 2-stroke engine oil could shorten the engine's service life.

Use a high-detergent, premium quality 4-stroke engine oil, certified to meet or exceed U.S. automobile manufacturer's requirements for API service classification SG/SF.

Select the appropriate viscosity of oil according to the ambient temperature.

#### SAE Viscosity Grades

Ambient temperature	Engine oil type
-25°C to -30°C	10W-30
-15°C to -40°C	15W-40

Open the left side service door, loosen the dipstick, and wipe the dipstick with a clean rag. Check the oil level by inserting the dipstick in the filler hole without screwing it in. If the oil level is below the end of the dipstick, refill the recommended oil up to the top of the oil filler neck. (See figure 4)

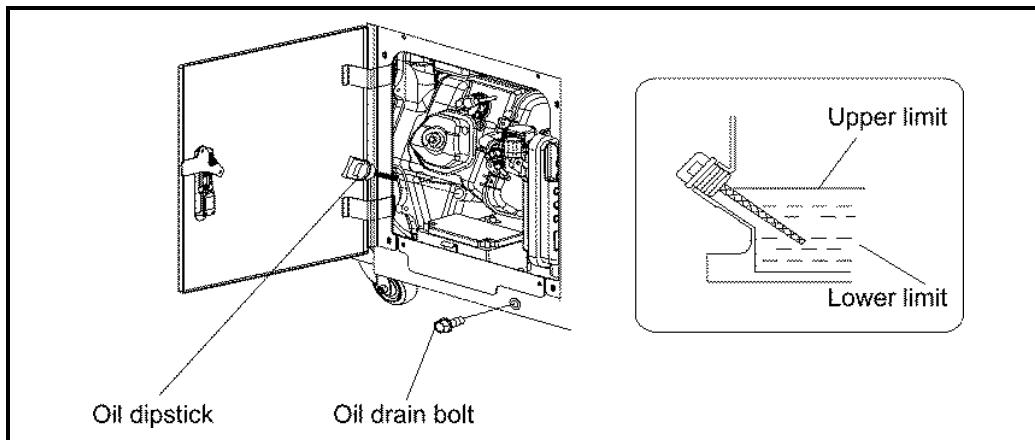


Figure 8 Oil level schematic diagram

## **⚠️ WARNING**

Running the engine with insufficient oil can cause serious engine damage.

The Low Oil Alarm System will automatically stop the engine before the oil level falls below the safe limit. However, to avoid the inconvenience of an unexpected shutdown, it is still advisable to visually inspect the oil level regularly.

### **3.2 Check the fuel level**

Use automotive gasoline (Unleaded or lowleaded is preferred to minimize combustion chamber deposits). If the fuel level is low, refuel the fuel tank until the level increased to the specified mark. (See figure 9)

Never use an oil/gasoline mixture or dirty gasoline.

Avoid getting dirt, dust or water in the fuel tank.

After refueling, tighten the oil rule securely.

## **⚠️ WARNING**

Gasoline is extremely flammable and is explosive under certain conditions.

Refuel in a well-ventilated area with the engine stopped.

Do not smoke or allow flames or sparks in the area where the engine is refueled or where gasoline is stored.

Do not overfill the fuel tank (there should be no fuel above the upper limit mark). After refueling, make sure the tank cap is closed properly and securely.

Be careful not to spill fuel when refueling. Spilled fuel or fuel vapor may ignite. If any fuel is spilled, make sure the area is dry before starting the engine.

Avoid repeated or prolonged contact with skin or breathing of vapor. **KEEP OUT OF REACH OF CHILDREN.**

Fuel capacity: 20L

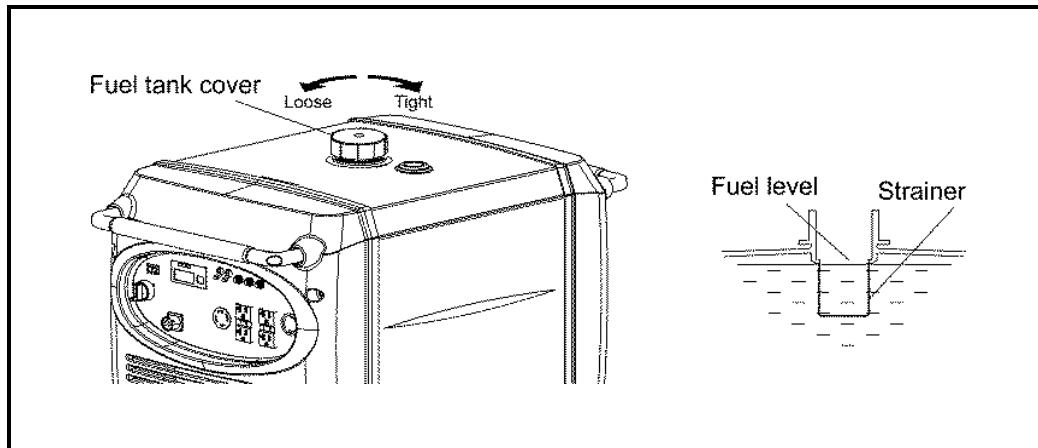


Figure 9 Fuel level schematic diagram

### **Gasoline containing alcohol**

If you decide to use a gasoline containing alcohol (gasohol), be sure it's octane rating is at least as high as that recommended by us. There are two types of gasohol: one containing ethanol, and the other containing methanol. Do not use gasohol that contains more than 10% ethanol. Do not use gasoline containing methanol (methyl or wood alcohol) that does not also contain cosolvents and corrosion inhibitors for methanol. Never use gasoline containing more than 5% methanol, even if it has cosolvents and corrosion inhibitors.



#### **NOTE**

Fuel system damage or engine performance problems resulting from the use of fuels that contain alcohol is not covered under the warranty. We cannot endorse the use of fuels containing methanol since evidence of their suitability is as yet incomplete.

Before buying fuel from an unfamiliar station, try to find out if the fuel contains alcohol, if it does, confirm the type and percentage of alcohol used. If you notice any undesirable operating symptoms while using a gasoline that contains alcohol, or one that you think contains alcohol, replace it by a gasoline that you know does not contain alcohol.

### 3.3 Check the air filter.

Check the air filter element to be sure it is clean and in good condition.

Open the left side maintenance door, and remove the air filter cover, take out the paper element and check it. Clean or replace the element if necessary. (See figure 10).

#### **CAUTION**

Never run the engine without the air filter. Rapid engine wear will result from contaminants, such as dust and dirt, being drawn through the carburetor, into the engine.

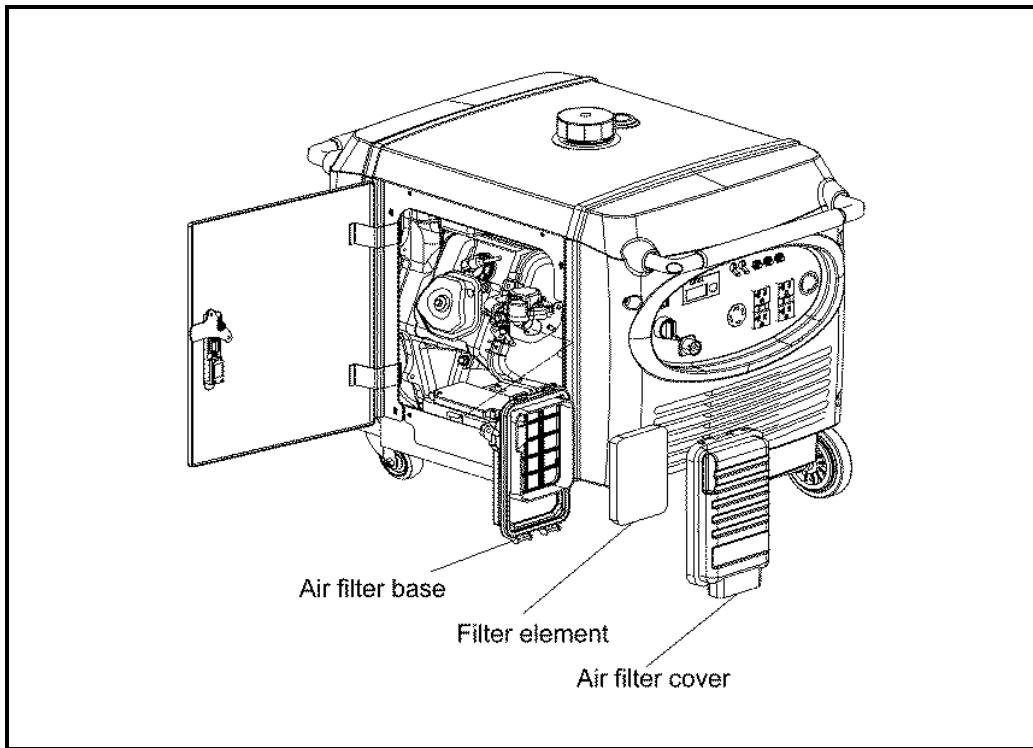


Figure 10 Air filter structure

---

## 4. STARTING THE ENGINE

---

1. Insert the engine key and turn the engine switch to “ON” position. (See figure 11).

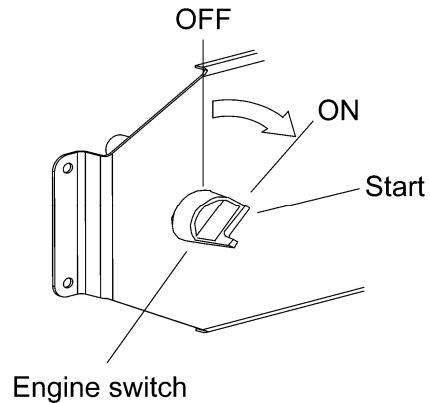


Figure 11 Engine switch drawing

2. Turn the engine switch to “START” position until the engine is started. (See figure 12).

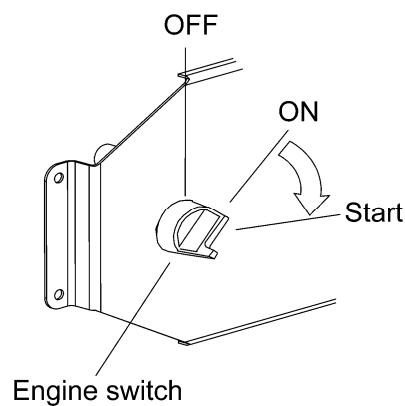


Figure 12 Engine switch

3. When the engine switch is in “OFF” position, the engine can be remote started by remote controller.

Press the remote control button for two times, the engine will be started. (See figure 13).



Figure 13 Remote controller

## 5. GENERATOR USE

### **WARNING**

To prevent electrical shock from faulty appliances, the generator should be grounded. Connect a length of heavy wire between the generator's ground terminal and an external ground source.

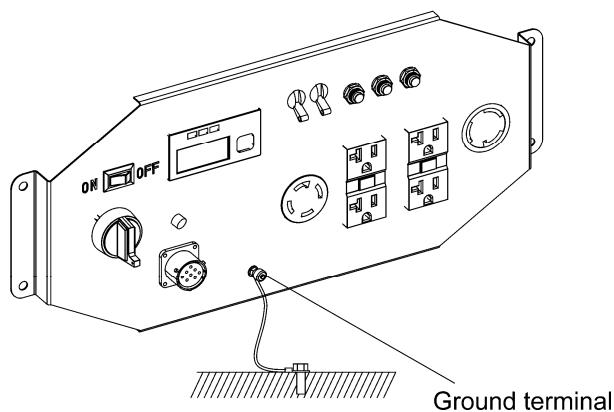


Figure 14 Alternator ground schematic diagram

### **CAUTION**

The starting power of most appliances exceeds the rated power. So be sure the total starting wattage of all appliances connected is less than the generator Max. power.

For continuous running, the total wattage shall be within the rated power specified in this manual.

Do not exceed the current limit specified for any one receptacle.

Do not connect the generator to a household circuit. This could cause the damage to the generator or to electrical appliances in the house.

Do not modify or use the generator for other purpose than it is intended for. Also observe the following when using the generator.

- Do not connect generators in parallel.
- Do not connect an extension to the exhaust pipe.

When an extension cable is required, be sure to use a

rubber sheathed flexible cable (IEC 245 or equivalent).  
Keep the generator away from other electric cables or wires such as commercial power supply lines.



#### NOTE

If you use AC receptacle at the same time, be sure not to exceed the AC total power.

Electrical equipment (including lines and plug connections) should not be defective.

#### 5.1 AC applications

1. Start the engine and make sure the output indicator light (green) comes on.
2. Confirm the connected appliance is switched off, and insert the appliance plug to the generator receptacle. (See figure 15)

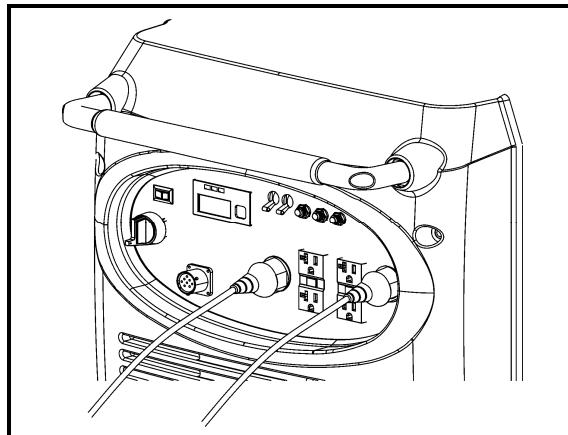


Figure 15 Connection of appliance and generator



#### CAUTION

Be sure that all appliances are in good working order before connecting them to the generator. If an appliance begins to operate abnormally, becomes sluggish, or stops suddenly, turn off the generator engine switch immediately. Then disconnect the appliance, and examine it for signs of malfunction.



#### NOTE

Before connecting an appliance to the generator, check that it is in good order, and that its electrical rating does not exceed that of the generator. Then connect the power cord of the appliance, and start the engine.

## 5.2 Display module

### 1. OIL ALARM/CHECK

(1) The function of oil alarm is to prevent generator damage from insufficient oil. The indicator lamp will illuminate when oil level is lower than safe value. At the same time, the oil alarm auto stops the generator.

After put the engine switch to START position, if the engine doesn't start or the oil alarm indicator lamp lights, priority check if there is sufficient oil before check other fault.

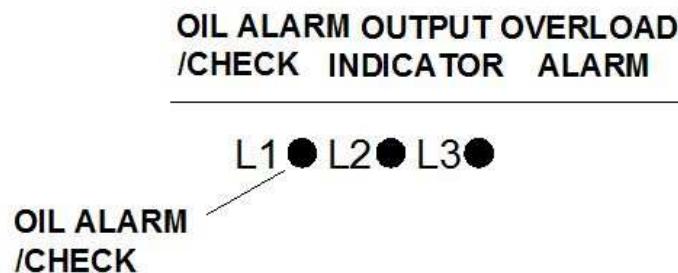


Figure 16

(2) If the oil alarm indicator lamp twinkle frequently, please contact Kipor dealer.

### 2. OUTPUT INDICATOR

The light of this output indicator (green) means the generator can work normally and can provide power to receptacle.

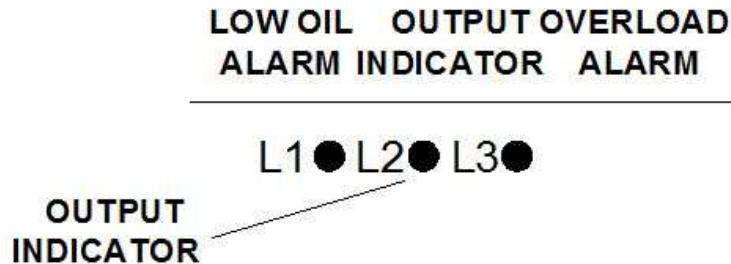


Figure 17

### 3. OVERLOAD ALARM

The light of this indicator (red) means the generator is overload or short circuit or overheat. After this indicator is lit, the generator will be disconnected with the appliance within 5s, and the OUTPUT INDICATOR (green) will extinguish at the same time.

## OIL ALARM OUTPUT OVERLOAD /CHECK INDICATOR ALARM

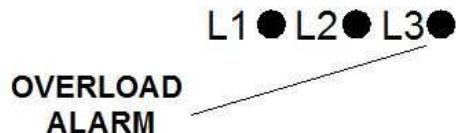


Figure 18

### 4. Display module

The display module shows engine speed, battery voltage, generator power, running time, oil level and fault code for users. The user can press mode button to select mode. Different mode provides the corresponding display.

When starting, the display module and three indicator lamps flash once at the same time, and automatically check the operation conditions of the display and the three indicator lamps. Once the engine runs, green output indicator lamp and display screen light.

(1) Figure 19 is the display of running hrs. When the mode button selects mode 4, the display shows generator running hrs.

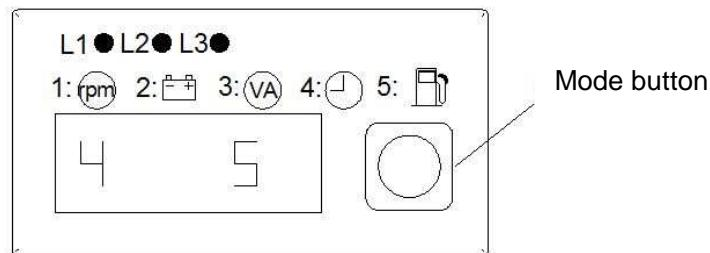


Figure 19

(2) Figure 20 is the display of generator power. When the mode button selects mode 3, the display shows generator power.

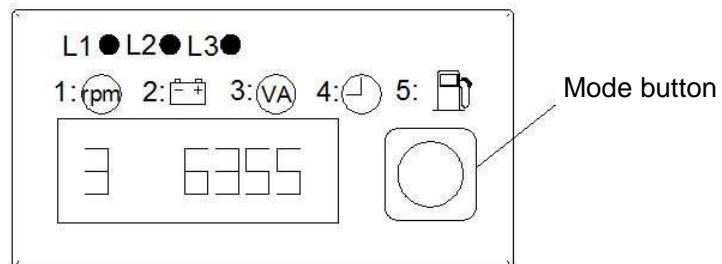


Figure 20

(3) Figure 21 is the display of generator rotation speed. When mode button selects mode 1, the displayer shows generator rotation speed.

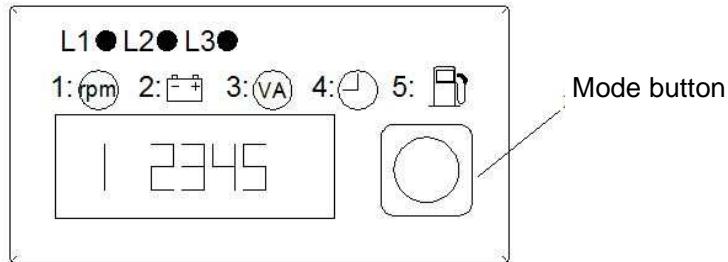


Figure 21

(4) Figure 22 is the display of battery voltage. When the mode button selects mode 2, the displayer shows battery voltage.

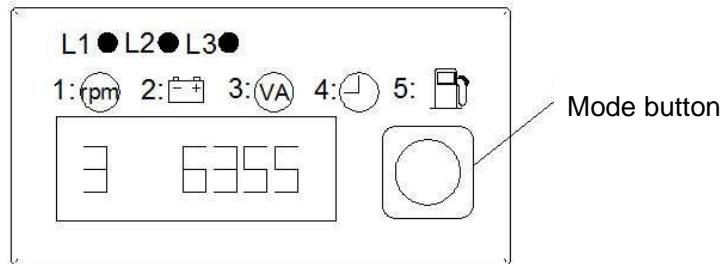


Figure 22

(5) Figure 23 is the display of oil level. When the mode button selects mode 5, the displayer shows oil level percentage.

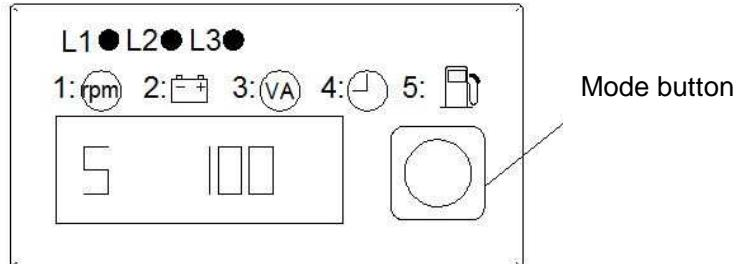


Figure 23

(6) Figure 24 is the system fault code display. When the generator appears system fault, the displayer shows word like "E-01" (see figure 24). If the generator still run

after this system fault code is shown, the receptacle output may remain unchanged. Beside, the remote operation gets well after system fault automatic cleaning. If the system fault code can not automatically clean or the display shows other fault code, please contact with Kipor dealer.

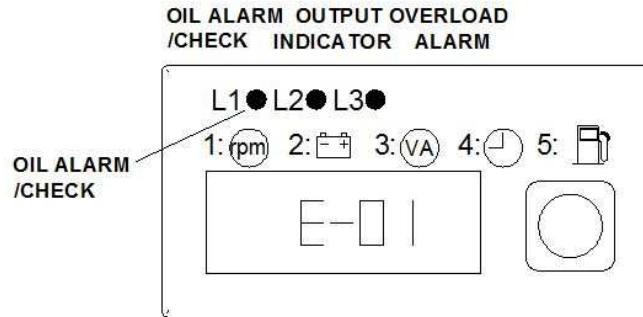


Figure 24

Meanings of fault codes	
E-01	Engine under-speed protection
E-02	Engine over-speed protection
E-03	Inverter over-current protection
E-04	Inverter AC output over-voltage protection
E-05	Inverter over-heating protection
E-06	Inverter instantaneous over-current protection
E-07	Inverter DC component over-voltage protection
E-08	Inverter DC high voltage over-voltage protection
E-09	Inverter DC high voltage under-voltage protection
E-10	Communication error
E-99	02 sensor wire disconnected

### 5.3 Reset button

When overload indicator lamp lights, the generator will stop power output. At this time, disconnect the load, check the load and the connection wire, after the failure resolved, the user can press reset button in generator running status to extinguish the indicator lamp. Let the generator continue to run and open the load again.



The red lamp and the green lamp may light at the same time during the generator starting. It is normal. If the red lamp extinguishes in 4s. Otherwise, contact Kipor dealer.

## 6. STOPPING THE ENGINE

**6.1** To stop the engine in an emergency, turn the engine switch to the OFF position.

In normal use:

1. Switch off the connected equipment and pull the inserted plug out.
2. Turn the engine switch to the OFF position

**6.2** If the generator is started by remote control, it can be stopped by remote control.

Note: if the generator is started when the engine switch is at "START" position, it cannot be stopped by remote control.

Stop by remote control:

Shut off the connected appliance, press the stop button and the generator shall be stopped.

The max. remote distance is 20m. See figure 25.



Figure 25 Remote controller

**6.3** In condition that the generator cannot be stopped by remote control, turn the engine switch to OFF1 position, then the remote control can emergency stop the generator in remote start status. See figure 26.

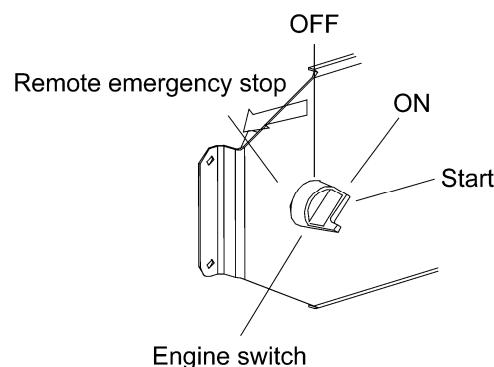


Figure 26 Remote stop in remote start status

## 7. MAINTENANCE

The purpose of the maintenance and adjustment schedule is to keep the generator in the best operating condition.

### **WARNING**

Shut off the engine before performing any maintenance. If the engine must be run, make sure the area is well ventilated. The exhaust contains poisonous carbon monoxide gas.

### **CAUTION**

Use genuine our parts or their equivalent. The use of replacement parts which are not of equivalent quality may damage the generator.

#### 7.1 Inspect or service as scheduled in the table below.

Items		Daily	First month or 10hrs	Every 3 month or 50hrs	Every 6 month or 100hrs	Every year or 300hrs
Interval(1)						
Engine oil	Check	<input type="radio"/>				
	Replace		<input type="radio"/>		<input type="radio"/>	
Air cleaner	Check	<input type="radio"/>				
	Clean			<input type="radio"/> (2)		
Spark plug	Clean-adjust				<input type="radio"/>	
Spark arrester	Clean				<input type="radio"/>	
Valve clearance	Clean-adjust				<input type="radio"/> (3)	
Fuel tank and filter	Clean				<input type="radio"/> (3)	
Oil pipe	Check		Every two years (replace if necessary(3))			

Note:

- The items marked by (1) means regular service interval.
- The items marked by (2) shall be serviced more frequently when used in dusty areas.
- The items marked by (3) shall be serviced by authorized Kipor dealer, unless you have proper tools and are mechanically proficient. Refer to the operation manuals.

## 7.2 Replace engine oil

Rapidly and thoroughly drain off the engine oil when the engine is still hot. See figure 27.

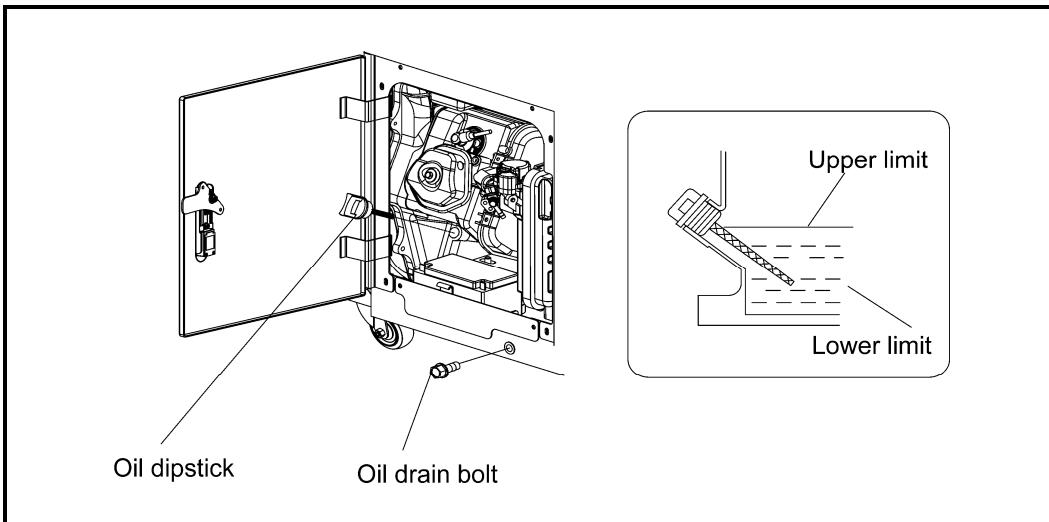


Figure 27 Replace the engine oil

1. Open the left side service door.
2. Take out the oil dipstick.
3. Remove the oil drain bolt, discharge the oil and then tighten the bolt.
4. Add recommended oil the check the oil level.
5. Close the left side service door.

**Oil capacity: 1.1L**



In order to comply with the requirements of environmental protection, we recommend that you put the waste engine oil in sealed container and deliver it to maintenance station or recycling center. Never pour the oil on the ground or to the garbage.

## 7.3 Air filter service

A dirty air filter will restrict air flow to the engine. Please service the air filter regularly. Service more frequently when operating the generator in extremely dirty areas.



Do not use gasoline or low flash point solvents for

cleaning. They are flammable and explosive under certain conditions.

## **⚠ CAUTION**

Never run the generator without the air filter, otherwise rapid engine wear may result.

1. Open the left side service door.

2. Loosen the lock plate in top of air filter, and remove the air filter.

3. Foam filter element:

- Dismantle the foam filter element from the air filter cover. 将
- Wash the foam filter element with warm water mixed with household detergent and then wash the element with clean water; you can also clean the element with nonflammable detergent and dry the foam filter element in the air.
- Wash the foam filter element with clean oil. Do remember to extrude the redundant oil. Too much residual oil in the element will make the engine exhaust black smoke in start process.
- Reassemble the foam filter element to the air filter cover.

4. Paper filter element

Replace the dirty paper filter element with new one. Never clean the paper filter element.

5. Reassemble the air filter cover.

6. Close the left side door.

## **7.4 SPARK PLUG SERVICE**

RECOMMENDED SPARK PLUG: WR7DC

To ensure proper engine operation, the spark plug must be properly gapped and free of deposits.

1. Open the left side service door.

2. Remove the spark plug cap.

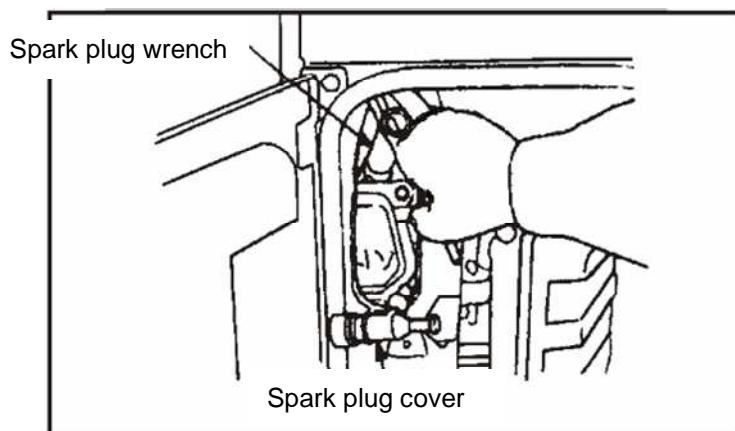


Figure 28 Dismantle the spark plug

3. Dismantle the spark plug using a spark plug wrench.
4. Clean any dirt from around the spark plug base.
5. Visually inspect the spark plug. Discard it if the insulator is cracked or chipped.  
Clean the spark plug with a wire brush if it is to be reused.
6. Measure the plug gap with a feeler gauge.  
The gap shall be 0.7~0.8mm (0.028-0.031in). Correct as necessary by carefully bending the side electrode.

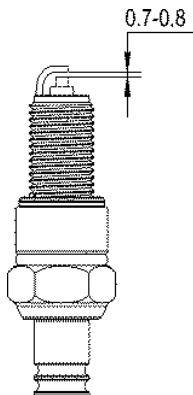


Figure 29 Measure the clearance of spark plug

**CAUTION**

The spark plug must be securely tightened. An improperly tightened plug can become very hot and possibly damage the generator.

Never use a spark plug with an improper heat range.

7. Install the spark plug carefully, by hand, to avoid cross-threading.
8. After a new spark plug has been seated by hand, it should be tightened 1/2 turn with a wrench to compress its washer.  
If a used plug is being re-installed, it should only require 1/8 to 1/4 turn after being seated.
9. Re-install the spark plug cap on the spark plug securely.
10. Re-install the spark plug maintenance cover.

## 7.5 Spark arrester service (See figure 30)

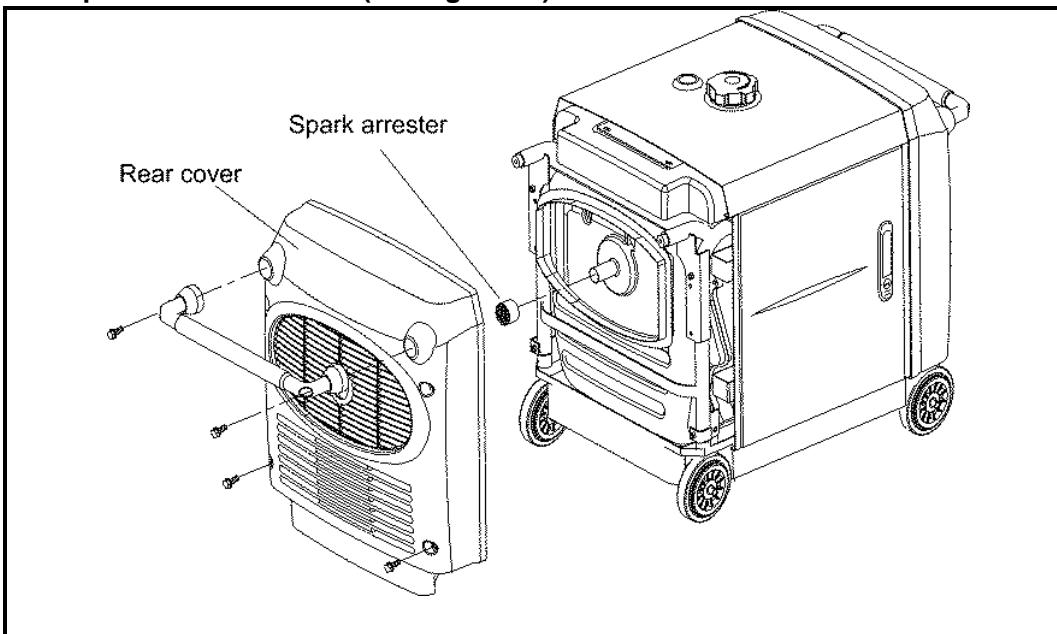


Figure 30 Dismantle the spark arrester



The muffler is very hot after the generator is just stopped.  
Service the generator when the muffler is cooled down.



In order to ensure the performance of spark arrester,  
service the spark arrester once every 100hrs.

1. Remove the rear cover
2. Dismantle the spark arrester from the exhaust end.
3. Wipe off the carbon deposition with a carbon brush.



Check if there is any broken hole or crack on the arrester net, replace the net as necessary.

4. Reassemble the spark arrester.
5. Reassemble the rear cover.

---

## 8. TRANSPORTING & STORAGE

---

**8.1 Keep the generator far away from spill fuel in transportation, for oil mist or spill fuel is very easy to burn.**

**8.2 Preparation for generator long term storage:**

1. Be sure the storage area is free of excessive humidity and dust.
2. Drain off the fuel.


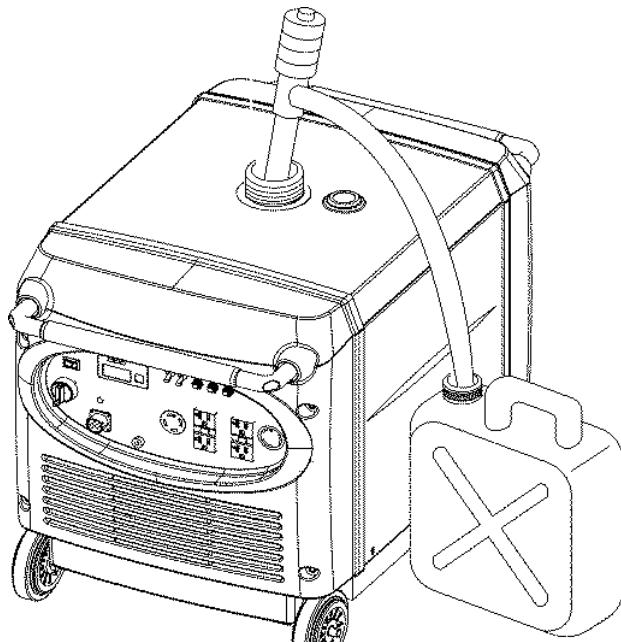


Figure 31 Drain the fuel

3. Charge the battery every two months.
4. Replace the engine oil.
5. Remove the spark plug and pour about a tablespoon of clean engine oil into the cylinder. Crank the engine several revolutions to distribute the oil, and then re-install the spark plug.

## 9. TROUBLE SHOOTING

When the engine does not start:

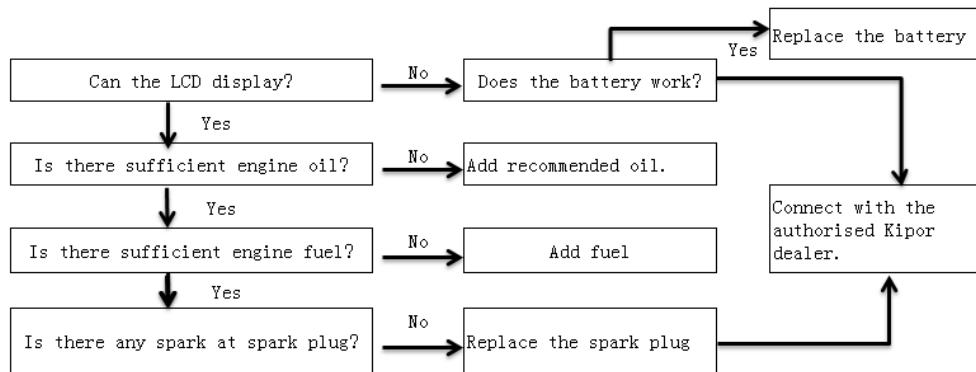


Be sure there is no spilled fuel around the spark plug. Spilled fuel may ignite.

Spark check:

- 1) Remove the spark plug cap and clean any dirt from around the spark plug.
- 2) Remove the spark plug and install the spark plug in the plug cap.
- 3) Set the plug side electrode on the cylinder head to ground. Keep the spark plug as far as possible from the mounting hole.
- 4) Start the generator, sparks should jump across the gap.

Appliance does not operate:

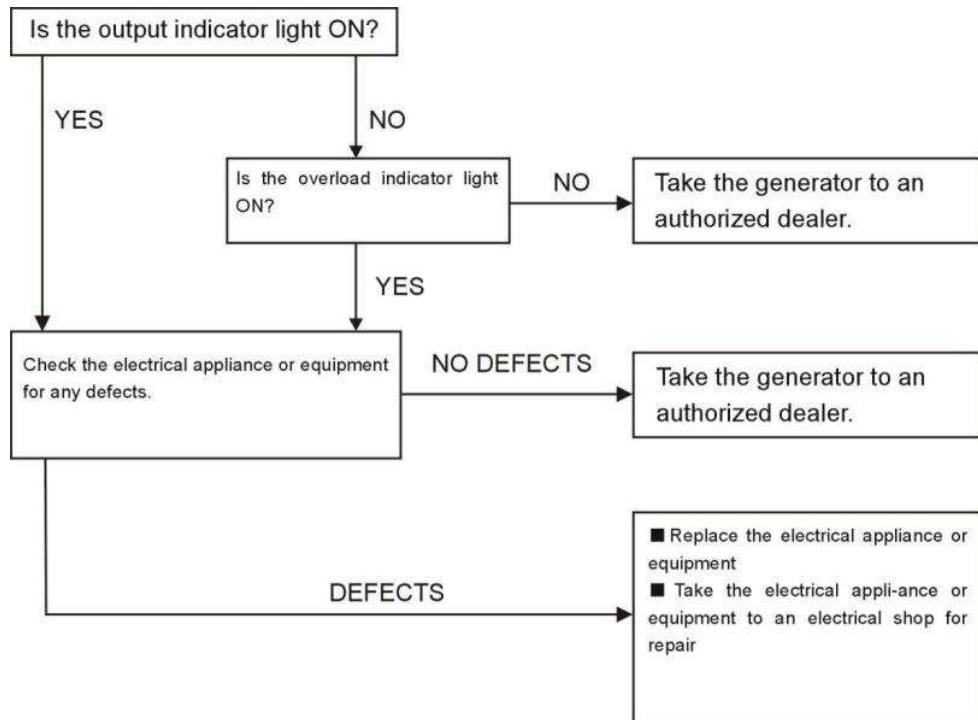

## 10. SPECIFICATIONS

Genset model	IG7000e
Rated frequency (Hz)	60
Rated voltage (V)	120/240
Rated current (A)	45.8/22.9
Rated speed (r/min)	3600
Rated output power (kVA)	5.5
Max. output power (kVA)	7.0

### Engine

Engine model	KG400GETi
Engine structure	Single cylinder, 4-stroke, air-cooled, OHV, cylinder inclined arrangement,
Displacement (bore×stroke)	398ml (89×64 mm)
Compression ratio	8.5:1
Ignition system	Transistor electrical ignition
Spark plug	WR7DC
Start mode	Electrical start
Fuel type	Automotive unleaded gasoline
Oil type	Above CD grade or SAE 10W-30, 15W-40

Capacity of fuel tank (L)	20
Running lasting time (hrs) (under rated output power)	6.5
Fuel consumption (g/Kw.h)	≤480
Noise (dB A/at 7m) (0-load~full-load)	65-75*
Dimension (L×W×H) [(mm)]	802×495×624 (31.57×19.49×24.57)
Net weight [kg]	90 (198)

\*The declared values shall consider uncertainties due to production variation and measurement procedures.

## 11. Electrical principle diagram

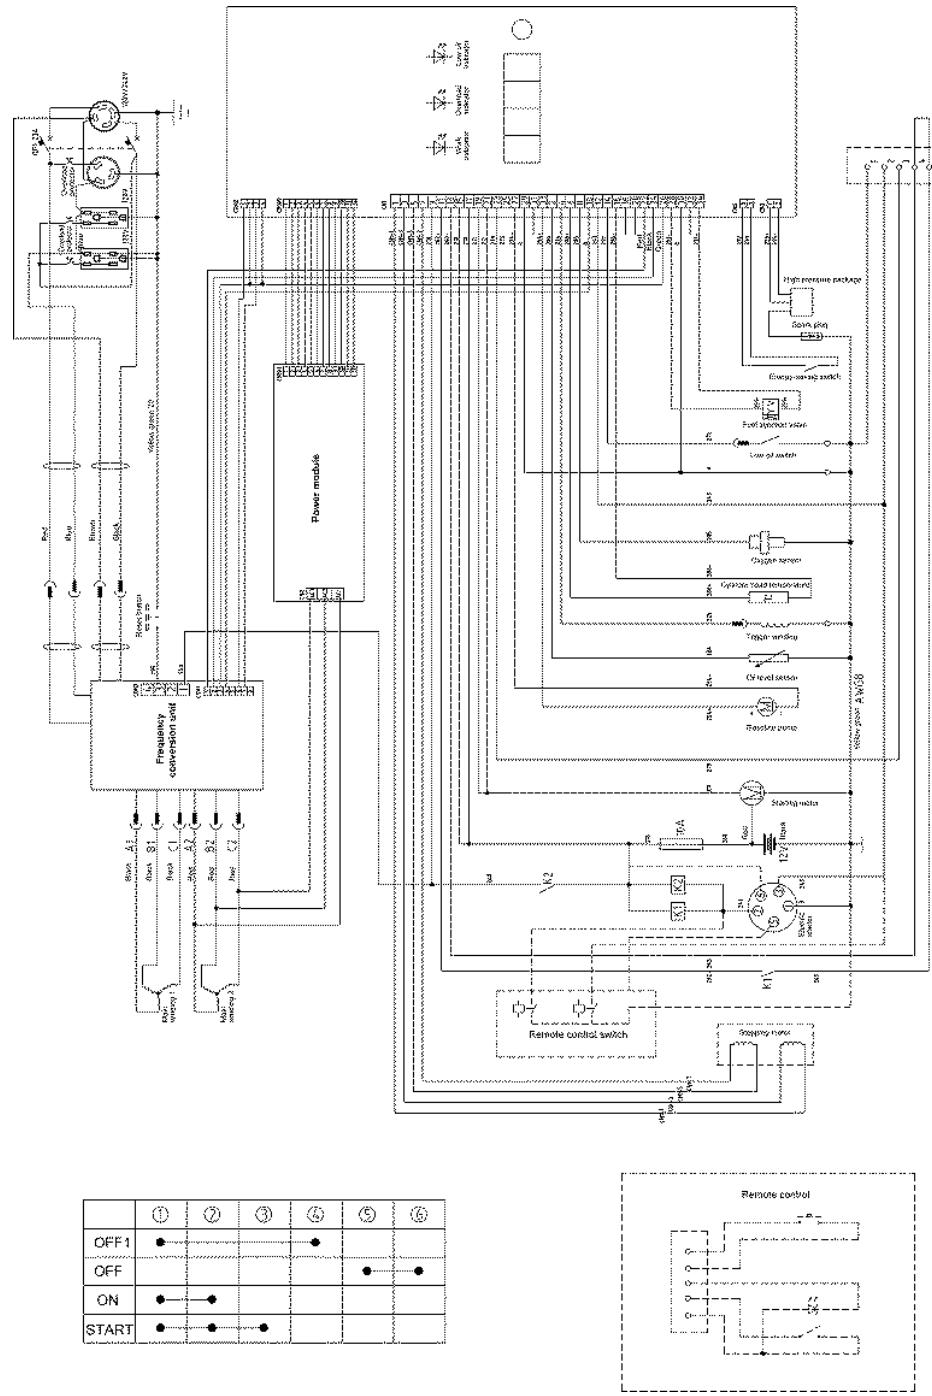


Figure 32 Electrical principle diagram

---

## 12. Trundle installation

---

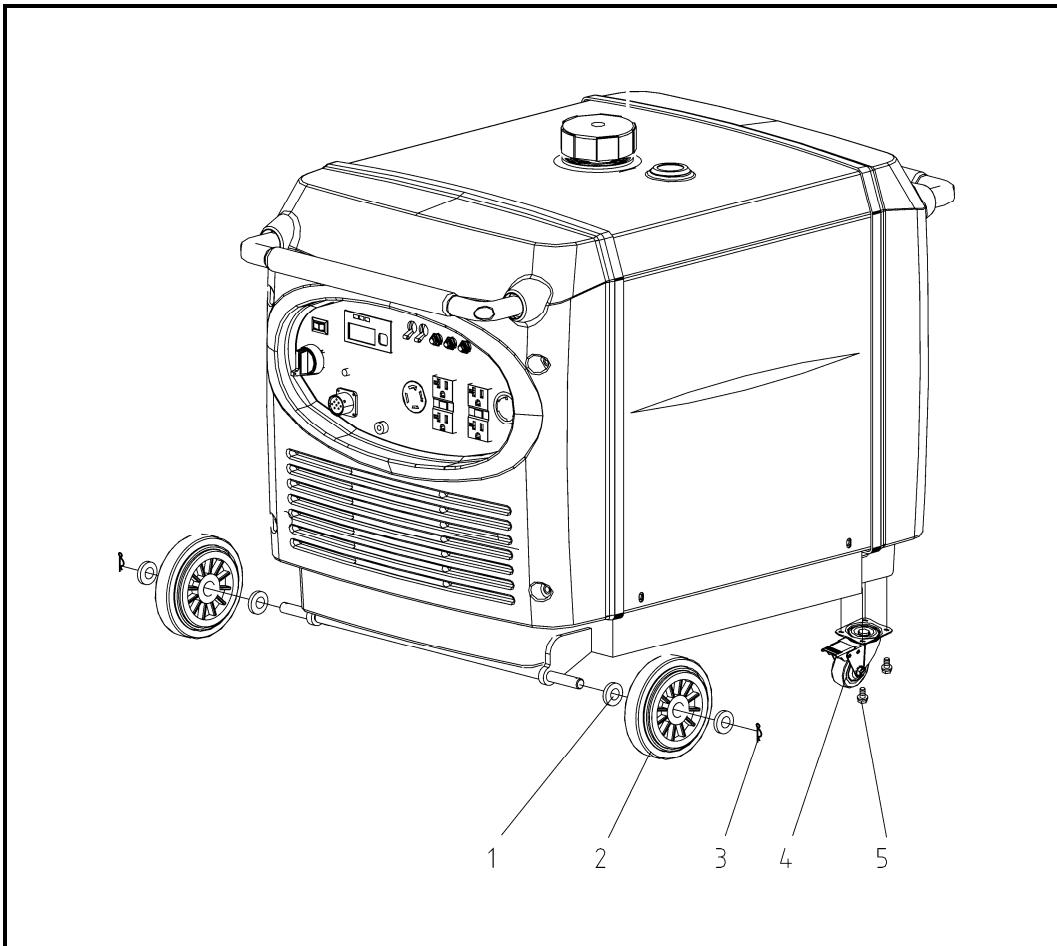


Figure 36 Trundle installation drawing

- |                         |               |             |
|-------------------------|---------------|-------------|
| 1. Washer               | 2. Wheel      | 3. Lock pin |
| 4. Locking swivel wheel | 5. Bolt M6*16 |             |

To install the front wheels, install a washer on the axle, then the wheel, another washer and secure with a wheel clip.

To install the locking swivel wheels, line up the bolt holes in the chassis with the holes in the wheel attaching plate. Secure with the 4 bolts.

---

## 13. Appendix

---

### 1. Cable Selections

#### 【Note】

Select the cable size based on the permissible current and distance between genset and load. If the current going through the cable exceeds the permissible current, it may burn the cables due to overheat. If the power cable is too long, and cable size is too small, the resistance will be large and cause a voltage drop which may stop the load from working.

- Choose the cable length and section area within 5% rated voltage.
- The following formula can be used to calculate the voltage drop value "e" from cable length, sectional area and current in 3-phase 3-line situation.

$$\text{Voltage drop (V)} = \frac{1}{58} \times \frac{\text{Length}}{\text{Section area}} \times \text{Current (A)} \times \sqrt{3}$$

The selection chart for single core and multi-core cables is as follows: (It's applicable for 220V voltage with a voltage drop of less than 10V).

For rubber insulated single core cable:

Length \ Current	Within 50m	75m	100m	125m	150m	200m
50A	8	14	22	22	30	38
100A	22	30	38	50	50	60
200A	60	60	60	80	100	125
300A	100	100	100	125	150	200

For rubber insulated multi-core cable:

mm<sup>2</sup>

Length \ Current	Within 50m	75m	100m	125m	150m	200m
50A	14	14	22	22	30	38
100A	38	38	38	50	50	60
200A	38x2 core	38x2 core	38x2 core	50x2 core	50x2 core	50x2 core
300A	60x2 core	60x2 core	60x2 core	60x2 core	80x2 core	100x2 core

## 2. Power Derating

Test conditions: Altitude: <=1000m Ambient temperature: 5°C~25°C

Relative humidity: 30%

Power derating factor: C (Relative humidity:30%)

Altitude (m)	Ambient temperature (°C)				
	25	30	35	40	45
1000	1	0.97	0.94	0.91	0.87
2000	0.87	0.84	0.81	0.78	0.74
3000	0.73	0.7	0.67	0.64	0.60
4000	0.60	0.57	0.54	0.51	0.47

Note:

The power derating factor is C-0.01 @ 60% relative humidity

The power derating factor is C-0.02 @ 80% relative humidity

The power derating factor is C-0.03 @ 90% relative humidity

The power derating factor is C-0.04 @ 100% relative humidity

For example:

The rated power of the genset is 20kW (PN) in test conditions. To determine the power if the altitude is 2000 meters, the ambient temperature 40°C and the relative humidity is 80%:

$$P=PN \times (C-0.02)=20 \times (0.78-0.02)=15.2\text{KW}$$