

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT FCC ID: 2A27O-AT1013U

Product: Tablet PC

Trade Mark: Azeyou

Model Number: AT1013U

Family Model: M17QF3U-T610, AT1013E, AT1013Q,
M17QF3U

Report No.: S21090603502006

Prepared for

Dongguan Lianzhou Electronic Technology Co., Ltd.

Building 1, No. 10, Feng Gang Technology Road, Feng Gang Town, DongGuan
City, GuangDong Province, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name	Dongguan Lianzhou Electronic Technology Co., Ltd.
Address.....	Building 1, No. 10, Feng Gang Technology Road, Feng Gang Town, DongGuan City, GuangDong Province, China
Manufacturer's Name	Dongguan Lianzhou Electronic Technology Co., Ltd.
Address.....	Building 1, No. 10, Feng Gang Technology Road, Feng Gang Town, DongGuan City, GuangDong Province, China
Product name.....	Tablet PC
Model and/or type reference ..	AT1013U
Family Model:	M17QF3U-T610, AT1013E, AT1013Q, M17QF3U
Standards	FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure	ANSI C63.26:2015 ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test	
Date (s) of performance of tests	Sep 07, 2021 ~ Oct 18, 2021
Date of Issue	Oct 21, 2021
Test Result	Pass

Testing Engineer : 

 (Allen Liu)

Authorized Signatory : 

 (Alex Li)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION	6
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	7
1.3 TEST METHODOLOGY	7
1.4 TEST FACILITY	7
MEASUREMENT UNCERTAINTY	7
1.5 SPECIAL ACCESSORIES	7
1.6 WORST-CASE CONFIGURATION AND MODE	8
1.6 SUMMARY OF TEST RESULTS	8
2. SYSTEM TEST CONFIGURATION	10
2.1 EUT CONFIGURATION	10
2.2 EUT EXERCISE.....	10
2.3 CONFIGURATION OF EUT SYSTEM	10
2.4 TEST SETUP	11
3.TEST AND MEASUREMENT EQUIPMENT	12
4. OUTPUT POWER.....	14
4.1 OUTPUT POWER MEASUREMENT	14
6. BANDEDGE AND EMISSION MASK.....	17
7. OUT OF BAND EMISSIONS	18
7.1 MEASUREMENT METHOD	19
8. RADIATED MEASUREMENT	20
8.1. RADIATED POWER (ERP & EIRP)	20
8.2 LTE BAND 2	21
8.3 LTE BAND 4	25
8.4 LTE BAND 5	29

8.5 LTE BAND 7	31
8.6 LTE BAND 17	33
9. SPURIOUS RADIATION EMISSION	35
9.1 LTE BAND 2	37
9.2 LTE BAND 4	39
9.3 LTE BAND 5	41
9.4 LTE BAND 7	43
9.5 LTE BAND 17	45
10. FREQUENCY STABILITY	47
10.1 LTE BAND 2	48
10.2 LTE BAND 4	50
10.3 LTE BAND 5	52
10.4 LTE BAND 7	54
10.5 LTE BAND 17	56
11. PEAK-TO-AVERAGE RATIO.....	58
11.1 Description of the PAR Measurement	58
11.2 Measuring Instruments	58
11.3 Test Procedures	58
11.4 Test Setup	58

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Tablet PC
Trade Mark	Azeyou
Model Name	AT1013U
Family Model	M17QF3U-T610, AT1013E, AT1013Q, M17QF3U
Model Difference	All models are the same circuit and RF module, except the Model name.
FCC ID:	2A27O-AT1013U
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2, 4, 5, 7, 17
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz;
Type of Modulation:	QPSK/16QAM
Power Class	Class 3
Antenna:	PIFA Antenna
Antenna gain:	1dBi
Power Supply:	DC 3.8V, 6000mAh from battery or DC 5V from Adapter.
Adapter:	Model: TEKA-UCA20US Input: 100-240V~50/60Hz 0.35A MAX Output: 5.0V---2.0A
Extreme Vol. Limits:	DC 3.4V to DC 4.2V (Nominal DC 3.8V) (Note 1)
HW Version	P30-T618-V2.0
SW Version	Android 11
** Note1: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2A27O-AT1013U** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
2	Conducted Emission Test	$\pm 1.38\text{dB}$
3	RF power, conducted	$\pm 0.16\text{dB}$
4	Spurious emissions, conducted	$\pm 0.21\text{dB}$
5	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
6	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
7	Temperature	$\pm 0.5^{\circ}\text{C}$
8	Humidity	$\pm 2\%$
9	Frequency error, conducted	$\pm 0.19\text{ ppm}$

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 17

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	

2.1053 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
Remark: 1. "N/A" denotes test is not applicable in this Test Report. 2. All test items were verified and recorded according to the standards and without any deviation during the test. 3. No modifications are made to the EUT during all test items.			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Tablet PC	AT1013U	FCC ID: 2A27O-AT1013U	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

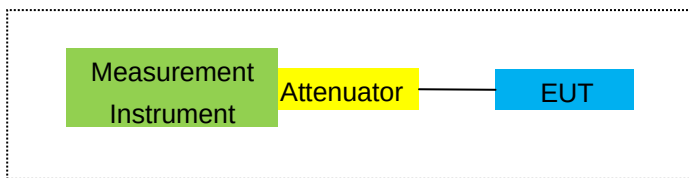

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

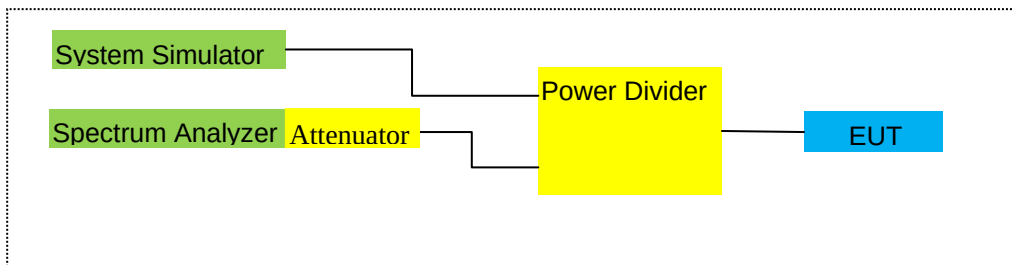

For Frequency Stability

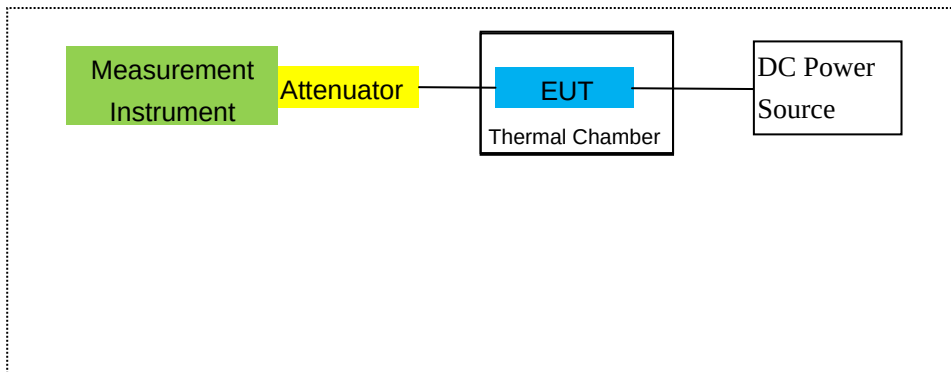

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2021.07.01	2022.06.30	1 year
2	Test Receiver	R&S	ESPI	101318	2021.04.27	2022.04.26	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2021.03.29	2022.03.28	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2021.03.29	2022.03.28	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2020.11.20	2021.11.19	1 year
7	Amplifier	EM	EM-30180	060538	2021.07.01	2022.06.30	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2021.04.27	2022.04.26	1 year
9	Power Meter	R&S	NRVS	100696	2021.07.01	2022.06.30	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2021.04.27	2022.04.26	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2021.04.27	2022.04.26	1 year
15	LISN	R&S	ENV216	101313	2021.04.27	2022.04.26	1 year
16	LISN	EMCO	3816/2	00042990	2021.04.27	2022.04.26	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2021.04.27	2022.04.26	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2021.04.27	2022.04.26	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2023.05.10	3 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2021.04.27	2022.04.26	1 year
24	test receiver	R&S	ESCI	a0304218	2021.04.27	2022.04.26	1 year
25	Communication Tester	R&S	CMU200	A0304247	2021.07.01	2022.06.30	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2021.04.27	2022.04.26	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.07.01	2022.06.30	1 year
29	Communication Tester	R&S	CMW500	148500	2021.07.01	2022.06.30	1 year
30	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.07.01	2022.06.30	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".³

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- ☐ LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 17

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- ☐ LTE Band 2/4/5/7/17

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- ☐ Set display line
- ☐ Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- ☐ LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 17

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

- ☐ LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 17

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	1850.7	-2.30	3.76	28.24	22.18	165.196	Horizontal	Pass
		1880	-2.11	3.91	28.22	22.20	165.959	Horizontal	Pass
		1909.3	-2.02	3.93	28.20	22.25	167.880	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-2.36	3.77	28.23	22.10	162.181	Horizontal	Pass
		1880	-2.21	3.91	28.24	22.12	162.930	Horizontal	Pass
		1908.5	-2.08	3.94	28.25	22.23	167.109	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-2.25	3.77	28.31	22.29	169.434	Horizontal	Pass
		1880	-1.87	3.91	28.22	22.44	175.388	Horizontal	Pass
		1907.5	-1.80	3.94	28.20	22.46	176.198	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	-2.11	3.79	28.33	22.43	174.985	Horizontal	Pass
		1880	-1.81	3.95	28.22	22.46	176.198	Horizontal	Pass
		1905	-1.70	3.97	28.19	22.52	178.649	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-2.07	3.79	28.34	22.48	177.011	Horizontal	Pass
		1880	-1.86	3.95	28.22	22.41	174.181	Horizontal	Pass
		1902.5	-1.72	3.97	28.18	22.49	177.419	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	-2.06	3.81	28.35	22.48	177.011	Horizontal	Pass
		1880	-1.73	3.96	28.22	22.53	179.061	Horizontal	Pass
		1900	-1.67	4.00	28.16	22.49	177.419	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	-3.09	3.76	28.24	21.39	137.721	Vertical	Pass
		1880	-3.34	3.91	28.22	20.97	125.026	Vertical	Pass
		1909.3	-2.49	3.93	28.20	21.78	150.661	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-2.73	3.77	28.23	21.73	148.936	Vertical	Pass
		1880	-2.58	3.91	28.24	21.75	149.624	Vertical	Pass
		1908.5	-2.83	3.94	28.25	21.48	140.605	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-2.82	3.77	28.31	21.72	148.594	Vertical	Pass
		1880	-2.57	3.91	28.22	21.74	149.279	Vertical	Pass
		1907.5	-3.04	3.94	28.20	21.22	132.434	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1855	-2.85	3.79	28.33	21.69	147.571	Vertical	Pass
		1880	-2.48	3.95	28.22	21.79	151.008	Vertical	Pass
		1905	-2.70	3.97	28.19	21.52	141.906	Vertical	Pass

15.0MHz Band QPSK	1/#Mid	1857.5	-2.79	3.79	28.34	21.76	149.968	Vertical	Pass
		1880	-2.90	3.95	28.22	21.37	137.088	Vertical	Pass
		1902.5	-2.71	3.97	28.18	21.50	141.254	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1860	-3.08	3.81	28.35	21.46	139.959	Vertical	Pass
		1880	-3.23	3.96	28.22	21.03	126.765	Vertical	Pass
		1900	-2.94	4.00	28.16	21.22	132.434	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP	Polarization Of Max. ERP	
							Average		
							(mW)		
1.4MHz Band 16 QAM	1/##Mid	1850.7	-3.34	3.76	28.24	21.14	130.017	Horizontal	Pass
		1880	-2.81	3.91	28.22	21.50	141.254	Horizontal	Pass
		1909.3	-2.74	3.93	28.20	21.53	142.233	Horizontal	Pass
3.0MHz Band 16 QAM	1/##Mid	1851.5	-2.84	3.77	28.23	21.62	145.211	Horizontal	Pass
		1880	-2.92	3.91	28.24	21.41	138.357	Horizontal	Pass
		1908.5	-3.13	3.94	28.25	21.18	131.220	Horizontal	Pass
5.0MHz Band 16 QAM	1/##Mid	1852.5	-2.78	3.77	28.31	21.76	149.968	Horizontal	Pass
		1880	-2.69	3.91	28.22	21.62	145.211	Horizontal	Pass
		1907.5	-2.37	3.94	28.20	21.89	154.525	Horizontal	Pass
10.0MHz Band 16 QAM	1/##Mid	1855	-2.83	3.79	28.33	21.71	148.252	Horizontal	Pass
		1880	-2.82	3.95	28.22	21.45	139.637	Horizontal	Pass
		1905	-2.29	3.97	28.19	21.93	155.955	Horizontal	Pass
15.0MHz Band 16 QAM	1/##Mid	1857.5	-2.81	3.79	28.34	21.74	149.279	Horizontal	Pass
		1880	-2.60	3.95	28.22	21.67	146.893	Horizontal	Pass
		1902.5	-2.56	3.97	28.18	21.65	146.218	Horizontal	Pass
20.0MHz Band 16 QAM	1/##Mid	1860	-2.70	3.81	28.35	21.84	152.757	Horizontal	Pass
		1880	-2.40	3.96	28.22	21.86	153.462	Horizontal	Pass
		1900	-2.22	4.00	28.16	21.94	156.315	Horizontal	Pass
1.4MHz Band 16 QAM	1/##Mid	1850.7	-3.60	3.76	28.24	20.88	122.462	Vertical	Pass
		1880	-3.63	3.91	28.22	20.68	116.950	Vertical	Pass
		1909.3	-3.97	3.93	28.20	20.30	107.152	Vertical	Pass
3.0MHz Band 16 QAM	1/##Mid	1851.5	-4.30	3.77	28.23	20.16	103.753	Vertical	Pass
		1880	-4.25	3.91	28.24	20.08	101.859	Vertical	Pass
		1908.5	-4.18	3.94	28.25	20.13	103.039	Vertical	Pass
5.0MHz Band 16 QAM	1/##Mid	1852.5	-3.83	3.77	28.31	20.71	117.761	Vertical	Pass
		1880	-4.15	3.91	28.22	20.16	103.753	Vertical	Pass
		1907.5	-3.60	3.94	28.20	20.66	116.413	Vertical	Pass
10.0MHz Band 16 QAM	1/##Mid	1855	-3.66	3.79	28.33	20.88	122.462	Vertical	Pass
		1880	-4.23	3.95	28.22	20.04	100.925	Vertical	Pass
		1905	-4.12	3.97	28.19	20.10	102.329	Vertical	Pass
15.0MHz Band 16	1/##Mid	1857.5	-4.25	3.79	28.34	20.30	107.152	Vertical	Pass
		1880	-3.65	3.95	28.22	20.62	115.345	Vertical	Pass

QAM		1902.5	-3.54	3.97	28.18	20.67	116.681	Vertical	Pass
20.0MHz	1/#Mid	1860	-3.80	3.81	28.35	20.74	118.577	Vertical	Pass
Band 16		1880	-3.63	3.96	28.22	20.63	115.611	Vertical	Pass
QAM		1900	-3.54	4.00	28.16	20.62	115.345	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level	Cable Loss	Antenna Gain	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
			(dBm)	(dBm)	(dB)	Average	Average		
						(dBm)	(mW)		
1.4MHz	1#Mid	1710.7	-2.00	3.12	27.58	22.46	176.198	Horizontal	Pass
Band		1732.5	-1.99	3.27	27.61	22.35	171.791	Horizontal	Pass
QPSK		1754.3	-1.97	3.29	27.63	22.37	172.584	Horizontal	Pass
3.0MHz	1#Mid	1711.5	-2.17	3.13	27.61	22.31	170.216	Horizontal	Pass
Band		1732.5	-2.09	3.27	27.61	22.25	167.880	Horizontal	Pass
QPSK		1753.5	-2.01	3.30	27.62	22.31	170.216	Horizontal	Pass
5.0MHz	1#Mid	1712.5	-1.94	3.13	27.63	22.56	180.302	Horizontal	Pass
Band		1732.5	-1.84	3.27	27.61	22.50	177.828	Horizontal	Pass
QPSK		1752.5	-1.72	3.30	27.60	22.58	181.134	Horizontal	Pass
10.0MHz	1#Mid	1715	-1.88	3.15	27.64	22.61	182.390	Horizontal	Pass
Band		1732.5	-1.65	3.31	27.61	22.65	184.077	Horizontal	Pass
QPSK		1750	-1.67	3.33	27.59	22.59	181.552	Horizontal	Pass
15.0MHz	1#Mid	1717.5	-1.89	3.15	27.65	22.61	182.390	Horizontal	Pass
Band		1732.5	-1.73	3.31	27.61	22.57	180.717	Horizontal	Pass
QPSK		1747.5	-1.67	3.33	27.57	22.57	180.717	Horizontal	Pass
20.0MHz	1#Mid	1720	-1.83	3.17	27.66	22.66	184.502	Horizontal	Pass
Band		1732.5	-1.66	3.32	27.61	22.63	183.231	Horizontal	Pass
QPSK		1745	-1.60	3.36	27.56	22.60	181.970	Horizontal	Pass
1.4MHz	1#Mid	1710.7	-3.33	3.12	27.58	21.13	129.718	Vertical	Pass
Band		1732.5	-2.83	3.27	27.61	21.51	141.579	Vertical	Pass
QPSK		1754.3	-3.02	3.29	27.63	21.32	135.519	Vertical	Pass
3.0MHz	1#Mid	1711.5	-2.47	3.13	27.61	22.01	158.855	Vertical	Pass
Band		1732.5	-2.82	3.27	27.61	21.52	141.906	Vertical	Pass
QPSK		1753.5	-2.98	3.30	27.62	21.34	136.144	Vertical	Pass
5.0MHz	1#Mid	1712.5	-2.66	3.13	27.63	21.84	152.757	Vertical	Pass
Band		1732.5	-2.46	3.27	27.61	21.88	154.170	Vertical	Pass
QPSK		1752.5	-2.54	3.30	27.60	21.76	149.968	Vertical	Pass
10.0MHz	1#Mid	1715	-3.32	3.15	27.64	21.17	130.918	Vertical	Pass
Band		1732.5	-3.04	3.31	27.61	21.26	133.660	Vertical	Pass
QPSK		1750	-2.36	3.33	27.59	21.90	154.882	Vertical	Pass

15.0MHz Band QPSK	1/#Mid	1717.5	-2.55	3.15	27.65	21.95	156.675	Vertical	Pass
		1732.5	-2.66	3.31	27.61	21.64	145.881	Vertical	Pass
		1747.5	-2.55	3.33	27.57	21.69	147.571	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1720	-2.55	3.17	27.66	21.94	156.315	Vertical	Pass
		1732.5	-2.19	3.32	27.61	22.10	162.181	Vertical	Pass
		1745	-2.95	3.36	27.56	21.25	133.352	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP	Max.	Polarization Of Max. ERP	
			Level			EIRP			
			(dBm)			Average	Average		
					(dBm)	(mW)			
1.4MHz	1/#Mid	1710.7	-2.81	3.12	27.58	21.65	146.218	Horizontal	Pass
Band 16		1732.5	-2.66	3.27	27.61	21.68	147.231	Horizontal	Pass
QAM		1754.3	-2.66	3.29	27.63	21.68	147.231	Horizontal	Pass
3.0MHz	1/#Mid	1711.5	-2.75	3.13	27.61	21.73	148.936	Horizontal	Pass
Band 16		1732.5	-2.88	3.27	27.61	21.46	139.959	Horizontal	Pass
QAM		1753.5	-3.10	3.30	27.62	21.22	132.434	Horizontal	Pass
5.0MHz	1/#Mid	1712.5	-2.58	3.13	27.63	21.92	155.597	Horizontal	Pass
Band 16		1732.5	-2.54	3.27	27.61	21.80	151.356	Horizontal	Pass
QAM		1752.5	-2.23	3.30	27.60	22.07	161.065	Horizontal	Pass
10.0MHz	1/#Mid	1715	-2.65	3.15	27.64	21.84	152.757	Horizontal	Pass
Band 16		1732.5	-2.84	3.31	27.61	21.46	139.959	Horizontal	Pass
QAM		1750	-2.22	3.33	27.59	22.04	159.956	Horizontal	Pass
15.0MHz	1/#Mid	1717.5	-2.45	3.15	27.65	22.05	160.325	Horizontal	Pass
Band 16		1732.5	-2.51	3.31	27.61	21.79	151.008	Horizontal	Pass
QAM		1747.5	-2.53	3.33	27.57	21.71	148.252	Horizontal	Pass
20.0MHz	1/#Mid	1720	-2.40	3.17	27.66	22.09	161.808	Horizontal	Pass
Band 16		1732.5	-2.41	3.32	27.61	21.88	154.170	Horizontal	Pass
QAM		1745	-2.22	3.36	27.56	21.98	157.761	Horizontal	Pass
1.4MHz	1/#Mid	1710.7	-3.55	3.12	27.58	20.91	123.310	Vertical	Pass
Band 16		1732.5	-3.49	3.27	27.61	20.85	121.619	Vertical	Pass
QAM		1754.3	-3.60	3.29	27.63	20.74	118.577	Vertical	Pass
3.0MHz	1/#Mid	1711.5	-3.40	3.13	27.61	21.08	128.233	Vertical	Pass
Band 16		1732.5	-3.24	3.27	27.61	21.10	128.825	Vertical	Pass
QAM		1753.5	-4.15	3.30	27.62	20.17	103.992	Vertical	Pass
5.0MHz	1/#Mid	1712.5	-3.67	3.13	27.63	20.83	121.060	Vertical	Pass
Band 16		1732.5	-3.89	3.27	27.61	20.45	110.917	Vertical	Pass
QAM		1752.5	-3.91	3.30	27.60	20.39	109.396	Vertical	Pass
10.0MHz	1/#Mid	1715	-3.94	3.15	27.64	20.55	113.501	Vertical	Pass
Band 16		1732.5	-3.56	3.31	27.61	20.74	118.577	Vertical	Pass
QAM		1750	-3.59	3.33	27.59	20.67	116.681	Vertical	Pass
15.0MHz	1/#Mid	1717.5	-4.13	3.15	27.65	20.37	108.893	Vertical	Pass
Band 16		1732.5	-3.89	3.31	27.61	20.41	109.901	Vertical	Pass

QAM		1747.5	-3.79	3.33	27.57	20.45	110.917	Vertical	Pass
20.0MHz	1/#Mid	1720	-3.82	3.17	27.66	20.67	116.681	Vertical	Pass
Band 16		1732.5	-4.11	3.32	27.61	20.18	104.232	Vertical	Pass
QAM		1745	-3.28	3.36	27.56	20.92	123.595	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG	Cable	Antenna	Correction	Max. EIRP	Max.	Polarization Of Max. ERP	
			Level	Loss	Gain		EIRP			
			(dBm)	(dBm)	(dB)		Average	Average		
						(dB)	(dBm)	(mW)		
1.4MHz	3/#Mid	824.7	7.16	2.01	19.68	2.15	22.68	185.353	Horizontal	Pass
Band		836.5	7.04	2.01	19.77	2.15	22.65	184.077	Horizontal	Pass
QPSK		848.3	6.84	2.02	19.82	2.15	22.49	177.419	Horizontal	Pass
3.0MHz	1/#Mid	825.5	6.93	2.01	19.70	2.15	22.47	176.604	Horizontal	Pass
Band		836.5	6.83	2.01	19.77	2.15	22.44	175.388	Horizontal	Pass
QPSK		847.5	6.70	2.02	19.81	2.15	22.34	171.396	Horizontal	Pass
5.0MHz	1/#Mid	826.5	7.21	2.01	19.71	2.15	22.76	188.799	Horizontal	Pass
Band		836.5	7.09	2.01	19.77	2.15	22.70	186.209	Horizontal	Pass
QPSK		846.5	6.93	2.02	19.79	2.15	22.55	179.887	Horizontal	Pass
10.0MHz	1/#Mid	829	7.23	2.01	19.73	2.15	22.80	190.546	Horizontal	Pass
Band		836.5	7.18	2.01	19.77	2.15	22.79	190.108	Horizontal	Pass
QPSK		844	7.08	2.02	19.78	2.15	22.69	185.780	Horizontal	Pass
1.4MHz	1/#Mid	824.7	5.51	2.01	19.68	2.15	21.03	126.765	Vertical	Pass
Band		836.5	6.20	2.01	19.77	2.15	21.81	151.705	Vertical	Pass
QPSK		848.3	5.48	2.02	19.82	2.15	21.13	129.718	Vertical	Pass
3.0MHz	1/#Mid	825.5	5.84	2.01	19.70	2.15	21.38	137.404	Vertical	Pass
Band		836.5	5.57	2.01	19.77	2.15	21.18	131.220	Vertical	Pass
QPSK		847.5	6.22	2.02	19.81	2.15	21.86	153.462	Vertical	Pass
5.0MHz	1/#Mid	826.5	5.70	2.01	19.71	2.15	21.25	133.352	Vertical	Pass
Band		836.5	5.76	2.01	19.77	2.15	21.37	137.088	Vertical	Pass
QPSK		846.5	6.14	2.02	19.79	2.15	21.76	149.968	Vertical	Pass
10.0MHz	1/#Mid	829	5.69	2.01	19.73	2.15	21.26	133.660	Vertical	Pass
Band		836.5	5.38	2.01	19.77	2.15	20.99	125.603	Vertical	Pass
QPSK		844	6.21	2.02	19.78	2.15	21.82	152.055	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level	Cable Loss	Antenna Gain	Correction	Max. EIRP	Max. EIRP	Polarization	
			(dBm)	(dBm)	(dB)		Average	Average	Of Max. ERP	
							(dBm)	(mW)		
1.4MHz	3/#Mid	824.7	6.31	2.01	19.68	2.15	21.83	152.405	Horizontal	Pass
Band 16		836.5	6.24	2.01	19.77	2.15	21.85	153.109	Horizontal	Pass
QAM		848.3	6.08	2.02	19.82	2.15	21.73	148.936	Horizontal	Pass
3.0MHz	1/#Mid	825.5	6.39	2.01	19.70	2.15	21.93	155.955	Horizontal	Pass
Band 16		836.5	6.10	2.01	19.77	2.15	21.71	148.252	Horizontal	Pass
QAM		847.5	5.58	2.02	19.81	2.15	21.22	132.434	Horizontal	Pass
5.0MHz	1/#Mid	826.5	6.71	2.01	19.71	2.15	22.26	168.267	Horizontal	Pass
Band 16		836.5	6.48	2.01	19.77	2.15	22.09	161.808	Horizontal	Pass
QAM		846.5	6.23	2.02	19.79	2.15	21.85	153.109	Horizontal	Pass
10.0MHz	1/#Mid	829	6.71	2.01	19.73	2.15	22.28	169.044	Horizontal	Pass
Band 16		836.5	6.43	2.01	19.77	2.15	22.04	159.956	Horizontal	Pass
QAM		844	5.97	2.02	19.78	2.15	21.58	143.880	Horizontal	Pass
1.4MHz	1/#Mid	824.7	5.45	2.01	19.68	2.15	20.97	125.026	Vertical	Pass
Band 16		836.5	5.76	2.01	19.77	2.15	21.37	137.088	Vertical	Pass
QAM		848.3	5.76	2.02	19.82	2.15	21.41	138.357	Vertical	Pass
3.0MHz	1/#Mid	825.5	5.01	2.01	19.70	2.15	20.55	113.501	Vertical	Pass
Band 16		836.5	4.72	2.01	19.77	2.15	20.33	107.895	Vertical	Pass
QAM		847.5	5.05	2.02	19.81	2.15	20.69	117.220	Vertical	Pass
5.0MHz	1/#Mid	826.5	5.85	2.01	19.71	2.15	21.40	138.038	Vertical	Pass
Band 16		836.5	6.34	2.01	19.77	2.15	21.95	156.675	Vertical	Pass
QAM		846.5	5.55	2.02	19.79	2.15	21.17	130.918	Vertical	Pass
10.0MHz	1/#Mid	829	4.90	2.01	19.73	2.15	20.47	111.429	Vertical	Pass
Band 16		836.5	5.08	2.01	19.77	2.15	20.69	117.220	Vertical	Pass
QAM		844	6.29	2.02	19.78	2.15	21.90	154.882	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG	Cable	Antenna	Max.	Max.	Polarization	
			Level	Loss	Gain	EIRP	EIRP	Of Max. ERP	
			(dBm)	(dBm)	(dB)	Average	Average		
						(dBm)	(mW)		
5.0MHz Band QPSK	1/#Mid	2502.5	-0.28	4.54	27.75	22.93	196.336	Horizontal	Pass
		2535	-0.11	4.69	27.72	22.92	195.884	Horizontal	Pass
		2567.5	-0.04	4.71	27.71	22.96	197.697	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	-0.21	4.55	27.76	23.00	199.526	Horizontal	Pass
		2535	-0.02	4.69	27.72	23.01	199.986	Horizontal	Pass
		2565	0.06	4.72	27.70	23.04	201.372	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-0.22	4.55	27.77	23.00	199.526	Horizontal	Pass
		2535	-0.08	4.69	27.72	22.95	197.242	Horizontal	Pass
		2562.5	0.02	4.72	27.69	22.99	199.067	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	-0.16	4.57	27.78	23.05	201.837	Horizontal	Pass
		2535	0.02	4.73	27.72	23.01	199.986	Horizontal	Pass
		2560	0.06	4.75	27.68	22.99	199.067	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	-1.81	4.54	27.75	21.40	138.038	Vertical	Pass
		2535	-1.35	4.69	27.72	21.68	147.231	Vertical	Pass
		2567.5	-0.99	4.71	27.71	22.01	158.855	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	-1.61	4.55	27.76	21.60	144.544	Vertical	Pass
		2535	-1.24	4.69	27.72	21.79	151.008	Vertical	Pass
		2565	-1.01	4.72	27.70	21.97	157.398	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-1.69	4.55	27.77	21.53	142.233	Vertical	Pass
		2535	-1.66	4.69	27.72	21.37	137.088	Vertical	Pass
		2562.5	-0.87	4.72	27.69	22.10	162.181	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	-2.00	4.57	27.78	21.21	132.130	Vertical	Pass
		2535	-1.53	4.73	27.72	21.46	139.959	Vertical	Pass
		2560	-1.28	4.75	27.68	21.65	146.218	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP	Max. EIRP	Polarization Of Max. ERP	
			Level						
			(dBm)			Average	Average		
						(dBm)	(mW)		
5.0MHz	1/#Mid	2502.5	-0.97	4.54	27.75	22.24	167.494	Horizontal	Pass
Band 16		2535	-0.66	4.69	27.72	22.37	172.584	Horizontal	Pass
QAM		2567.5	-0.74	4.71	27.71	22.26	168.267	Horizontal	Pass
10.0MHz	1/#Mid	2505	-0.86	4.55	27.76	22.35	171.791	Horizontal	Pass
Band 16		2535	-0.87	4.69	27.72	22.16	164.437	Horizontal	Pass
QAM		2565	-1.14	4.72	27.70	21.84	152.757	Horizontal	Pass
15.0MHz	1/#Mid	2507.5	-1.04	4.55	27.77	22.18	165.196	Horizontal	Pass
Band 16		2535	-1.01	4.69	27.72	22.02	159.221	Horizontal	Pass
QAM		2562.5	-0.62	4.72	27.69	22.35	171.791	Horizontal	Pass
20.0MHz	1/#Mid	2510	-0.92	4.57	27.78	22.29	169.434	Horizontal	Pass
Band 16		2535	-0.59	4.73	27.72	22.40	173.780	Horizontal	Pass
QAM		2560	-0.69	4.75	27.68	22.24	167.494	Horizontal	Pass
5.0MHz	1/#Mid	2502.5	-1.79	4.54	27.75	21.42	138.676	Vertical	Pass
Band 16		2535	-1.85	4.69	27.72	21.18	131.220	Vertical	Pass
QAM		2567.5	-2.28	4.71	27.71	20.72	118.032	Vertical	Pass
10.0MHz	1/#Mid	2505	-3.03	4.55	27.76	20.18	104.232	Vertical	Pass
Band 16		2535	-2.68	4.69	27.72	20.35	108.393	Vertical	Pass
QAM		2565	-2.00	4.72	27.70	20.98	125.314	Vertical	Pass
15.0MHz	1/#Mid	2507.5	-1.42	4.55	27.77	21.80	151.356	Vertical	Pass
Band 16		2535	-1.63	4.69	27.72	21.40	138.038	Vertical	Pass
QAM		2562.5	-1.35	4.72	27.69	21.62	145.211	Vertical	Pass
20.0MHz	1/#Mid	2510	-1.63	4.57	27.78	21.58	143.880	Vertical	Pass
Band 16		2535	-1.74	4.73	27.72	21.25	133.352	Vertical	Pass
QAM		2560	-1.25	4.75	27.68	21.68	147.231	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 17

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG	Cable	Antenna	Correction	Max. EIRP	Max.	Polarization	
			Level	Loss	Gain		Average	EIRP	Of Max. ERP	
			(dBm)	(dBm)	(dB)		Average	Average		
						(dB)	(dBm)	(mW)		
5.0MHz Band QPSK	1/#Mid	706.5	7.99	1.91	19.23	2.15	23.16	207.014	Vertical	Pass
		710	7.85	1.91	19.26	2.15	23.05	201.837	Vertical	Pass
		713.5	7.75	1.92	19.33	2.15	23.01	199.986	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	709	8.00	1.91	19.25	2.15	23.19	208.449	Vertical	Pass
		710	7.95	1.91	19.26	2.15	23.15	206.538	Vertical	Pass
		711	7.91	1.92	19.32	2.15	23.16	207.014	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	706.5	6.76	1.91	19.23	2.15	21.93	155.955	Horizontal	Pass
		710	5.92	1.91	19.26	2.15	21.12	129.420	Horizontal	Pass
		713.5	6.03	1.92	19.33	2.15	21.29	134.586	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	709	6.40	1.91	19.25	2.15	21.59	144.212	Horizontal	Pass
		710	6.31	1.91	19.26	2.15	21.51	141.579	Horizontal	Pass
		711	6.94	1.92	19.32	2.15	22.19	165.577	Horizontal	Pass

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG	Cable Loss (dBm)	Antenna Gain (dB)	Correction	Max. EIRP	Max.	Polarization	
			Level				EIRP	Of Max.		
			(dBm)				Average	Average	ERP	
						(dB)	(dBm)	(mW)		
5.0MHz Band 16 QAM	1/#Mid	706.5	7.34	1.91	19.23	2.15	22.51	178.238	Vertical	Pass
		710	7.25	1.91	19.26	2.15	22.45	175.792	Vertical	Pass
		713.5	7.05	1.92	19.33	2.15	22.31	170.216	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	709	6.88	1.91	19.25	2.15	22.07	161.065	Vertical	Pass
		710	7.41	1.91	19.26	2.15	22.61	182.390	Vertical	Pass
		711	7.14	1.92	19.32	2.15	22.39	173.380	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	706.5	6.53	1.91	19.23	2.15	21.70	147.911	Horizontal	Pass
		710	6.00	1.91	19.26	2.15	21.20	131.826	Horizontal	Pass
		713.5	6.63	1.92	19.33	2.15	21.89	154.525	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	709	6.44	1.91	19.25	2.15	21.63	145.546	Horizontal	Pass
		710	6.11	1.91	19.26	2.15	21.31	135.207	Horizontal	Pass
		711	6.49	1.92	19.32	2.15	21.74	149.279	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P \text{ [Watts]})$.

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P \text{ [Watts]})$, where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- ☐ LTE Band 2
LTE Band 4
- ☐ LTE Band 5
LTE Band 7
LTE Band 17

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-44.87	4.04	33.51	-15.40	-13	-2.40	Horizontal
3701.4	-50.29	4.04	33.51	-20.82	-13	-7.82	Vertical
5552.1	-44.43	5.24	35.84	-13.83	-13	-0.83	Vertical
5552.1	-51.66	5.24	35.84	-21.06	-13	-8.06	Horizontal
187.4	-43.67	1.43	16.02	-29.08	-13	-16.08	Vertical
269.6	-44.65	1.30	17.99	-27.96	-13	-14.96	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-49.02	4.04	33.56	-19.50	-13	-6.50	Horizontal
3760.0	-51.14	4.04	33.56	-21.62	-13	-8.62	Vertical
5640.0	-48.81	5.24	35.91	-18.14	-13	-5.14	Vertical
5640.0	-53.10	5.24	35.91	-22.43	-13	-9.43	Horizontal
209.5	-36.72	1.62	16.97	-21.37	-13	-8.37	Vertical
408.2	-42.74	1.74	15.98	-28.51	-13	-15.51	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-51.70	4.04	34.00	-21.74	-13	-8.74	Horizontal
3818.6	-49.71	4.04	34.00	-19.75	-13	-6.75	Vertical
5727.9	-46.65	5.24	36.04	-15.85	-13	-2.85	Vertical
5727.9	-49.81	5.24	36.04	-19.01	-13	-6.01	Horizontal
194.5	-38.84	1.42	17.29	-22.97	-13	-9.97	Vertical
464.7	-40.27	1.50	17.90	-23.86	-13	-10.86	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-48.03	4.07	33.54	-18.56	-13	-5.56	Horizontal
3720.0	-47.91	4.07	33.54	-18.44	-13	-5.44	Vertical
5580.0	-48.93	5.28	35.86	-18.35	-13	-5.35	Vertical
5580.0	-53.57	5.28	35.86	-22.99	-13	-9.99	Horizontal
202.6	-37.91	1.58	16.89	-22.59	-13	-9.59	Vertical
416.1	-35.44	1.76	17.26	-19.94	-13	-6.94	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-44.53	4.04	33.56	-15.01	-13	-2.01	Horizontal
3760.0	-49.50	4.04	33.56	-19.98	-13	-6.98	Vertical
5640.0	-53.07	5.24	35.91	-22.40	-13	-9.40	Vertical
5640.0	-53.67	5.24	35.91	-23.00	-13	-10.00	Horizontal
187.3	-40.06	1.46	16.27	-25.25	-13	-12.25	Vertical
294.5	-34.96	1.59	15.15	-21.40	-13	-8.40	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-51.48	4.04	34.00	-21.52	-13	-8.52	Horizontal
3800.0	-44.37	4.04	34.00	-14.41	-13	-1.41	Vertical
5700.0	-47.10	5.24	36.04	-16.30	-13	-3.30	Vertical
5700.0	-50.56	5.24	36.04	-19.76	-13	-6.76	Horizontal
177.1	-38.61	1.36	17.39	-22.57	-13	-9.57	Vertical
411.6	-35.46	1.66	15.39	-21.73	-13	-8.73	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-45.60	4.02	29.80	-19.82	-13	-6.82	Horizontal
3421.4	-49.58	4.02	29.80	-23.80	-13	-10.80	Vertical
5132.1	-50.85	5.24	35.84	-20.25	-13	-7.25	Vertical
5132.1	-49.25	5.24	35.84	-18.65	-13	-5.65	Horizontal
189.9	-37.96	1.68	16.04	-23.60	-13	-10.60	Vertical
438.8	-34.65	1.78	17.74	-18.69	-13	-5.69	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-47.97	4.03	30.00	-22.00	-13	-9.00	Horizontal
3465.0	-51.00	4.03	30.00	-25.03	-13	-12.03	Vertical
5197.5	-52.60	5.25	35.86	-21.99	-13	-8.99	Vertical
5197.5	-49.68	5.25	35.86	-19.07	-13	-6.07	Horizontal
195.7	-36.87	1.72	17.69	-20.90	-13	-7.90	Vertical
466.6	-38.37	1.62	16.02	-23.96	-13	-10.96	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-51.99	4.05	30.01	-26.03	-13	-13.03	Horizontal
3508.6	-50.73	4.05	30.01	-24.77	-13	-11.77	Vertical
5262.9	-51.49	5.26	35.86	-20.89	-13	-7.89	Vertical
5262.9	-52.03	5.26	35.86	-21.43	-13	-8.43	Horizontal
191.1	-43.65	1.80	16.69	-28.76	-13	-15.76	Vertical
362.5	-38.11	1.75	16.66	-23.21	-13	-10.21	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-52.25	4.02	29.80	-26.47	-13	-13.47	Horizontal
3440.0	-46.28	4.02	29.80	-20.50	-13	-7.50	Vertical
5160.0	-47.91	5.24	35.84	-17.31	-13	-4.31	Vertical
5160.0	-49.46	5.24	35.84	-18.86	-13	-5.86	Horizontal
189.0	-36.33	1.57	17.26	-20.64	-13	-7.64	Vertical
381.0	-38.15	1.78	16.35	-23.58	-13	-10.58	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-48.26	4.03	30.00	-22.29	-13	-9.29	Horizontal
3465.0	-53.80	4.03	30.00	-27.83	-13	-14.83	Vertical
5197.5	-53.19	5.25	35.86	-22.58	-13	-9.58	Vertical
5197.5	-51.79	5.25	35.86	-21.18	-13	-8.18	Horizontal
208.9	-35.50	1.44	17.95	-18.99	-13	-5.99	Vertical
371.1	-35.39	1.65	16.09	-20.95	-13	-7.95	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-44.33	2.91	27.68	-19.56	-13	-6.56	Horizontal
3490.0	-46.33	2.91	27.68	-21.56	-13	-8.56	Vertical
5235.0	-51.90	5.26	35.86	-21.30	-13	-8.30	Vertical
5235.0	-53.55	5.26	35.86	-22.95	-13	-9.95	Horizontal
195.7	-44.37	1.61	16.85	-29.13	-13	-16.13	Vertical
286.2	-44.17	1.61	15.19	-30.59	-13	-17.59	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-49.10	2.78	27.50	-24.38	-13	-11.38	Horizontal
1649.4	-48.24	2.78	27.50	-23.52	-13	-10.52	Vertical
2474.1	-46.66	2.90	27.80	-21.76	-13	-8.76	Vertical
2474.1	-50.64	2.90	27.80	-25.74	-13	-12.74	Horizontal
200.5	-36.95	1.76	17.59	-21.12	-13	-8.12	Vertical
380.3	-44.95	1.63	15.87	-30.71	-13	-17.71	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-53.33	2.80	27.48	-28.65	-13	-15.65	Horizontal
1673.0	-48.36	2.80	27.48	-23.68	-13	-10.68	Vertical
2509.5	-45.80	2.91	27.70	-21.01	-13	-8.01	Vertical
2509.5	-49.79	2.91	27.70	-25.00	-13	-12.00	Horizontal
177.0	-35.70	1.61	15.68	-21.63	-13	-8.63	Vertical
393.0	-38.08	1.59	17.52	-22.16	-13	-9.16	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-49.83	2.82	27.43	-25.22	-13	-12.22	Horizontal
1696.6	-45.76	2.82	27.43	-21.15	-13	-8.15	Vertical
2544.9	-48.92	2.92	27.74	-24.10	-13	-11.10	Vertical
2544.9	-50.73	2.92	27.74	-25.91	-13	-12.91	Horizontal
188.4	-44.69	1.69	16.67	-29.70	-13	-16.70	Vertical
440.0	-34.39	1.70	17.18	-18.91	-13	-5.91	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-47.97	2.78	27.50	-23.25	-13	-10.25	Horizontal
1658.0	-49.47	2.78	27.50	-24.75	-13	-11.75	Vertical
2487.0	-46.69	2.90	27.80	-21.79	-13	-8.79	Vertical
2487.0	-49.86	2.90	27.80	-24.96	-13	-11.96	Horizontal
185.4	-34.75	1.71	15.57	-20.89	-13	-7.89	Vertical
297.0	-44.14	1.34	16.40	-29.08	-13	-16.08	Horizontal
Test Results for Mid Channel 836.5MHz							
1673.0	-51.74	2.80	27.48	-27.06	-13	-14.06	Horizontal
1673.0	-44.48	2.80	27.48	-19.80	-13	-6.80	Vertical
2509.5	-51.59	2.91	27.70	-26.80	-13	-13.80	Vertical
2509.5	-53.17	2.91	27.70	-28.38	-13	-15.38	Horizontal
199.9	-36.61	1.44	17.04	-21.01	-13	-8.01	Vertical
417.4	-34.16	1.76	17.62	-18.30	-13	-5.30	Horizontal
Test Results for High Channel 844MHz							
1688.0	-53.86	2.82	27.43	-29.25	-13	-16.25	Horizontal
1688.0	-48.09	2.82	27.43	-23.48	-13	-10.48	Vertical
2532.0	-47.44	2.92	27.74	-22.62	-13	-9.62	Vertical
2532.0	-53.22	2.92	27.74	-28.40	-13	-15.40	Horizontal
192.2	-38.94	1.74	17.70	-22.98	-13	-9.98	Vertical
326.2	-34.91	1.41	17.46	-18.85	-13	-5.85	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + AR_{pl}(dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-61.61	5.23	35.81	-31.03	-25	-6.03	Horizontal
5005.0	-60.11	5.23	35.81	-29.53	-25	-4.53	Vertical
7507.5	-62.64	5.67	36.85	-31.46	-25	-6.46	Vertical
7507.5	-60.92	5.67	36.85	-29.74	-25	-4.74	Horizontal
177.3	-46.22	1.73	17.97	-29.98	-25	-4.98	Vertical
383.1	-49.61	1.38	15.11	-35.88	-25	-10.88	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-64.47	5.23	35.82	-33.88	-25	-8.88	Horizontal
5070.0	-59.01	5.23	35.82	-28.42	-25	-3.42	Vertical
7605.0	-59.72	5.67	36.85	-28.54	-25	-3.54	Vertical
7605.0	-64.87	5.67	36.85	-33.69	-25	-8.69	Horizontal
194.6	-51.79	1.77	16.17	-37.38	-25	-12.38	Vertical
371.8	-50.44	1.63	15.21	-36.86	-25	-11.86	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-62.86	5.24	35.83	-32.27	-25	-7.27	Horizontal
5135.0	-63.22	5.24	35.83	-32.63	-25	-7.63	Vertical
7702.5	-64.35	5.68	36.87	-33.16	-25	-8.16	Vertical
7702.5	-60.41	5.68	36.87	-29.22	-25	-4.22	Horizontal
207.2	-54.68	1.58	17.56	-38.70	-25	-13.70	Vertical
268.5	-53.51	1.45	16.58	-38.38	-25	-13.38	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-63.63	5.23	35.82	-33.04	-25	-8.04	Horizontal
5020.0	-62.08	5.23	35.82	-31.49	-25	-6.49	Vertical
7530.0	-60.48	5.67	36.86	-29.29	-25	-4.29	Vertical
7530.0	-63.32	5.67	36.86	-32.13	-25	-7.13	Horizontal
177.4	-51.12	1.63	15.76	-36.99	-25	-11.99	Vertical
372.0	-51.87	1.71	15.44	-38.14	-25	-13.14	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-62.51	5.23	35.82	-31.92	-25	-6.92	Horizontal
5070.0	-63.58	5.23	35.82	-32.99	-25	-7.99	Vertical
7605.0	-64.64	5.67	36.85	-33.46	-25	-8.46	Vertical
7605.0	-62.98	5.67	36.85	-31.80	-25	-6.80	Horizontal
185.3	-44.06	1.79	16.84	-29.00	-25	-4.00	Vertical
441.7	-44.51	1.71	17.64	-28.58	-25	-3.58	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-62.97	5.24	35.83	-32.38	-25	-7.38	Horizontal
5120.0	-64.16	5.24	35.83	-33.57	-25	-8.57	Vertical
7680.0	-60.62	5.70	36.88	-29.44	-25	-4.44	Vertical
7680.0	-62.18	5.70	36.88	-31.00	-25	-6.00	Horizontal
209.4	-47.58	1.79	16.84	-32.52	-25	-7.52	Vertical
337.0	-46.32	1.71	17.64	-30.39	-25	-5.39	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 17

QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413.0	-45.51	2.61	27.28	-20.84	-13	-7.84	Horizontal
1413.0	-52.13	2.61	27.28	-27.46	-13	-14.46	Vertical
2119.5	-52.01	2.87	27.59	-27.29	-13	-14.29	Vertical
2119.5	-51.05	2.87	27.59	-26.33	-13	-13.33	Horizontal
195.8	-35.26	1.71	16.15	-20.82	-13	-7.82	Vertical
262.1	-43.63	1.41	17.32	-27.72	-13	-14.72	Horizontal
Test Results For Mid Channel 710MHz							
1420.0	-48.67	2.62	27.30	-23.99	-13	-10.99	Horizontal
1420.0	-46.12	2.62	27.30	-21.44	-13	-8.44	Vertical
2130.0	-52.02	2.87	27.62	-27.27	-13	-14.27	Vertical
2130.0	-49.05	2.87	27.62	-24.30	-13	-11.30	Horizontal
209.4	-42.66	1.42	15.25	-28.84	-13	-15.84	Vertical
296.1	-39.83	1.36	17.19	-24.00	-13	-11.00	Horizontal
Test Results for High Channel 713.5MHz							
1427.0	-46.04	2.66	27.28	-21.42	-13	-8.42	Horizontal
1427.0	-45.56	2.66	27.28	-20.94	-13	-7.94	Vertical
2140.5	-52.58	2.88	27.60	-27.86	-13	-14.86	Vertical
2140.5	-51.11	2.88	27.60	-26.39	-13	-13.39	Horizontal
200.9	-36.19	1.32	17.29	-20.22	-13	-7.22	Vertical
444.8	-35.44	1.72	16.89	-20.27	-13	-7.27	Horizontal

QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418.0	-50.36	2.62	27.30	-25.68	-13	-12.68	Horizontal
1418.0	-53.73	2.62	27.30	-29.05	-13	-16.05	Vertical
2127.0	-53.20	2.87	27.62	-28.45	-13	-15.45	Vertical
2127.0	-52.00	2.87	27.62	-27.25	-13	-14.25	Horizontal
208.1	-34.73	1.35	16.91	-19.17	-13	-6.17	Vertical
343.0	-44.76	1.62	16.31	-30.07	-13	-17.07	Horizontal
Test Results for Mid Channel 710MHz							
1420.0	-44.15	2.62	27.30	-19.47	-13	-6.47	Horizontal
1420.0	-51.76	2.62	27.30	-27.08	-13	-14.08	Vertical
2130.0	-51.46	2.87	27.62	-26.71	-13	-13.71	Vertical
2130.0	-52.77	2.87	27.62	-28.02	-13	-15.02	Horizontal
209.0	-41.11	1.51	17.14	-25.48	-13	-12.48	Vertical
462.1	-37.95	1.77	16.88	-22.84	-13	-9.84	Horizontal
Test Results for High Channel 711MHz							
1422.0	-52.95	2.62	27.30	-28.27	-13	-15.27	Horizontal
1422.0	-46.28	2.62	27.30	-21.60	-13	-8.60	Vertical
2133.0	-45.22	2.87	27.62	-20.47	-13	-7.47	Vertical
2133.0	-53.56	2.87	27.62	-28.81	-13	-15.81	Horizontal
209.8	-43.95	1.78	15.95	-29.78	-13	-16.78	Vertical
469.0	-40.25	1.34	17.95	-23.65	-13	-10.65	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- ☐ Temp. = -30° to $+50^{\circ}\text{C}$
- ☐ Voltage = low voltage, DC 3.4V, Normal, DC 3.8V and High voltage, DC 4.2V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- ☐ LTE Band 2
LTE Band 4
- ☐ LTE Band 5
LTE Band 7
LTE Band 17

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	13.1	0.006958	2.5
3.8	1880	13.3	0.007099	2.5
4.2	1880	13.7	0.007265	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	12.9	0.006848	2.5
Extreme (50C)	1880	12.0	0.006394	2.5
Extreme (40C)	1880	14.0	0.007445	2.5
Extreme (30C)	1880	13.2	0.007010	2.5
Extreme (10C)	1880	13.4	0.007136	2.5
Extreme (0C)	1880	11.7	0.006204	2.5
Extreme (-10C)	1880	13.0	0.006923	2.5
Extreme (-20C)	1880	14.5	0.007690	2.5
Extreme (-30C)	1880	15.2	0.008083	2.5

Band 2 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	9.4	0.004973	2.5
3.8	1880	9.1	0.004819	2.5
4.2	1880	7.7	0.004100	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	9.7	0.005151	2.5
Extreme (50C)	1880	8.8	0.004698	2.5
Extreme (40C)	1880	8.2	0.004380	2.5
Extreme (30C)	1880	9.1	0.004824	2.5
Extreme (10C)	1880	8.9	0.004708	2.5
Extreme (0C)	1880	8.6	0.004562	2.5
Extreme (-10C)	1880	8.8	0.004665	2.5
Extreme (-20C)	1880	8.9	0.004716	2.5
Extreme (-30C)	1880	7.8	0.004144	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	8.8	0.005100	2.5
3.8	1732.5	8.9	0.005118	2.5
4.2	1732.5	8.0	0.004639	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	8.5	0.004924	2.5
Extreme (50C)	1732.5	8.9	0.005133	2.5
Extreme (40C)	1732.5	7.5	0.004314	2.5
Extreme (30C)	1732.5	6.0	0.003448	2.5
Extreme (10C)	1732.5	7.1	0.004078	2.5
Extreme (0C)	1732.5	9.1	0.005238	2.5
Extreme (-10C)	1732.5	8.8	0.005081	2.5
Extreme (-20C)	1732.5	6.7	0.003875	2.5
Extreme (-30C)	1732.5	8.7	0.004998	2.5

Band 4 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	10.3	0.005934	2.5
3.8	1732.5	9.1	0.005276	2.5
4.2	1732.5	7.8	0.004519	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	10.0	0.005745	2.5
Extreme (50C)	1732.5	8.6	0.004936	2.5
Extreme (40C)	1732.5	8.3	0.004819	2.5
Extreme (30C)	1732.5	9.5	0.005480	2.5
Extreme (10C)	1732.5	9.2	0.005313	2.5
Extreme (0C)	1732.5	7.8	0.004511	2.5
Extreme (-10C)	1732.5	8.7	0.005046	2.5
Extreme (-20C)	1732.5	8.5	0.004930	2.5
Extreme (-30C)	1732.5	8.1	0.004674	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	6.0	0.007176	2.5
3.8	836.5	6.9	0.008210	2.5
4.2	836.5	4.9	0.005858	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6.2	0.007432	2.5
Extreme (50C)	836.5	5.5	0.006547	2.5
Extreme (40C)	836.5	6.5	0.007741	2.5
Extreme (30C)	836.5	6.9	0.008223	2.5
Extreme (10C)	836.5	5.1	0.006107	2.5
Extreme (0C)	836.5	5.1	0.006147	2.5
Extreme (-10C)	836.5	6.0	0.007135	2.5
Extreme (-20C)	836.5	6.1	0.007326	2.5
Extreme (-30C)	836.5	5.8	0.006980	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	5.7	0.006787	2.5
3.8	836.5	6.9	0.008305	2.5
4.2	836.5	4.6	0.005519	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6.3	0.007577	2.5
Extreme (50C)	836.5	6.0	0.007119	2.5
Extreme (40C)	836.5	6.6	0.007852	2.5
Extreme (30C)	836.5	6.1	0.007343	2.5
Extreme (10C)	836.5	5.6	0.006685	2.5
Extreme (0C)	836.5	5.4	0.006491	2.5
Extreme (-10C)	836.5	5.8	0.006899	2.5
Extreme (-20C)	836.5	5.9	0.007007	2.5
Extreme (-30C)	836.5	6.7	0.007997	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	9.7	0.003842	2.5
3.8	2535	9.2	0.003629	2.5
4.2	2535	8.3	0.003268	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	9.2	0.003616	2.5
Extreme (50C)	2535	8.5	0.003360	2.5
Extreme (40C)	2535	7.9	0.003126	2.5
Extreme (30C)	2535	9.2	0.003612	2.5
Extreme (10C)	2535	8.2	0.003228	2.5
Extreme (0C)	2535	8.8	0.003454	2.5
Extreme (-10C)	2535	9.1	0.003586	2.5
Extreme (-20C)	2535	8.4	0.003329	2.5
Extreme (-30C)	2535	8.3	0.003282	2.5

Band 7 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	6.9	0.002722	2.5
3.8	2535	6.7	0.002627	2.5
4.2	2535	5.8	0.002296	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	6.9	0.002722	2.5
Extreme (50C)	2535	5.9	0.002323	2.5
Extreme (40C)	2535	5.7	0.002240	2.5
Extreme (30C)	2535	7.1	0.002808	2.5
Extreme (10C)	2535	6.2	0.002430	2.5
Extreme (0C)	2535	5.2	0.002052	2.5
Extreme (-10C)	2535	5.1	0.001998	2.5
Extreme (-20C)	2535	5.8	0.002295	2.5
Extreme (-30C)	2535	5.7	0.002247	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 17

Band 17 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710	10.3	0.014491	2.5
3.8	710	9.4	0.013178	2.5
4.2	710	8.3	0.011656	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710	10.1	0.014156	2.5
Extreme (50C)	710	8.9	0.012510	2.5
Extreme (40C)	710	7.8	0.010956	2.5
Extreme (30C)	710	8.8	0.012418	2.5
Extreme (10C)	710	8.6	0.012062	2.5
Extreme (0C)	710	8.1	0.011477	2.5
Extreme (-10C)	710	9.1	0.012828	2.5
Extreme (-20C)	710	9.1	0.012796	2.5
Extreme (-30C)	710	8.4	0.011809	2.5

Band 17 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	710	10.2	0.014426	2.5
3.8	710	9.2	0.012941	2.5
4.2	710	8.5	0.011942	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	710	9.5	0.013355	2.5
Extreme (50C)	710	9.0	0.012704	2.5
Extreme (40C)	710	8.0	0.011242	2.5
Extreme (30C)	710	8.5	0.012007	2.5
Extreme (10C)	710	8.3	0.011662	2.5
Extreme (0C)	710	8.5	0.011926	2.5
Extreme (-10C)	710	9.0	0.012661	2.5
Extreme (-20C)	710	8.9	0.012590	2.5
Extreme (-30C)	710	8.5	0.011952	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

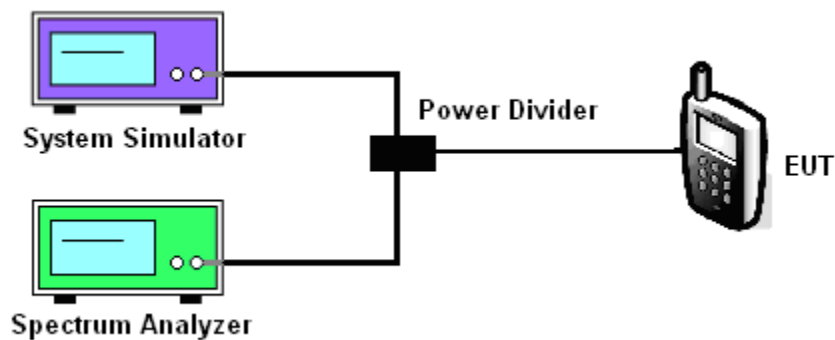

MODES TESTED

- ☐ LTE Band 2/4/5/7/17
- ☐

Test data reference attachment.

----END OF REPORT----