

Only using the AS-100TX information  
for the certification

# User Manual

## 6.TROUBLE SHOOTING AND MAINTENANCE

TROUBLE	TROUBLE CAUSE	REMEDY
Unit does not power up	No voltage of battery	Replace new batteries
	Battery direction reversed	Change the direction of the battery
Transmitter alarm LED does not light	No or low input power	Apply proper input voltage
	No signal	Correct wiring polarity
Receiver alarm LED does not light	No wireless signal	Signal line connection reverse
	The wire to the "V-" power input was disconnected, the "V+" is still connected.	Disconnect wire from the "+" power input.

## 7.NOTES

1. The product shall be installed indoor and do not use it under the following conditions.
  - ① In the place where it is likely to be exposed to dust, high humidity, high temperatures, or rain.
  - ② In the place where it is closed to magnetic field.
  - ③ In the place where vibration or shock is directly transmitted to the product.
2. In order to ensure the normal operation of the product
  - ① Please power off before cleaning the product.
  - ② Do not use chemical detergents to clean the product.
3. Never disassemble, repair and modify the product.
4. The product comply with the FCC Standard and requirements of RoHS.
5. Specifications and design are subject to change without prior notice.

## 8. Caution



AIN TECHNOLOGY(SHENZHEN)CO.,LTD

C6 Building 301A Heng Feng Industrial City, He Zhou, Xi Xiang Street, Bao An Qu, Shenzhen, China.

Tel. : +86-755 - 3321 0588      Fax.: +86-755-3321 0600  
E-mail: sales@ain-cn.com      Http://www.ain-cn.com

AI NEXT LLC

4700 Aircenter Circle, Reno Nevada, 89502 USA  
Tel. : +1-775-827-8000      Fax.: +1-775-827-8044  
E-mail: info@aleph-usa.com      Http://www.aleph-usa.com



USER MANUAL

# Wireless Transmission Module

## AS-100

Thank you for selecting ALEPH product.  
Please read the manual carefully before operating the product.

AS-100TX



AS-100RX



The AS-100 is a digital receiver with an isolated relay output for use with transmitters. The receiver can be used in a variety of remote control applications. When the receiver detects signal from transmitter, the relay output activates.


- Get rid of wire, keep your house clean and safe
- Easy installation, with adhesive pad or screws
- Compact and consumes very little power
- Micro-based signal activates
- Transmitter and Receiver Relay kit
- Compatible with various wired detectors

## 1. SPECIFICATIONS

Power Supply	Transmitter	1.5V AAA LR03 x 2
	Receiver	12 - 24V DC
Temperature		-20°C ~ +60°C
Working Frequency		433.92 MHz
Wireless Distance		≥ 100m (Open field)
Transmitter Input		Dual N. O. (Contact without power)
Receiver Relay Output		N. C. / N. O. DC 24V, 2A Max.
Battery Life		3 Years (Normal Mode)
Using Environments		Indoor
Dimension		2.5" H x 1.2" W x 0.7" D (65.0 x 31.0 x 18.5 mm)
Product Certificates		FCC CE ROHS

## 2. DIMENSIONS

UNIT: inch(mm)



## 3. SYSTEM PARING


To paring the receiver to the transmitter, required to trigger the detector(connected with transmitter) in 5 seconds when receiver power on, the Receiver's LED will flash 6 times when paring successes.

### NOTE:


Every Receiver can only paring one Transmitter, the previous Transmitter will invalid automatically when Receiver is success to paring with new one

\*Specifications and design are subject to change without prior notice.

## 4. INSTALLATION

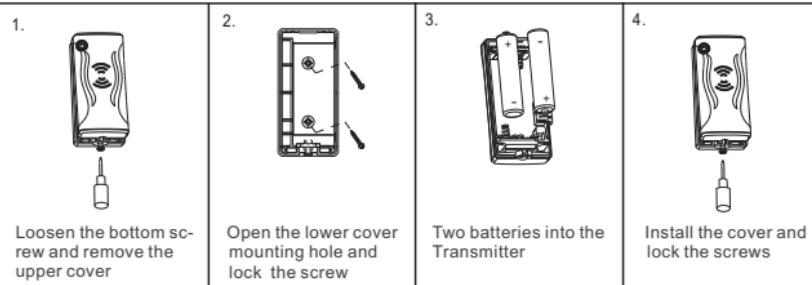

## 5. CONNECTION MODE

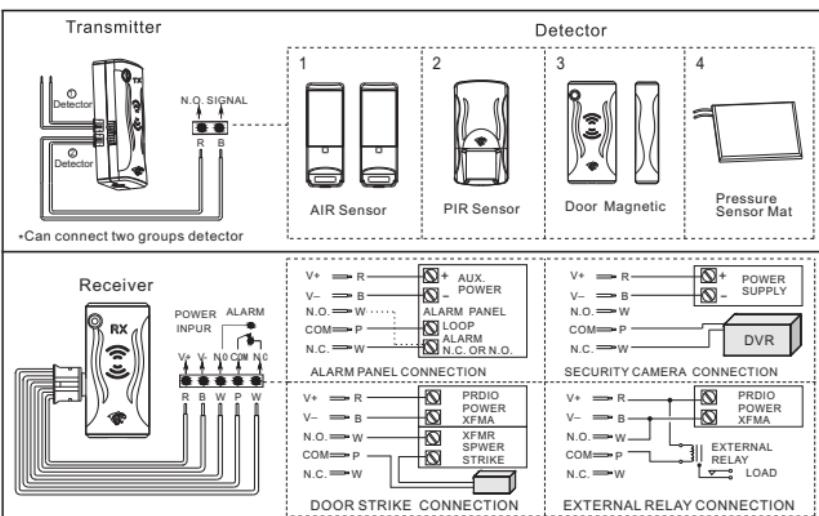

**FCC Caution:**

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.