



FCC TEST REPORT

FCC ID:2A27TDFSS-0724

Report Number.....: PTC21062103301E-FC01

Date of Test..... Aug. 20, 2021 to Sep. 14, 2021

Date of issue.....: Sep. 14, 2021

Total number of pages 39

Test Result: PASS

Testing Laboratory.....: Precise Testing & Certification Co., LTD.

Address: Building 1, No.6 Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

Applicant's name: Ningbo Oriental Shengshi Photoelectric Technology Co., Ltd

Address: Dongfang Shengshi, Xiangyun Road, Binhai Industrial Zone, Yinzhou, Ningbo, China

Manufacturer's name: Ningbo Oriental Shengshi Photoelectric Technology Co., Ltd

Address: Dongfang Shengshi, Xiangyun Road, Binhai Industrial Zone, Yinzhou, Ningbo, China

Test specification:

Standard.....: FCC CFR Title 47 Part 15 Subpart C Section 15.249
ANSI C63.10:2013

Test procedure.....: /

Non-standard test method: N/A

Test Report Form No......: TRF-EL-111_V0

Test Report Form(s) Originator....: PTC Testing

Master TRF: Dated: 2020-01-06

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Product name.....: Remote Bluetooth Audio

Trademark: DFSS


Model/Type reference.....: DFSS-0724,DFSS-0625,DFSS-0804

Ratings.....: DC 5V

Testing procedure and testing location:

Testing Laboratory.....: Precise Testing & Certification Co., LTD.

Address.....: Building 1, No.6 Tongxin Road, Dongcheng Street,
Dongguan, Guangdong, China



Test Engineer:.....: Leo Yang / Engineer



Technical Manager:.....: Henry Wang /Manager

Table of Contents	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 1POWER LINE CONDUCTED EMISSION LIMITS	13
4.1.2 TEST PROCEDURE	13
4.1.3 DEVIATION FROM TEST STANDARD	13
4.1.4 TEST SETUP	14
4.1.5 EUT OPERATING CONDITIONS	14
4.1.6 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 TEST PROCEDURE	18
4.2.3 DEVIATION FROM TEST STANDARD	18
4.2.4 TEST SETUP	18
4.2.5 EUT OPERATING CONDITIONS	19
5. BANDWIDTH OF FREQUENCY BAND EDGE	25
5.1 TEST REQUIREMENT:	25
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM TEST STANDARD	25
5.4 TEST SETUP	25
5.5 EUT OPERATING CONDITIONS	26
5.6 TEST RESULT	27
6. CHANNEL BANDWIDTH	29
7.1 APPLIED PROCEDURES / LIMIT	29
7.2 TEST PROCEDURE	29
7.3 DEVIATION FROM STANDARD	29
7.4 TEST SETUP	29

Table of Contents	Page
7.5 EUT OPERATION CONDITIONS	29
7.6 TEST RESULTS	30
8. ANTENNA REQUIREMENT	33
9. TEST SETUP PHOTO	34
10. EUT CONSTRUCTIONAL DETAILS	36

1.VERSION

Report No.	Version	Description	Approved
PTC21062103301E-FC01	Rev.01	Initial issue of report	Sep. 14, 2021

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
FCC part 15.203	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.249	Fundamental &Radiated Spurious Emission Measurement	PASS	
FCC part 15.215	20dB Channel Bandwidth	PASS	
FCC part 15.205	Band Edge	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

2.1 TEST FACILITY

Precise Testing & Certification Co., LTD.

Building 1, No.6 Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Test Firm Registration Number: 790290

Designation Number: CN1219

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power conducted	$\pm 0.16\text{dB}$
3	Spurious emissions conducted	$\pm 0.21\text{dB}$
4	All emissions radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Remote Bluetooth Audio
Model No.:	DFSS-0724,DFSS-0625,DFSS-0804
Model Different.:	PCB board, circuit, structure and internal of these model(s) are the same, only model name is different for these models.
Serial No.:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Sample(s) Status:	Engineer sample
Channel Numbers:	79
Channel Separation:	2402MHz~2480MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type:	PCB Antenna
Antenna gain:	0 dBi
Power supply:	DC 5V
SWITCHING POWER ADAPTER:	/

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	BT Test Tool
Power level setup	<0dBm

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Remote Bluetooth Audio	N/A	DFSS-0724	N/A	EUT
E-2	Adapter	N/A	YS0500100ES		Laboratory provided

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in «Length» column.

3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2022
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2022
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 28, 2022
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 28, 2022

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions(Test Frequency from 9KHz-18GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 28, 2022
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 28, 2022
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 22, 2020
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2022
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2022
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 28, 2022
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Apr. 13, 2022
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2022
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Apr. 13, 2022
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2022
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2022



RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2022
----------	-----	------	------	------------	---------------

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 28, 2022
Artificial Network	Mains	Rohde&Schwarz	ENV216	102453	9KHz-300MHz
Artificial Network	Mains	Rohde&Schwarz	ENV216	101342	9KHz-300MHz

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas -peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

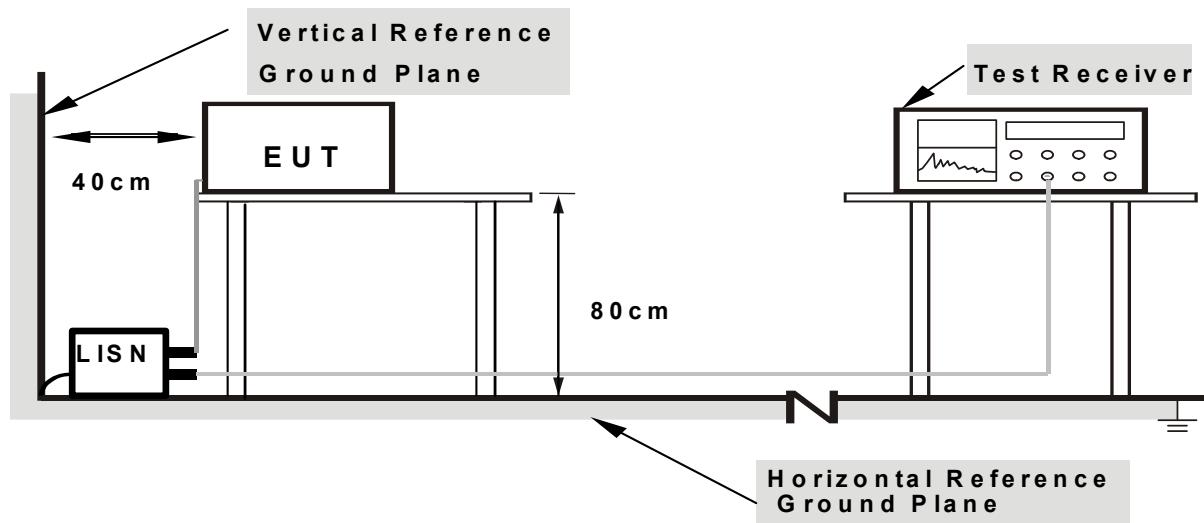

Note:


1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

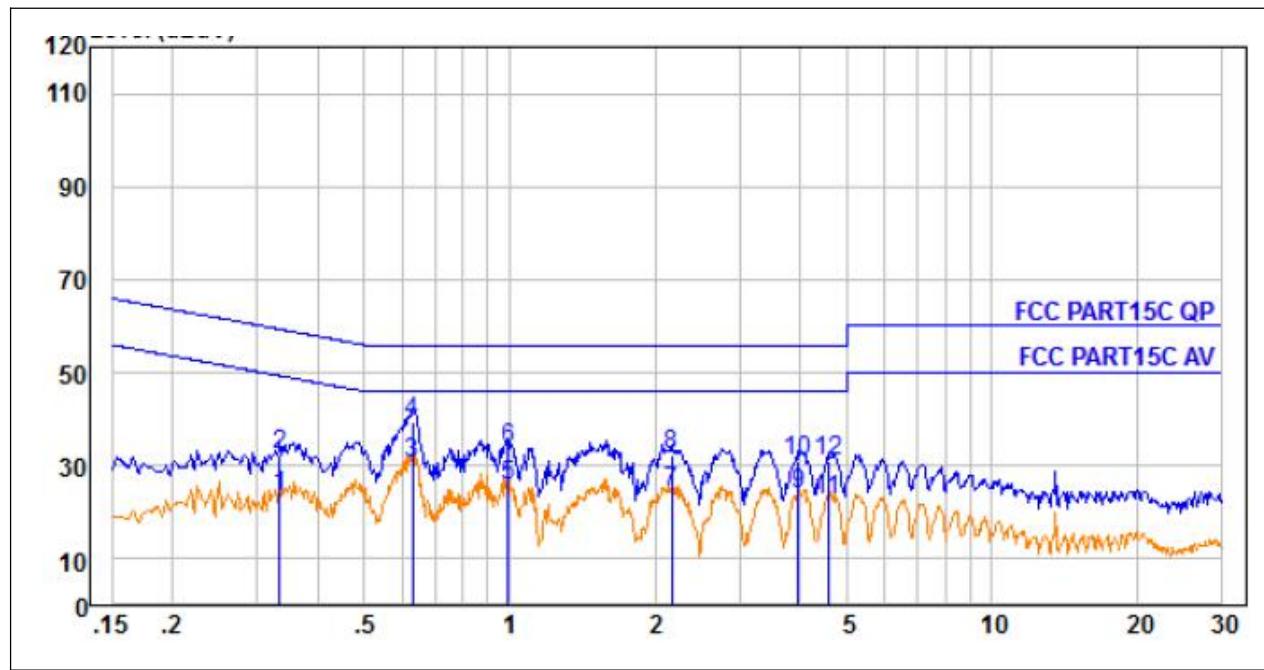


No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBµV	Emission Level dBµV	Limit dBµV	Over Limit dB	Remark
1.	0.334	0.38	9.60	13.29	23.27	49.35	-26.08	Average
2.	0.334	0.38	9.60	22.25	32.23	59.35	-27.12	QP
3.	0.630	0.44	9.61	20.52	30.57	46.00	-15.43	Average
4.	0.630	0.44	9.61	29.52	39.57	56.00	-16.43	QP
5.	0.994	0.46	9.61	15.66	25.73	46.00	-20.27	Average
6.	0.994	0.46	9.61	23.66	33.73	56.00	-22.27	QP
7.	2.167	0.47	9.61	14.25	24.33	46.00	-21.67	Average
8.	2.167	0.47	9.61	22.25	32.33	56.00	-23.67	QP
9.	3.964	0.47	9.65	13.88	24.00	46.00	-22.00	Average
10.	3.964	0.47	9.65	20.84	30.96	56.00	-25.04	QP
11.	4.574	0.49	9.67	12.63	22.79	46.00	-23.21	Average
12.	4.574	0.49	9.67	20.63	30.79	56.00	-25.21	QP

Notes:

- An initial pre-scan was performed on the line and neutral lines with peak detector.
- Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- Measurement Level = Reading level + Correct Factor

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

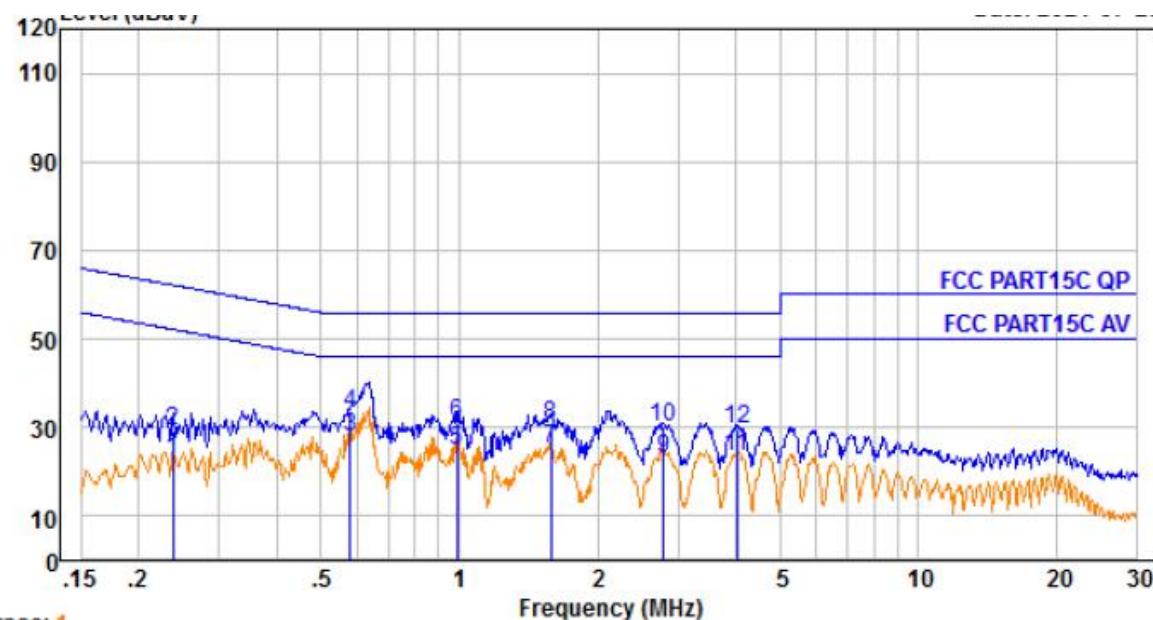

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBµV	Emission Level dBµV	Limit dBµV	Over Limit dB	Remark
1.	0.238	0.32	9.61	12.48	22.41	52.17	-29.76	Average
2.	0.238	0.32	9.61	19.47	29.40	62.17	-32.77	QP
3.	0.579	0.43	9.63	17.74	27.80	46.00	-18.20	Average
4.	0.579	0.43	9.63	23.32	33.38	56.00	-22.62	QP
5.	0.989	0.46	9.64	14.52	24.62	46.00	-21.38	Average
6.	0.989	0.46	9.64	20.99	31.09	56.00	-24.91	QP
7.	1.585	0.47	9.64	14.91	25.02	46.00	-20.98	Average
8.	1.585	0.47	9.64	20.31	30.42	56.00	-25.58	QP
9.	2.779	0.47	9.66	13.08	23.21	46.00	-22.79	Average
10.	2.779	0.47	9.66	20.08	30.21	56.00	-25.79	QP
11.	4.027	0.47	9.68	13.45	23.60	46.00	-22.40	Average
12.	4.027	0.47	9.68	19.44	29.59	56.00	-26.41	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Mesurement Level = Reading level + Correct Factor

4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

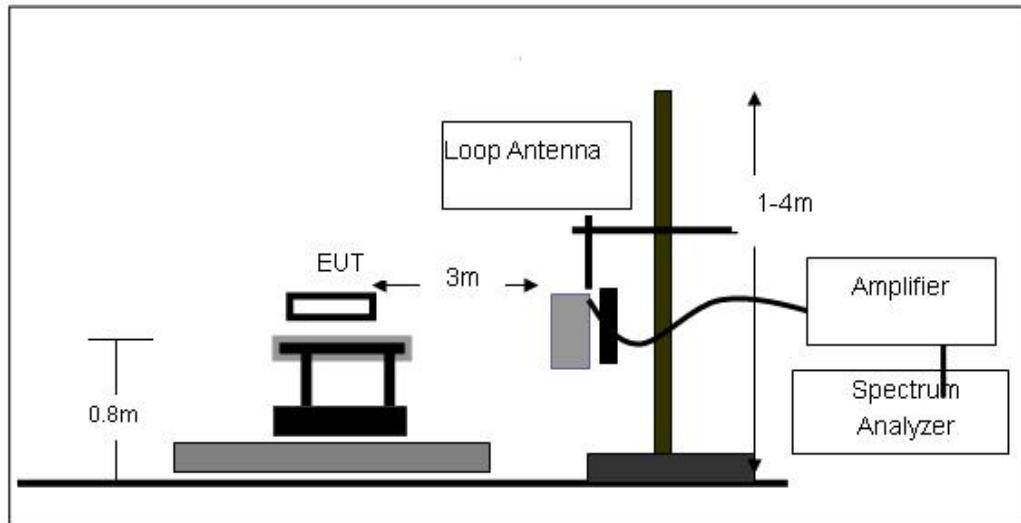

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

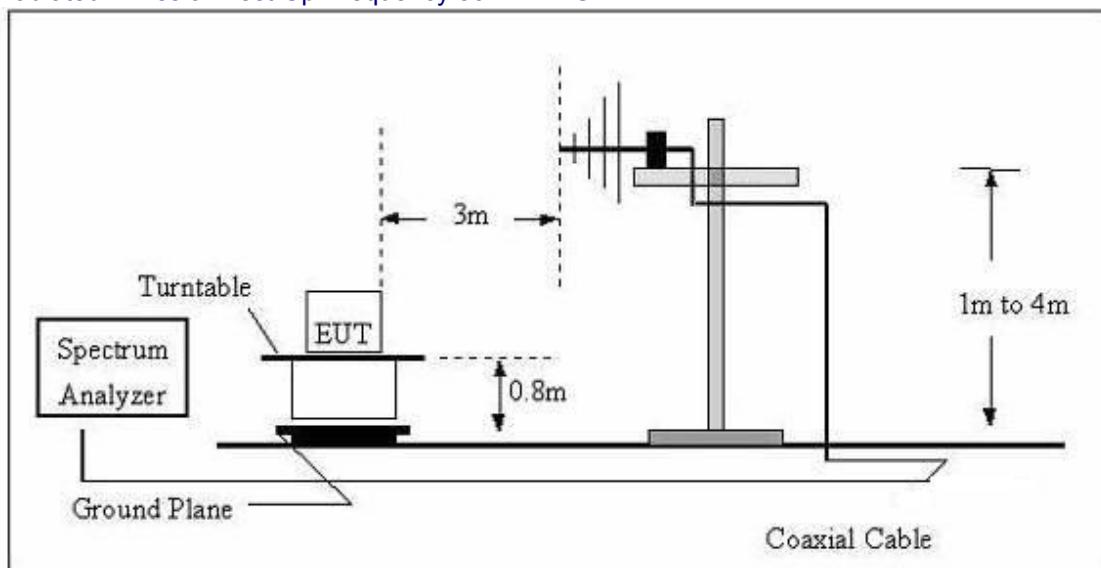

(C) Radiated Emission Test-Up Frequency Above 1GHz

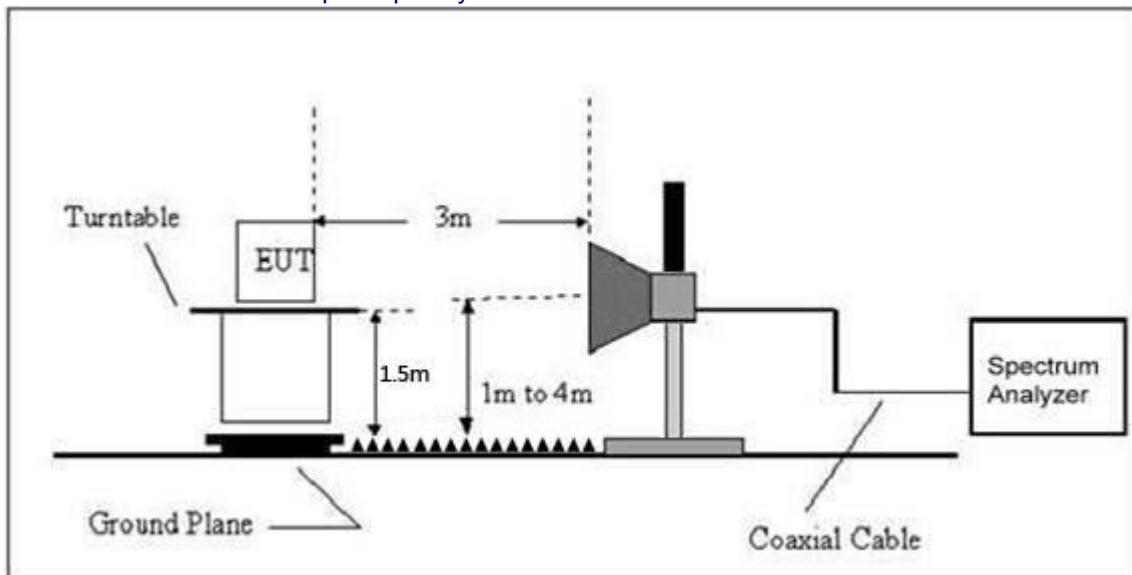

4.2.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (Between 9KHz – 30 MHz)


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Note: The EUT was tested in GFSK, $\pi/4$ -DQPSK and 8DPSK modulation, and found the GFSK modulation is the worst case, the test results are both the "worst case" and "worst setup".

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V by battery		

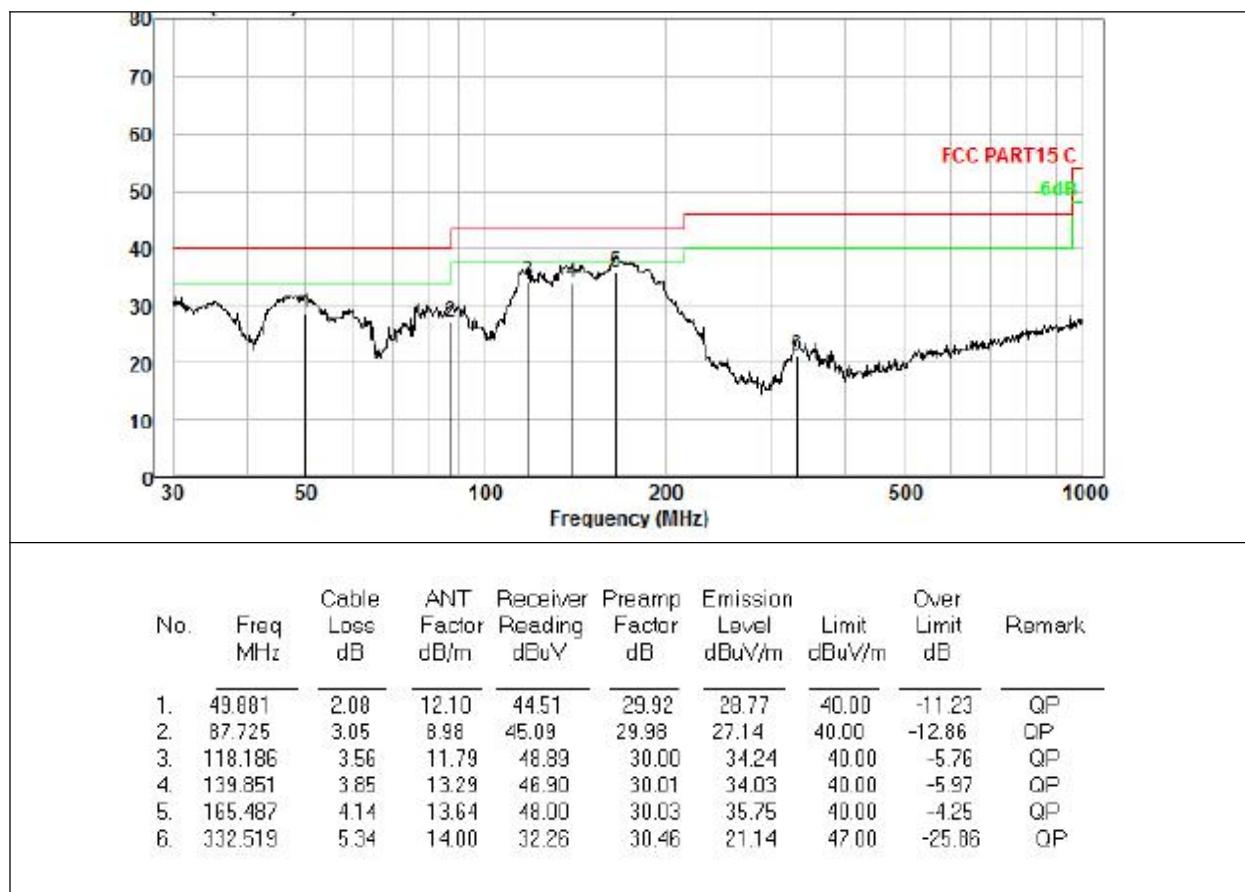

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 3.7V by battery		

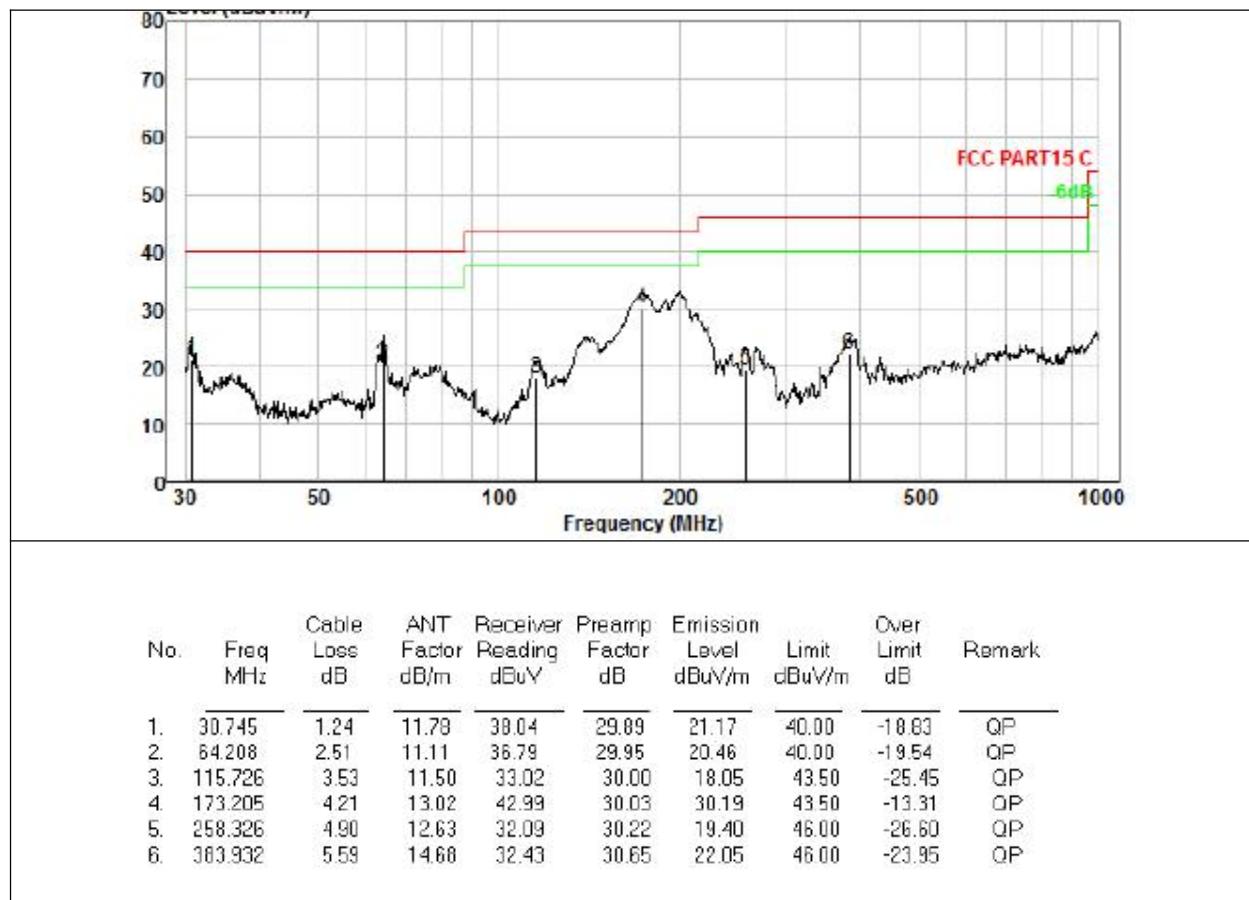

Remarks:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Field Strength of The Fundamental Signal

Note: The EUT was tested in GFSK and $\pi/4$ -DQPSK, 8DPSK modulation, and found the GFSK modulation is the worst case, the test results are both the “worst case” and “worst setup”.

Peak value: BR+EDR

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402	98.47	22.55	3.25	33.45	90.82	114	-23.18	Vertical
2402	99.17	22.55	3.25	33.45	91.52	114	-22.48	Horizontal
2441	97.56	23.05	3.36	33.15	90.82	114	-23.18	Vertical
2441	100.47	23.05	3.36	33.15	93.73	114	-20.27	Horizontal
2480	101.36	23.57	3.67	33.68	94.92	114	-19.08	Vertical
2480	99.78	23.57	3.67	33.68	93.34	114	-20.66	Horizontal

Average value: BR+EDR

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402	84.15	22.55	3.25	33.45	76.5	94	-17.50	Vertical
2402	83.69	22.55	3.25	33.45	76.04	94	-17.96	Horizontal
2441	85.14	23.05	3.36	33.15	78.4	94	-15.60	Vertical
2441	82.67	23.05	3.36	33.15	75.93	94	-18.07	Horizontal
2480	83.56	23.57	3.67	33.68	77.12	94	-16.88	Vertical
2480	83.66	23.57	3.67	33.68	77.22	94	-16.78	Horizontal

1GHz~25GHz

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	

Low Channel:2402MHz

V	4804.00	53.47	30.55	5.77	24.66	53.35	74.00	-20.65	Pk
V	4804.00	41.47	30.55	5.77	24.66	41.35	54.00	-12.65	AV
V	7206.00	51.68	30.33	6.32	24.55	52.22	74.00	-21.78	Pk
V	7206.00	39.78	30.33	6.32	24.55	40.32	54.00	-13.68	AV
V	9608.00	43.97	30.85	7.45	24.69	45.26	74.00	-28.74	Pk
V	9608.00	41.17	30.85	7.45	24.69	42.46	54.00	-11.54	AV
V	12010.00	45.64	31.02	8.99	25.57	49.18	74.00	-24.82	Pk
V	12010.00	31.17	31.02	8.99	25.57	34.71	54.00	-19.29	AV
H	4804.00	53.78	30.55	5.77	24.66	53.66	74.00	-20.34	Pk
H	4804.00	42.99	30.55	5.77	24.66	42.87	54.00	-11.13	AV
H	7206.00	49.71	30.33	6.32	24.55	50.25	74.00	-23.75	Pk
H	7206.00	38.97	30.33	6.32	24.55	39.51	54.00	-14.49	AV
H	9608.00	42.74	30.85	7.45	24.69	44.03	74.00	-29.97	Pk
H	9608.00	31.18	30.85	7.45	24.69	32.47	54.00	-21.53	AV
H	12010.00	40.55	31.02	8.99	25.57	44.09	74.00	-29.91	Pk
H	12010.00	29.74	31.02	8.99	25.57	33.28	54.00	-20.72	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	

Middle Channel:2441MHz

V	4882.00	54.77	30.55	5.77	24.66	54.65	74.00	-19.35	Pk
V	4882.00	41.18	30.55	5.77	24.66	41.06	54.00	-12.94	AV
V	7323.00	52.77	30.33	6.32	24.55	53.31	74.00	-20.69	Pk
V	7323.00	41.12	30.33	6.32	24.55	41.66	54.00	-12.34	AV
V	9764.00	44.97	30.85	7.45	24.69	46.26	74.00	-27.74	Pk
V	9764.00	32.54	30.85	7.45	24.69	33.83	54.00	-20.17	AV
V	12205.00	39.75	31.02	8.99	25.57	43.29	74.00	-30.71	Pk
V	12205.00	28.79	31.02	8.99	25.57	32.33	54.00	-21.67	AV
H	4882.00	52.44	30.55	5.77	24.66	52.32	74.00	-21.68	Pk
H	4882.00	41.57	30.55	5.77	24.66	41.45	54.00	-12.55	AV
H	7323.00	49.71	30.33	6.32	24.55	50.25	74.00	-23.75	Pk
H	7323.00	38.99	30.33	6.32	24.55	39.53	54.00	-14.47	AV
H	9764.00	42.71	30.85	7.45	24.69	44.00	74.00	-30.00	Pk
H	9764.00	30.67	30.85	7.45	24.69	31.96	54.00	-22.04	AV
H	12205.00	41.11	31.02	8.99	25.57	44.65	74.00	-29.35	Pk
H	12205.00	28.97	31.02	8.99	25.57	32.51	54.00	-21.49	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	

High Channel:2480MHz

V	4960.00	54.13	30.55	5.77	24.66	54.01	74.00	-19.99	Pk
V	4960.00	41.65	30.55	5.77	24.66	41.53	54.00	-12.47	AV
V	7440.00	51.14	30.33	6.32	24.55	51.68	74.00	-22.32	Pk
V	7440.00	38.79	30.33	6.32	24.55	39.33	54.00	-14.67	AV

V	9920.00	42.67	30.85	7.45	24.69	43.96	74.00	-30.04	Pk
V	9920.00	36.78	30.85	7.45	24.69	38.07	54.00	-15.93	AV
V	12400.00	39.55	31.02	8.99	25.57	43.09	74.00	-30.91	Pk
V	12400.00	28.73	31.02	8.99	25.57	32.27	54.00	-21.73	AV
H	4960.00	50.67	30.55	5.77	24.66	50.55	74.00	-23.45	Pk
H	4960.00	38.78	30.55	5.77	24.66	38.66	54.00	-15.34	AV
H	7440.00	49.63	30.33	6.32	24.55	50.17	74.00	-23.83	Pk
H	7440.00	38.75	30.33	6.32	24.55	39.29	54.00	-14.71	AV
H	9920.00	42.99	30.85	7.45	24.69	44.28	74.00	-29.72	Pk
H	9920.00	34.22	30.85	7.45	24.69	35.51	54.00	-18.49	AV
H	12400.00	41.17	31.02	8.99	25.57	44.71	74.00	-29.29	Pk
H	12400.00	28.97	31.02	8.99	25.57	32.51	54.00	-21.49	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5. BANDWIDTH OF FREQUENCY BAND EDGE

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- a. 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel


Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

5.3 DEVIATION FROM TEST STANDARD

No deviation

5.4 TEST SETUP

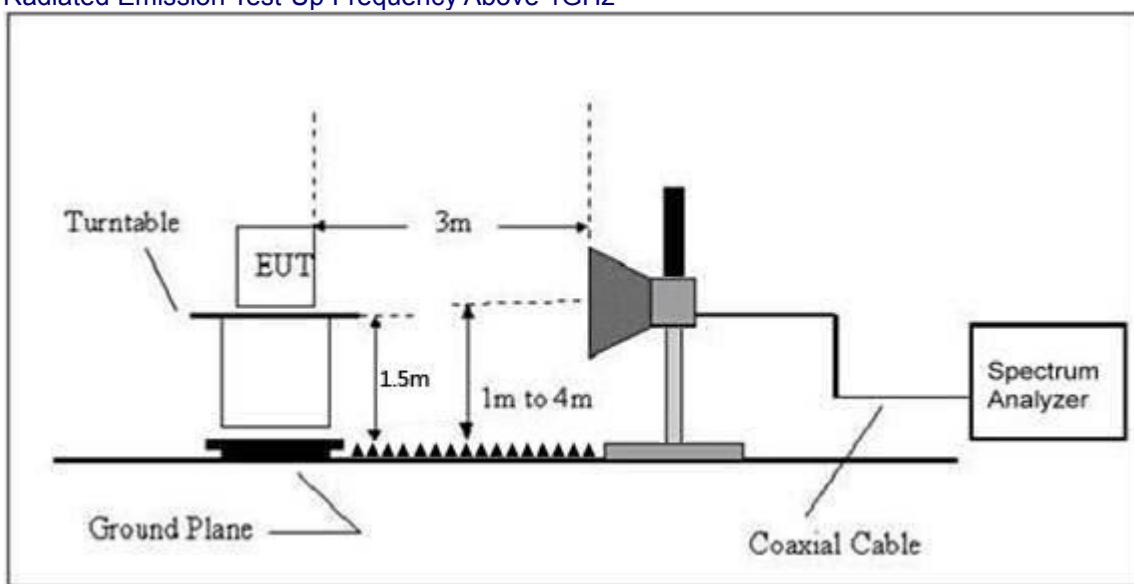

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULT

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC5V
Test Mode :	TX Mode		

2402MHz

Polar (H/V)	Frequency (MHz)	Read Level (dBuV)	Preamp Factor (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector Type
H	2390.00	55.12	30.55	5.77	24.66	55.00	74.00	-19.00	Pk
H	2390.00	41.46	30.55	5.77	24.66	41.34	54.00	-12.66	AV
H	2400.00	51.67	30.33	6.32	24.55	52.21	74.00	-21.79	Pk
H	2400.00	39.76	30.33	6.32	24.55	40.30	54.00	-13.70	AV
V	2390.00	44.97	30.85	7.45	24.69	46.26	74.00	-27.74	Pk
V	2390.00	41.16	30.85	7.45	24.69	42.45	54.00	-11.55	AV
V	2400.00	45.54	31.02	8.99	25.57	49.08	74.00	-24.92	Pk
V	2400.00	31.46	31.02	8.99	25.57	35.00	54.00	-19.00	AV

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Test Voltage :	DC5V
Test Mode :	TX Mode		

2480MHz

Polar (H/V)	Frequency (MHz)	Read Level (dBuV)	Preamp Factor (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector Type
H	2483.50	53.67	30.55	5.77	24.66	53.55	74.00	-20.45	Pk
H	2483.50	43.28	30.55	5.77	24.66	43.16	54.00	-10.84	AV
H	2483.50	51.77	30.33	6.32	24.55	52.31	74.00	-21.69	Pk
H	2483.50	41.52	30.33	6.32	24.55	42.06	54.00	-11.94	AV
V	2483.50	44.67	30.85	7.45	24.69	45.96	74.00	-28.04	Pk
V	2483.50	32.53	30.85	7.45	24.69	33.82	54.00	-20.18	AV
V	2483.50	39.65	31.02	8.99	25.57	43.19	74.00	-30.81	Pk
V	2483.50	28.69	31.02	8.99	25.57	32.23	54.00	-21.77	AV

Remark: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

All of the restriction bands were tested, and only the data of worst case was exhibited.

6. CHANNEL BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.215
Test Method:	ANSI C63.10: 2013

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.215) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.215	Bandwidth	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

Temperature :	26°C	Relative Humidity :	54%
Test Mode :	GFSK, $\pi/4$ -DQPSK, 8DPSK	Test Voltage :	DC 5V

Test channel		Channel Bandwidth (MHz)	Result
GFSK	Lowest	0.854	Pass
	Middle	0.852	Pass
	Highest	0.854	Pass
$\pi/4$ -DQPSK	Lowest	1.278	Pass
	Middle	1.278	Pass
	Highest	1.278	Pass
8DPSK	Lowest	1.121	Pass
	Middle	1.118	Pass
	Highest	1.296	Pass

GFSK

$\pi/4$ -DQPSK



Lowest channel



Middle channel



Highest channel

8DPSK



Lowest channel



Middle channel





Highest channel



8. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<p>EUT Antenna:</p> <p>The antennas are PCB antenna, the best case gain of the antennas are 0dBi.</p>	


9. TEST SETUP PHOTO

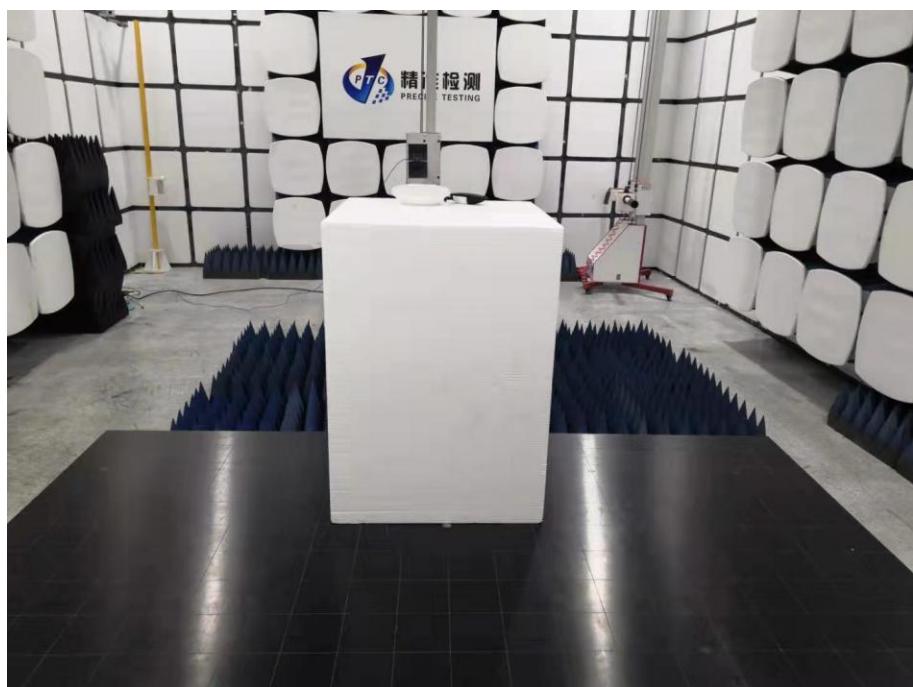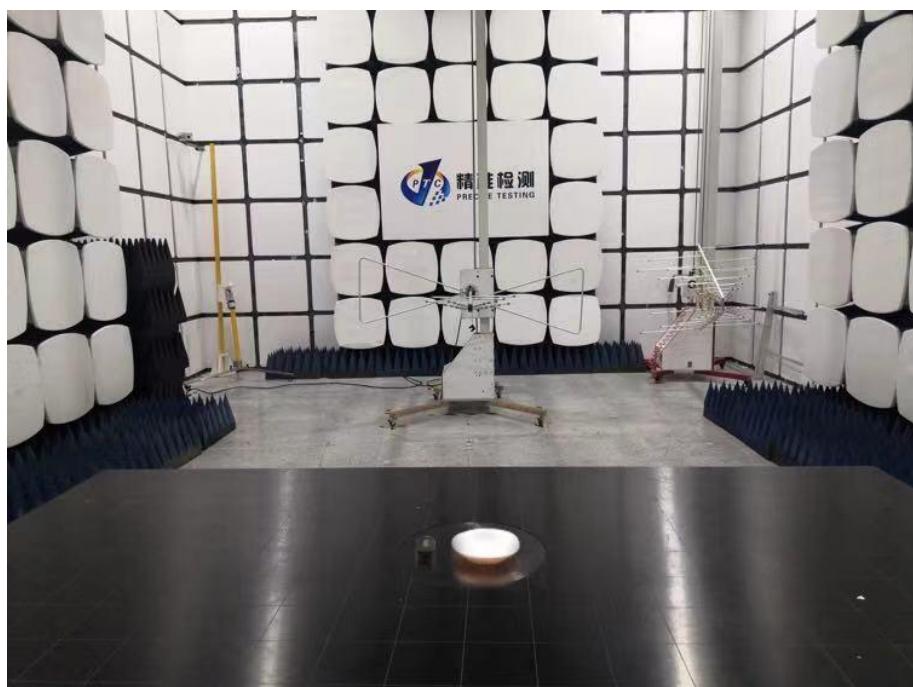



10. EUT CONSTRUCTIONAL DETAILS



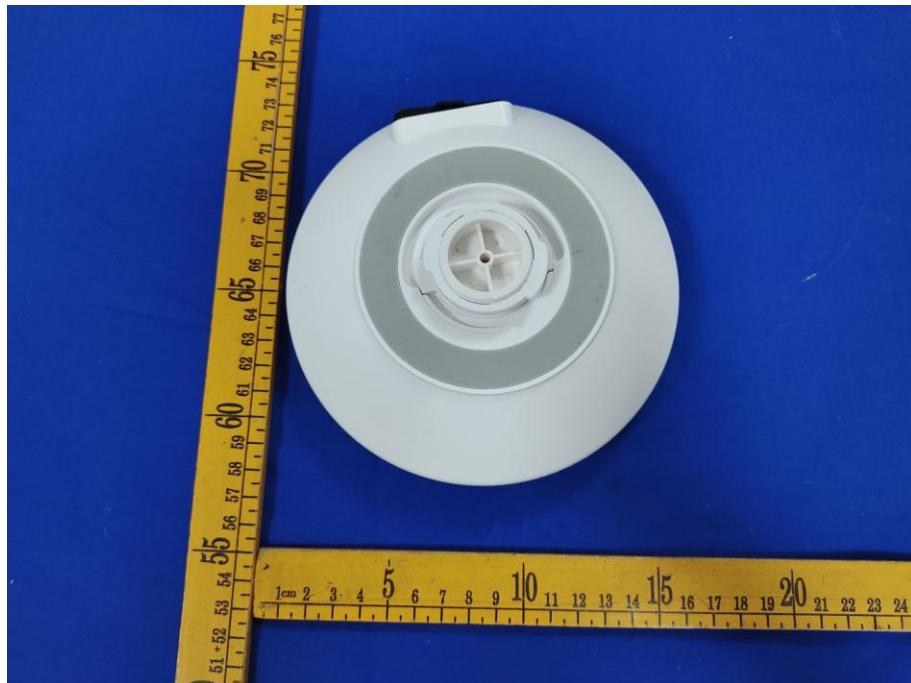





***** END OF REPORT *****