





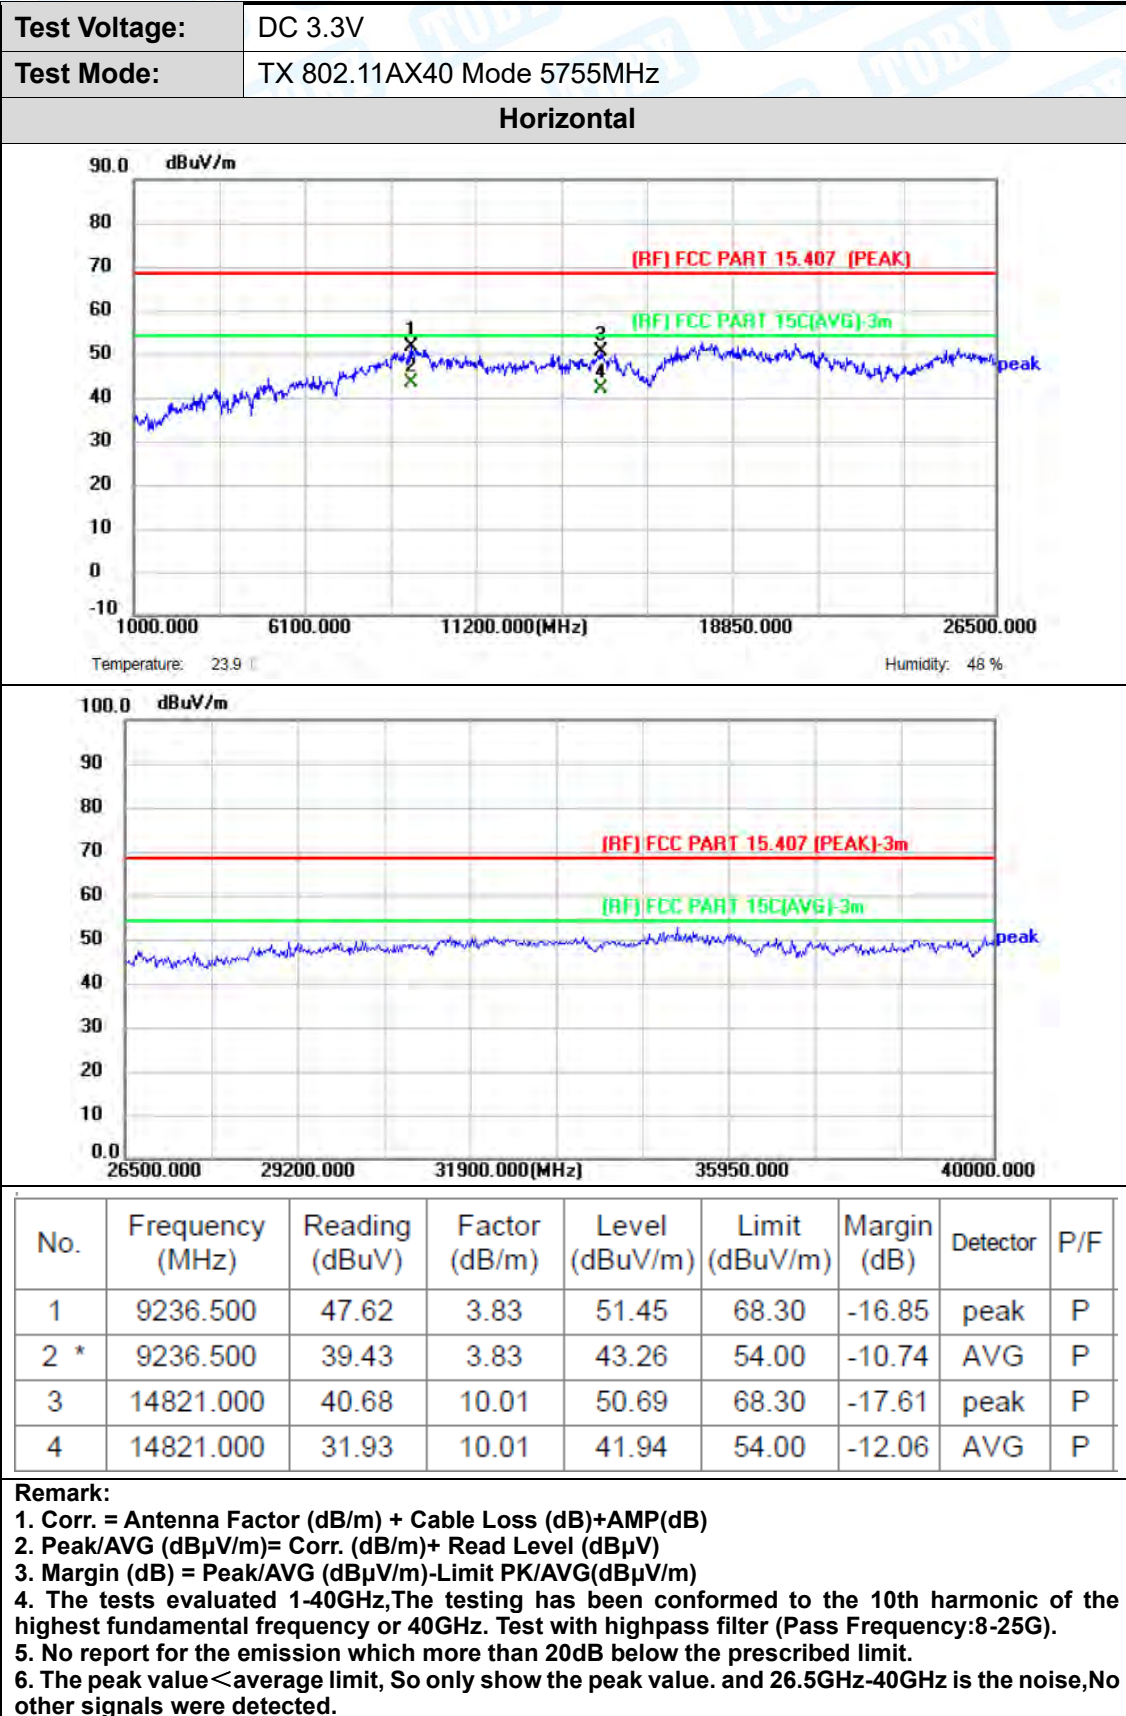


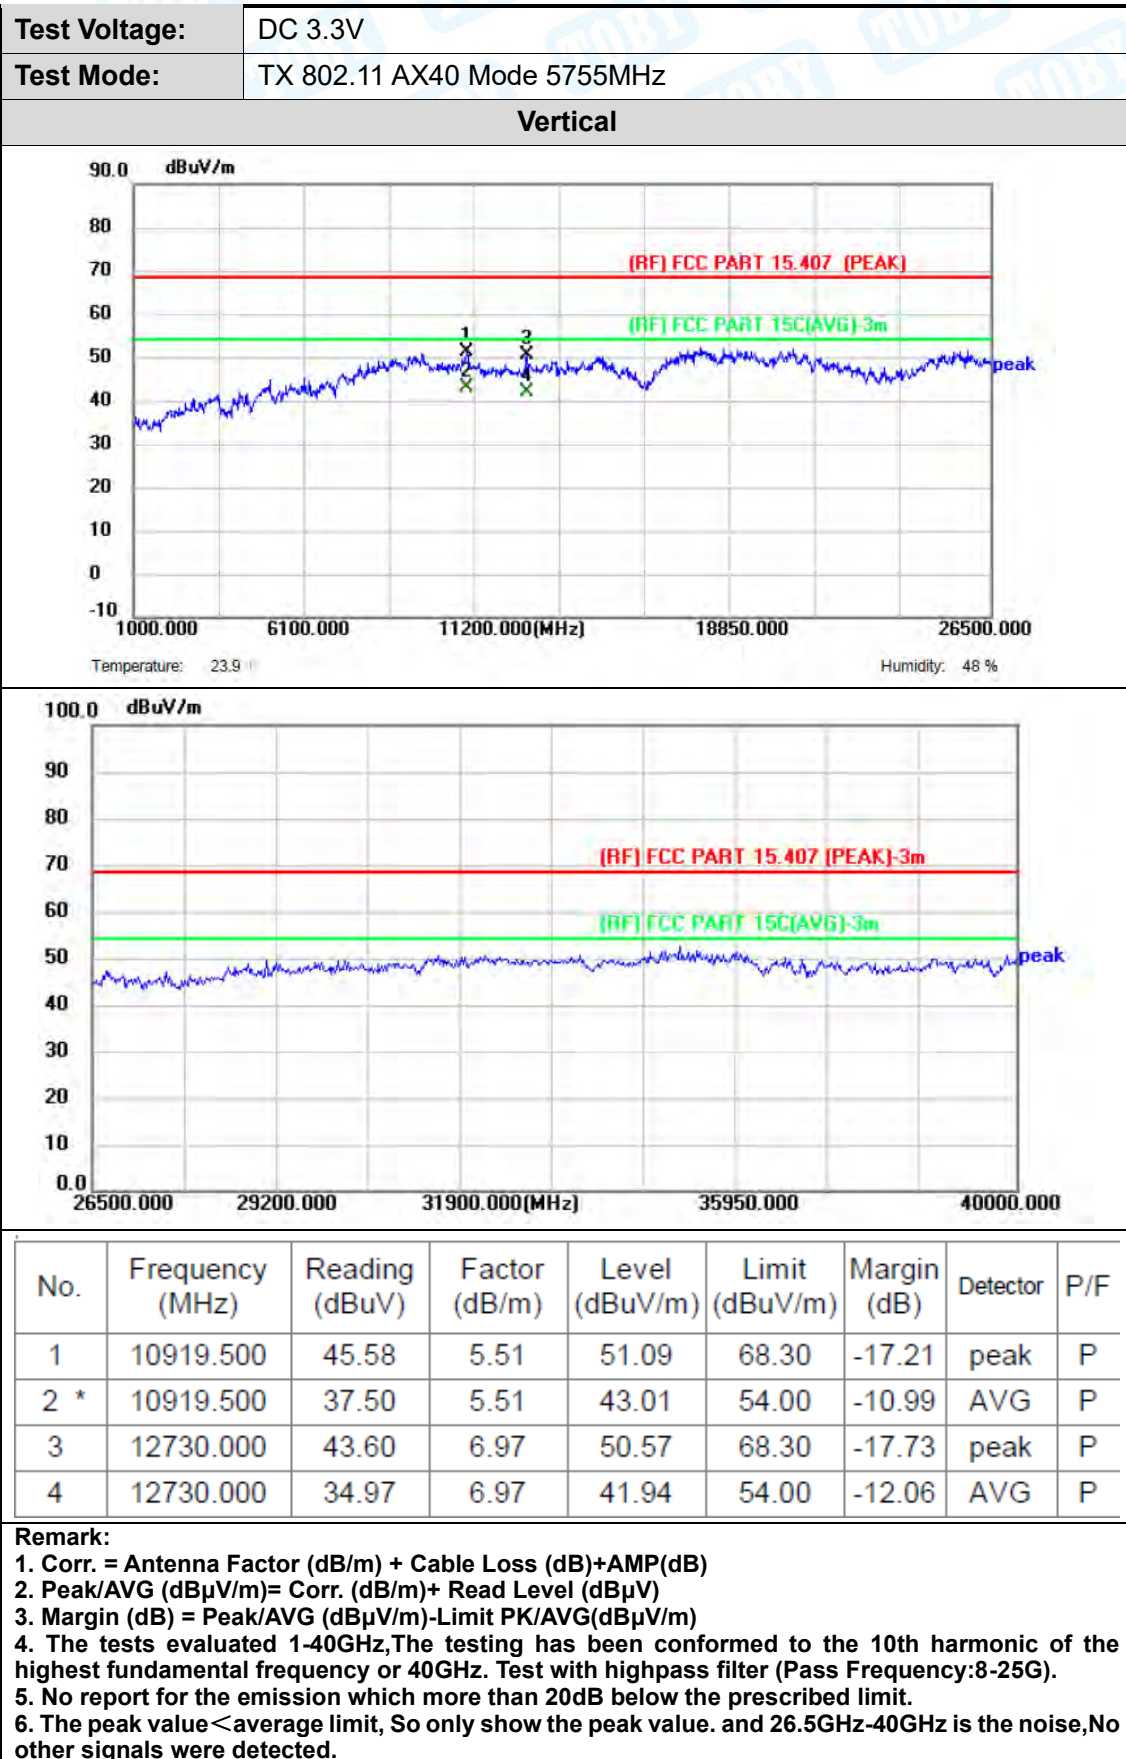

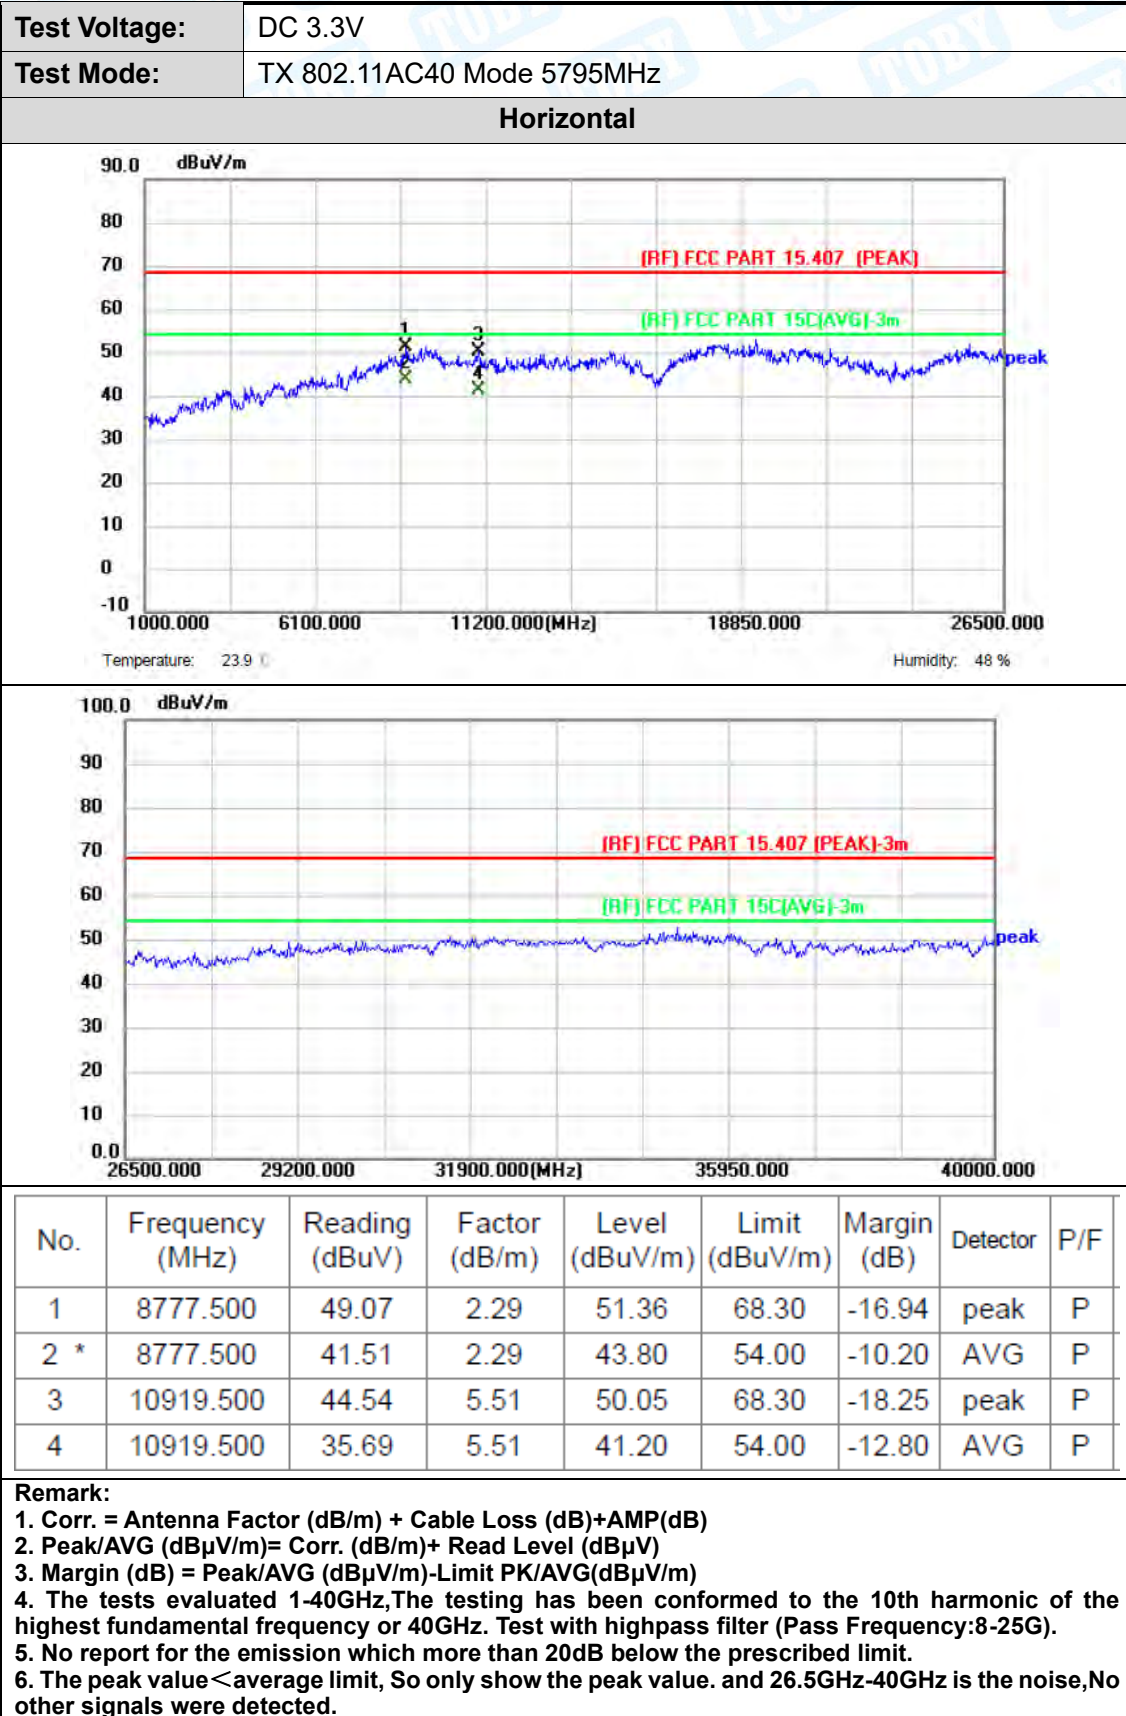

Test Voltage:	DC 3.3V
Test Mode:	TX 802.11 AC40 Mode 5795MHz

Vertical

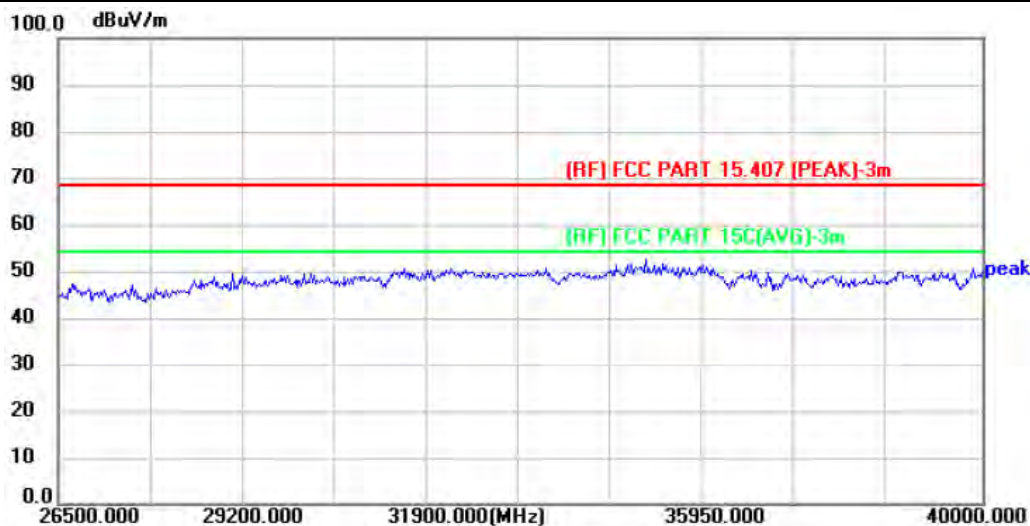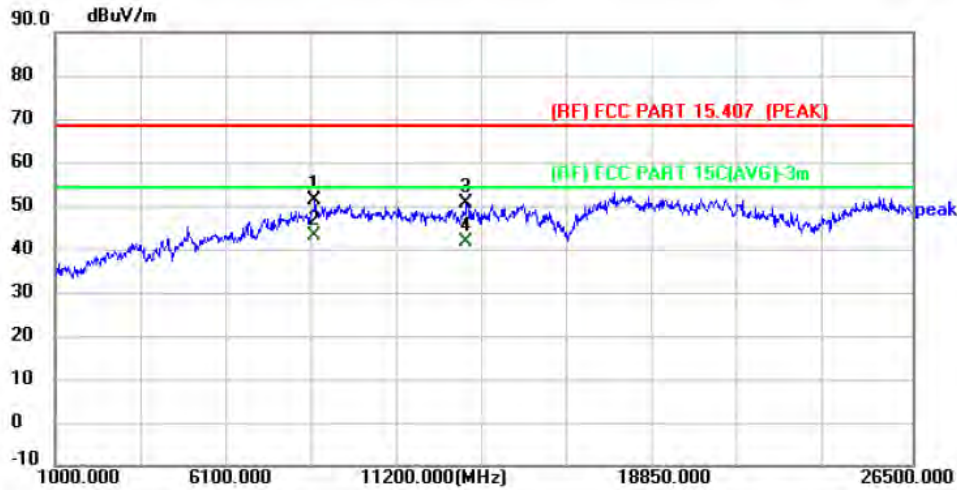

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	8726.500	48.78	2.31	51.09	68.30	-17.21	peak	P
2 *	8726.500	40.73	2.31	43.04	54.00	-10.96	AVG	P
3	13240.000	44.06	6.55	50.61	68.30	-17.69	peak	P
4	13240.000	34.97	6.55	41.52	54.00	-12.48	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 26.5GHz-40GHz is the noise,No other signals were detected.



	Horizontal
--	------------



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV)

highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).



6. The peak value < average limit, So only show the peak value. and 26.5GHz-40G

other signals were detected.



Test Voltage:	DC 3.3V
Test Mode:	TX 802.11 AC80 Mode 5775MHz

Vertical

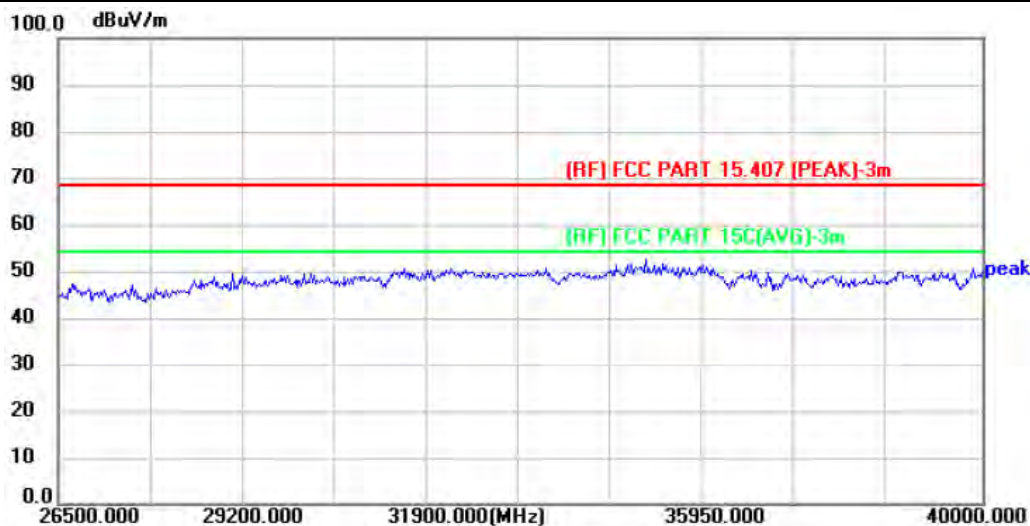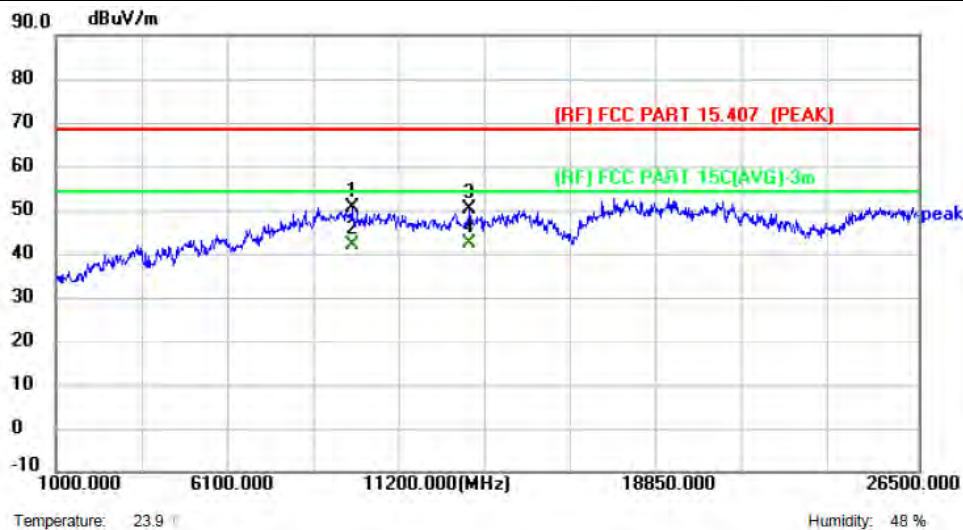



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9746.500	45.37	5.21	50.58	68.30	-17.72	peak	P
2	9746.500	36.83	5.21	42.04	54.00	-11.96	AVG	P
3	13240.000	43.68	6.55	50.23	68.30	-18.07	peak	P
4 *	13240.000	35.63	6.55	42.18	54.00	-11.82	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 26.5GHz-40GHz is the noise, No other signals were detected.



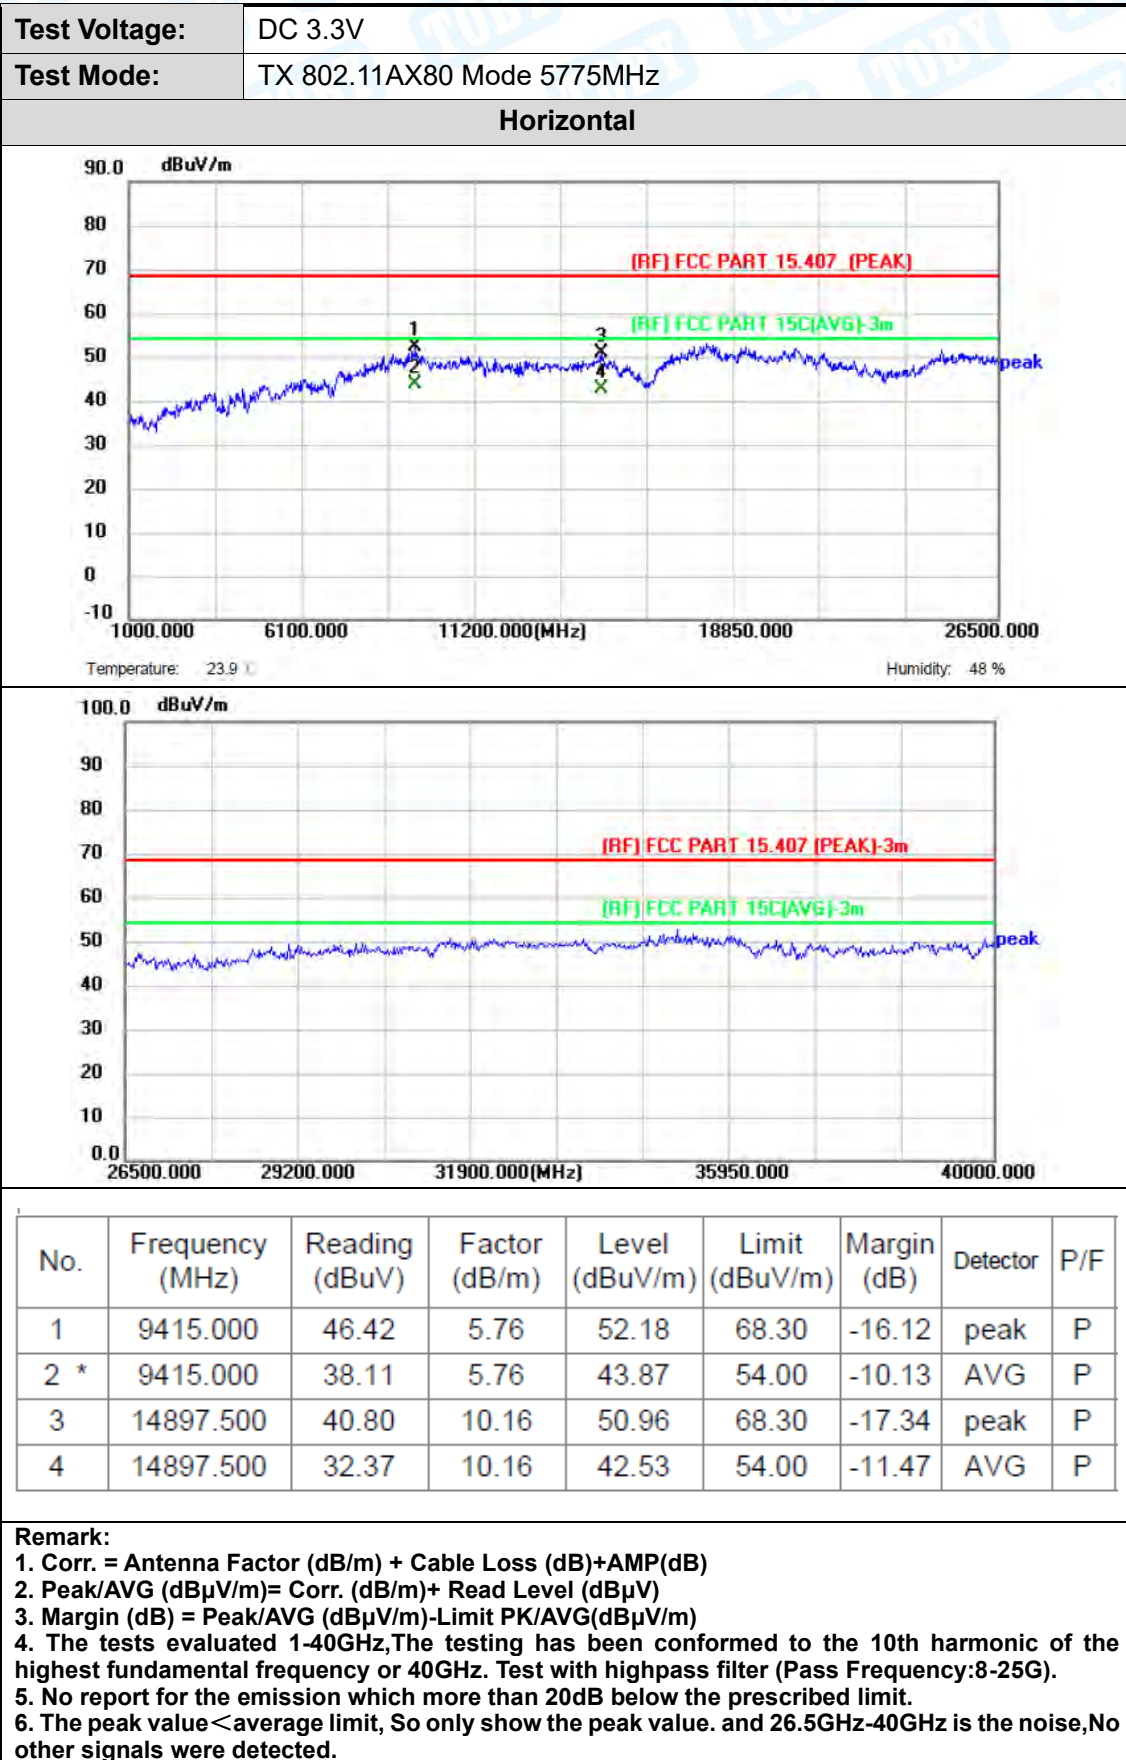


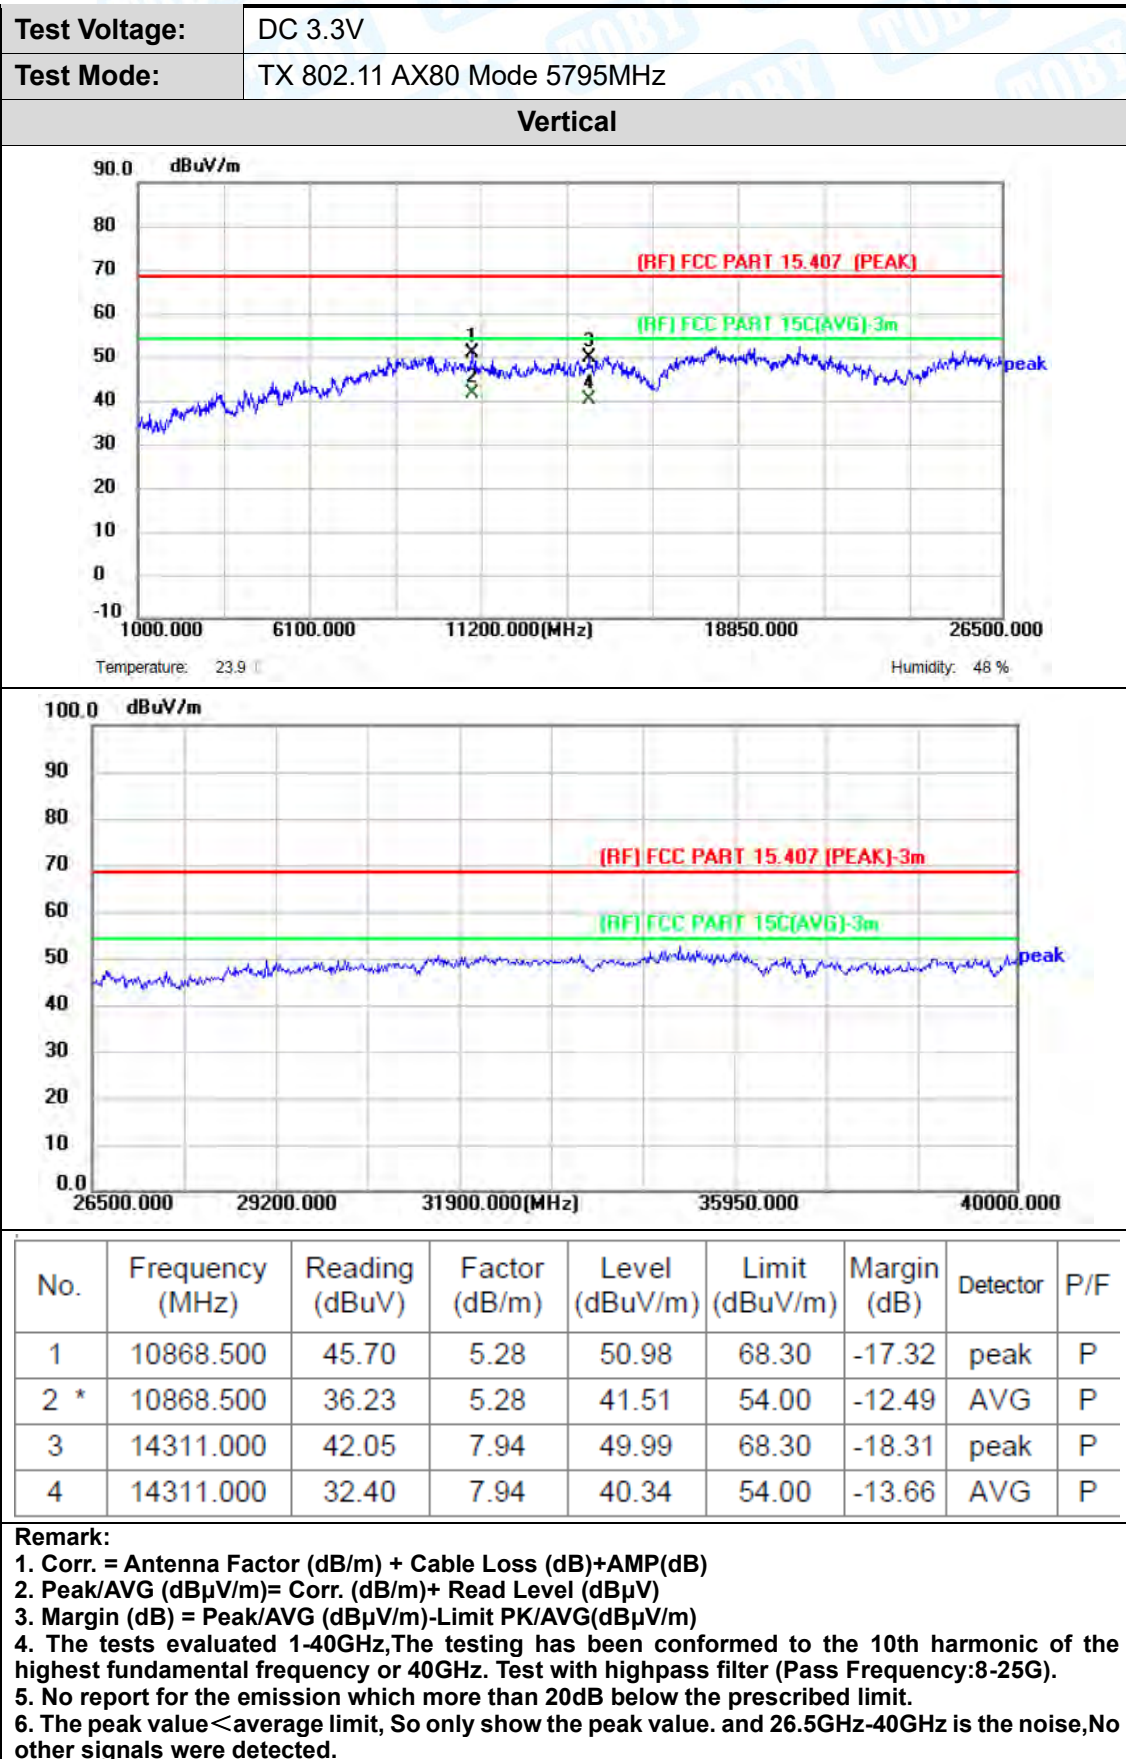

Attachment C-- Restricted Bands Requirement Test Data

Radiation Test

Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)
Remark:	Only evaluate the data of the worst antenna A

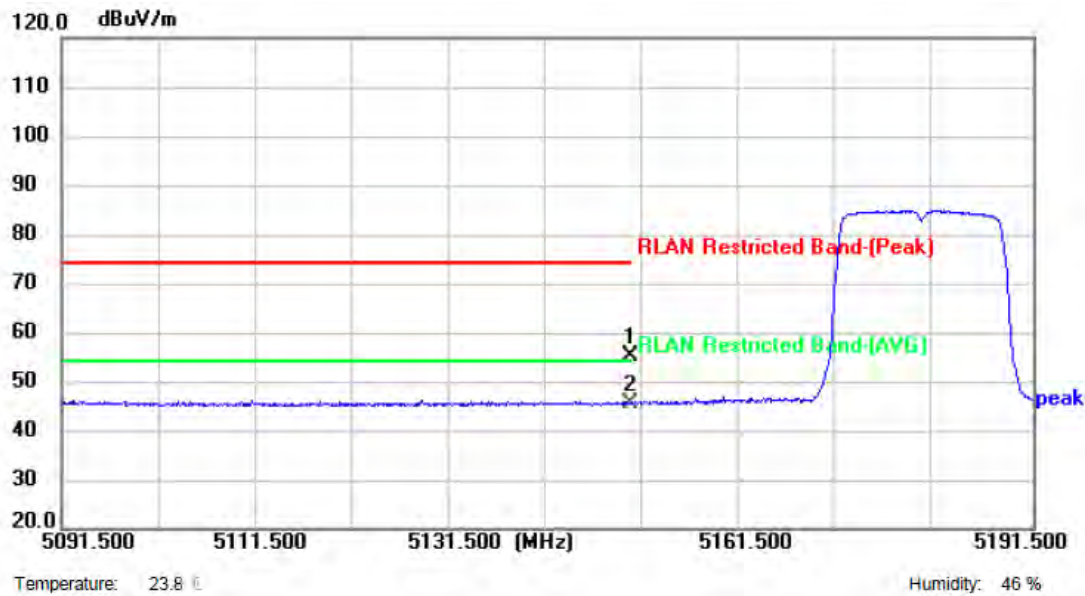


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	43.41	11.66	55.07	74.00	-18.93	peak	P
2 *	5150.000	34.03	11.66	45.69	54.00	-8.31	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)
Remark:	Only evaluate the data of the worst antenna A

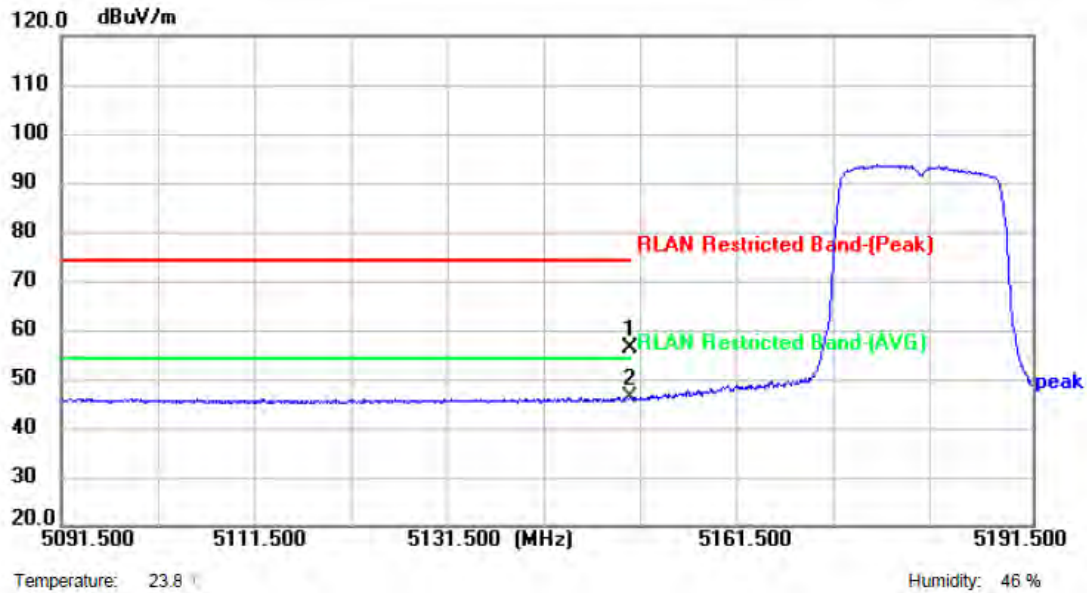


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.66	11.66	56.32	74.00	-17.68	peak	P
2 *	5150.000	34.48	11.66	46.14	54.00	-7.86	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)
Remark:	Only evaluate the data of the worst antenna A

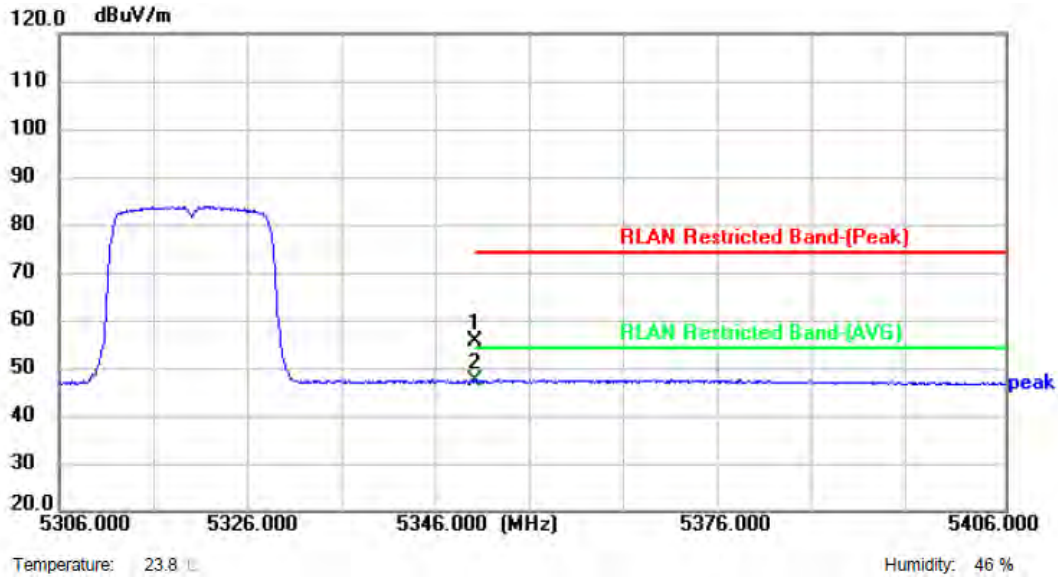


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.60	12.07	55.67	74.00	-18.33	peak	P
2 *	5350.000	35.12	12.07	47.19	54.00	-6.81	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)
Remark:	Only evaluate the data of the worst antenna A

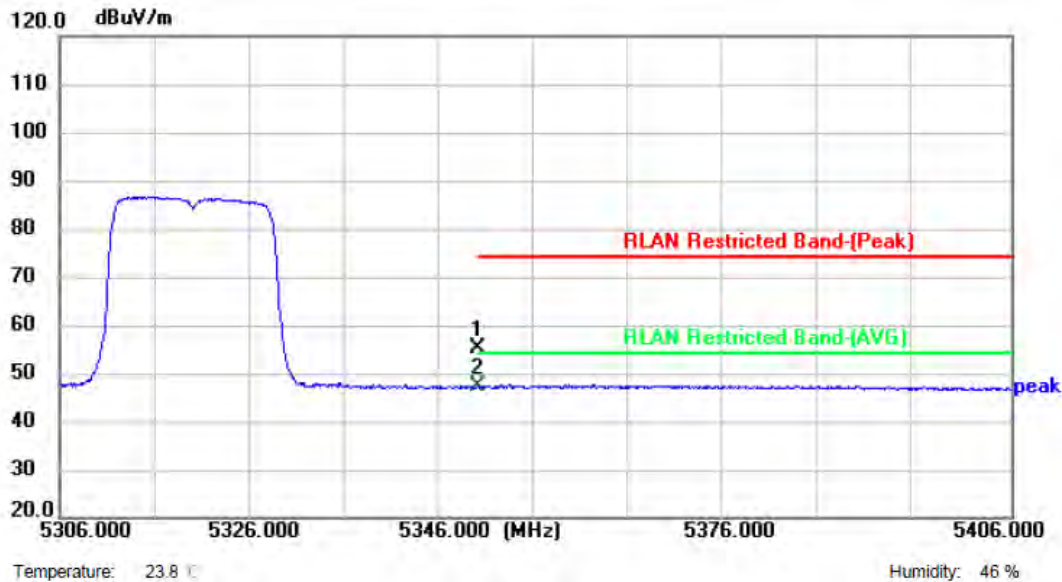


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.19	12.07	55.26	74.00	-18.74	peak	P
2 *	5350.000	35.10	12.07	47.17	54.00	-6.83	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)
Remark:	

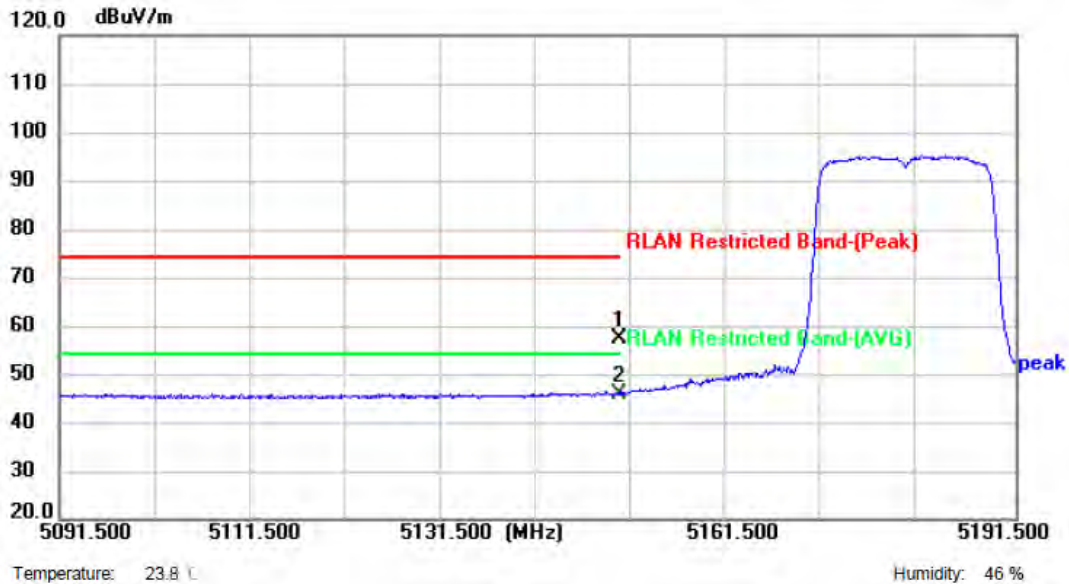


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	45.68	11.66	57.34	74.00	-16.66	peak	P
2 *	5150.000	34.18	11.66	45.84	54.00	-8.16	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)
Remark:	

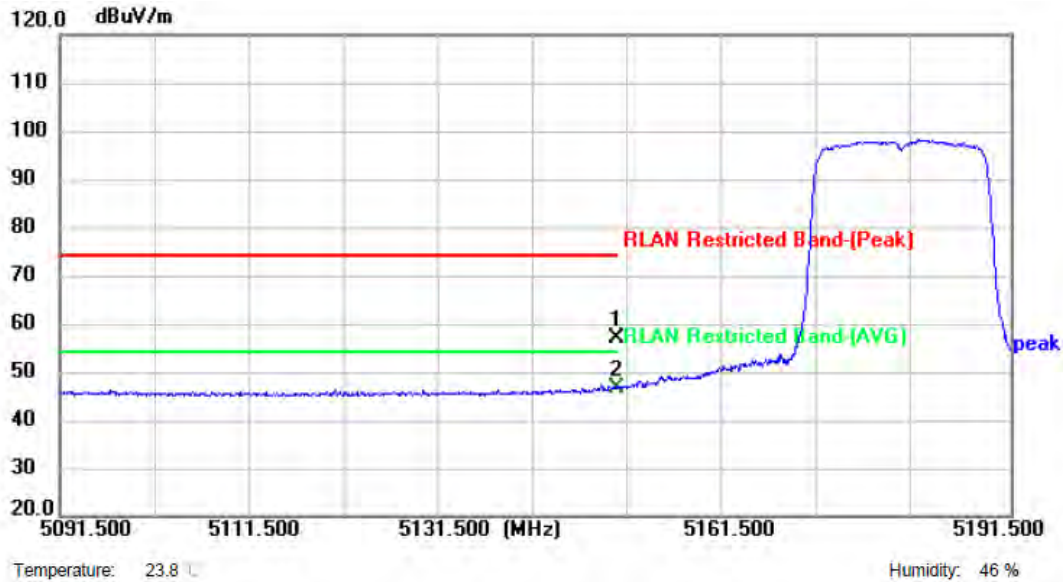


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	45.32	11.66	56.98	74.00	-17.02	peak	P
2 *	5150.000	35.04	11.66	46.70	54.00	-7.30	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)
Remark:	

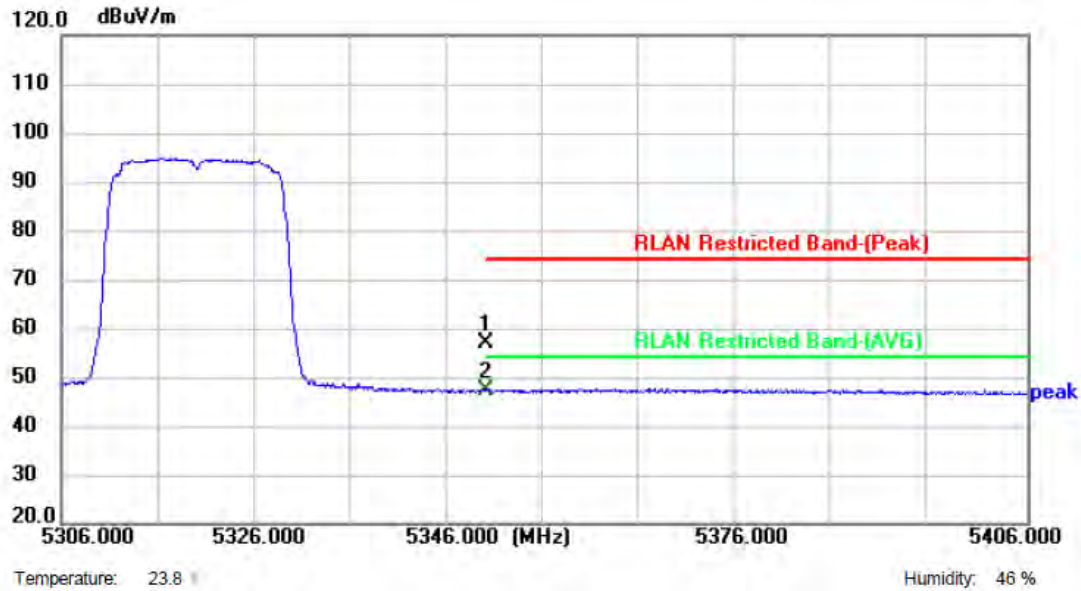


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.87	12.07	56.94	74.00	-17.06	peak	P
2 *	5350.000	35.27	12.07	47.34	54.00	-6.66	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)
Remark:	

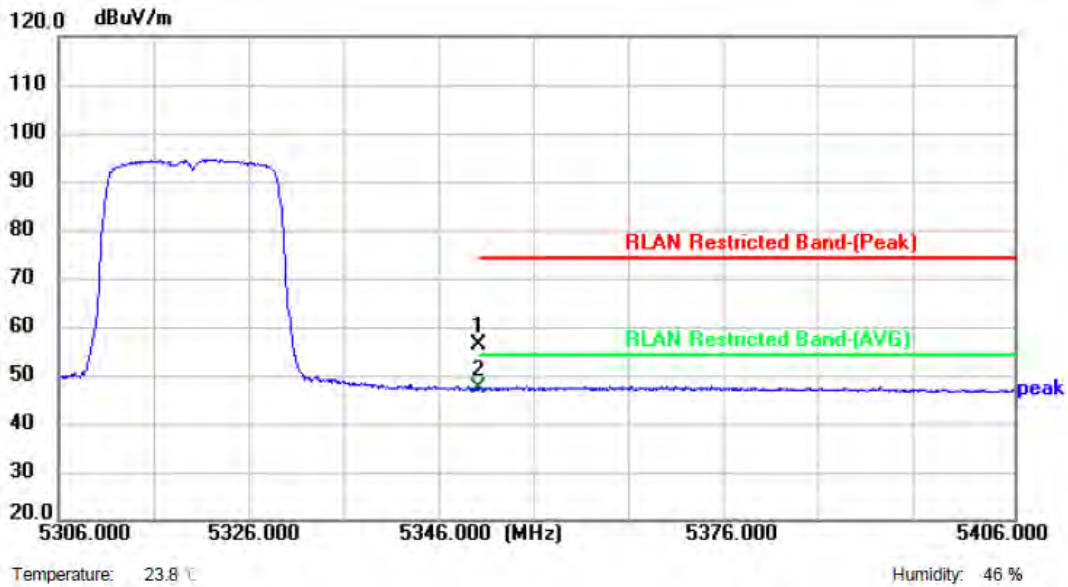


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.30	12.07	56.37	74.00	-17.63	peak	P
2 *	5350.000	35.11	12.07	47.18	54.00	-6.82	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)
Remark:	

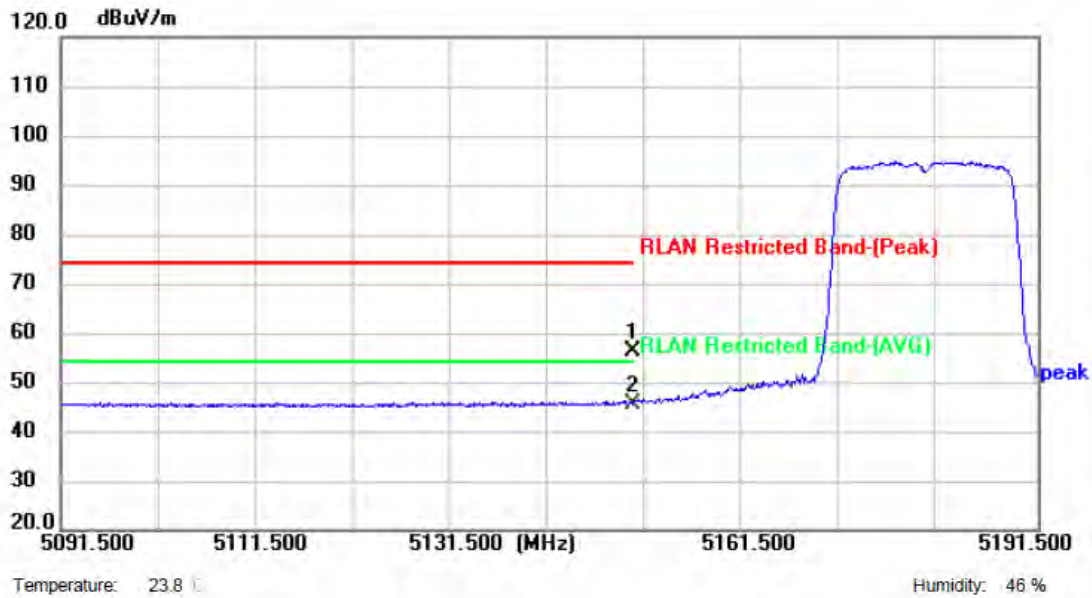


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.55	11.66	56.21	74.00	-17.79	peak	P
2 *	5150.000	33.84	11.66	45.50	54.00	-8.50	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)
Remark:	

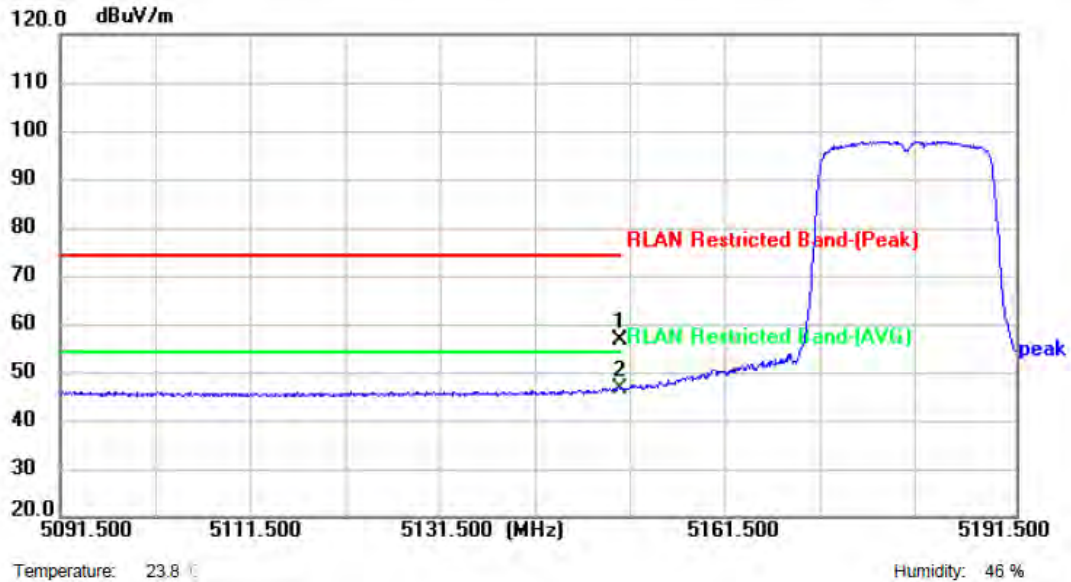


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.79	11.66	56.45	74.00	-17.55	peak	P
2 *	5150.000	35.03	11.66	46.69	54.00	-7.31	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)
Remark:	

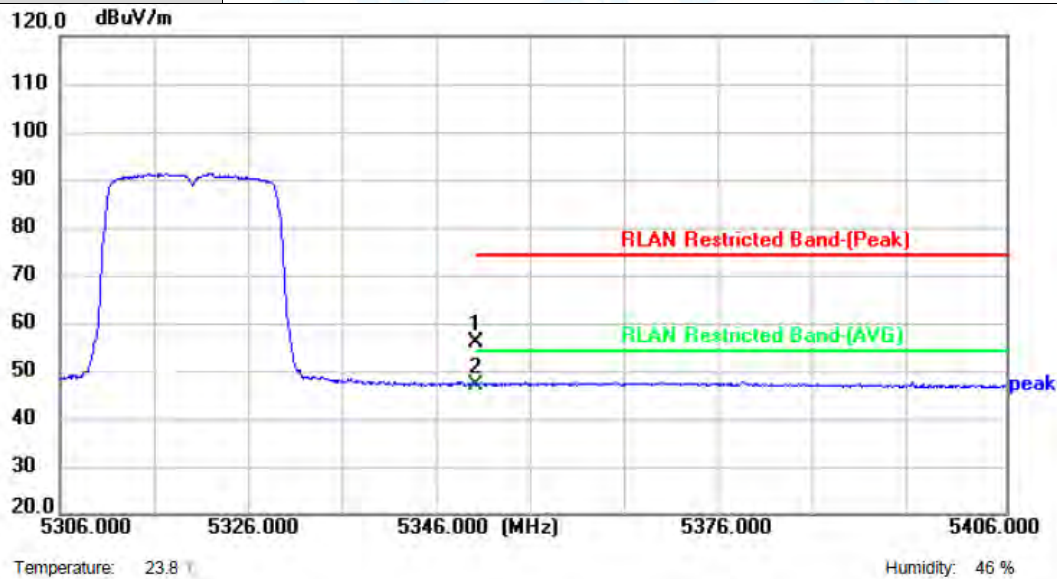


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.89	12.07	55.96	74.00	-18.04	peak	P
2 *	5350.000	35.00	12.07	47.07	54.00	-6.93	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)
Remark:	

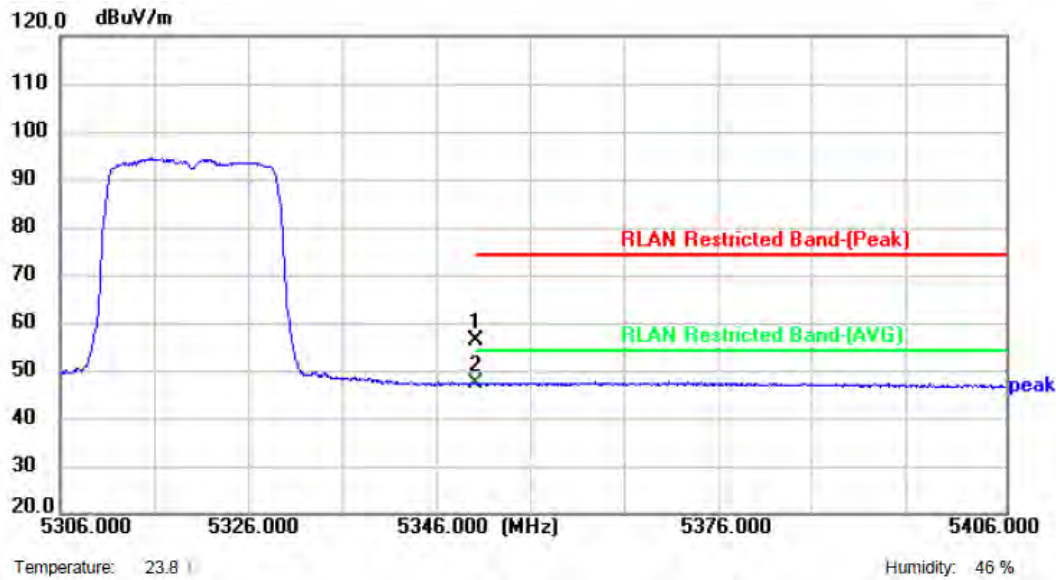


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.25	12.07	56.32	74.00	-17.68	peak	P
2 *	5350.000	35.13	12.07	47.20	54.00	-6.80	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5180 MHz (U-NII-1)
Remark:	

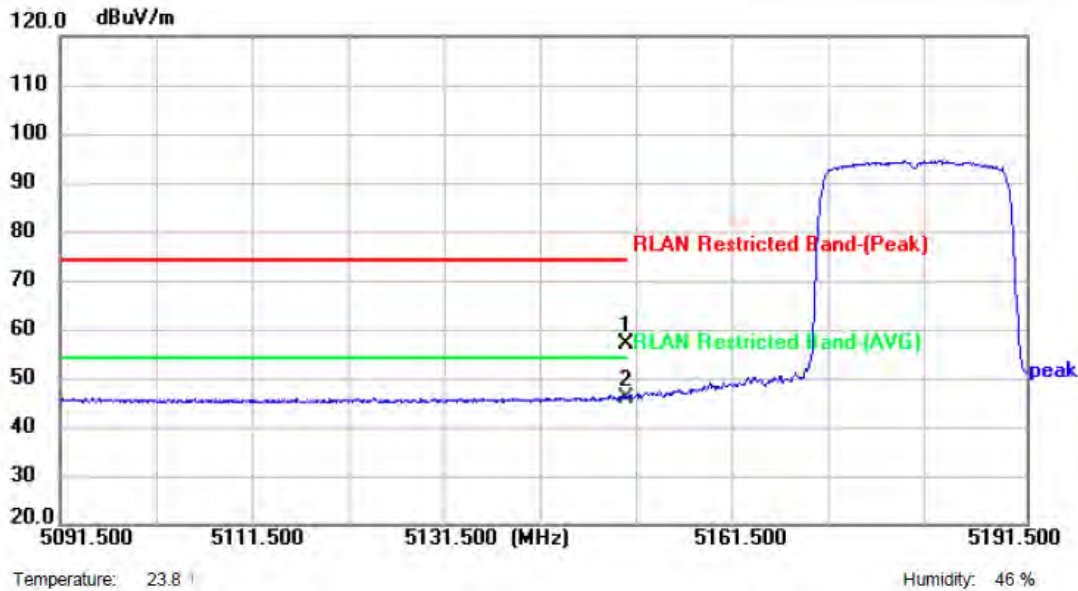


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	45.21	11.66	56.87	74.00	-17.13	peak	P
2 *	5150.000	34.30	11.66	45.96	54.00	-8.04	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE20) Mode 5180 MHz (U-NII-1)
Remark:	

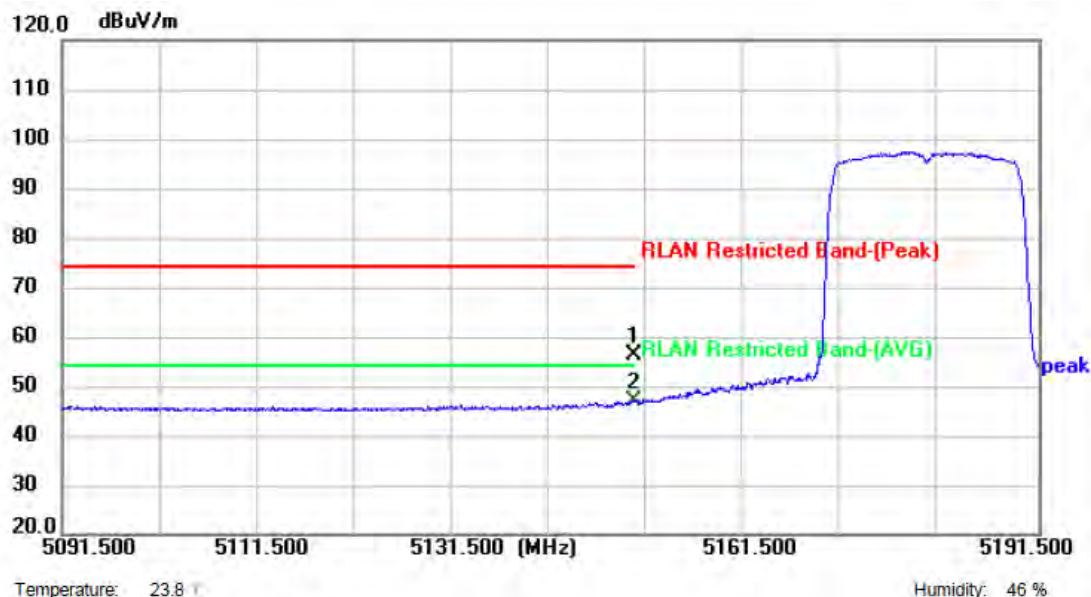


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.66	11.66	56.32	74.00	-17.68	peak	P
2 *	5150.000	35.30	11.66	46.96	54.00	-7.04	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A)
Remark:	

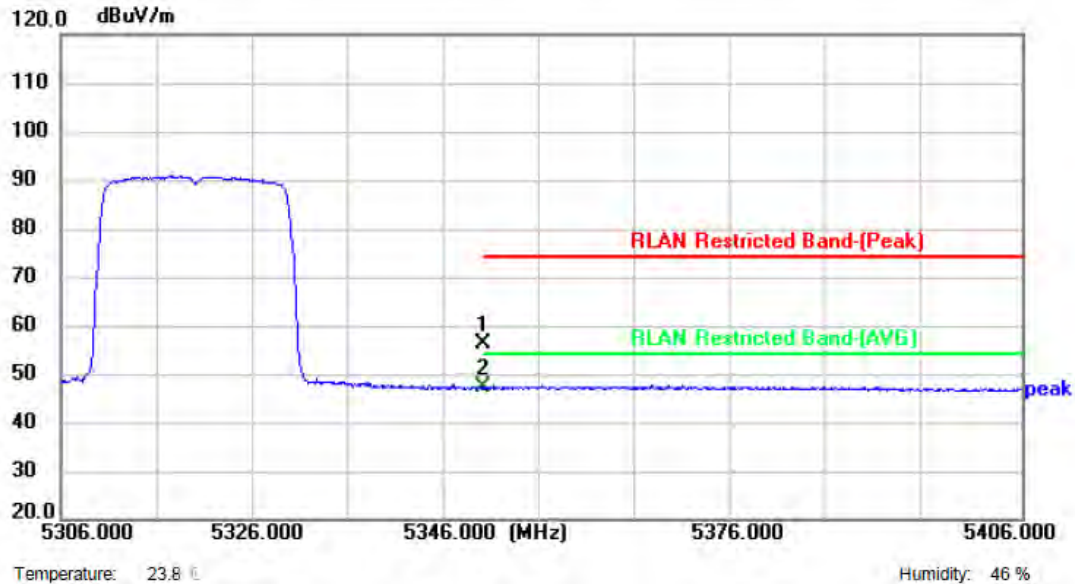


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.31	12.07	56.38	74.00	-17.62	peak	P
2 *	5350.000	35.10	12.07	47.17	54.00	-6.83	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE20) Mode 5320 MHz (U-NII-2A)
Remark:	

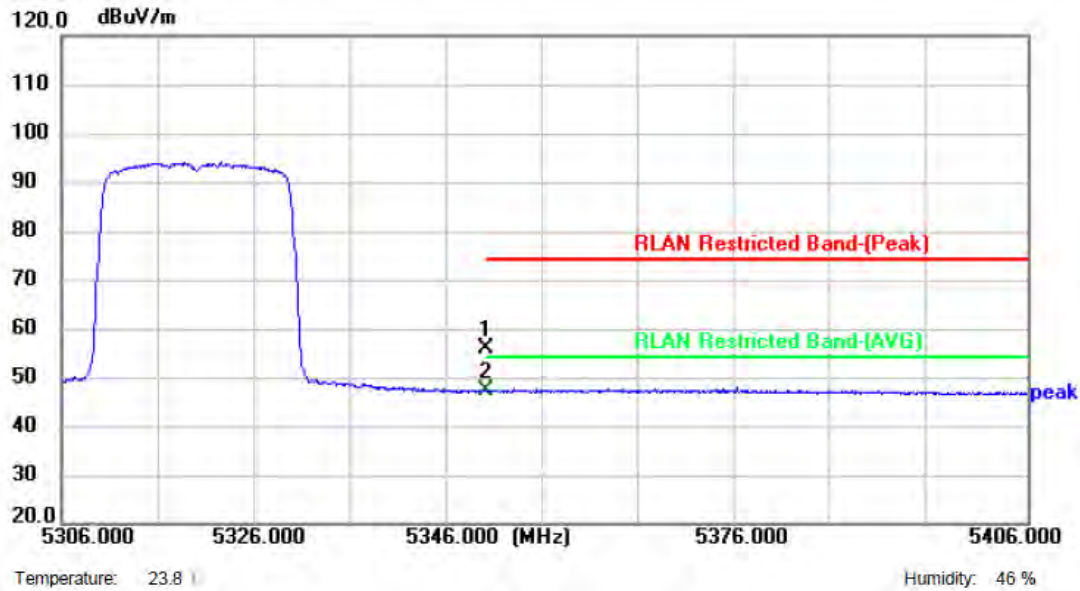


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.96	12.07	56.03	74.00	-17.97	peak	P
2 *	5350.000	35.10	12.07	47.17	54.00	-6.83	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)
Remark:	

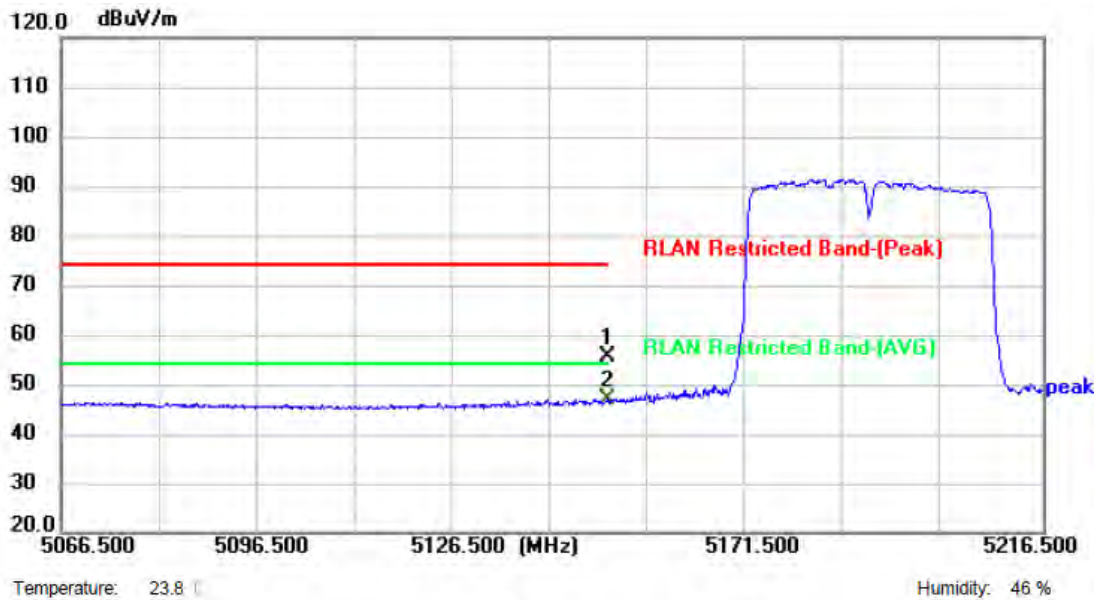


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.03	11.66	55.69	74.00	-18.31	peak	P
2 *	5150.000	35.29	11.66	46.95	54.00	-7.05	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)
Remark:	

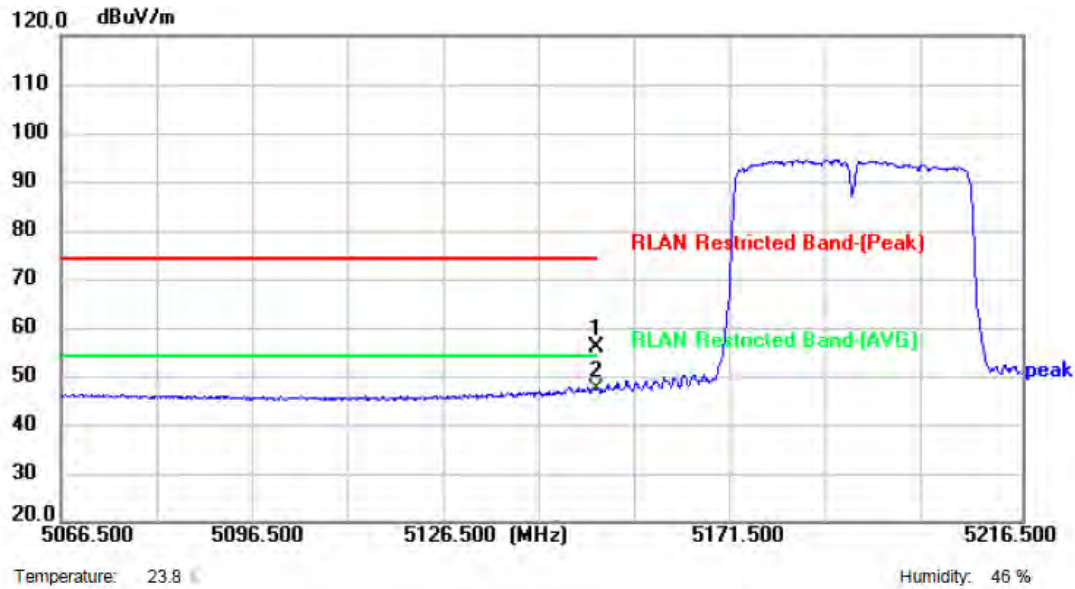


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.32	11.66	55.98	74.00	-18.02	peak	P
2 *	5150.000	35.80	11.66	47.46	54.00	-6.54	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)
Remark:	

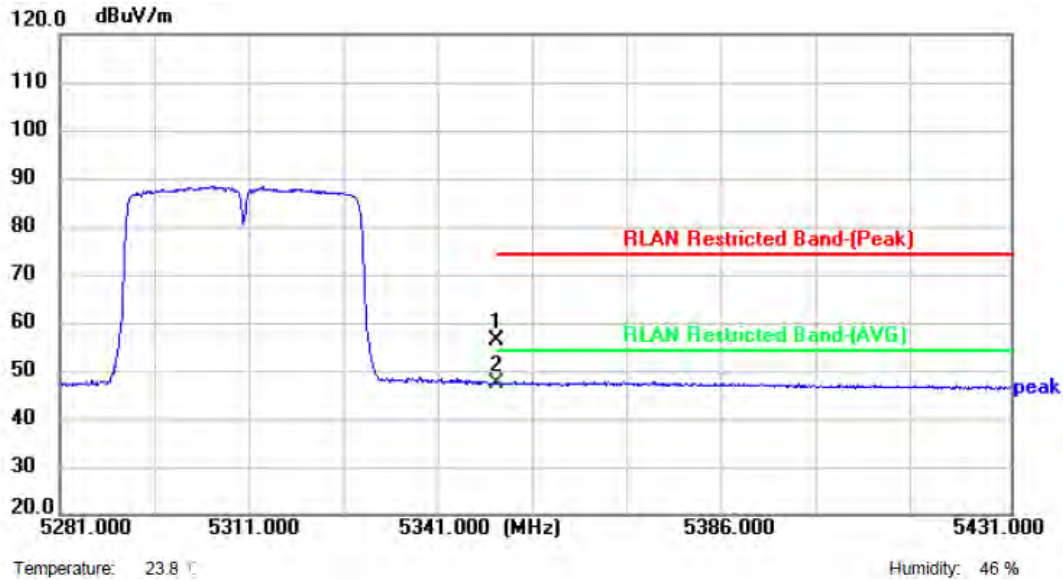


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.25	12.07	56.32	74.00	-17.68	peak	P
2 *	5350.000	35.13	12.07	47.20	54.00	-6.80	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)
Remark:	

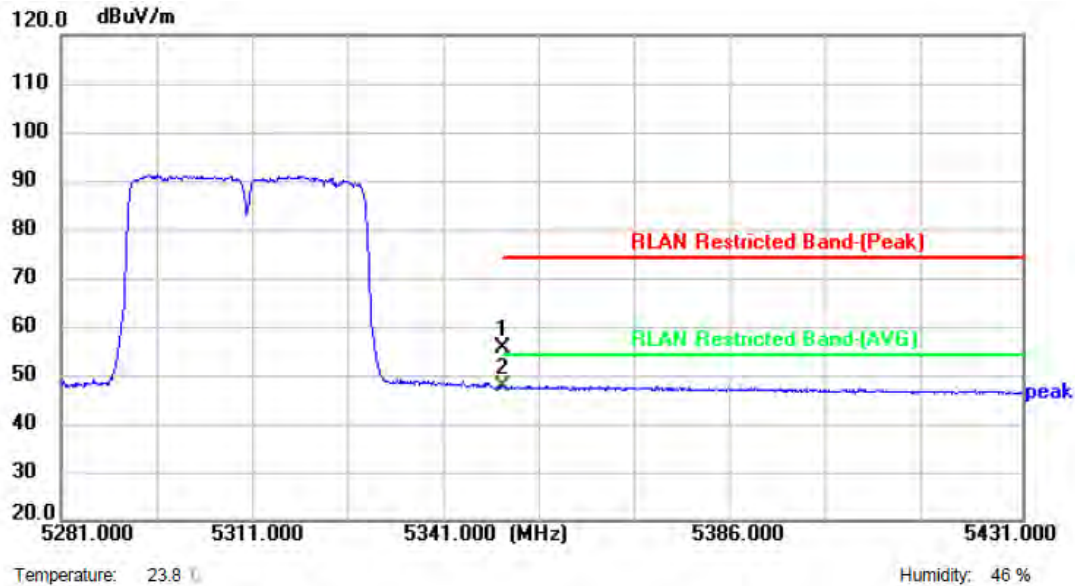


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.55	12.07	55.62	74.00	-18.38	peak	P
2 *	5350.000	35.48	12.07	47.55	54.00	-6.45	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)
Remark:	

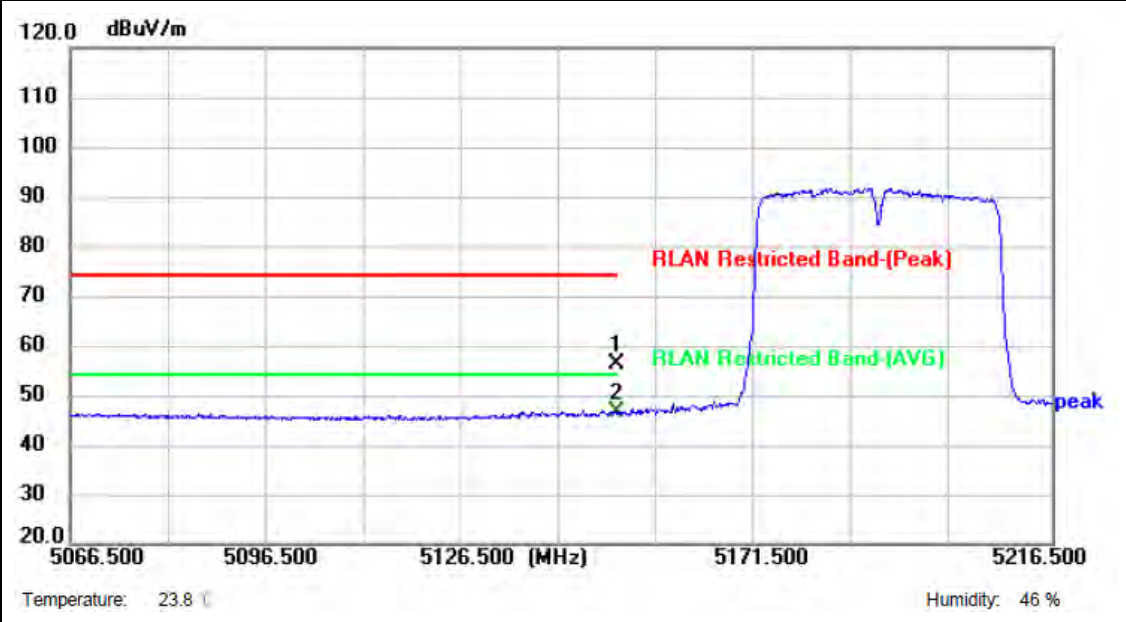


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.61	11.66	56.27	74.00	-17.73	peak	P
2 *	5150.000	34.83	11.66	46.49	54.00	-7.51	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)
Remark:	

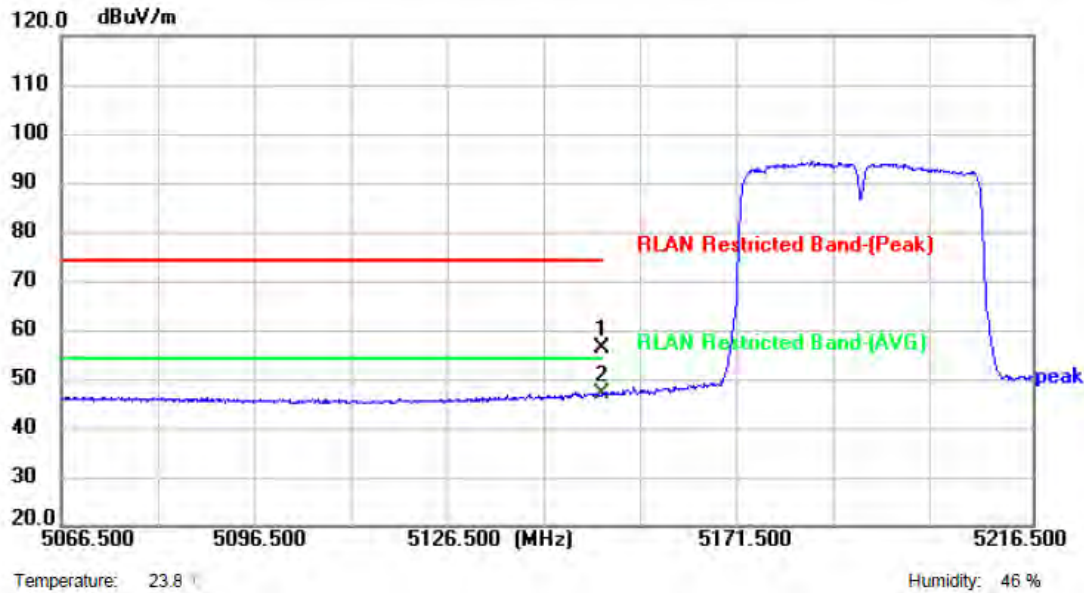


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.58	11.66	56.24	74.00	-17.76	peak	P
2 *	5150.000	35.17	11.66	46.83	54.00	-7.17	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)
Remark:	

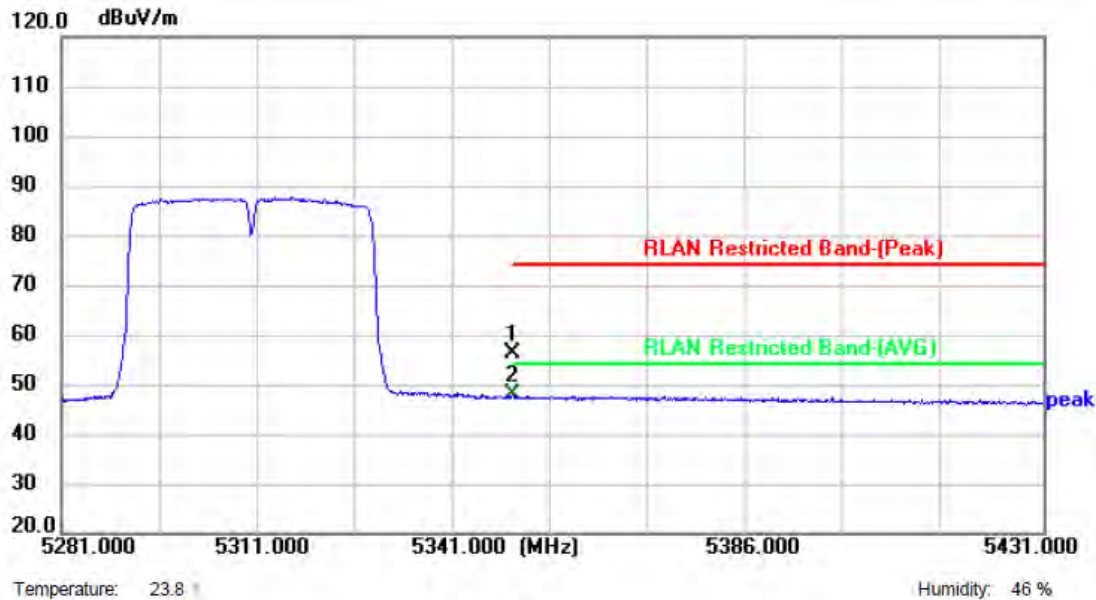


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.31	12.07	56.38	74.00	-17.62	peak	P
2 *	5350.000	35.83	12.07	47.90	54.00	-6.10	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)
Remark:	

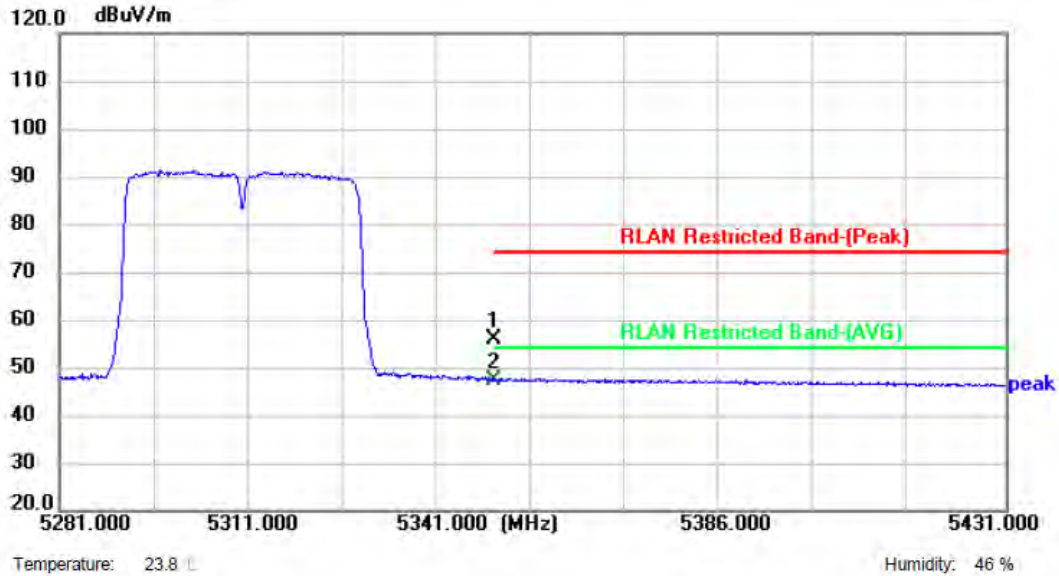


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.89	12.07	55.96	74.00	-18.04	peak	P
2 *	5350.000	35.31	12.07	47.38	54.00	-6.62	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1)
Remark:	

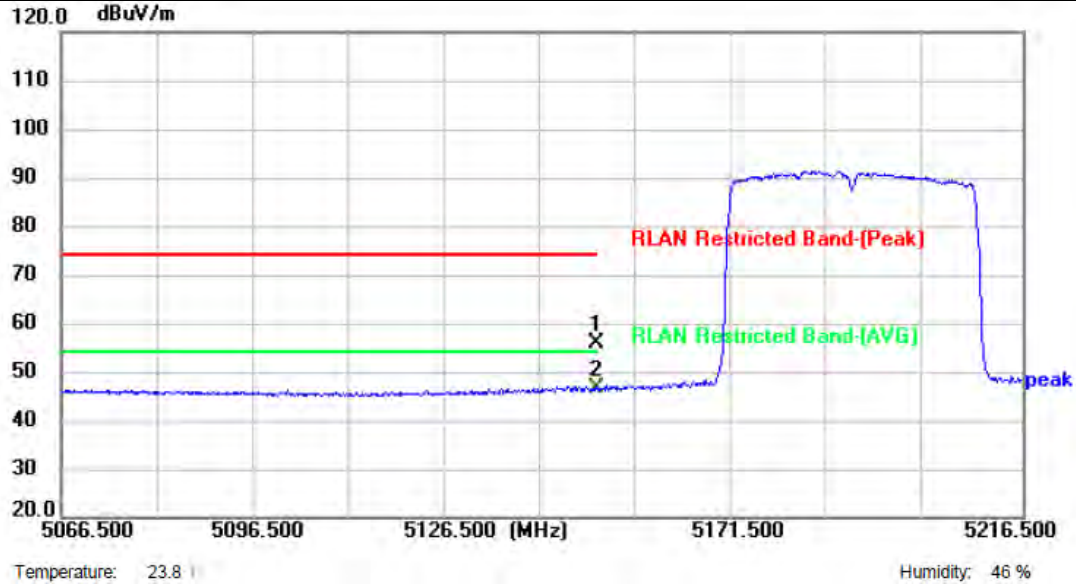


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.28	11.66	55.94	74.00	-18.06	peak	P
2 *	5150.000	34.95	11.66	46.61	54.00	-7.39	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE40) Mode 5190 MHz (U-NII-1)
Remark:	

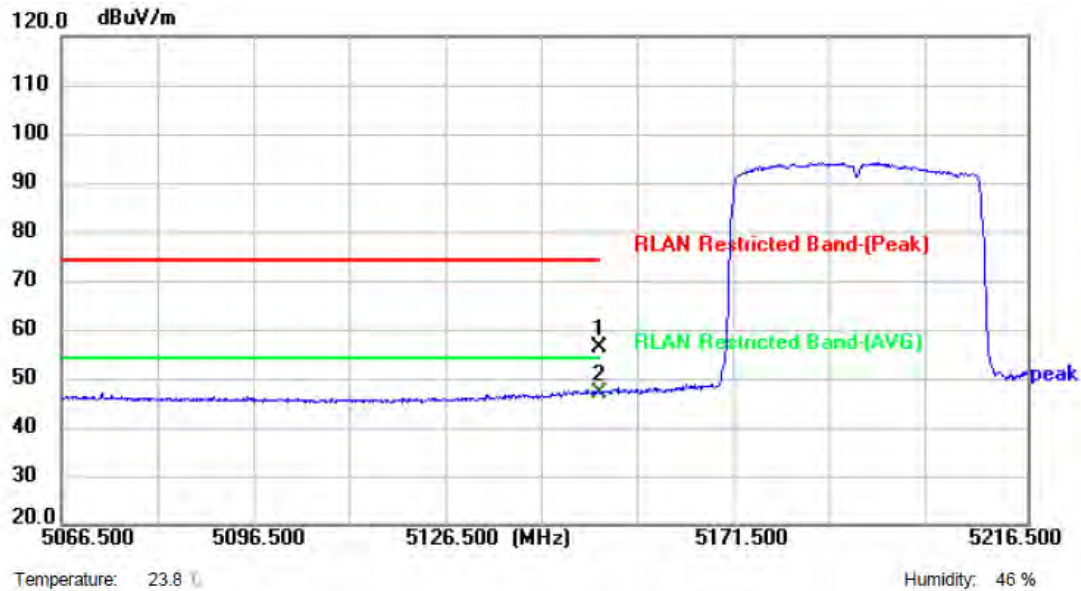


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.58	11.66	56.24	74.00	-17.76	peak	P
2 *	5150.000	35.28	11.66	46.94	54.00	-7.06	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11 ax(HE40) Mode 5310 MHz (U-NII-2A)
Remark:	

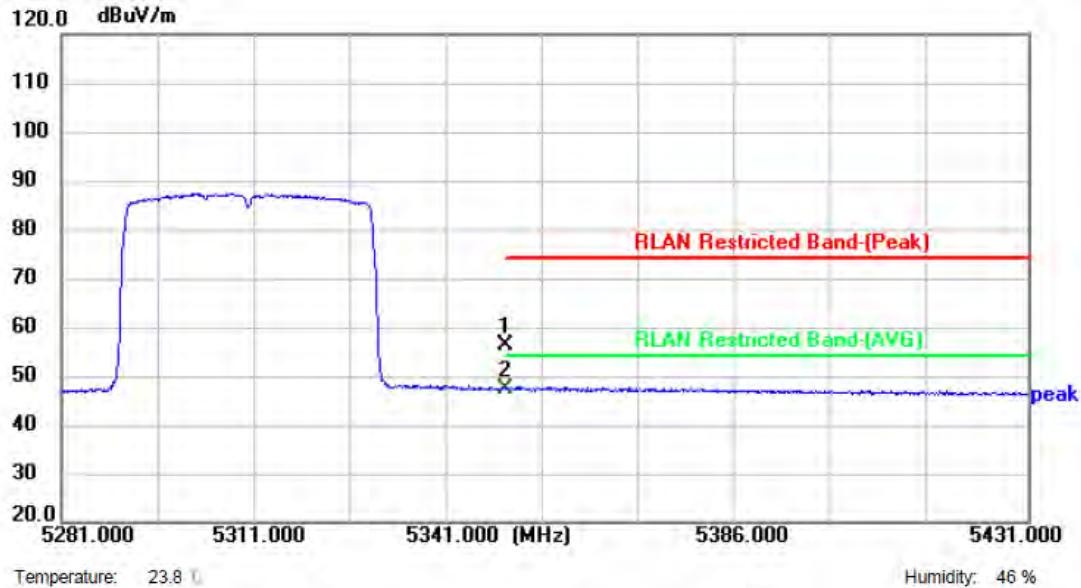


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.28	12.07	56.35	74.00	-17.65	peak	P
2 *	5350.000	35.30	12.07	47.37	54.00	-6.63	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE40) Mode 5310 MHz (U-NII-2A)
Remark:	

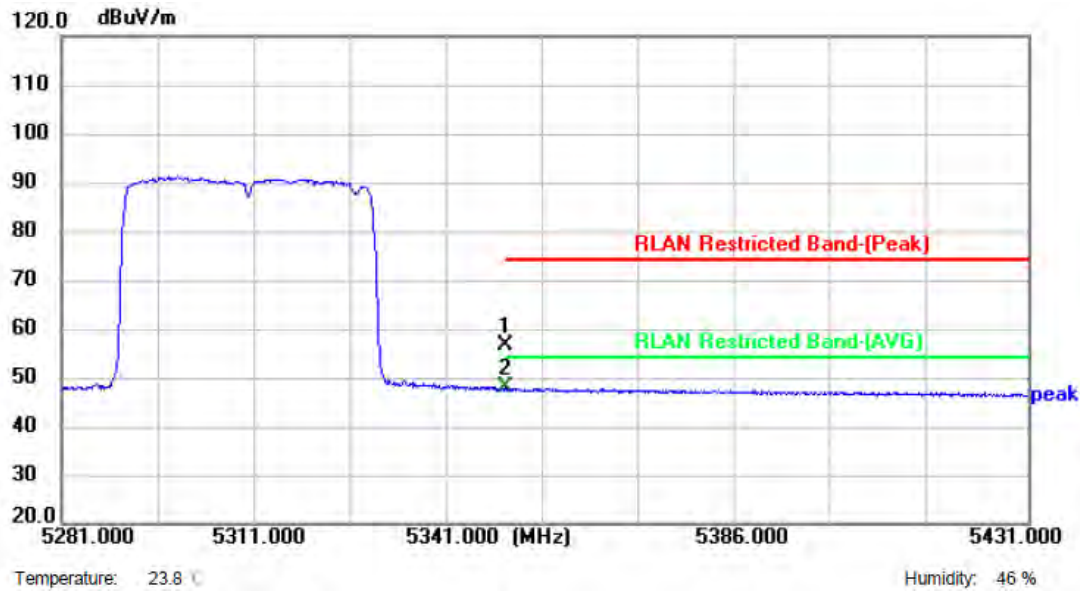


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.67	12.07	56.74	74.00	-17.26	peak	P
2 *	5350.000	36.10	12.07	48.17	54.00	-5.83	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)
Remark:	

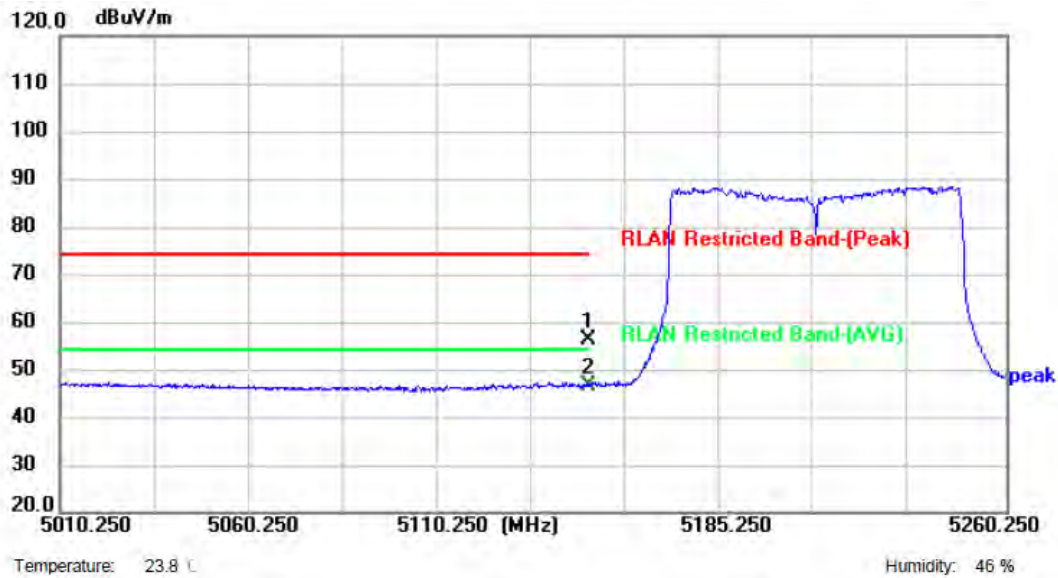


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.61	11.66	56.27	74.00	-17.73	peak	P
2 *	5150.000	35.06	11.66	46.72	54.00	-7.28	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)
Remark:	

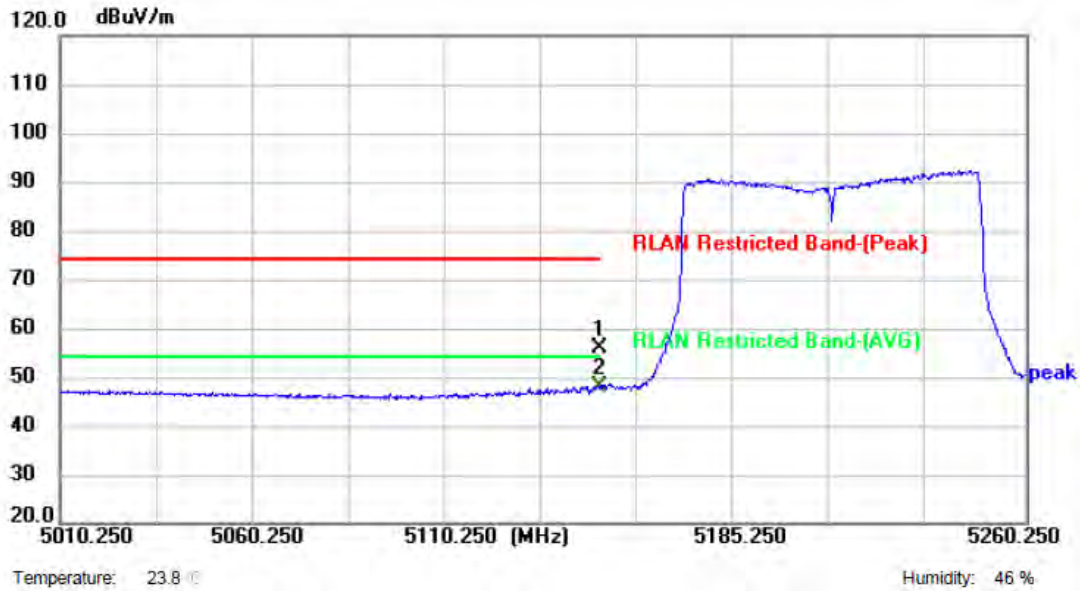


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.21	11.66	55.87	74.00	-18.13	peak	P
2 *	5150.000	36.38	11.66	48.04	54.00	-5.96	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)
Remark:	

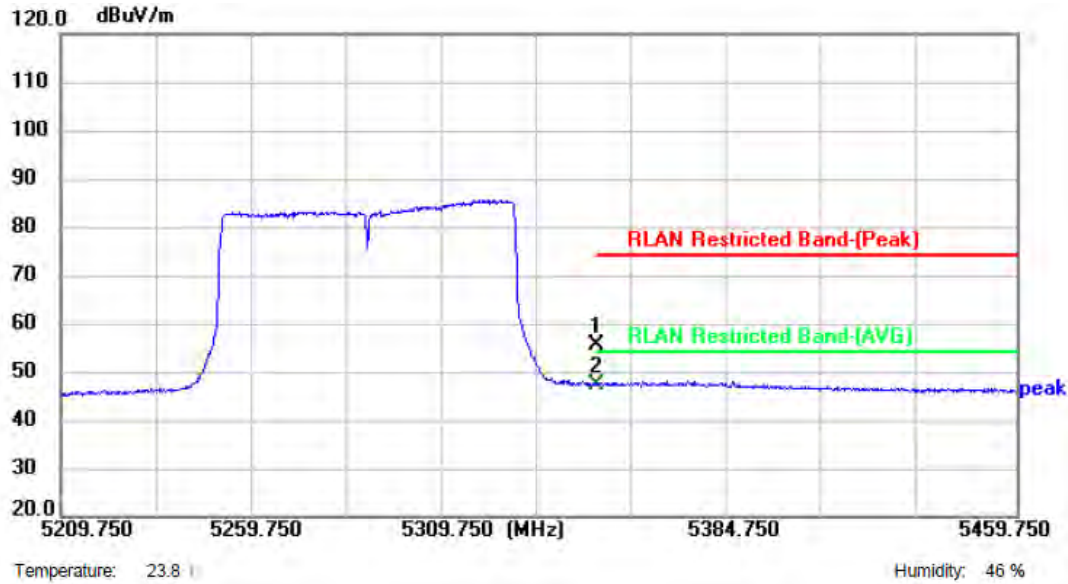


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.59	12.07	55.66	74.00	-18.34	peak	P
2 *	5350.000	35.31	12.07	47.38	54.00	-6.62	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)
Remark:	

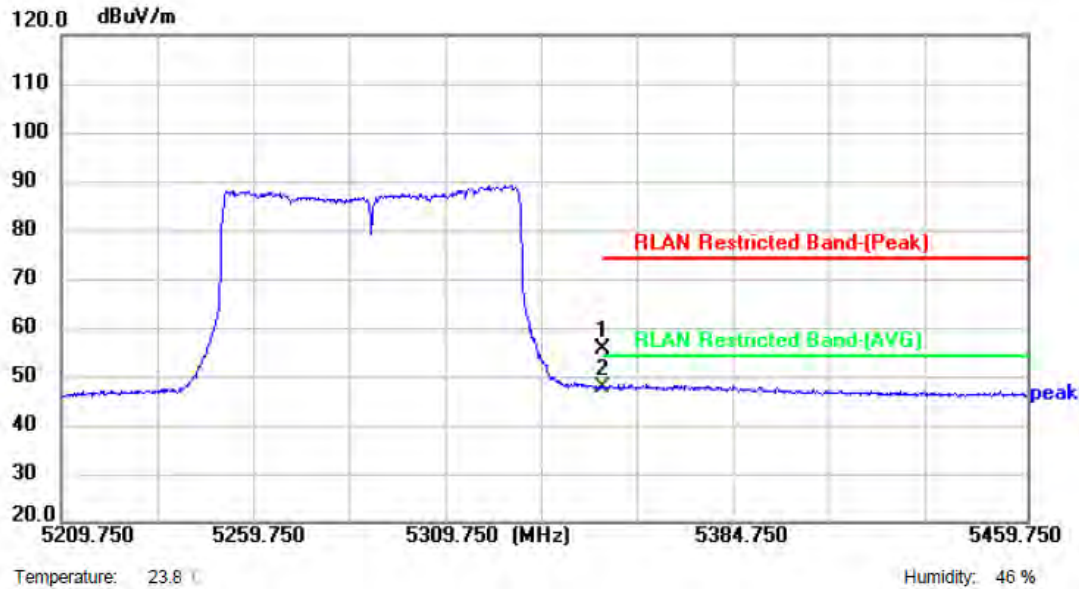


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.62	12.07	55.69	74.00	-18.31	peak	P
2 *	5350.000	35.73	12.07	47.80	54.00	-6.20	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5210 MHz (U-NII-1)
Remark:	

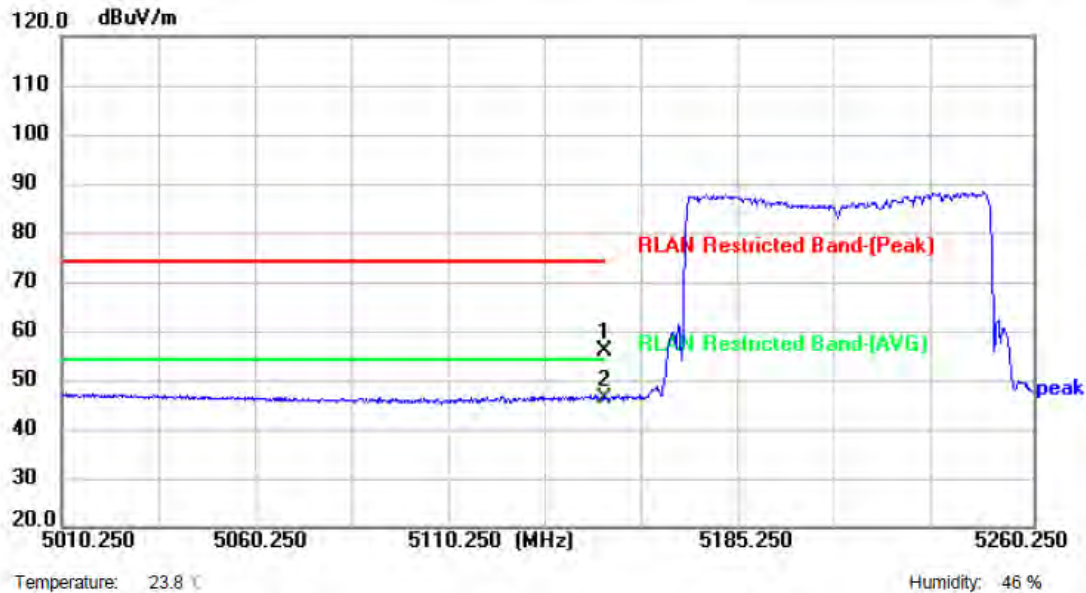


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.19	11.66	55.85	74.00	-18.15	peak	P
2 *	5150.000	34.53	11.66	46.19	54.00	-7.81	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE80) Mode 5210 MHz (U-NII-1)
Remark:	

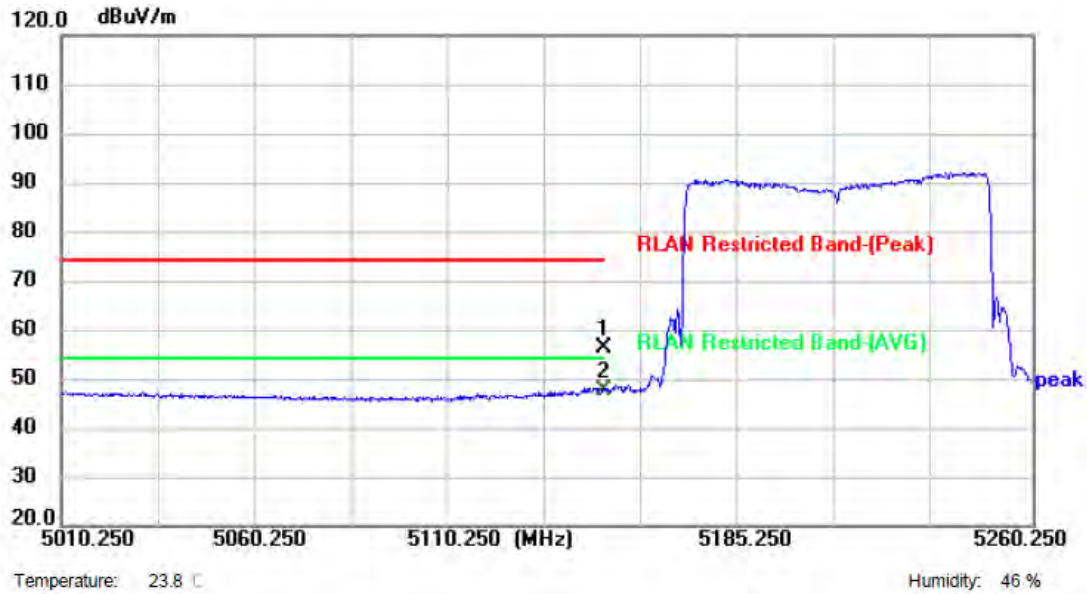

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.61	11.66	56.27	74.00	-17.73	peak	P
2 *	5150.000	36.18	11.66	47.84	54.00	-6.16	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11 ax(HE80) Mode 5290 MHz (U-NII-2A)
Remark:	




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.25	12.07	55.32	74.00	-18.68	peak	P
2 *	5350.000	35.35	12.07	47.42	54.00	-6.58	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE80) Mode 5290 MHz (U-NII-2A)
Remark:	

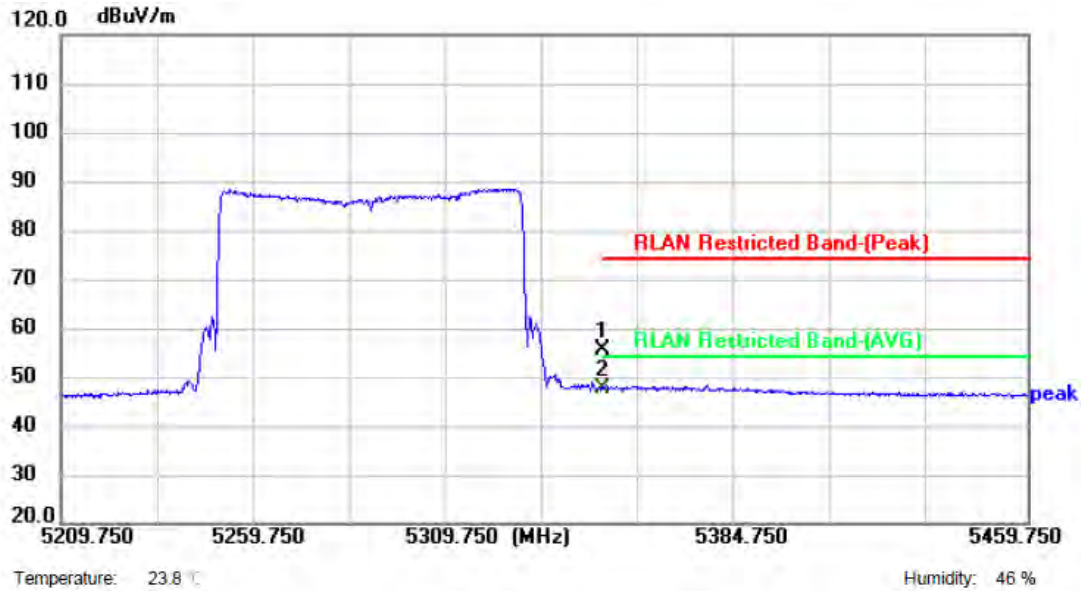


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.56	12.07	55.63	74.00	-18.37	peak	P
2 *	5350.000	35.75	12.07	47.82	54.00	-6.18	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)
Remark:	Only evaluate the data of the worst antenna A

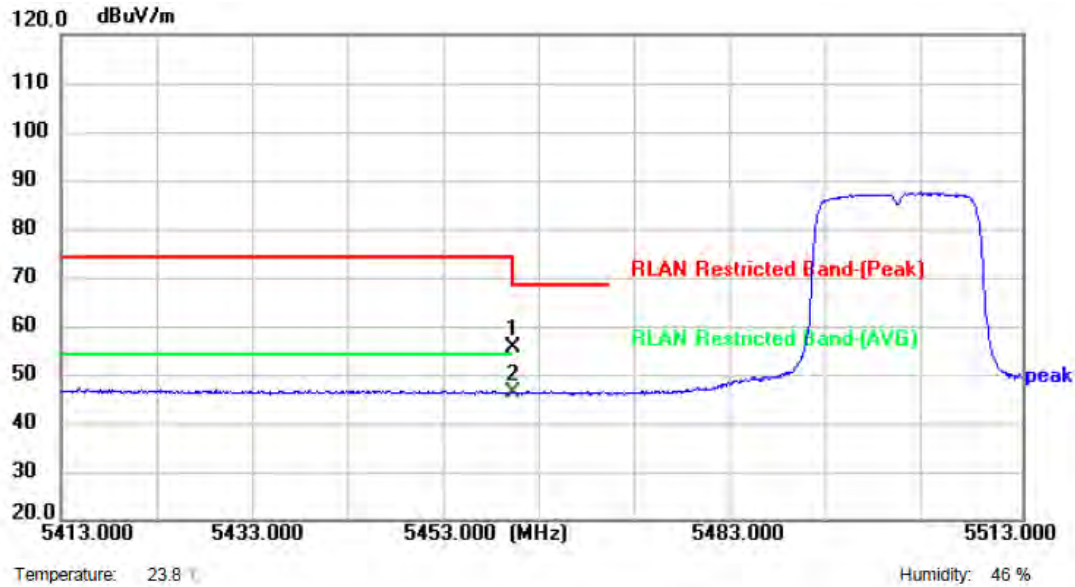


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	43.24	12.12	55.36	68.30	-12.94	peak	P
2 *	5460.000	34.01	12.12	46.13	54.00	-7.87	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)
Remark:	Only evaluate the data of the worst antenna A

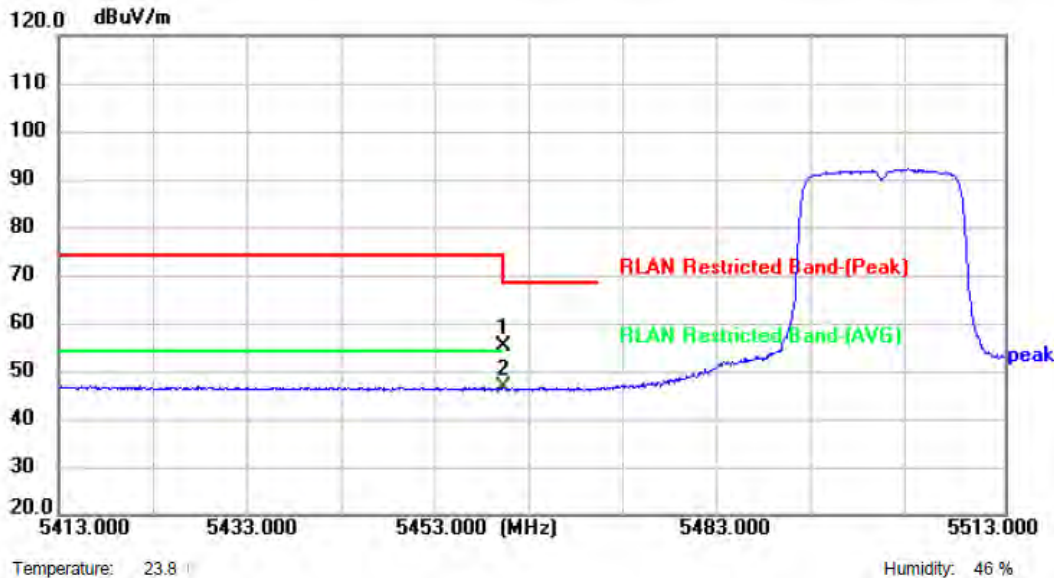

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	43.11	12.12	55.23	68.30	-13.07	peak	P
2 *	5460.000	34.37	12.12	46.49	54.00	-7.51	AVG	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)

2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)

3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)
Remark:	

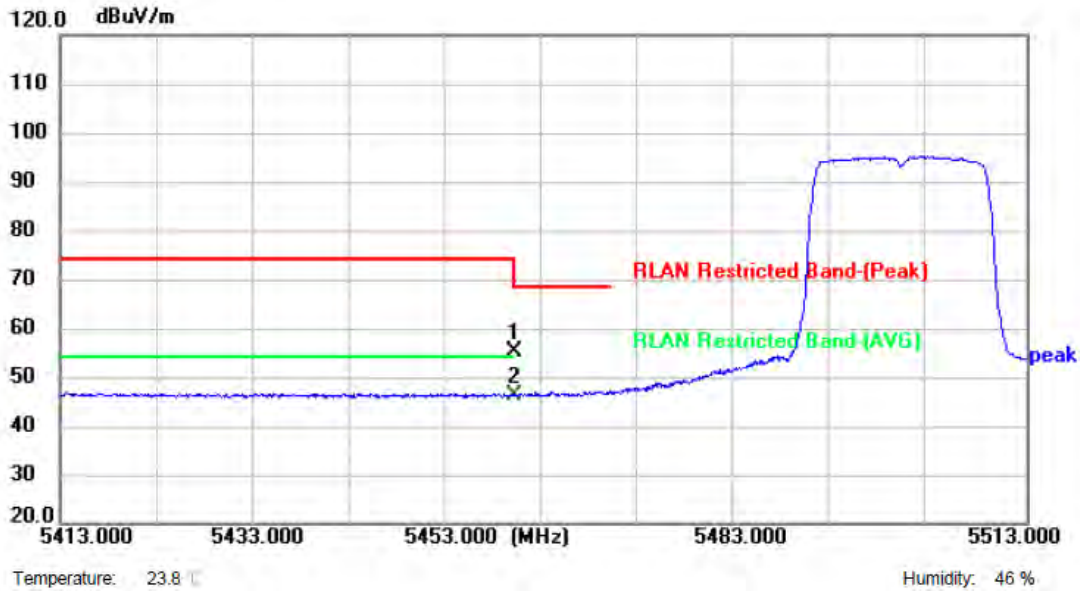


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	43.14	12.12	55.26	68.30	-13.04	peak	P
2 *	5460.000	34.11	12.12	46.23	54.00	-7.77	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)
Remark:	

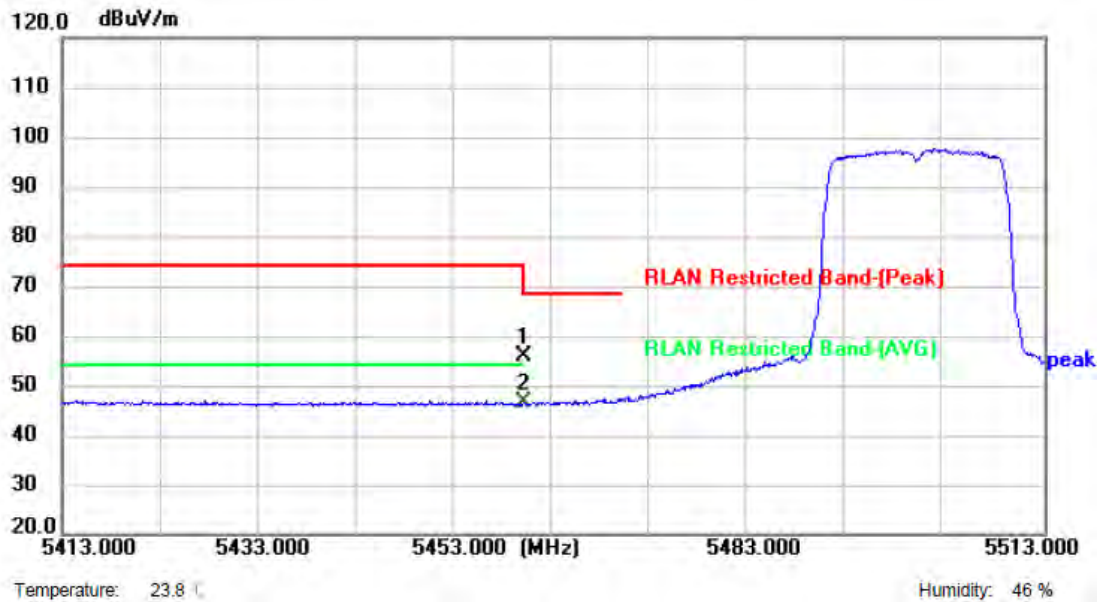


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	43.74	12.12	55.86	68.30	-12.44	peak	P
2 *	5460.000	34.47	12.12	46.59	54.00	-7.41	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)
Remark:	

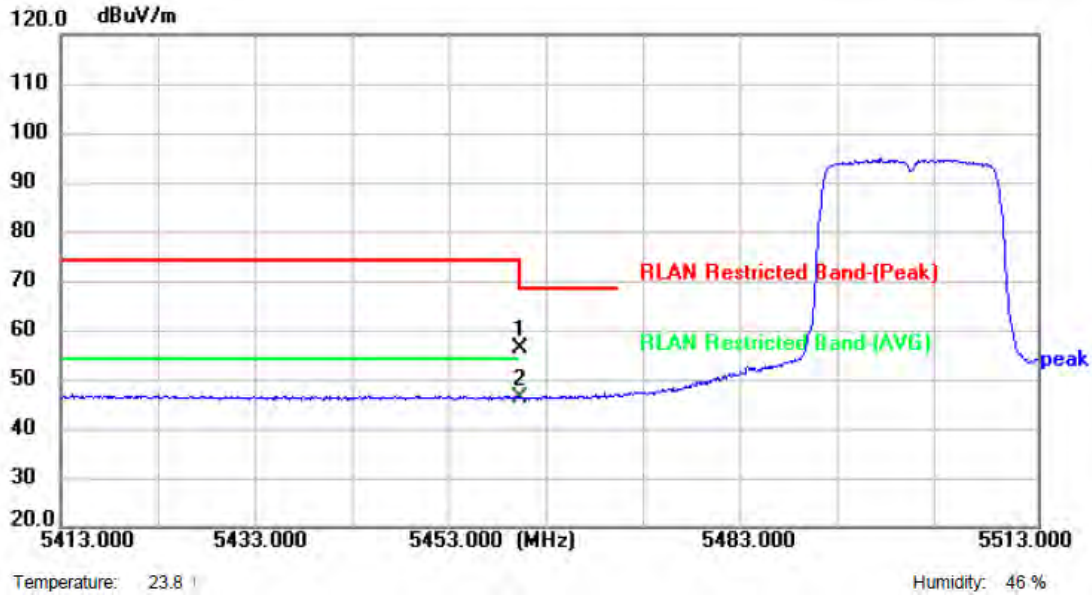


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.11	12.12	56.23	68.30	-12.07	peak	P
2 *	5460.000	34.08	12.12	46.20	54.00	-7.80	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)
Remark:	

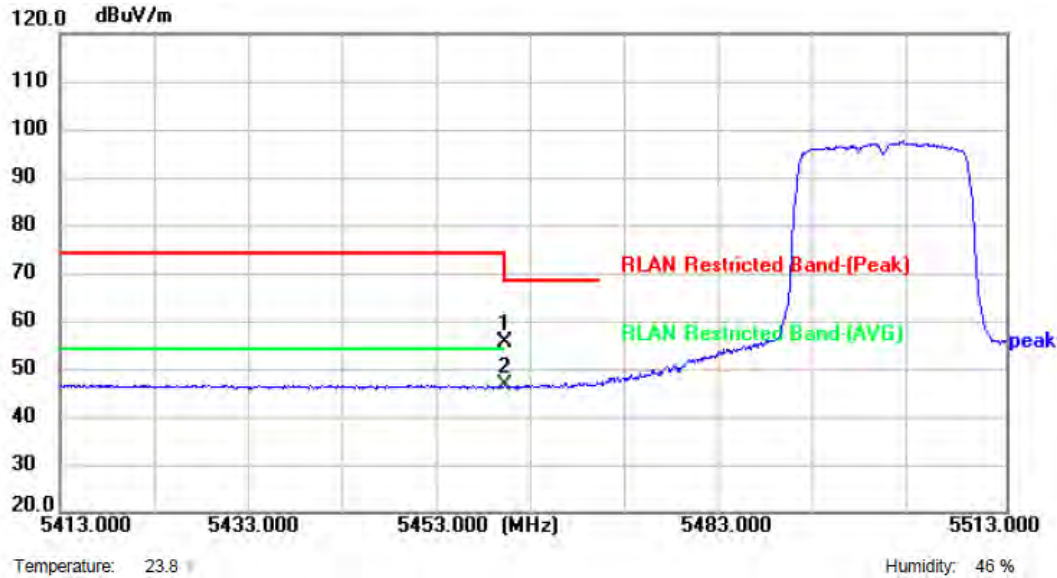


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	43.57	12.12	55.69	68.30	-12.61	peak	P
2 *	5460.000	34.40	12.12	46.52	54.00	-7.48	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C)
Remark:	

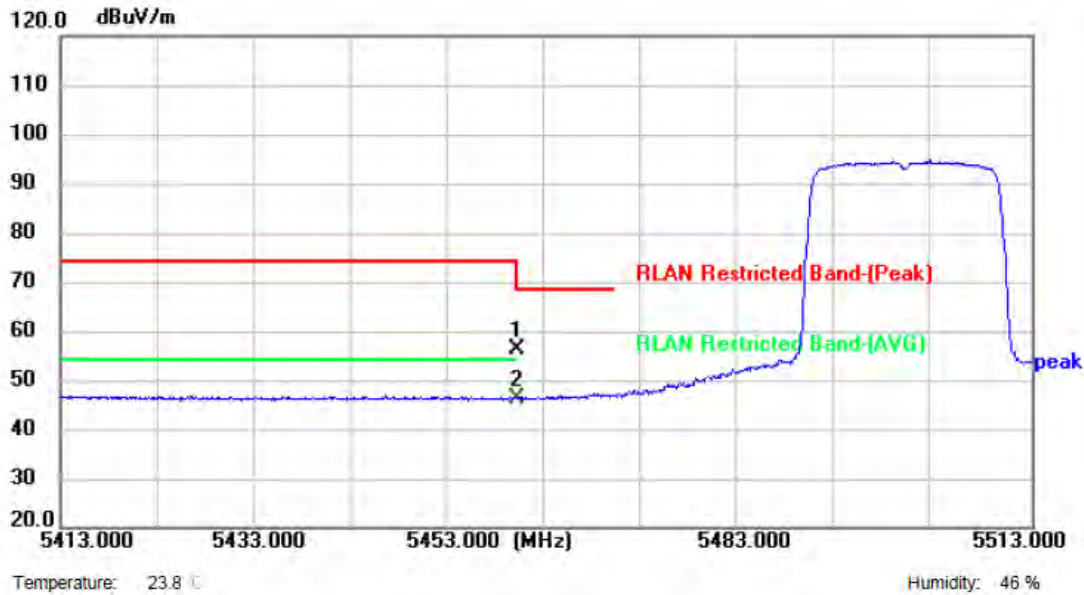


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.15	12.12	56.27	68.30	-12.03	peak	P
2 *	5460.000	34.19	12.12	46.31	54.00	-7.69	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE20) Mode 5500 MHz (U-NII-2C)
Remark:	

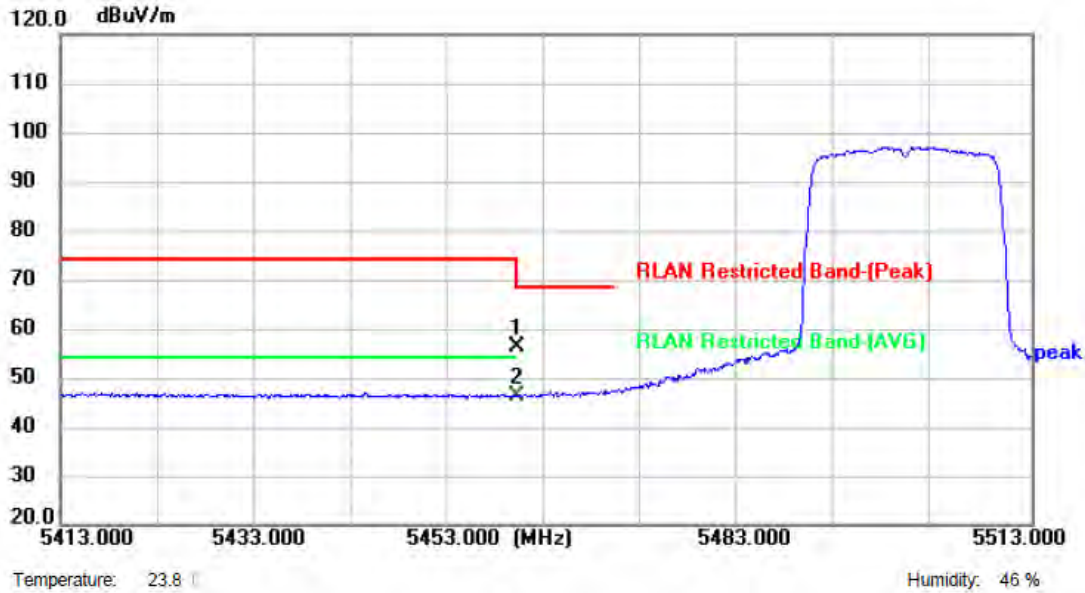


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.20	12.12	56.32	68.30	-11.98	peak	P
2 *	5460.000	34.27	12.12	46.39	54.00	-7.61	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)
Remark:	

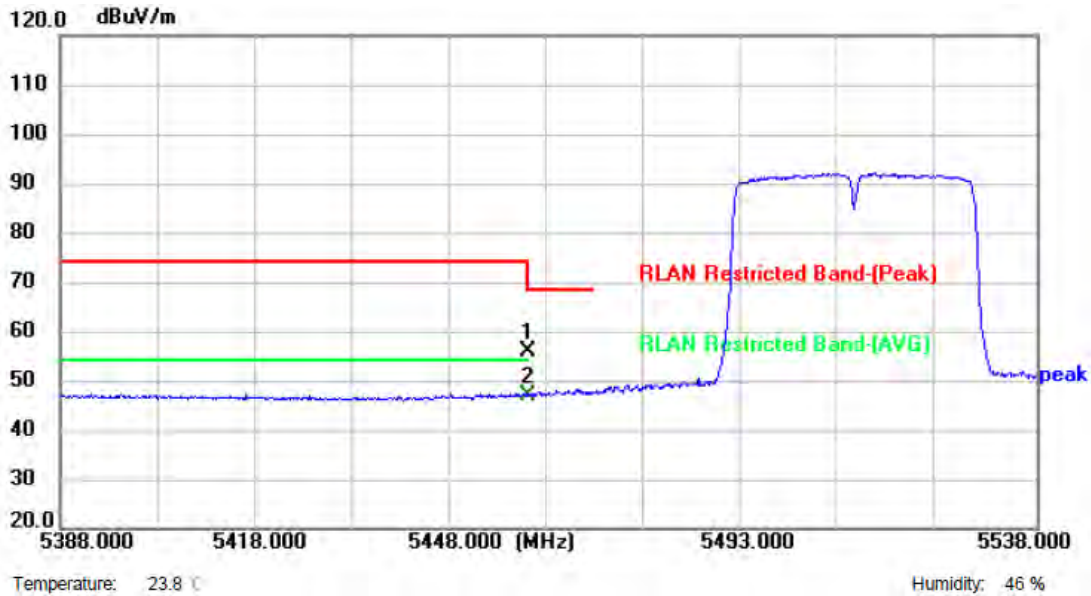


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	43.84	12.12	55.96	68.30	-12.34	peak	P
2 *	5460.000	34.76	12.12	46.88	54.00	-7.12	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)
Remark:	

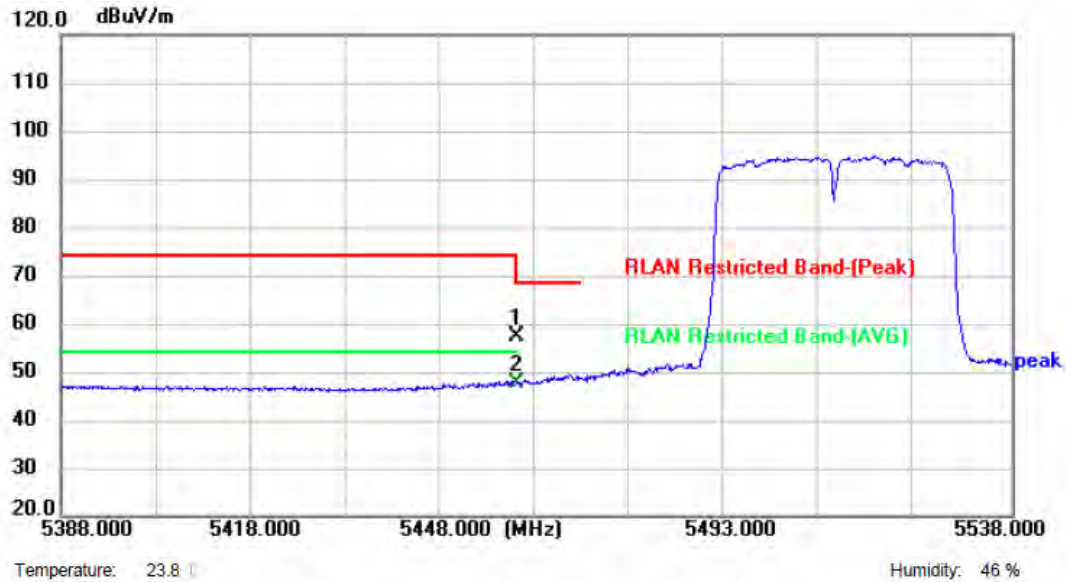


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	45.14	12.12	57.26	68.30	-11.04	peak	P
2 *	5460.000	35.56	12.12	47.68	54.00	-6.32	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)
Remark:	

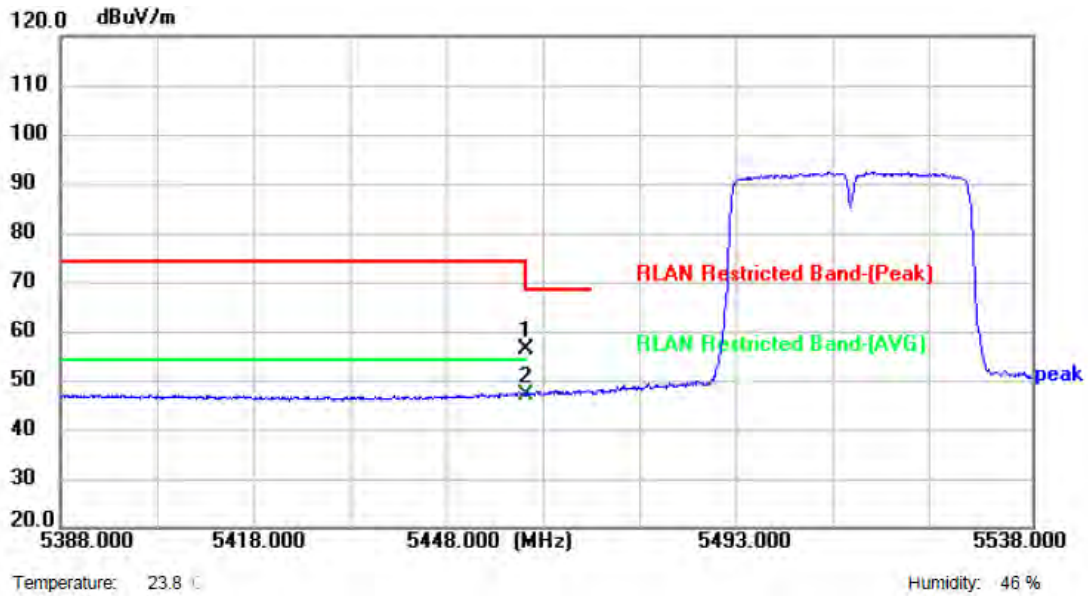


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.26	12.12	56.38	68.30	-11.92	peak	P
2 *	5460.000	34.81	12.12	46.93	54.00	-7.07	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)
Remark:	

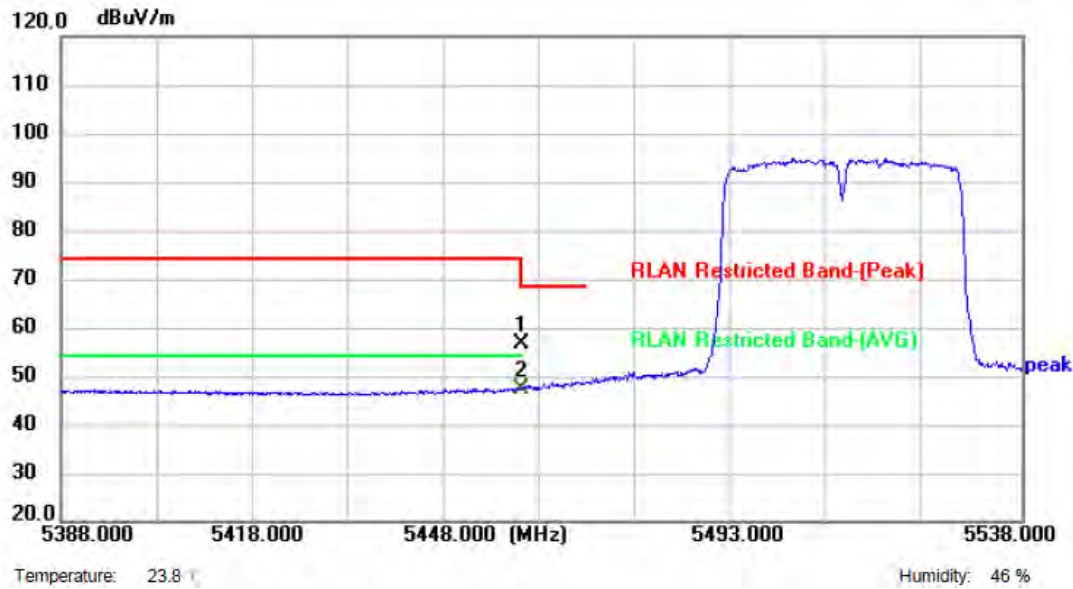


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.62	12.12	56.74	68.30	-11.56	peak	P
2 *	5460.000	35.30	12.12	47.42	54.00	-6.58	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C)
Remark:	

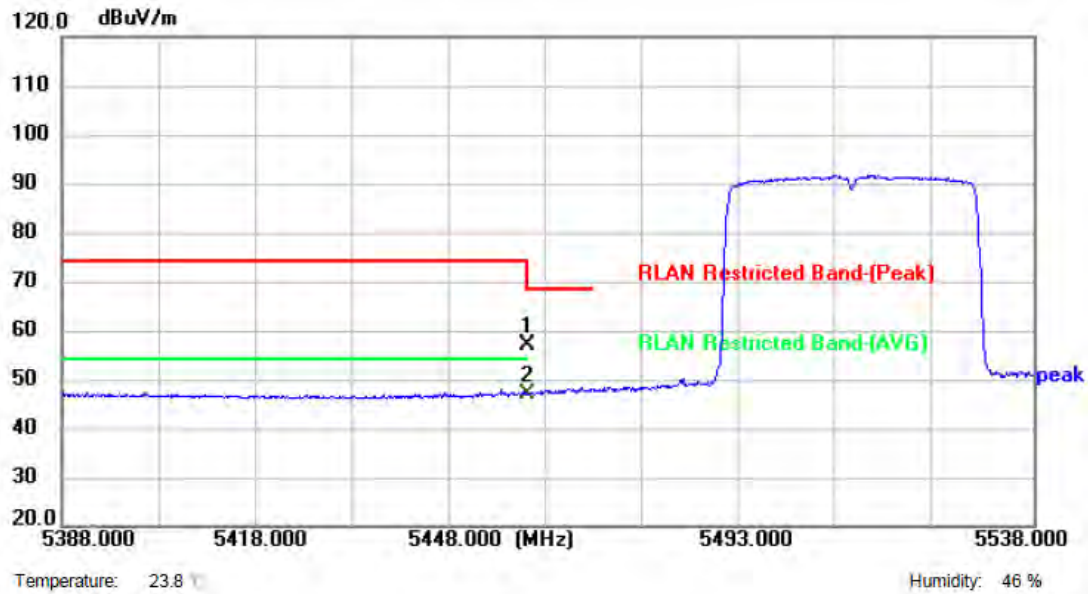


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.86	12.12	56.98	68.30	-11.32	peak	P
2 *	5460.000	35.01	12.12	47.13	54.00	-6.87	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE40) Mode 5510 MHz (U-NII-2C)
Remark:	

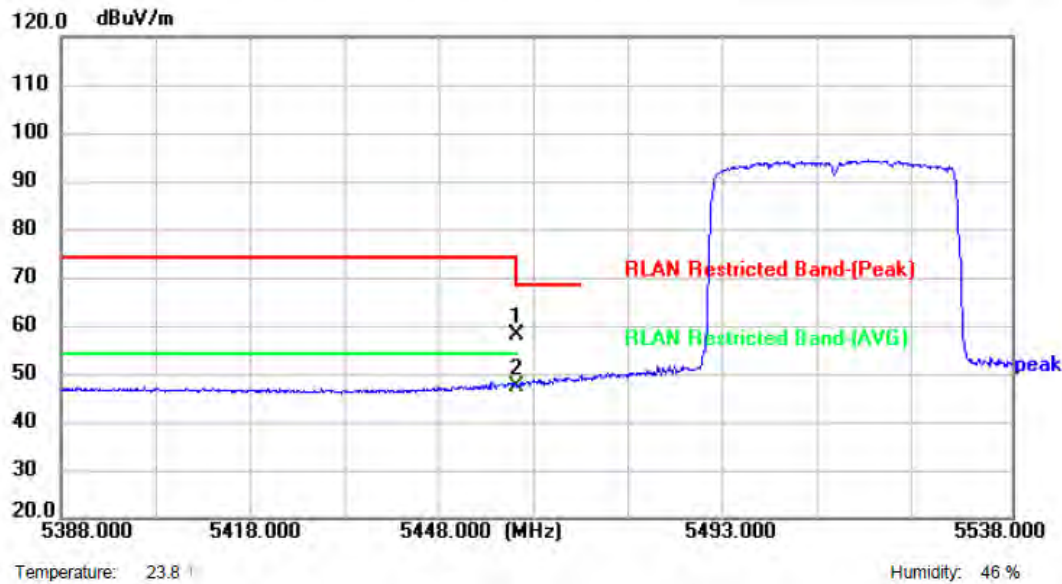


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	45.74	12.12	57.86	68.30	-10.44	peak	P
2 *	5460.000	35.24	12.12	47.36	54.00	-6.64	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)
Remark:	

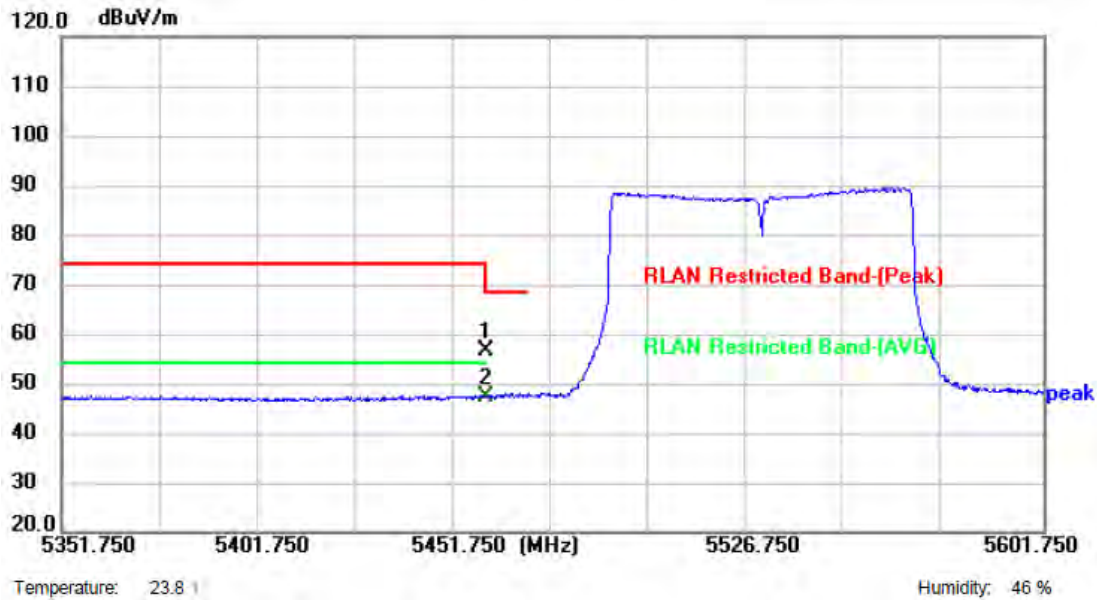


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.62	12.12	56.74	68.30	-11.56	peak	P
2 *	5460.000	35.27	12.12	47.39	54.00	-6.61	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)
Remark:	

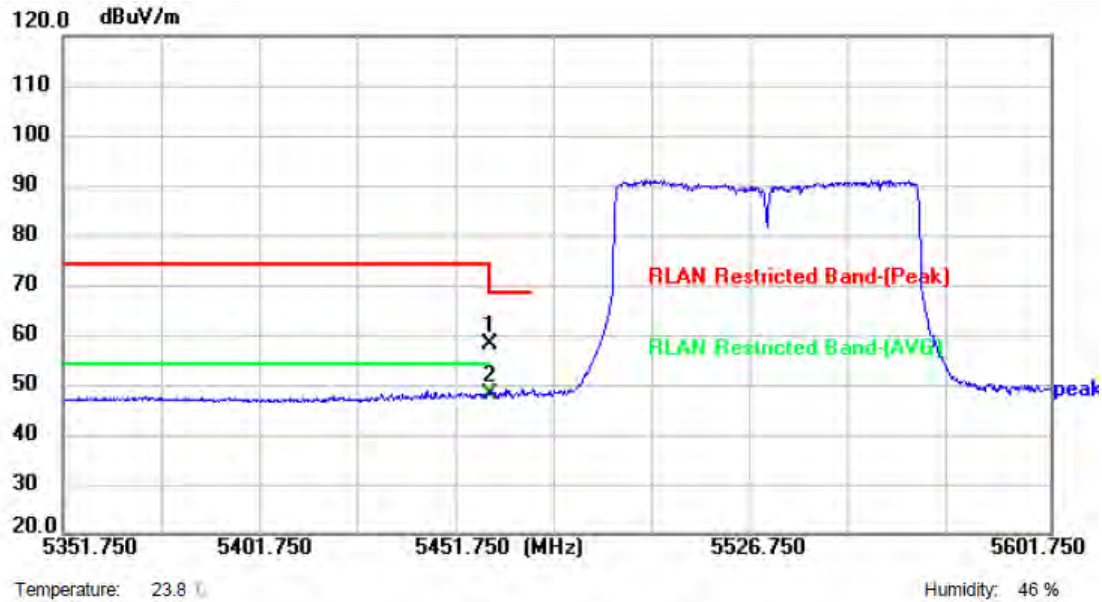


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	45.84	12.12	57.96	68.30	-10.34	peak	P
2 *	5460.000	35.98	12.12	48.10	54.00	-5.90	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5530 MHz (U-NII-2C)
Remark:	

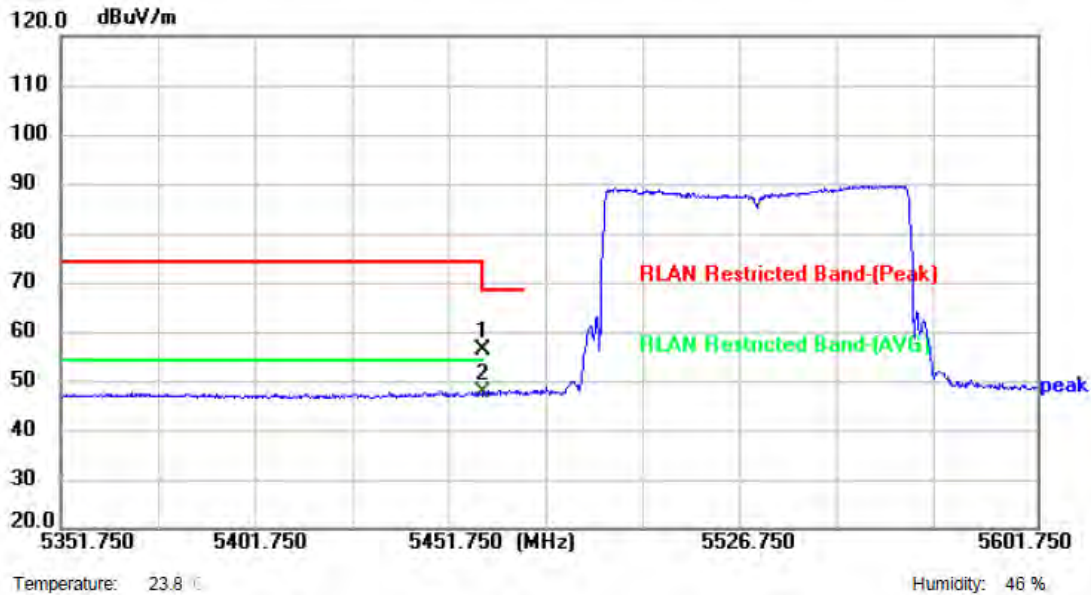


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.20	12.12	56.32	68.30	-11.98	peak	P
2 *	5460.000	35.50	12.12	47.62	54.00	-6.38	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE80) Mode 5530 MHz (U-NII-2C)
Remark:	

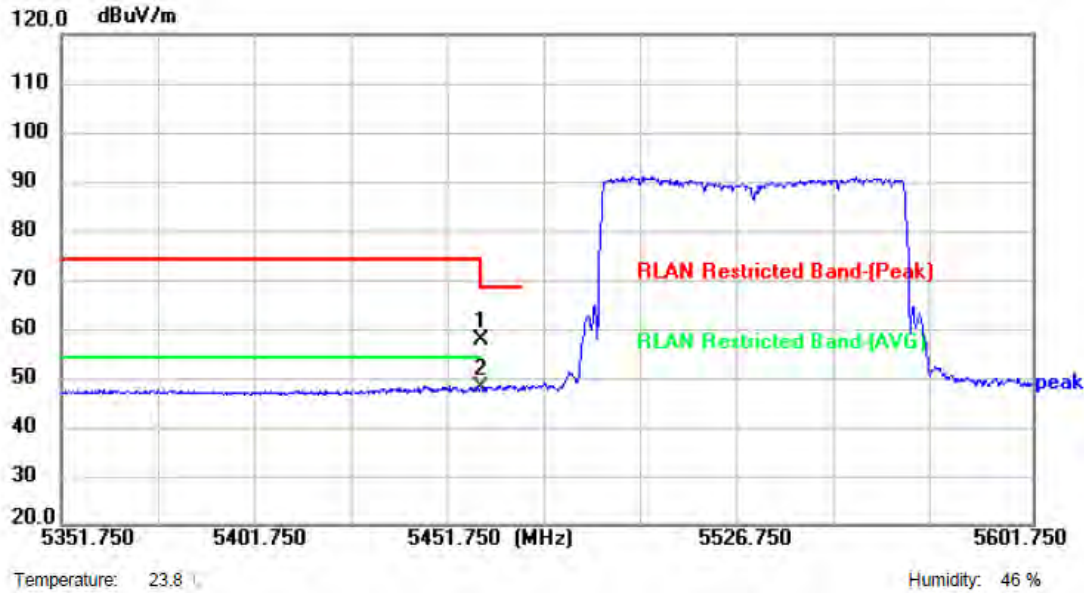


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	45.57	12.12	57.69	68.30	-10.61	peak	P
2 *	5460.000	35.93	12.12	48.05	54.00	-5.95	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)
Remark:	Only evaluate the data of the worst antenna A

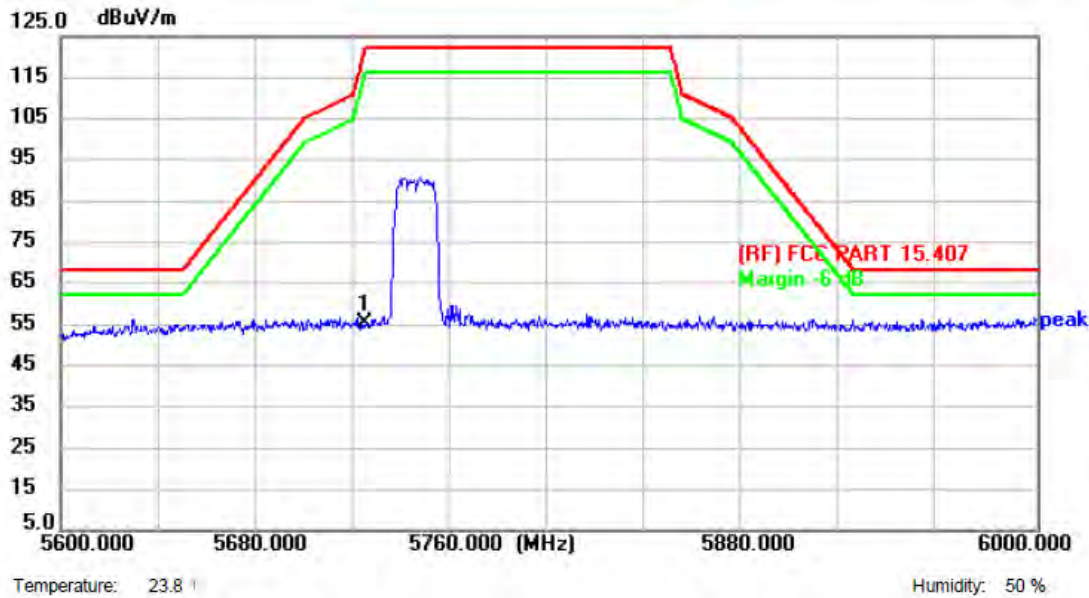


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	43.56	11.59	55.15	122.30	-67.15	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)
Remark:	Only evaluate the data of the worst antenna A

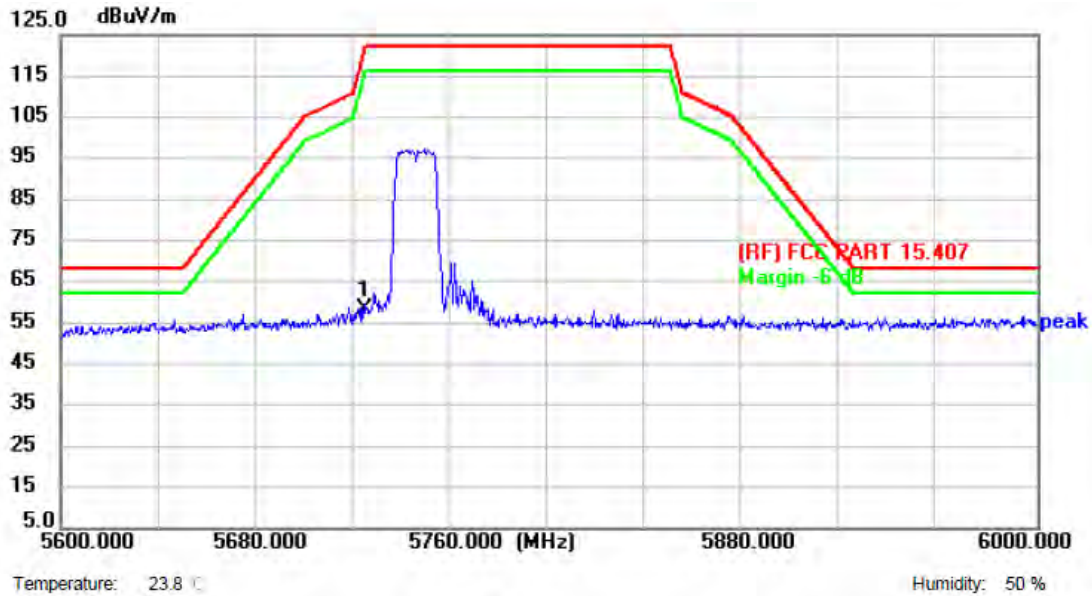


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	46.67	11.59	58.26	122.30	-64.04	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)
Remark:	Only evaluate the data of the worst antenna A

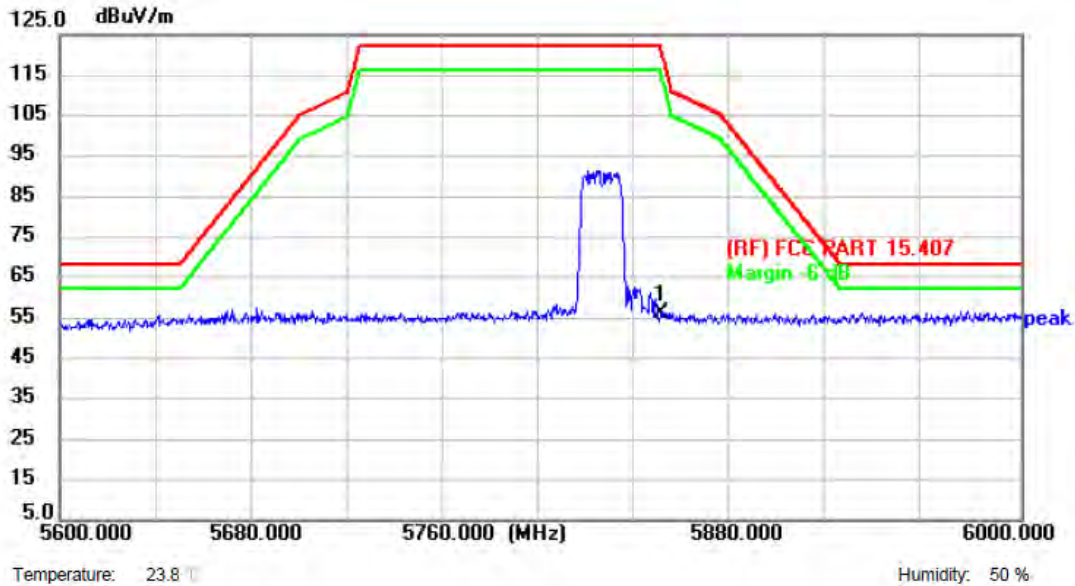


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	44.37	11.90	56.27	122.30	-66.03	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3)
Remark:	Only evaluate the data of the worst antenna A

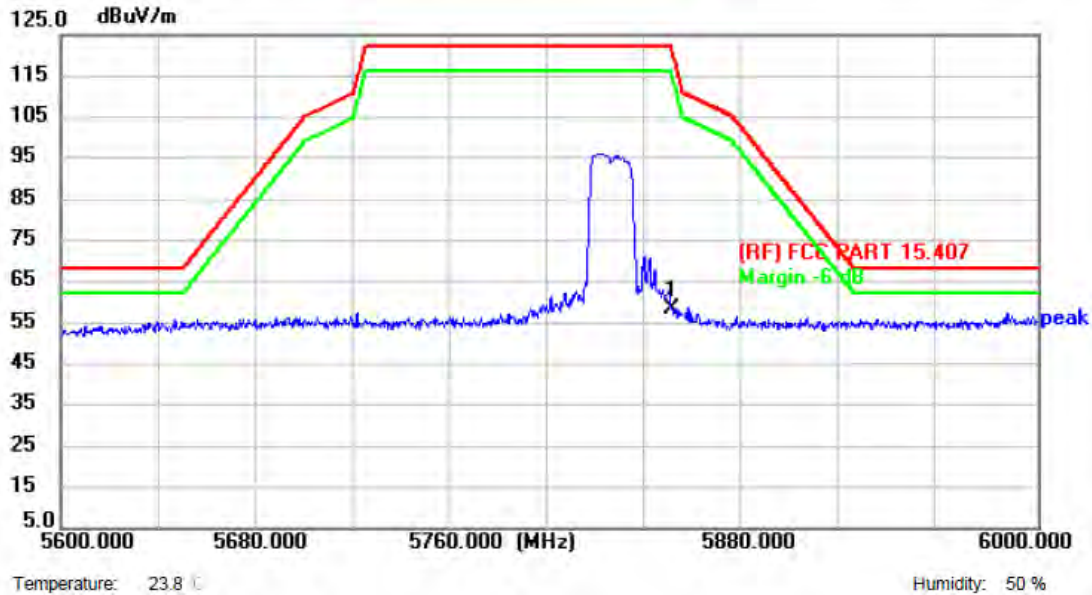


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	46.63	11.90	58.53	122.30	-63.77	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)
Remark:	

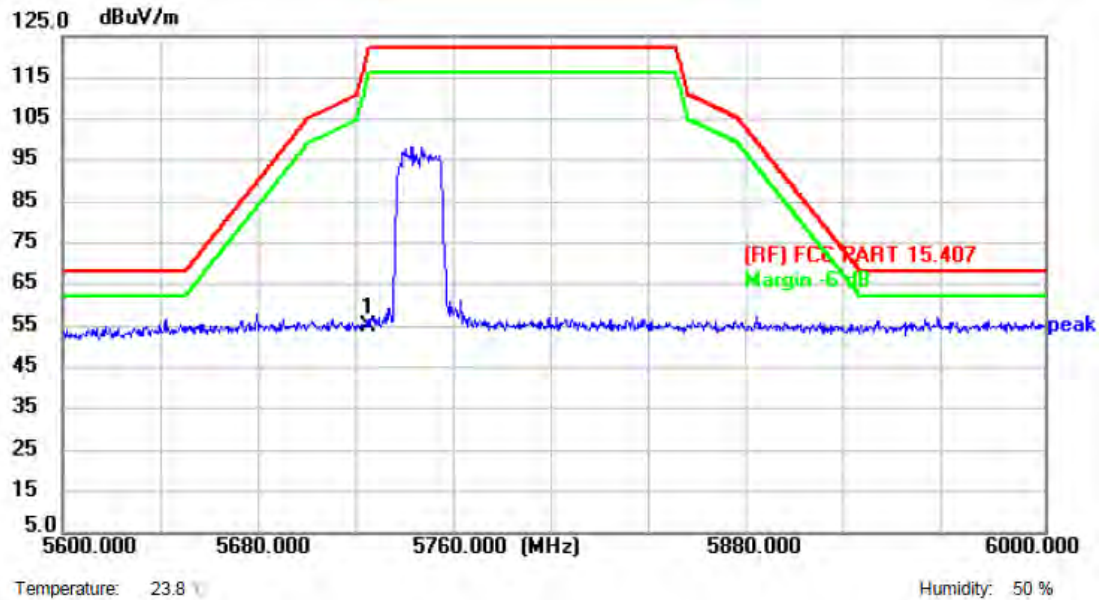


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	43.52	11.59	55.11	122.30	-67.19	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)
Remark:	

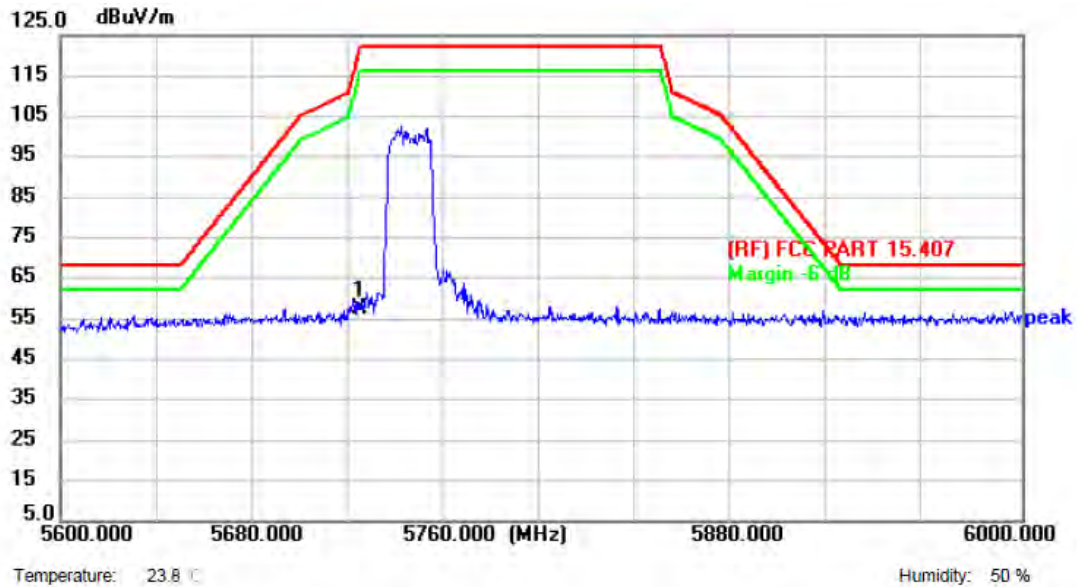


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	46.00	11.59	57.59	122.30	-64.71	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)
Remark:	

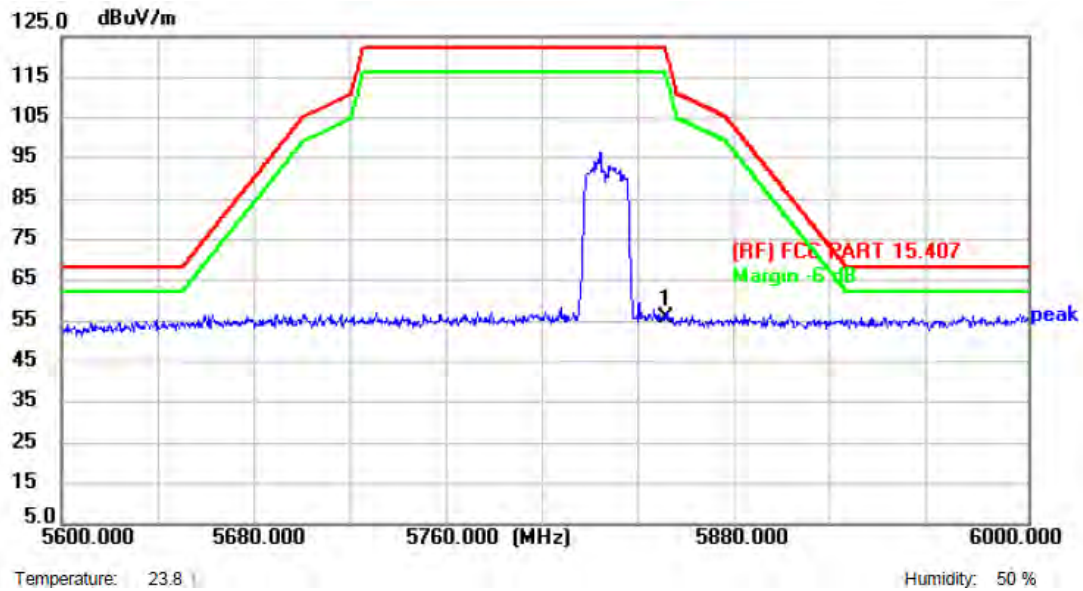


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	43.80	11.90	55.70	122.30	-66.60	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)
Remark:	

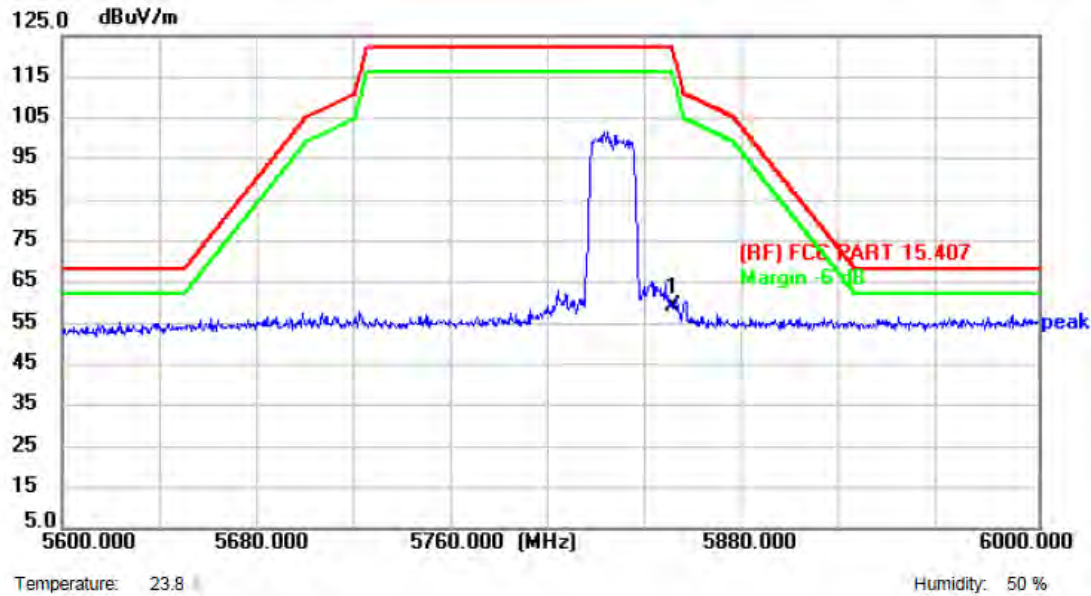


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	47.43	11.90	59.33	122.30	-62.97	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)
Remark:	

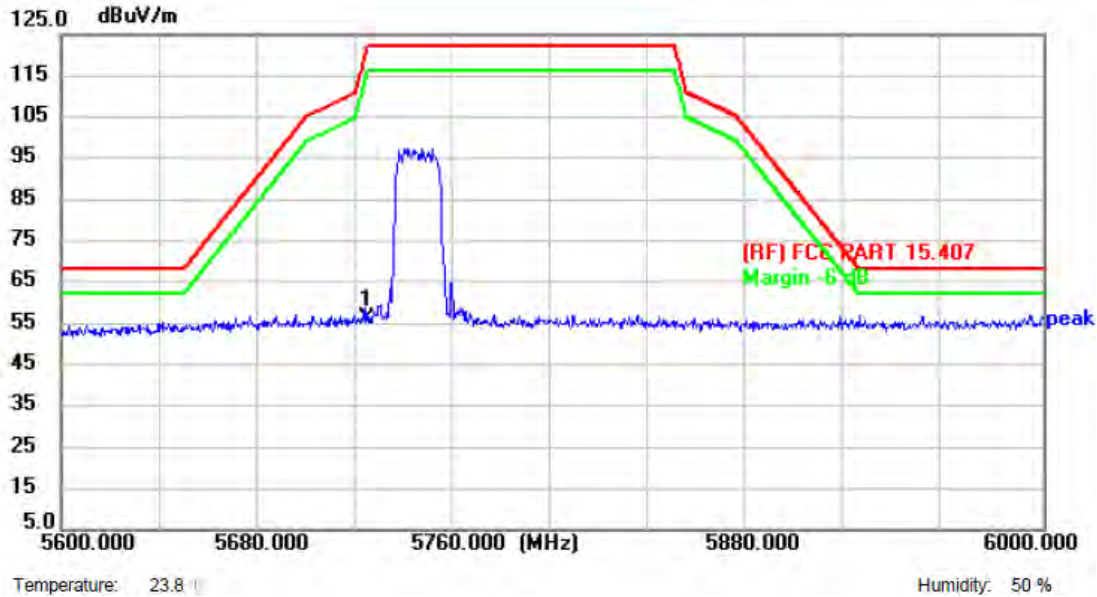


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	44.56	11.59	56.15	122.30	-66.15	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)
Remark:	

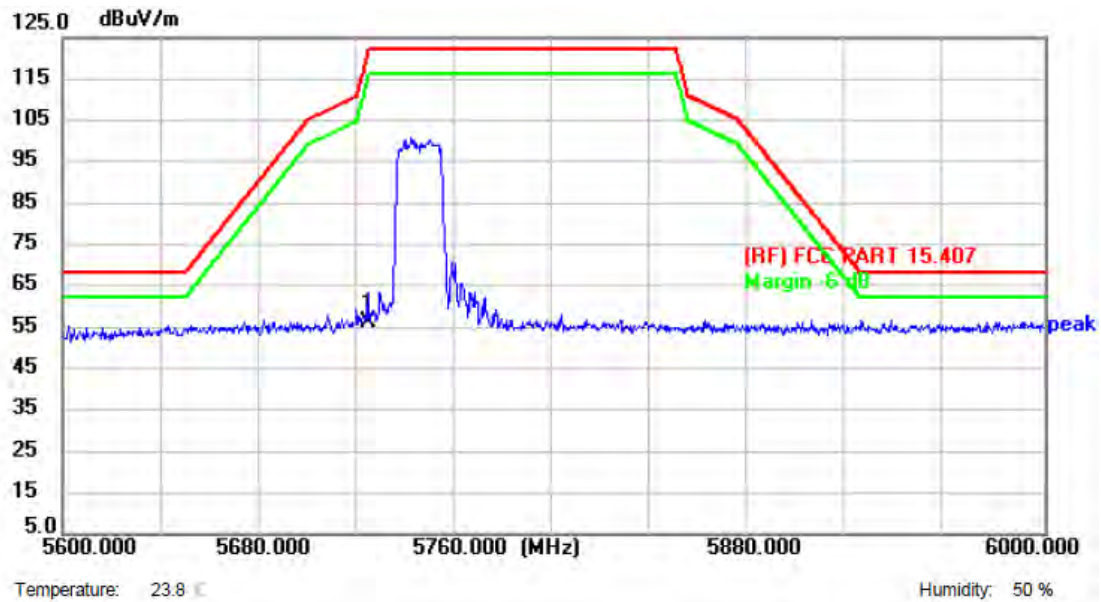


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	44.70	11.59	56.29	122.30	-66.01	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)
Remark:	

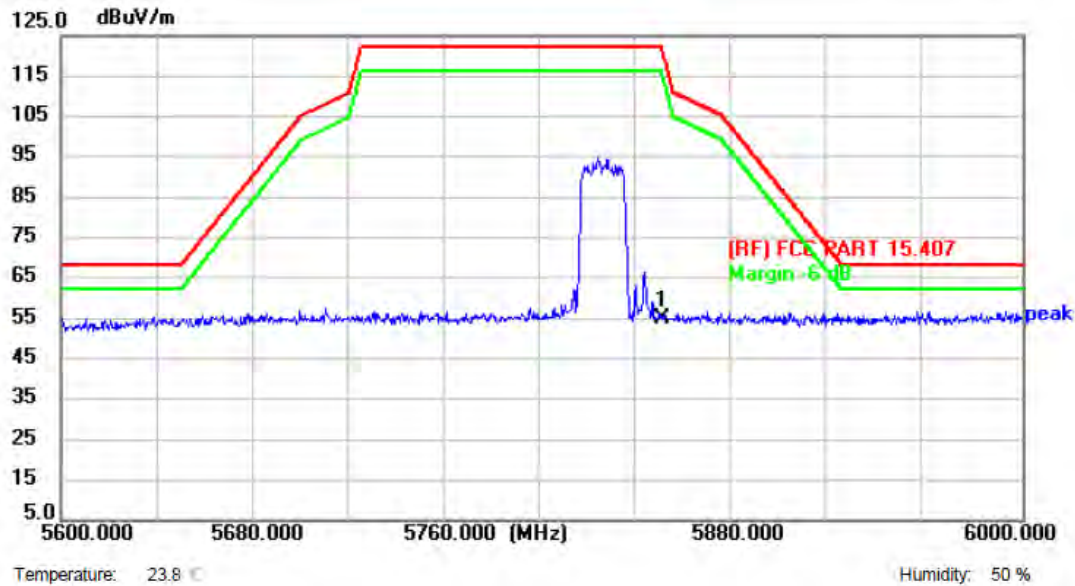


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	42.89	11.90	54.79	122.30	-67.51	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)
Remark:	

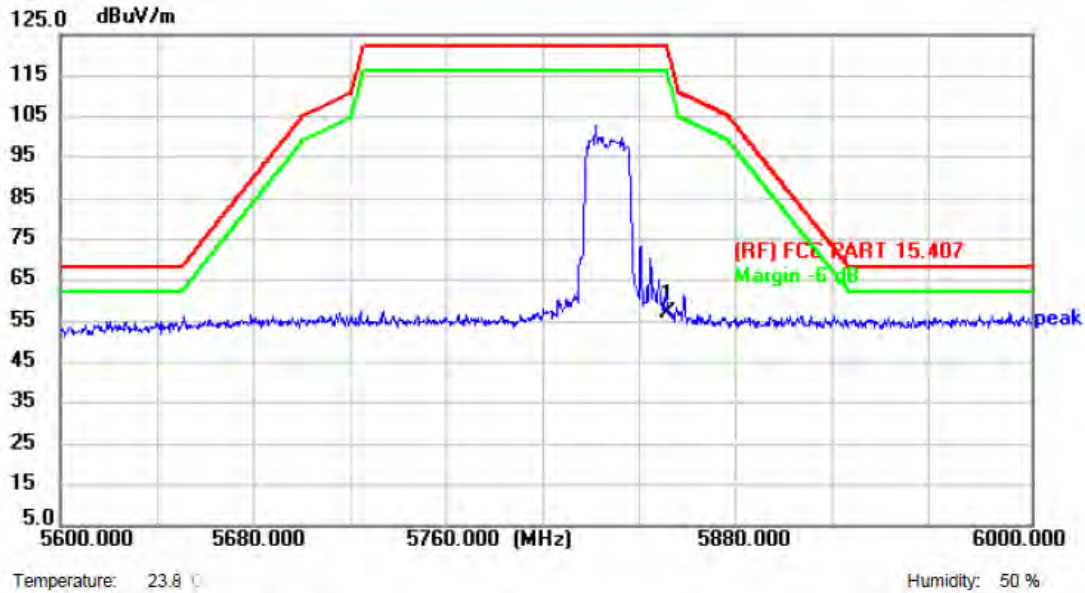


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	45.14	11.90	57.04	122.30	-65.26	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3)
Remark:	

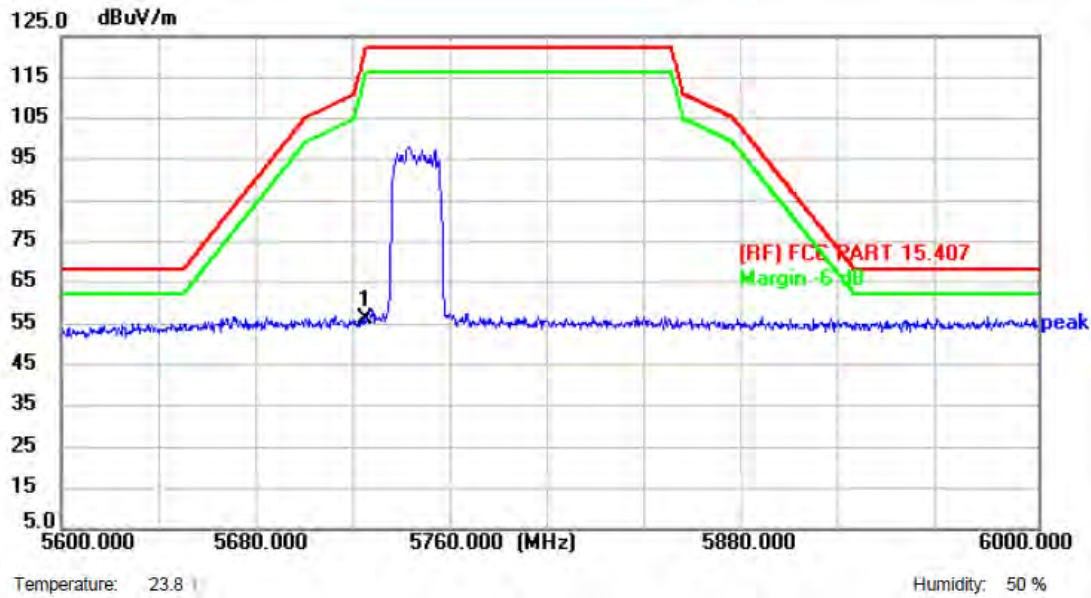


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	44.55	11.59	56.14	122.30	-66.16	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE20) Mode 5745 MHz (U-NII-3)
Remark:	

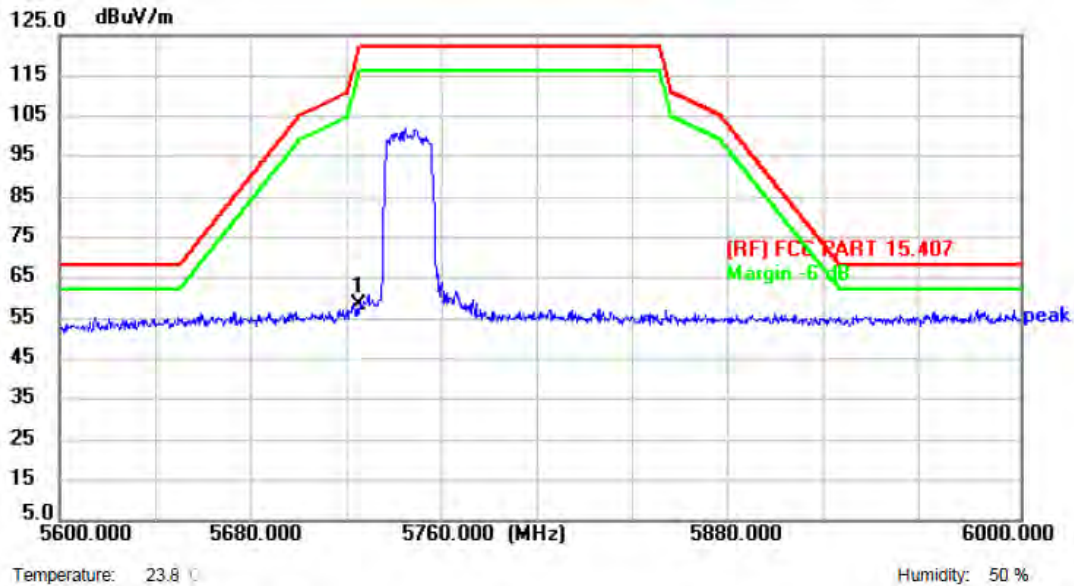


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	46.79	11.59	58.38	122.30	-63.92	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11 ax(HE20) Mode 5825 MHz (U-NII-3)
Remark:	

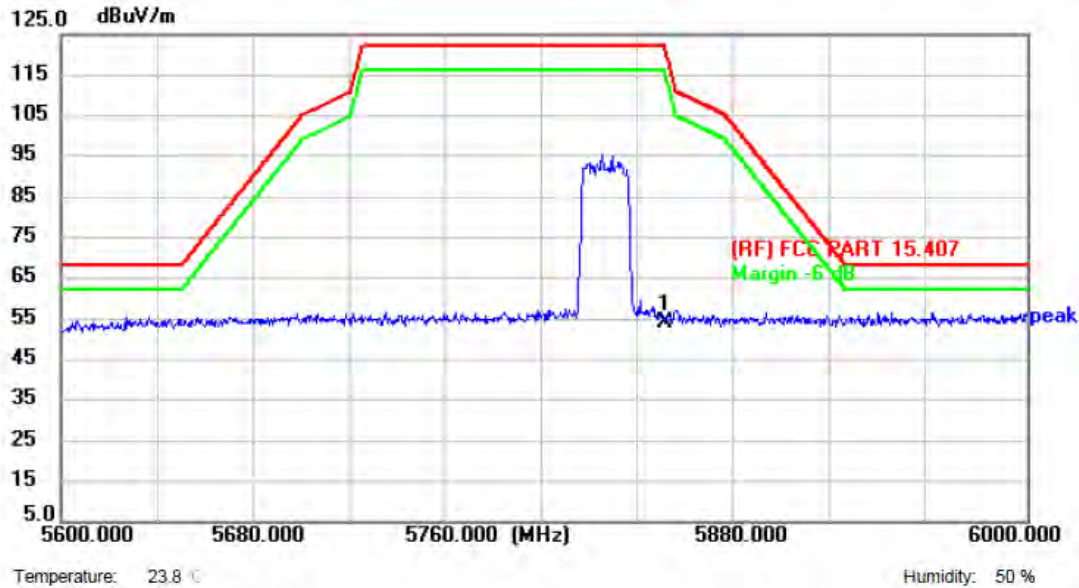


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	42.26	11.90	54.16	122.30	-68.14	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE20) Mode 5825 MHz (U-NII-3)
Remark:	

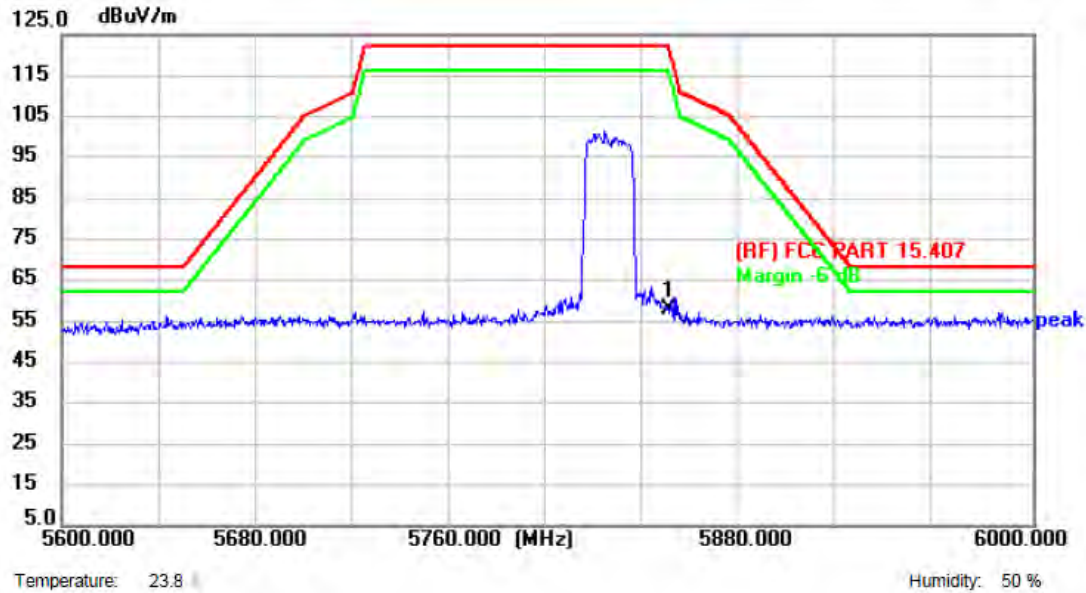


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	46.12	11.90	58.02	122.30	-64.28	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)
Remark:	

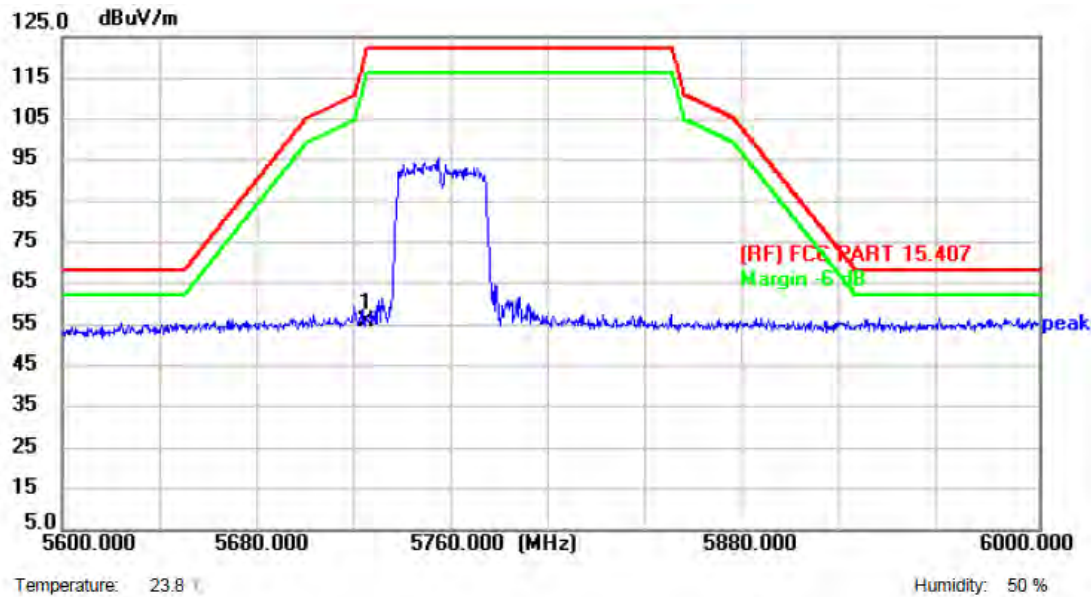

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	44.38	11.59	55.97	122.30	-66.33	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Temperature: 23.8 °C Humidity: 50 %



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)
Remark:	

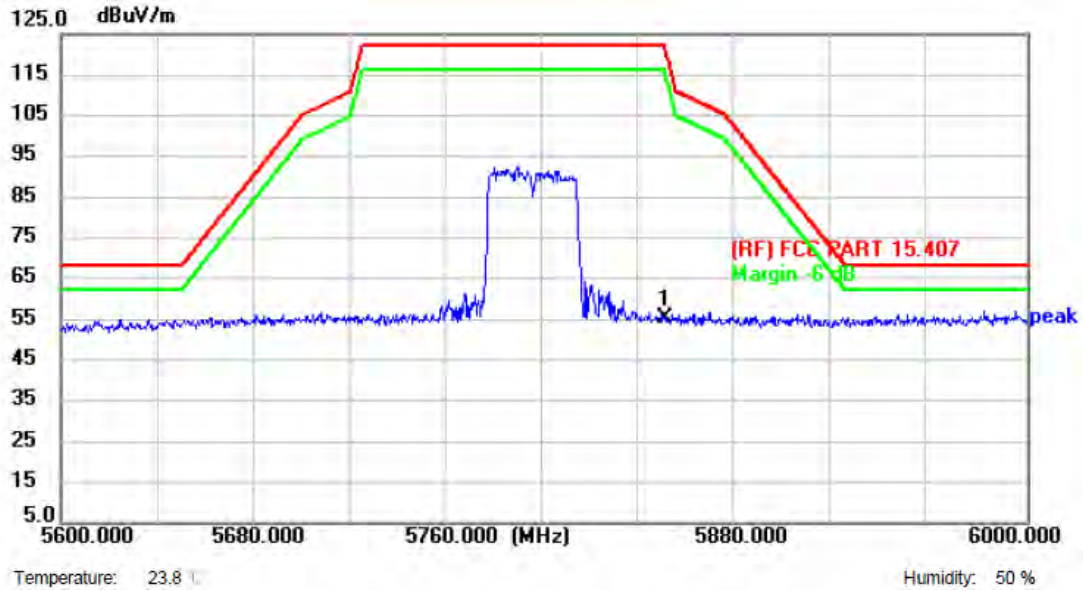


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	43.27	11.90	55.17	122.30	-67.13	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)
Remark:	

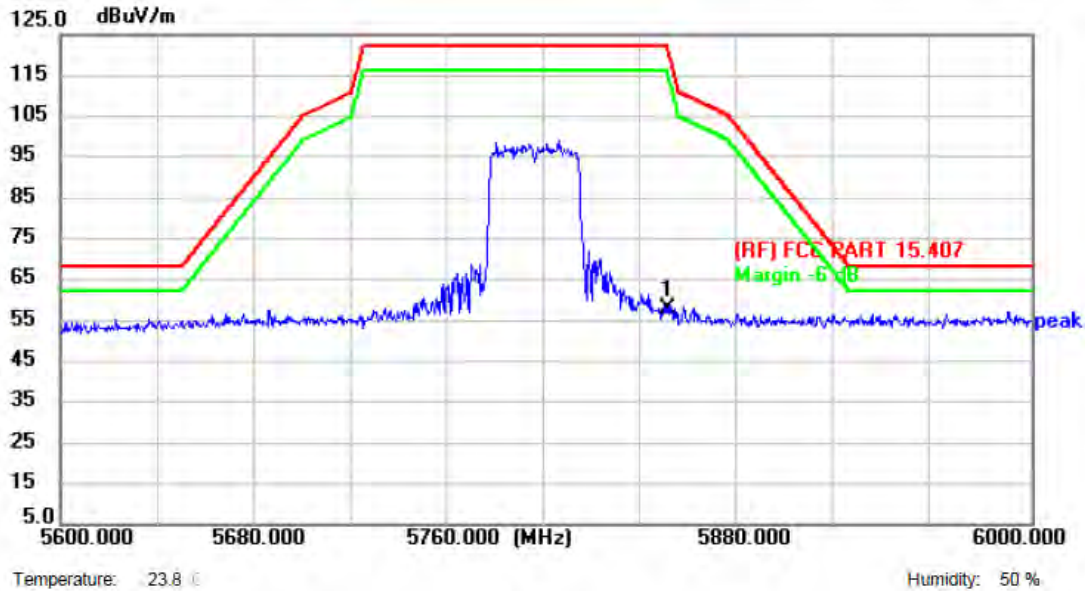


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	45.91	11.90	57.81	122.30	-64.49	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)
Remark:	

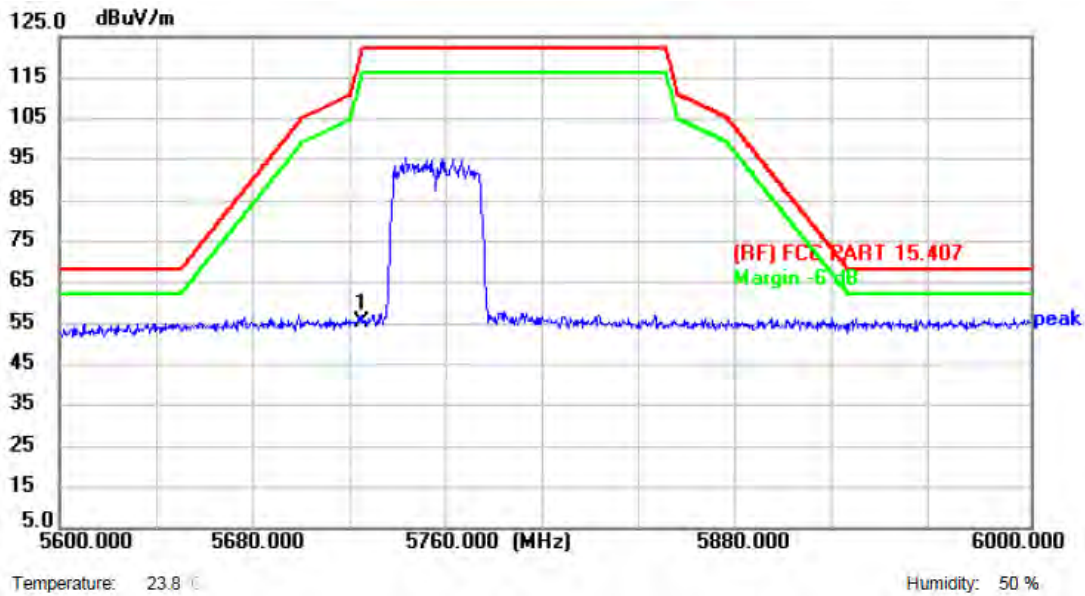


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	43.97	11.59	55.56	122.30	-66.74	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)
Remark:	

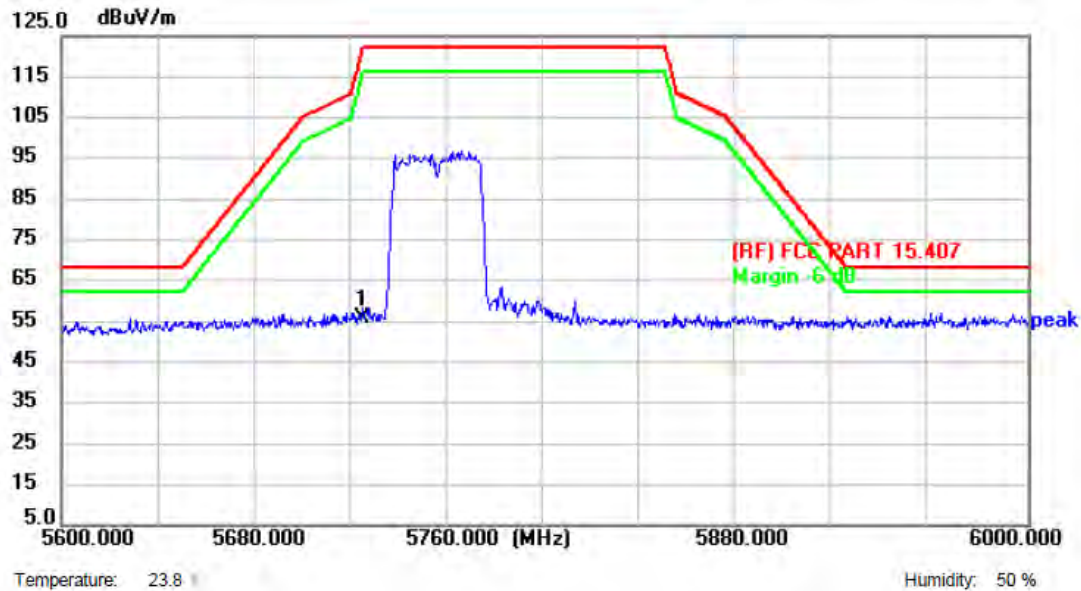


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	44.09	11.59	55.68	122.30	-66.62	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)
Remark:	

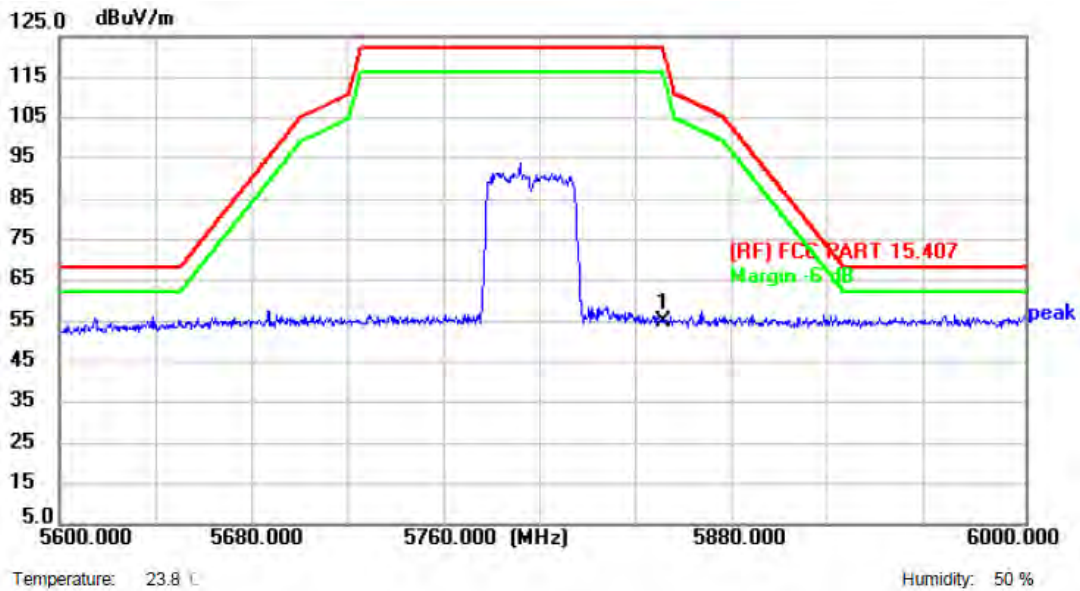


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	43.05	11.90	54.95	122.30	-67.35	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)
Remark:	

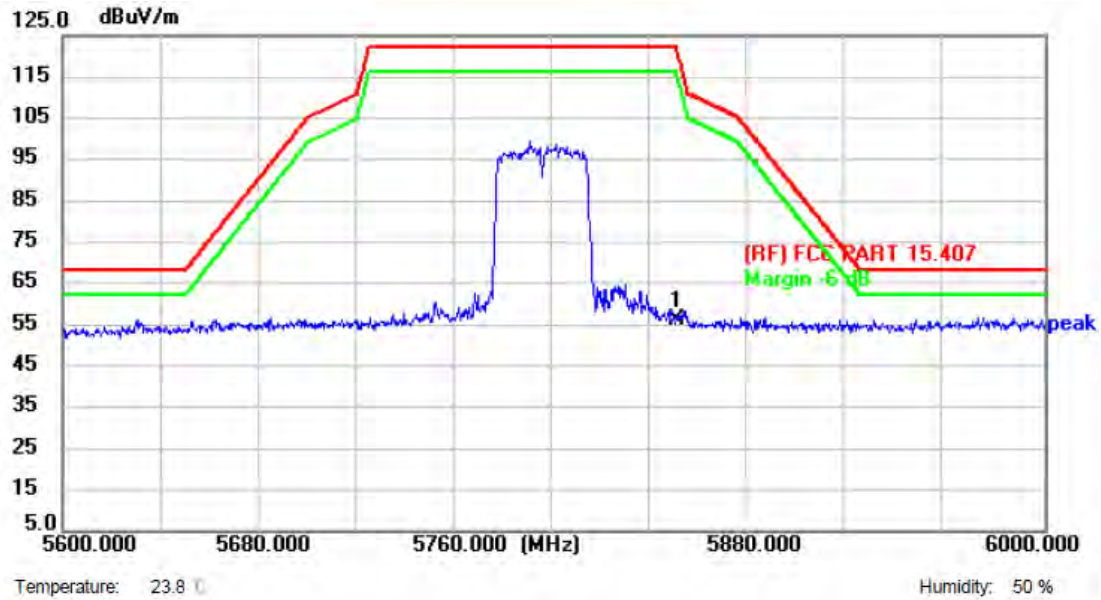


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	44.14	11.90	56.04	122.30	-66.26	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3)
Remark:	

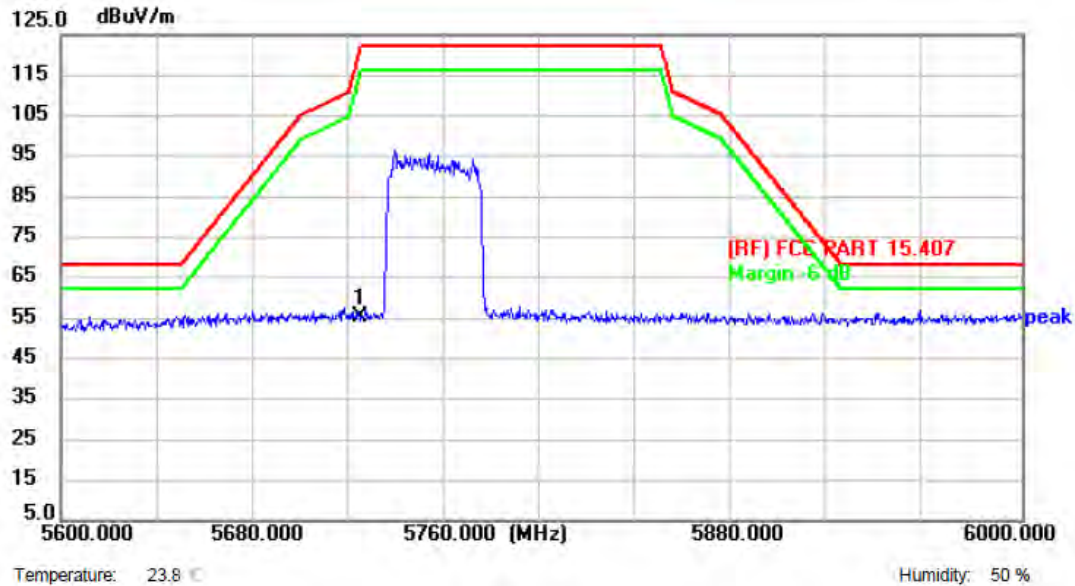


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	43.76	11.59	55.35	122.30	-66.95	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE40) Mode 5755 MHz (U-NII-3)
Remark:	

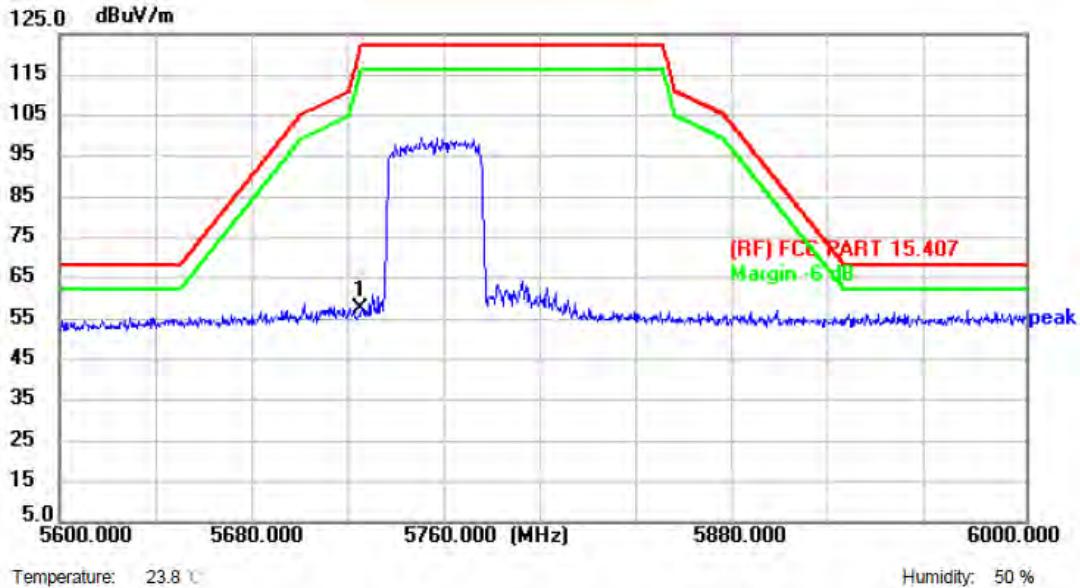


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	45.93	11.59	57.52	122.30	-64.78	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11 ax(HE40) Mode 5795 MHz (U-NII-3)
Remark:	

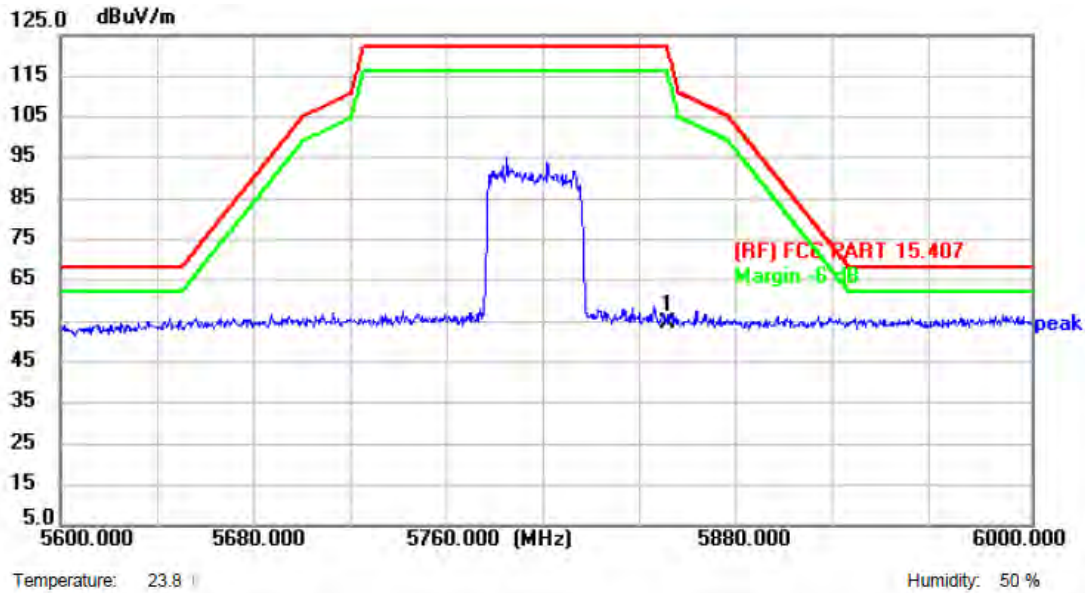


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	42.41	11.90	54.31	122.30	-67.99	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11 ax(HE40) Mode 5795 MHz (U-NII-3)
Remark:	

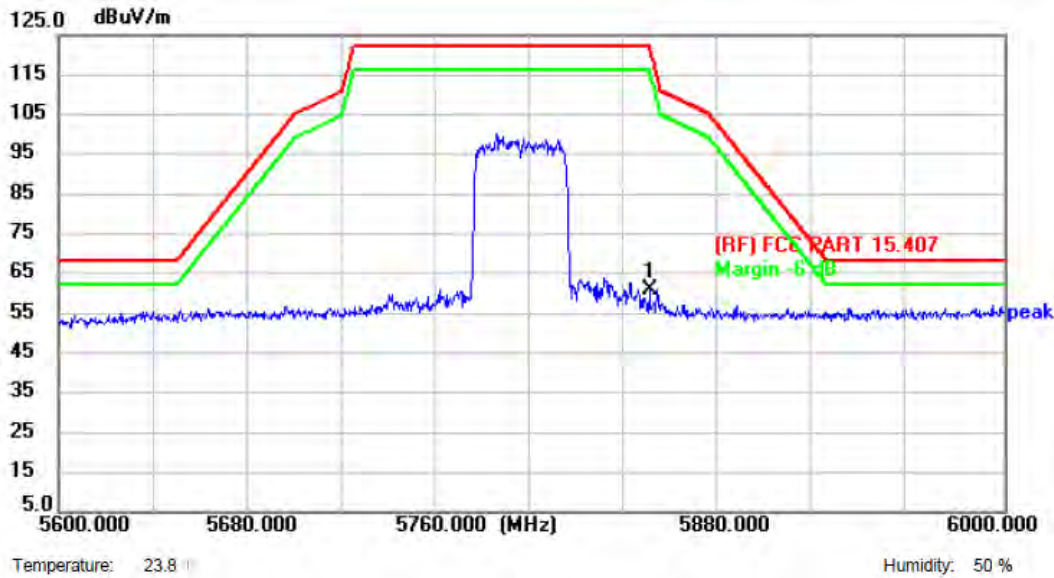


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	48.82	11.90	60.72	122.30	-61.58	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)
Remark:	

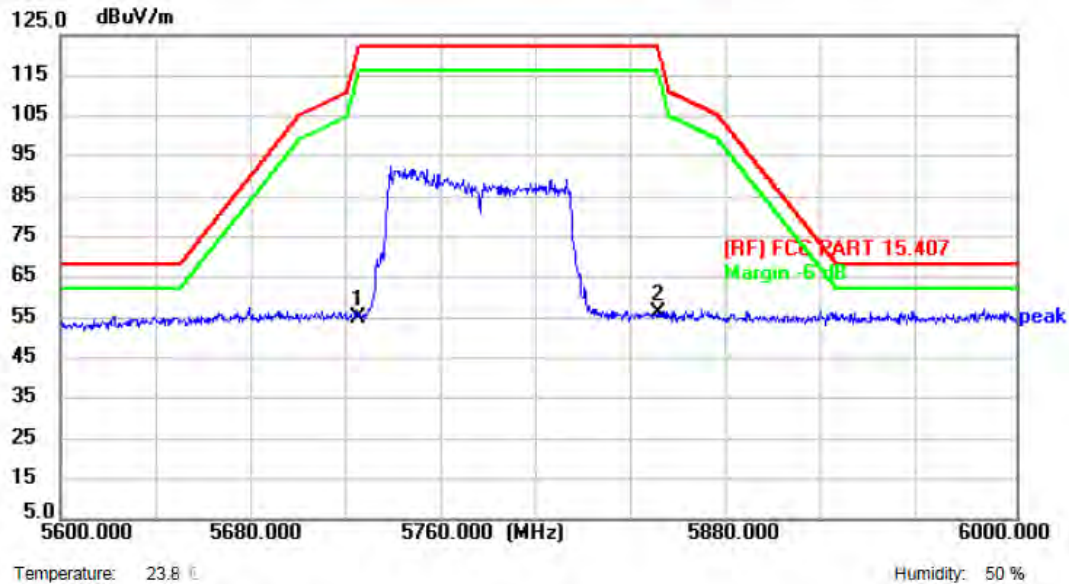


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	43.33	11.59	54.92	122.30	-67.38	peak	P
2 *	5850.000	44.18	11.90	56.08	122.30	-66.22	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)
Remark:	

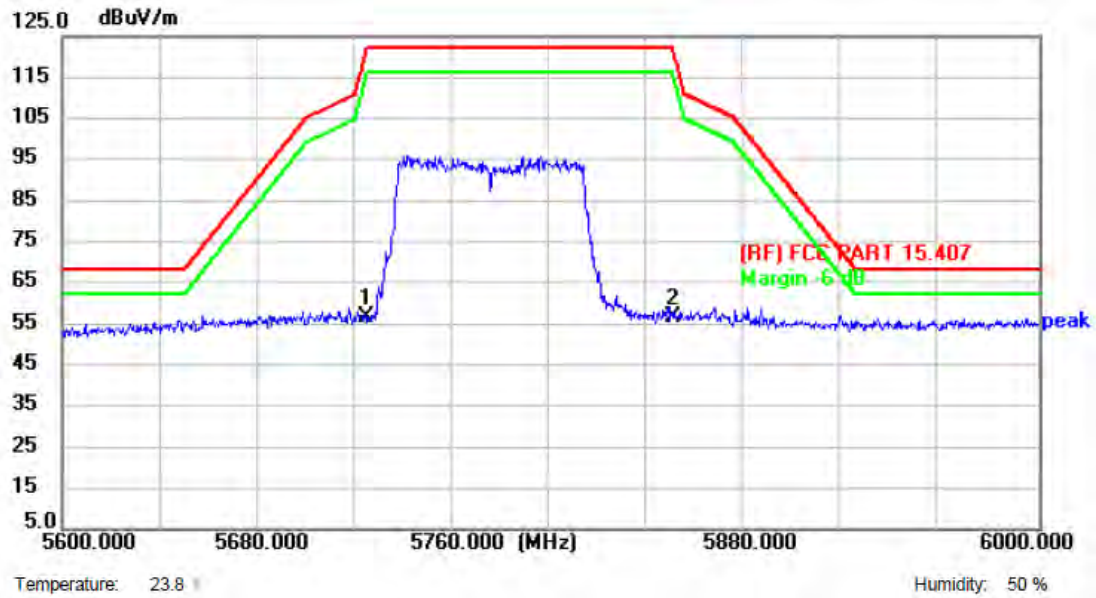


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	44.99	11.59	56.58	122.30	-65.72	peak	P
2 *	5850.000	44.80	11.90	56.70	122.30	-65.60	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Horizontal
Test Mode:	TX 802.11 ax(HE80) Mode 5775 MHz (U-NII-3)
Remark:	

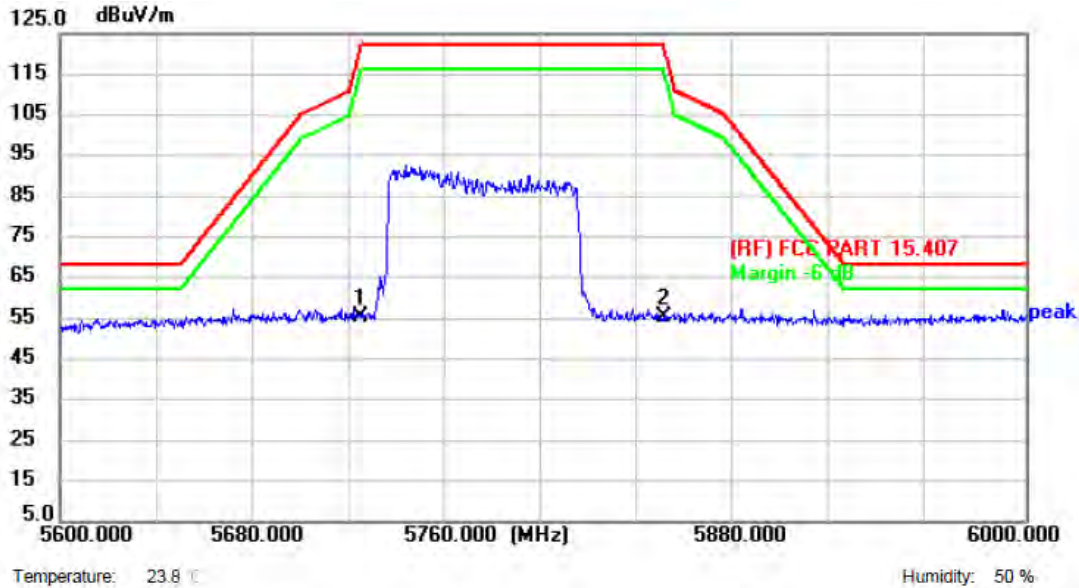


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	43.61	11.59	55.20	122.30	-67.10	peak	P
2 *	5850.000	43.46	11.90	55.36	122.30	-66.94	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	DC 3.3V
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775 MHz (U-NII-3)
Remark:	

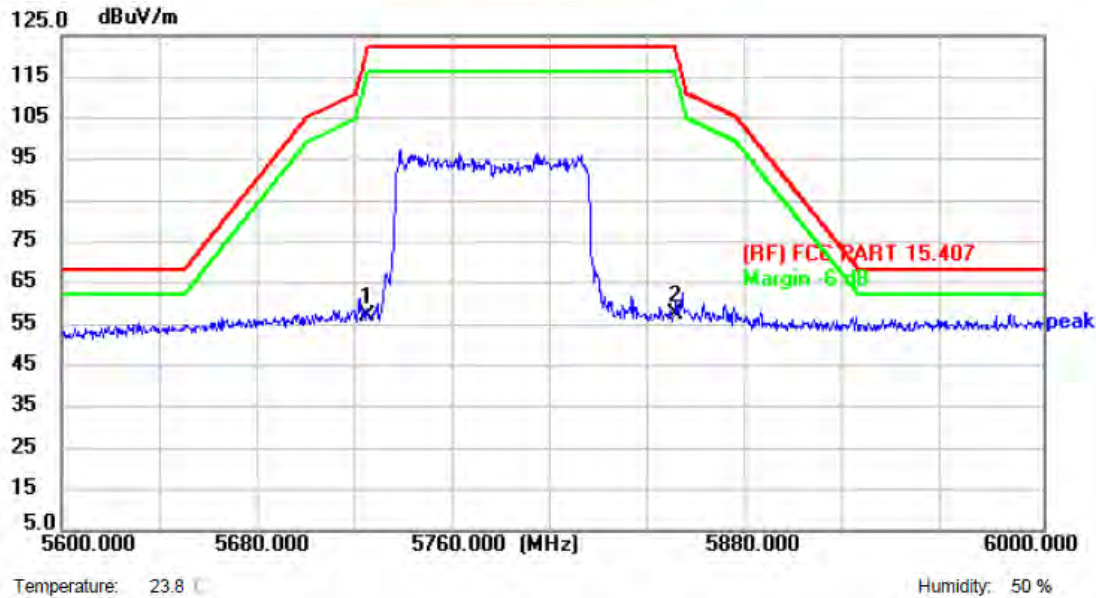

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5725.000	45.53	11.59	57.12	122.30	-65.18	peak	P
2 *	5850.000	45.41	11.90	57.31	122.30	-64.99	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)+AMP(dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

-----END OF THE REPORT-----

