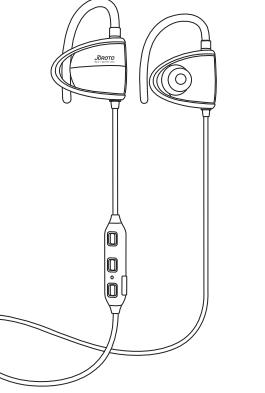
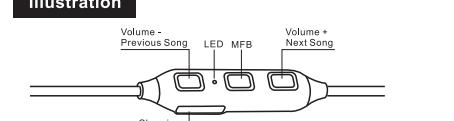


<p>JOROTO Sport and Music</p> <p>Sport Wireless Headset EAR-5</p>  <p>Remark: Language switch: Turn on the earphone, before pairing long press both volum "+" and "-" at the same time to switch language between Chinese and English.</p>	<p>Thank you for purchasing our sport wireless headset, read it carefully before use. Read this manual.</p> <p>Specification</p> <ul style="list-style-type: none"> Item NO.: EAR-5 Version: Ver.4.1 Profile support: HSP/HFP/A2DP/AVRCP/APTX RF: ClassII (-6dBm~+4dBm) Sensitivity: -92dBm Frequency: 2.40GHz~2.48GHz Charge port: Micro USB Battery capacity: 150*2mAh Standby time: Up to 600h Talking time: Up to 24h Playing time: Up to 24h Charging time: About 2h Frequency Range: 20Hz~20KHz Work temperature: -10~50°C Storage temperature: -20~80°C Length: 56cm wire length: 45cm Net weight: 18.6g Transmission Distance: 10M(without obstacle) 	<p>Illustration</p>  <p>Power on/off</p> <ul style="list-style-type: none"> Power on: Long press MFB 2 seconds, blue LED flash with prompt "power on". Power off: Long press MFB 3 seconds, red LED light with prompt "power off". <p>Pairing</p> <ul style="list-style-type: none"> When the earphone is power off, press MFB until the red and blue LED flash alternately to enter pairing mode. Search "EAR-5" on your smart device's bluetooth list bluetooth list, and select it to pair. Earphone will turn off in 5 minutes without connected with any device. <p>Noted:</p> <ul style="list-style-type: none"> Support iPhone battery indicating. When low battery red LED always flashes, every 15 minutes alarms and prompts "Low battery". When turn on the earphone, it will pair with the last paired device automatically. If it couldn't pair, it will enter the bluetooth mode. 	<p>Play music</p> <ul style="list-style-type: none"> Play music: Short press MFB to play music. Pause music: Short press MFB to pause music, press MFB again to restart. Volume up: Short press "+", when reach the max volume with "beep" prompt. Volume down: Short press "-", when reach the min volume with "beep" prompt. Previous song: Long press "-" 2 seconds. Next song: Long press "+" 2 seconds. <p>Operations</p> <ul style="list-style-type: none"> Answer calls: When calls come in, short press MFB to answer with prompt "beep beep". Reject calls: When calls come in, long press MFB 2 seconds with prompt "beep beep". Hang up calls: Short press MFB with prompt "beep beep". Redial last call number: When earphone is power on, double click MFB to redial the last call number with prompt "beep beep". Mute: When answer calls, long press volume "+" or "-" 3 seconds with prompt "beep beep". (At this status, you can hear caller's voice but caller can not hear your voice. Every 10 seconds a prompt tells you are in mute.) Cancel mute: When in mute status, long press volume "+" or "-" 3 seconds with prompt "beep beep" to cancel mute. Sound switching: Double click MFB to switch sound between smartphone and earphone with prompt "beep beep". 	<p>Voice dialing (smartphone should support this function): When earphone power on, long press volume "+" or "-" 2 seconds with prompt "beep" to voice dial.</p> <p>Disconnect and reconnect: when earphone disconnects with your smartphone with prompt "beep beep", short press MFB to reconnect with your smartphone again with prompt "your headset is connected".</p> <p>Connect with two smartphones</p> <ul style="list-style-type: none"> When earphone has connected with first smartphone, disconnected from it. At the same time, red and blue LED light flash alternately which means the earphone enters pairing mode again. Search the bluetooth name "EAR-5" on the second smartphone and connected with earphone. Lastly the first smartphone connects with earphone again, so both of smartphones are connected with earphone. <p>Call waiting</p> <ul style="list-style-type: none"> The second smartphone calls coming when you answer call by the first smartphone, long press MFB 2 seconds to reject the calls of second smartphone and continue to talk with the first smartphone. Press both volume "+" and "-" at the same time to answer call with second smartphone, retain the call with first smartphone. Press both volume "+" and "-" again to switch to answer call with first smartphone, retain the call with second smartphone. This function could switch the call between two smartphones. Short press MFB once to hang up the current call, automatically answer the other smartphone. 	<p>LED Indicator Status</p> <table border="1"> <tbody> <tr> <td>Power on</td> <td>Blue LED lights</td> </tr> <tr> <td>Power off</td> <td>Red LED lights</td> </tr> <tr> <td>Pairing</td> <td>Red and blue LED flash alternately</td> </tr> <tr> <td>Incoming call</td> <td>Blue LED flashes continuously</td> </tr> <tr> <td>Dial call number</td> <td>Blue LED flashes continuously</td> </tr> <tr> <td>Talking</td> <td>Blue LED flashes twice every 5 seconds</td> </tr> <tr> <td>Music play</td> <td>Blue LED flashes twice every 5 seconds</td> </tr> <tr> <td>Standby(paired)</td> <td>Blue LED flashes once every 5 seconds</td> </tr> <tr> <td>Charging</td> <td>Red LED light</td> </tr> <tr> <td>Full charge</td> <td>Blue LED light</td> </tr> <tr> <td>Low battery</td> <td>Red LED light flashes</td> </tr> </tbody> </table>	Power on	Blue LED lights	Power off	Red LED lights	Pairing	Red and blue LED flash alternately	Incoming call	Blue LED flashes continuously	Dial call number	Blue LED flashes continuously	Talking	Blue LED flashes twice every 5 seconds	Music play	Blue LED flashes twice every 5 seconds	Standby(paired)	Blue LED flashes once every 5 seconds	Charging	Red LED light	Full charge	Blue LED light	Low battery	Red LED light flashes	<p>Li'ang Health Science and Technology (Beijing) Co., Ltd. Add: Room2-3, Building No.26, Xiju North Street, West Third Ring Road South, Fengtai District, Beijing PRC TEL: (+0086)4007005199</p>
Power on	Blue LED lights																											
Power off	Red LED lights																											
Pairing	Red and blue LED flash alternately																											
Incoming call	Blue LED flashes continuously																											
Dial call number	Blue LED flashes continuously																											
Talking	Blue LED flashes twice every 5 seconds																											
Music play	Blue LED flashes twice every 5 seconds																											
Standby(paired)	Blue LED flashes once every 5 seconds																											
Charging	Red LED light																											
Full charge	Blue LED light																											
Low battery	Red LED light flashes																											

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.