



FEATURES


- The wireless microphone system comes with Ultra-High Frequency (UHF) and is interference free.
- Compatible with an array of devices including TV, Smart TV, Blue-Ray player, notebook, iPad, tablet, home theater, receiver, speaker, etc.
- The portable receiver and audio mixer supports up to two wireless microphones (included) and two wired microphones (not included).
- Adjustable echo and tone controls for more Karaoke fun.
- Easy to set up with up to 8 selectable frequencies and independent volume controls.
- Up to 100 feet line-of-sight operation range. Perfect for Karaoke, DJ music and house party.

NOTE: Please use the receiver 3.5mm out to connect your amplifier/speaker.

Receiver


Receiver

Front Panel

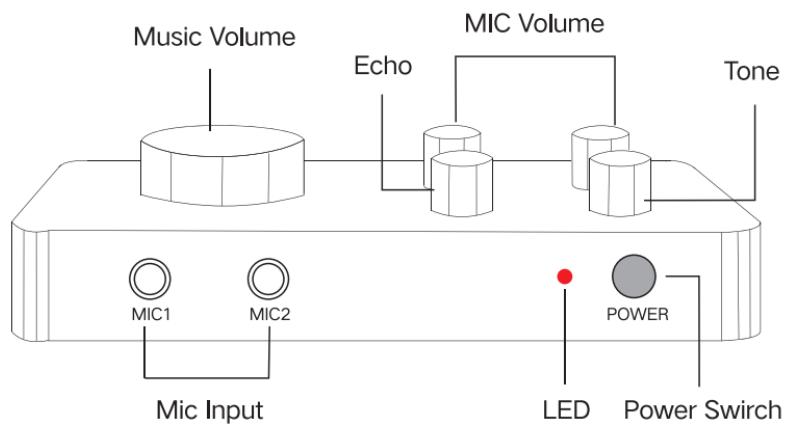

Rear Panel

Rear Panel

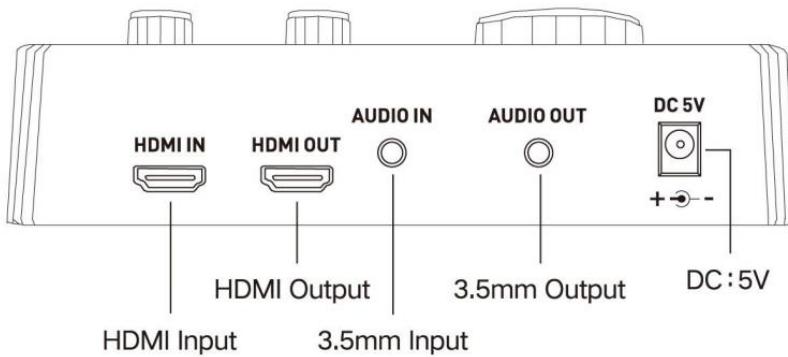

Transmitter



- ① Microphone-core
- ② Display
- ③ Frequency adjustment/Power switch
- ④ Battery Cover

Operation

- 1) Connect the receiver to a power outlet through the power adapter provided and turn on the receiver.
- 2) Put two alkaline AA batteries into the battery compartment of the microphone. Please ensure the positive and negative ends are positioned in the correct direction
- 3) Power on the handheld microphone. In case of any frequency interference, quick press the power button on the microphone will be turn to a different frequency. There are up to eight frequencies for you to choose
- 4) Please note that it will take a few seconds for the receiver to automatically syndicate the frequency with the microphone each time the power button is pressed.
- 5) If there others one use the same product.please turn off microphone for a second. Then turn on the microphone don;t release untill it flashing. Then quick pressed  one time. The  will also flashing Then quick turn on the receive within 2 second. The receiver light will change right to blue.this one match the receiver.do the same step for the other one(after match each. If you want use the other microphone.you need do the same step)
- 6) To connect the receiver to a device such as a computer, TV, and speaker, etc.,


please refer to the connection diagram section.

NOTE:

1. Connect with PC, Streaming device or streaming media player and HDMI blueray and TV



2. Small meeting connection

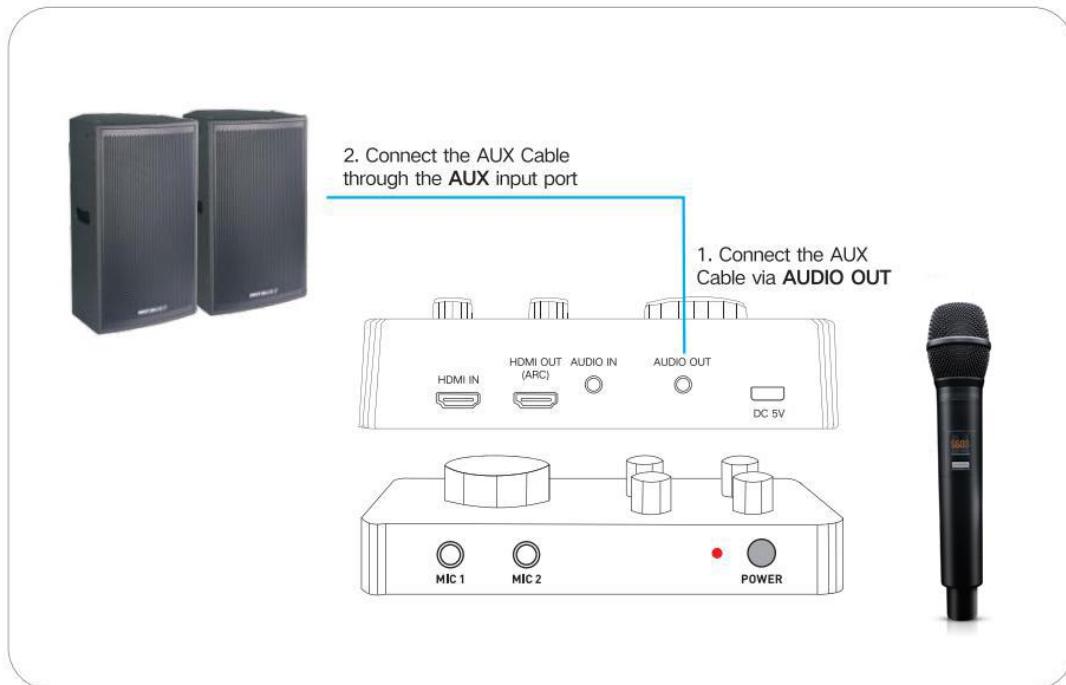

Parameter Specifications

Frequency	UHF
HDMI	HDMI1.4
S/N ratio	-90dB
T.H.D	<0.5%
Frequency responses	30Hz-18Khz
Working Distance	100Feet
Typical Tone Control	±15dB@10KHz
Spurious Emission	>60dB
Antenna	PCB Antenna
Gain	1.8dBi

Trouble Shooting

Receiver & Microphone Does not connect

If your receiver is showing a red light. It means receiver and microphone not paired correctly. You need to follow the instruction in below to pair receiver with microphones.

Turn off both the receiver and the handheld microphone

Press the Power buttons dont release until the it flashing.then quick press



power key again. then the antenna signal flashing . open the receiver within 2 seconds. After finished the paired. The light will turn to blue.

Faint Sound or No sound

Check connections to PA system

Adjust mic volume

Turn on handheld microphone

Check that batteries are installed correctly

If the battery low change batteries

Verify power adapter is plugged securely into the outlet

Check that receiver unit is powered on

Audio Interference, Artifacts, or Dropouts

Identify and remove sources of interference: mobile phones, Wi-Fi access points, signal processors, electronics, etc

If the battery low change batteries

Move system away from metallic surfaces

Provide line-of-sight from handheld microphone or bodypack to receiver unit antennas

Distortion

- Lower Channel volume
- Change the battery
- Check fidelity of signal cable to PA

If you are still experiencing issues after following this troubleshooting guide, please contact jiuy0211@163.com.

In the package

KSTATION PRO

- 1 receiver/mixer
- 2 handheld wireless microphone
- 3 power adapter
- 4 3.5mm-3.5mm audio cable
- 5 3.5mm-2RCA audio cable
- 6 user manual

Warning:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF exposure compliance statement:

This device has been evaluated to meet the general RF exposure requirement it can be used in portable exposure condition without restriction.