






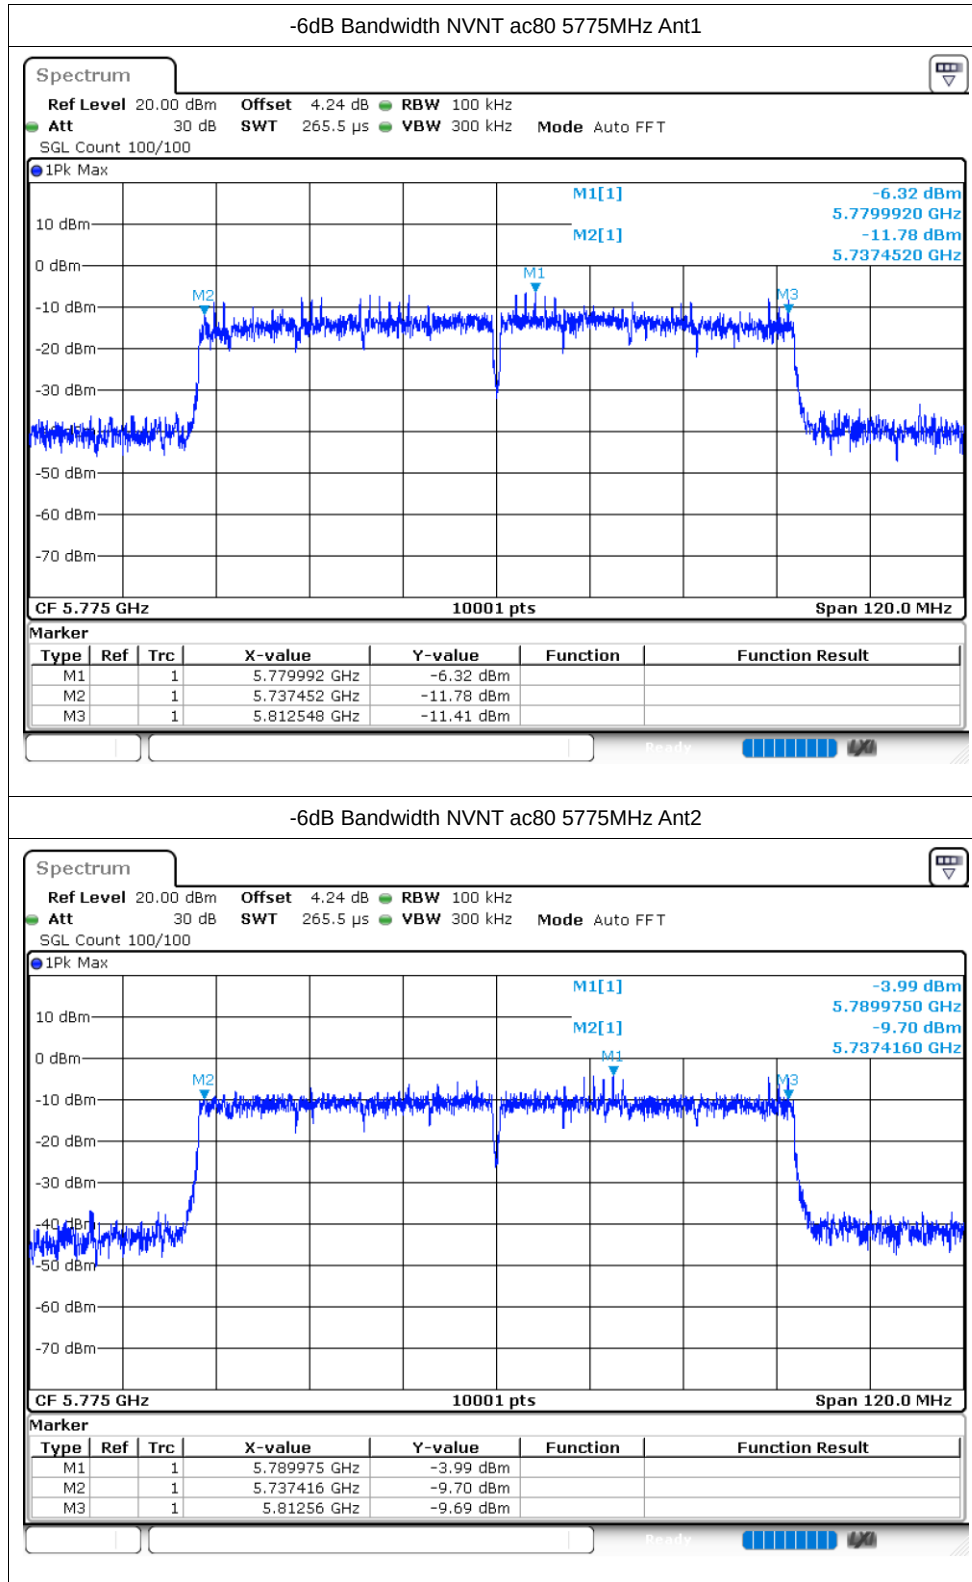


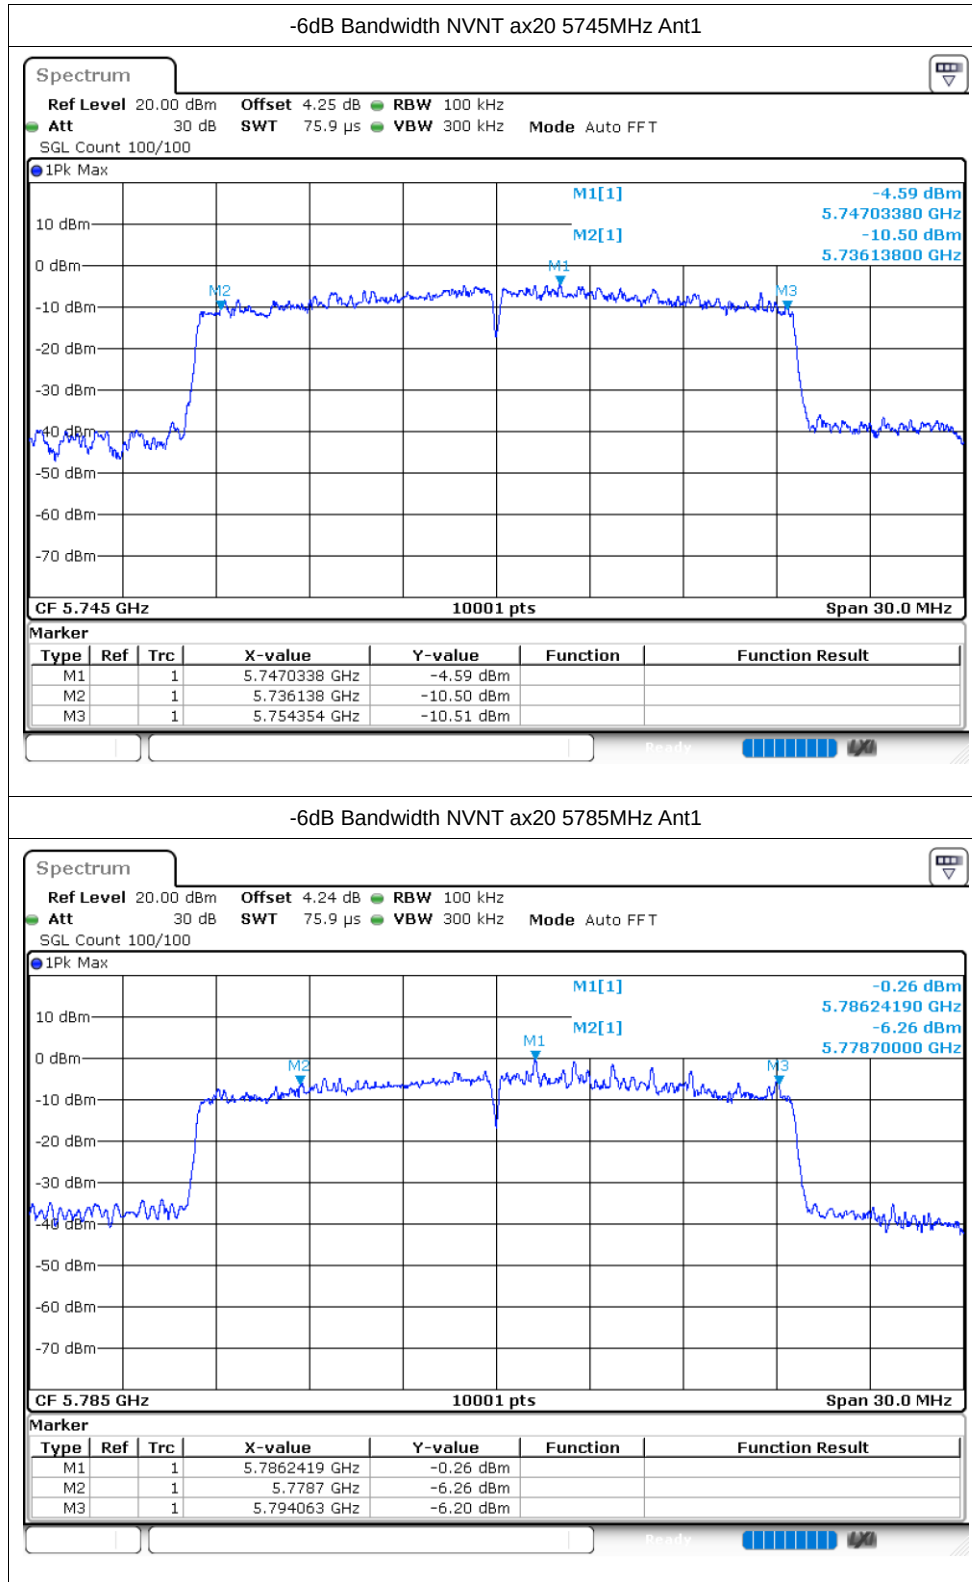


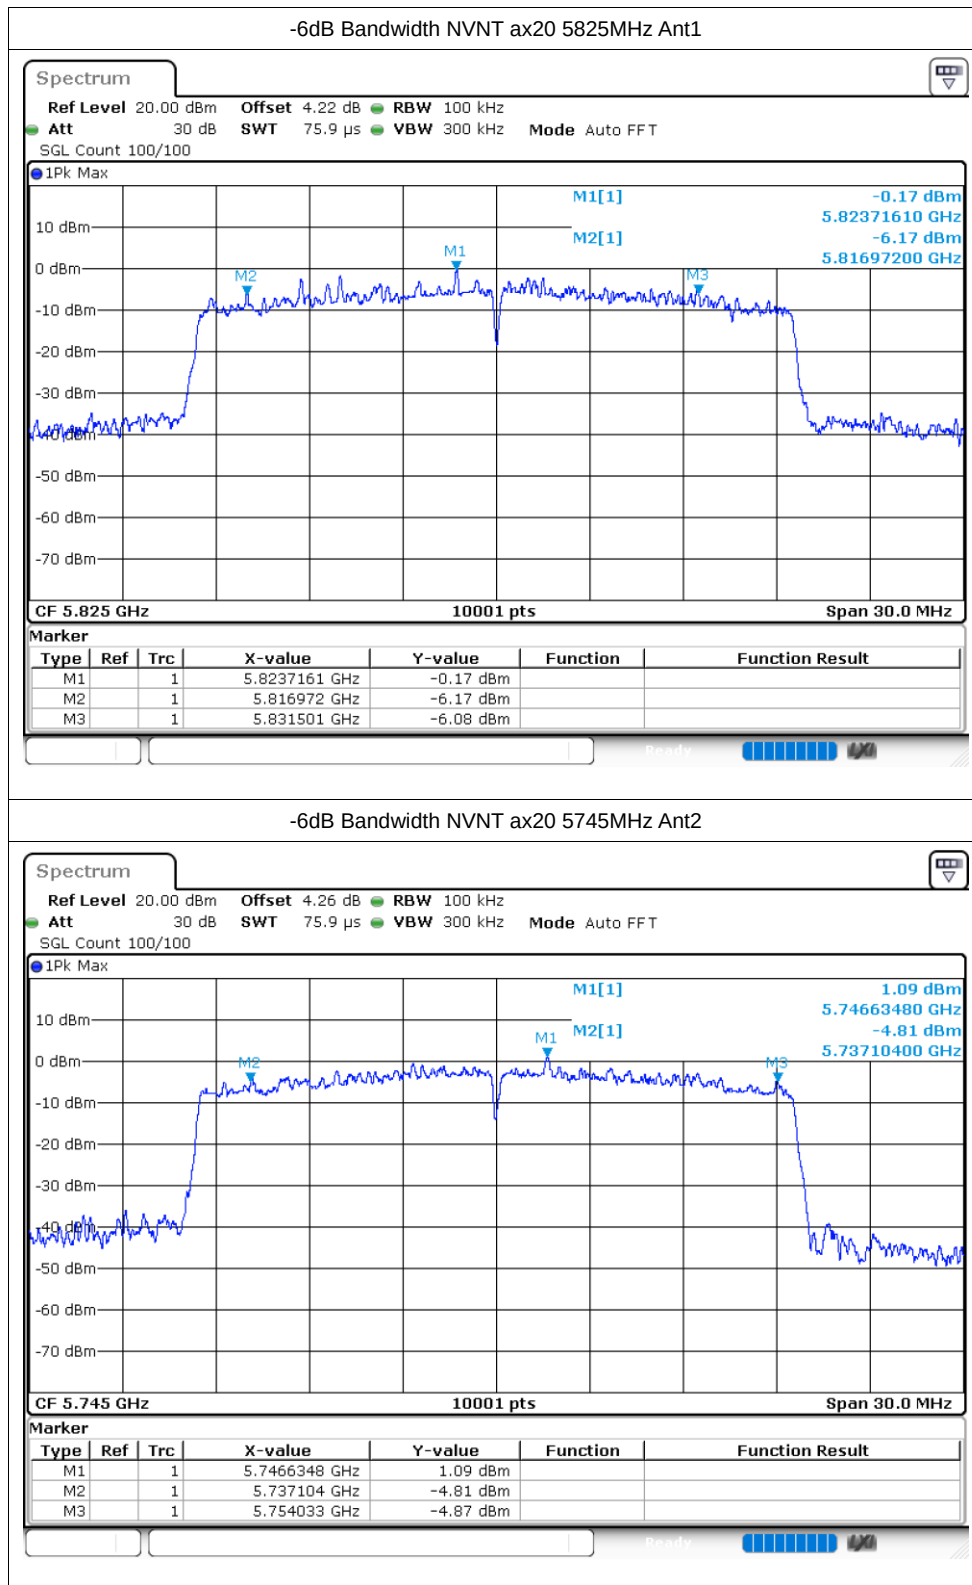

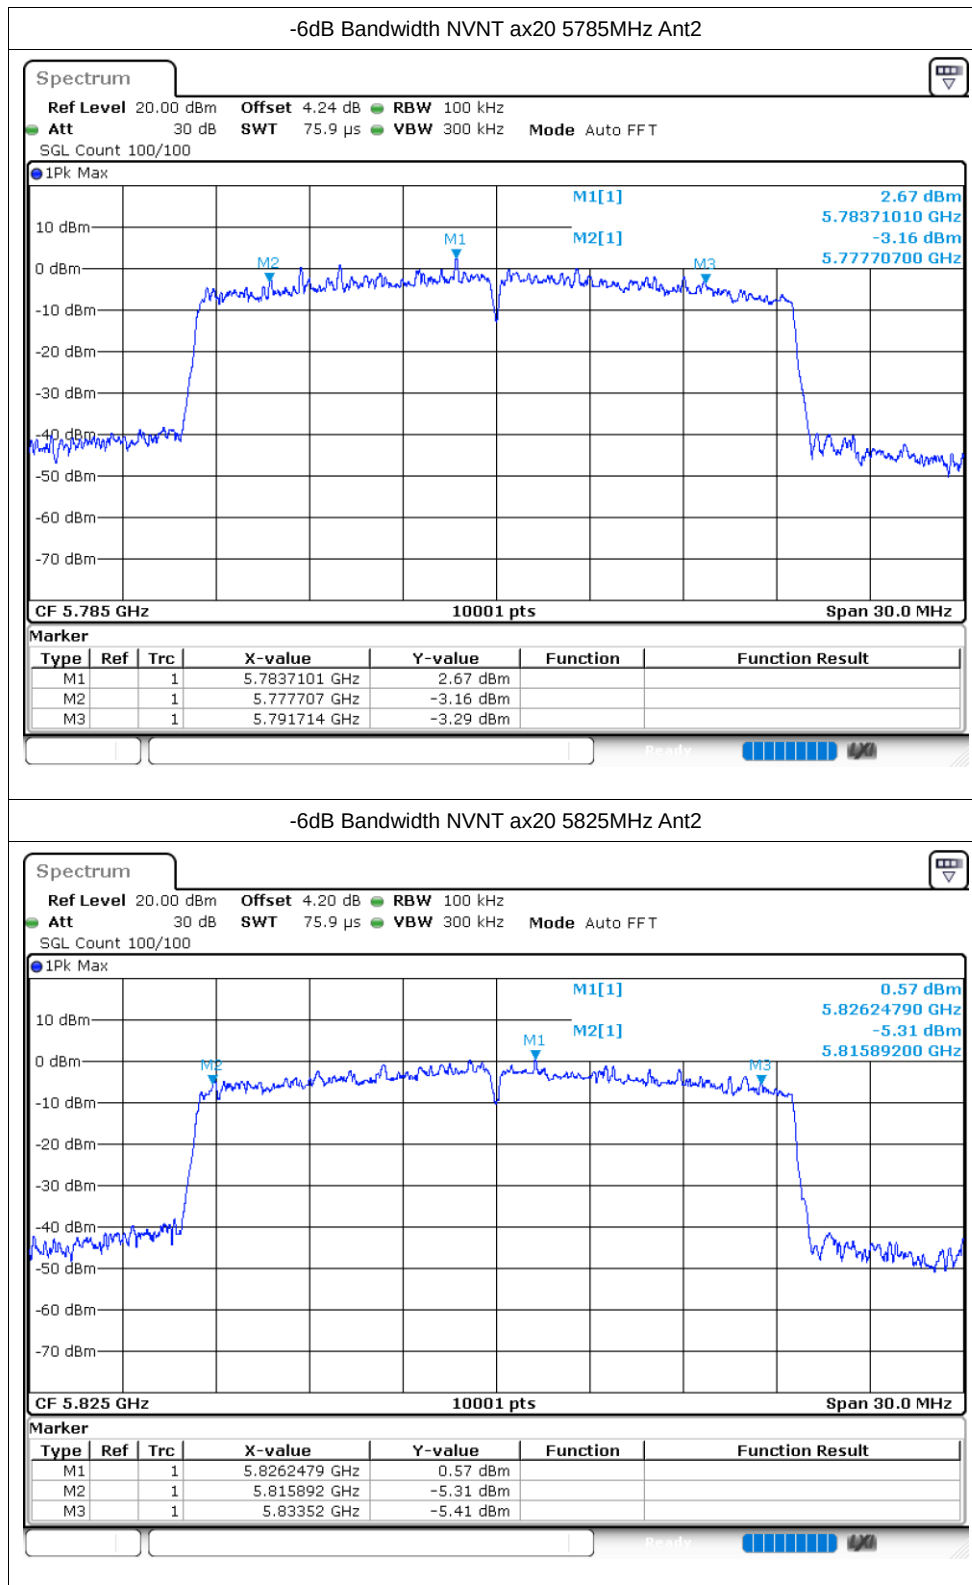

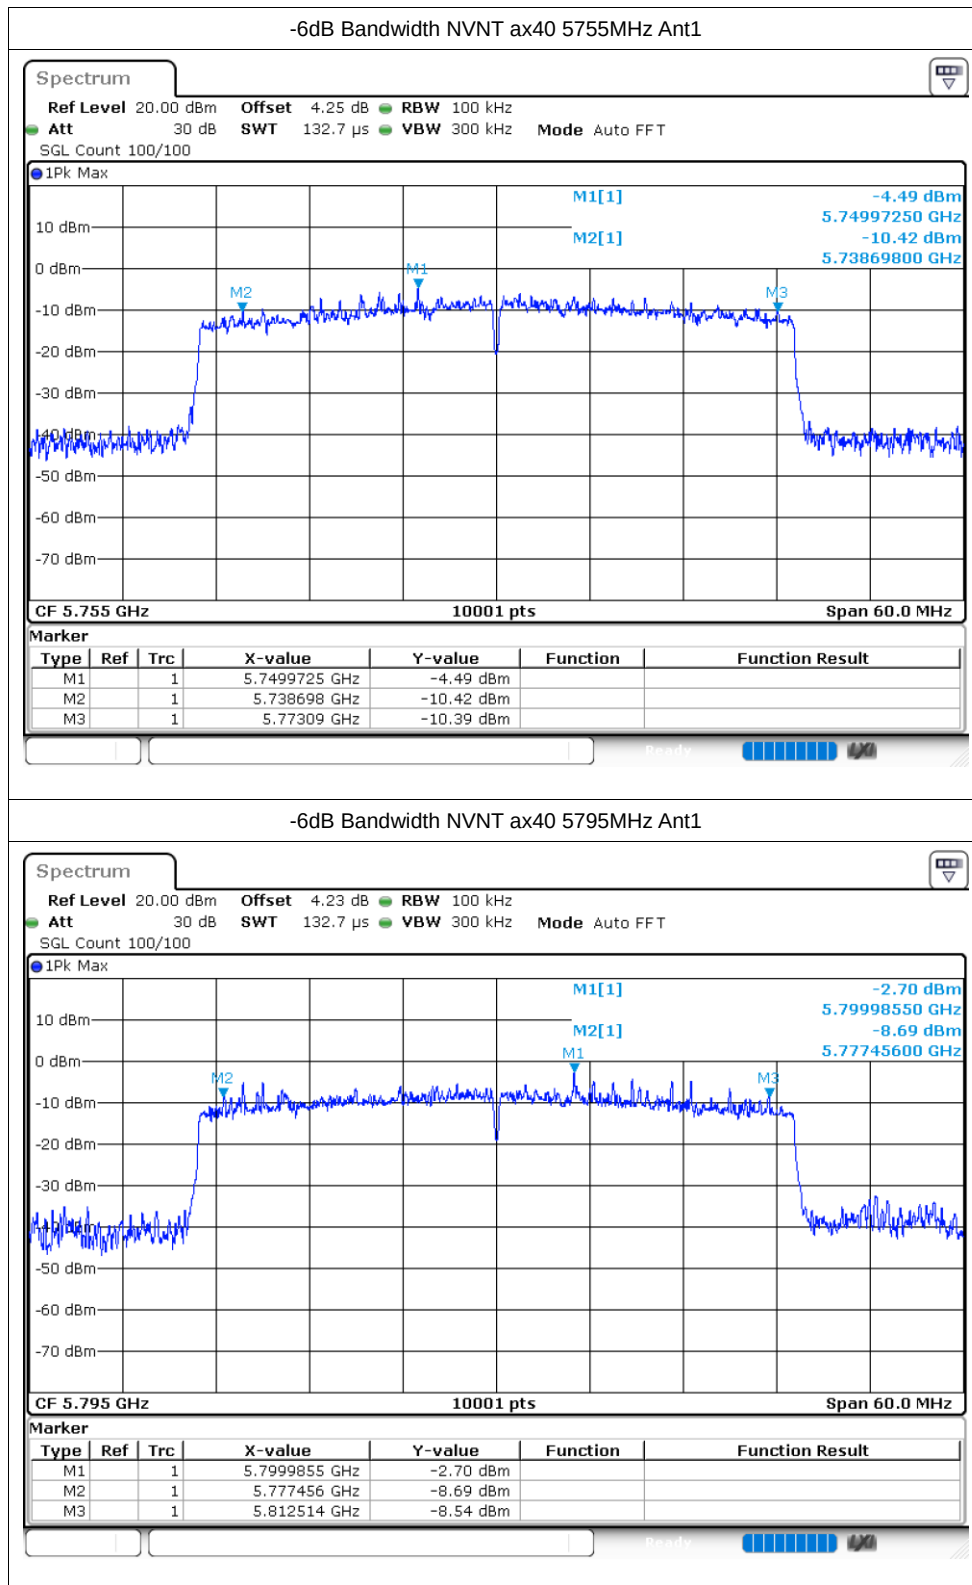

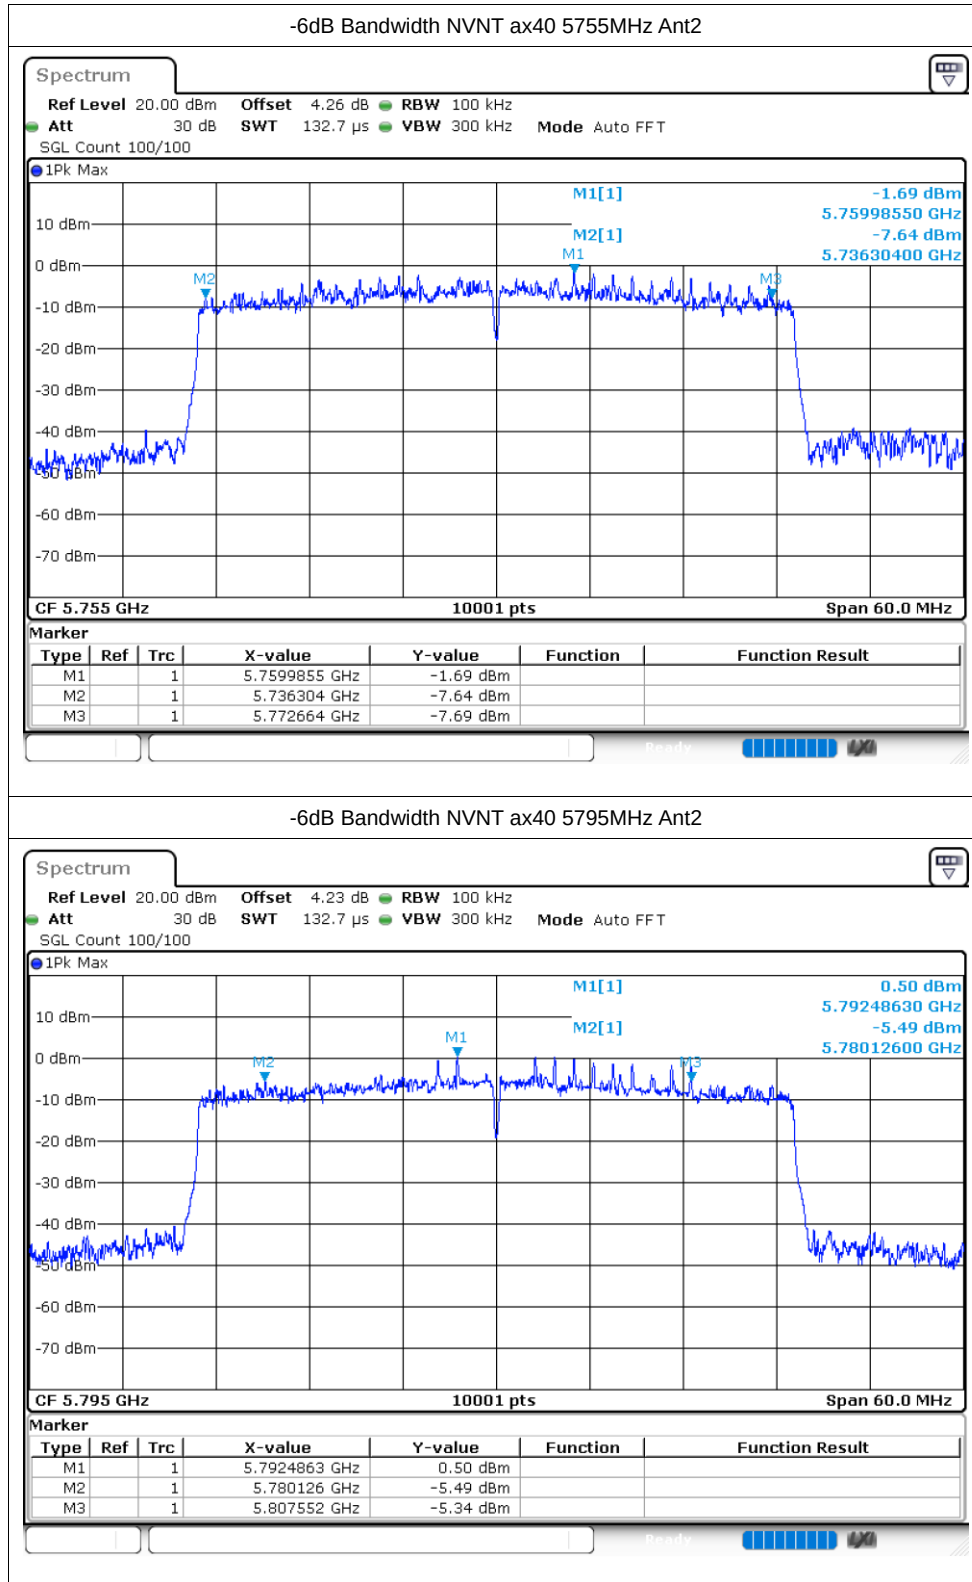

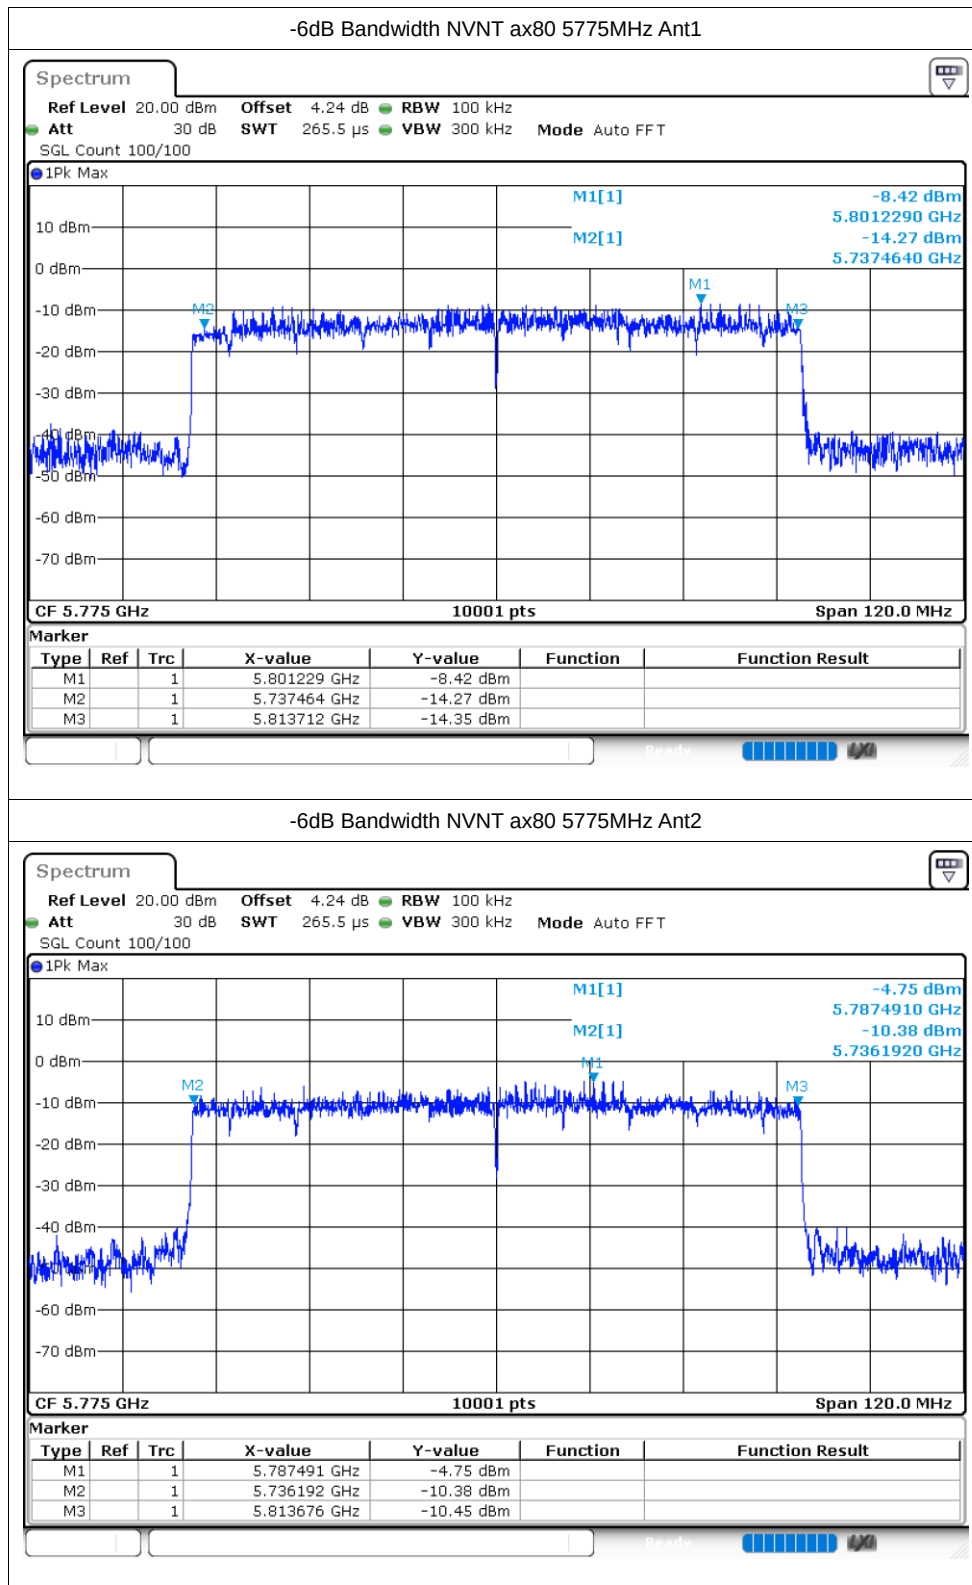


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.357
NVNT	a	5785	Ant1	16.348
NVNT	a	5825	Ant1	16.375
NVNT	a	5745	Ant2	16.333
NVNT	a	5785	Ant2	16.33
NVNT	a	5825	Ant2	16.321
NVNT	n20	5745	Ant1	17.467
NVNT	n20	5785	Ant1	17.521
NVNT	n20	5825	Ant1	17.5
NVNT	n20	5745	Ant2	17.635
NVNT	n20	5785	Ant2	17.437
NVNT	n20	5825	Ant2	17.416
NVNT	n40	5755	Ant1	35.984
NVNT	n40	5795	Ant1	36.02
NVNT	n40	5755	Ant2	35.918
NVNT	n40	5795	Ant2	35.93
NVNT	ac20	5745	Ant1	17.665
NVNT	ac20	5785	Ant1	17.494
NVNT	ac20	5825	Ant1	17.47
NVNT	ac20	5745	Ant2	17.389
NVNT	ac20	5785	Ant2	17.464
NVNT	ac20	5825	Ant2	17.368
NVNT	ac40	5755	Ant1	35.99
NVNT	ac40	5795	Ant1	36.008
NVNT	ac40	5755	Ant2	35.87
NVNT	ac40	5795	Ant2	35.906
NVNT	ac80	5775	Ant1	75.712
NVNT	ac80	5775	Ant2	75.712
NVNT	ax20	5745	Ant1	18.793
NVNT	ax20	5785	Ant1	18.76
NVNT	ax20	5825	Ant1	18.733
NVNT	ax20	5745	Ant2	18.694
NVNT	ax20	5785	Ant2	18.781
NVNT	ax20	5825	Ant2	18.763
NVNT	ax40	5755	Ant1	37.514
NVNT	ax40	5795	Ant1	37.526
NVNT	ax40	5755	Ant2	37.514
NVNT	ax40	5795	Ant2	37.55
NVNT	ax80	5775	Ant1	77.128
NVNT	ax80	5775	Ant2	77.116


Test Graphs


OBW NVNT a 5745MHz Ant1

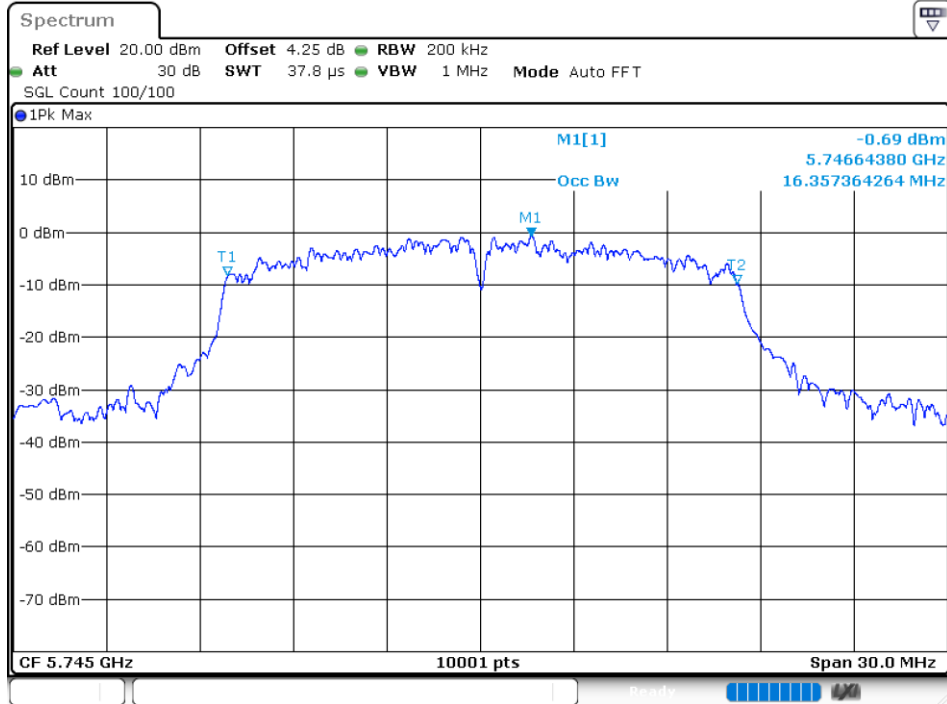



OBW NVNT a 5785MHz Ant1

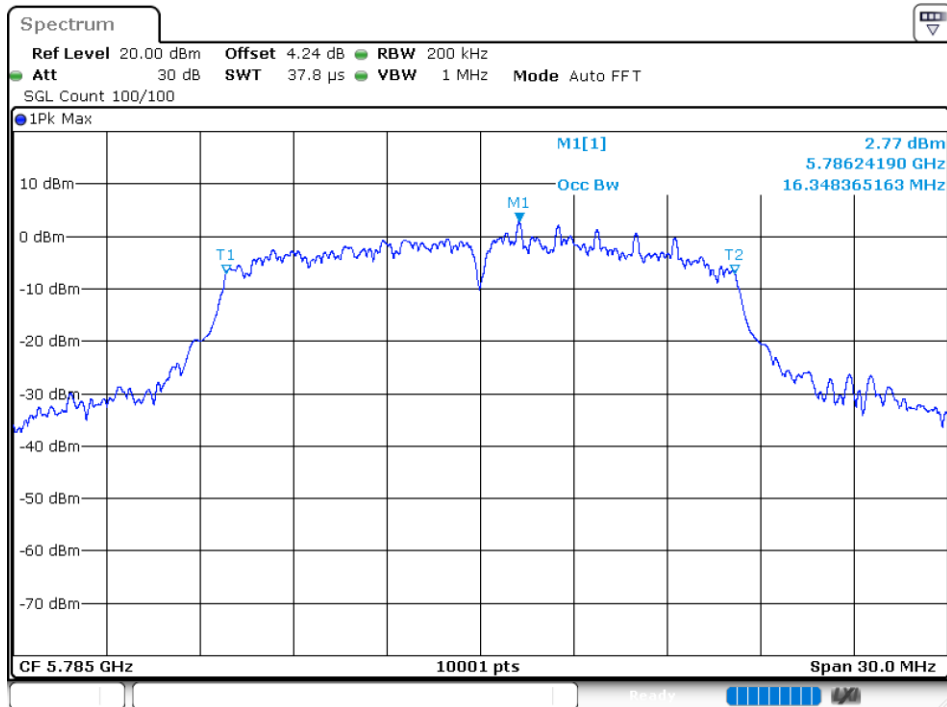


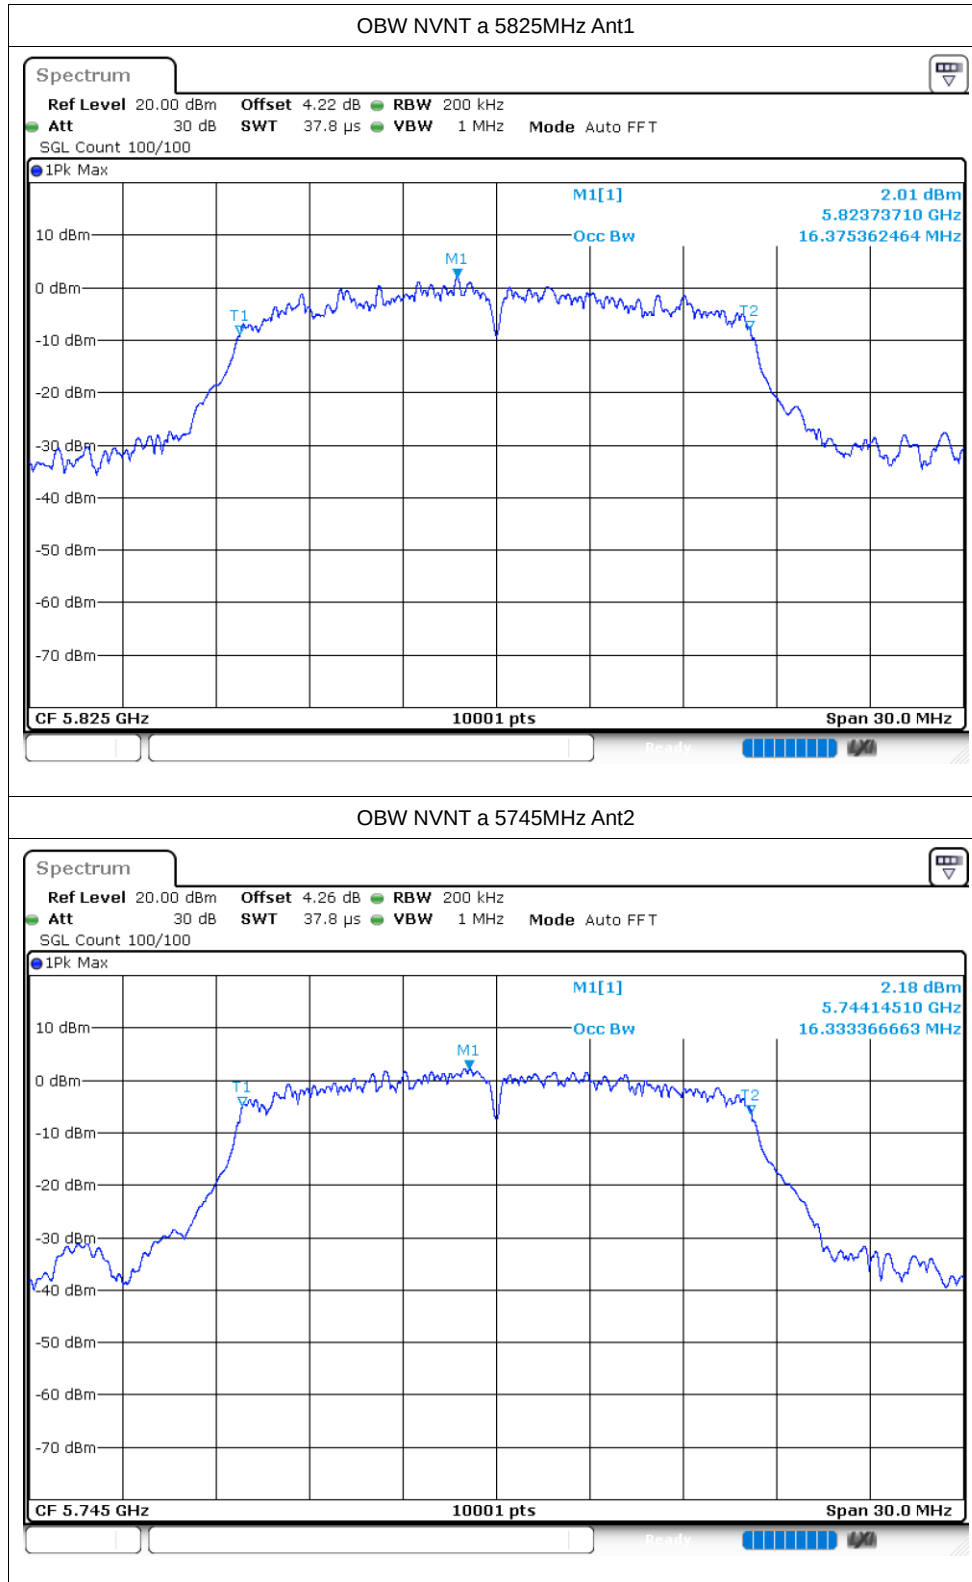


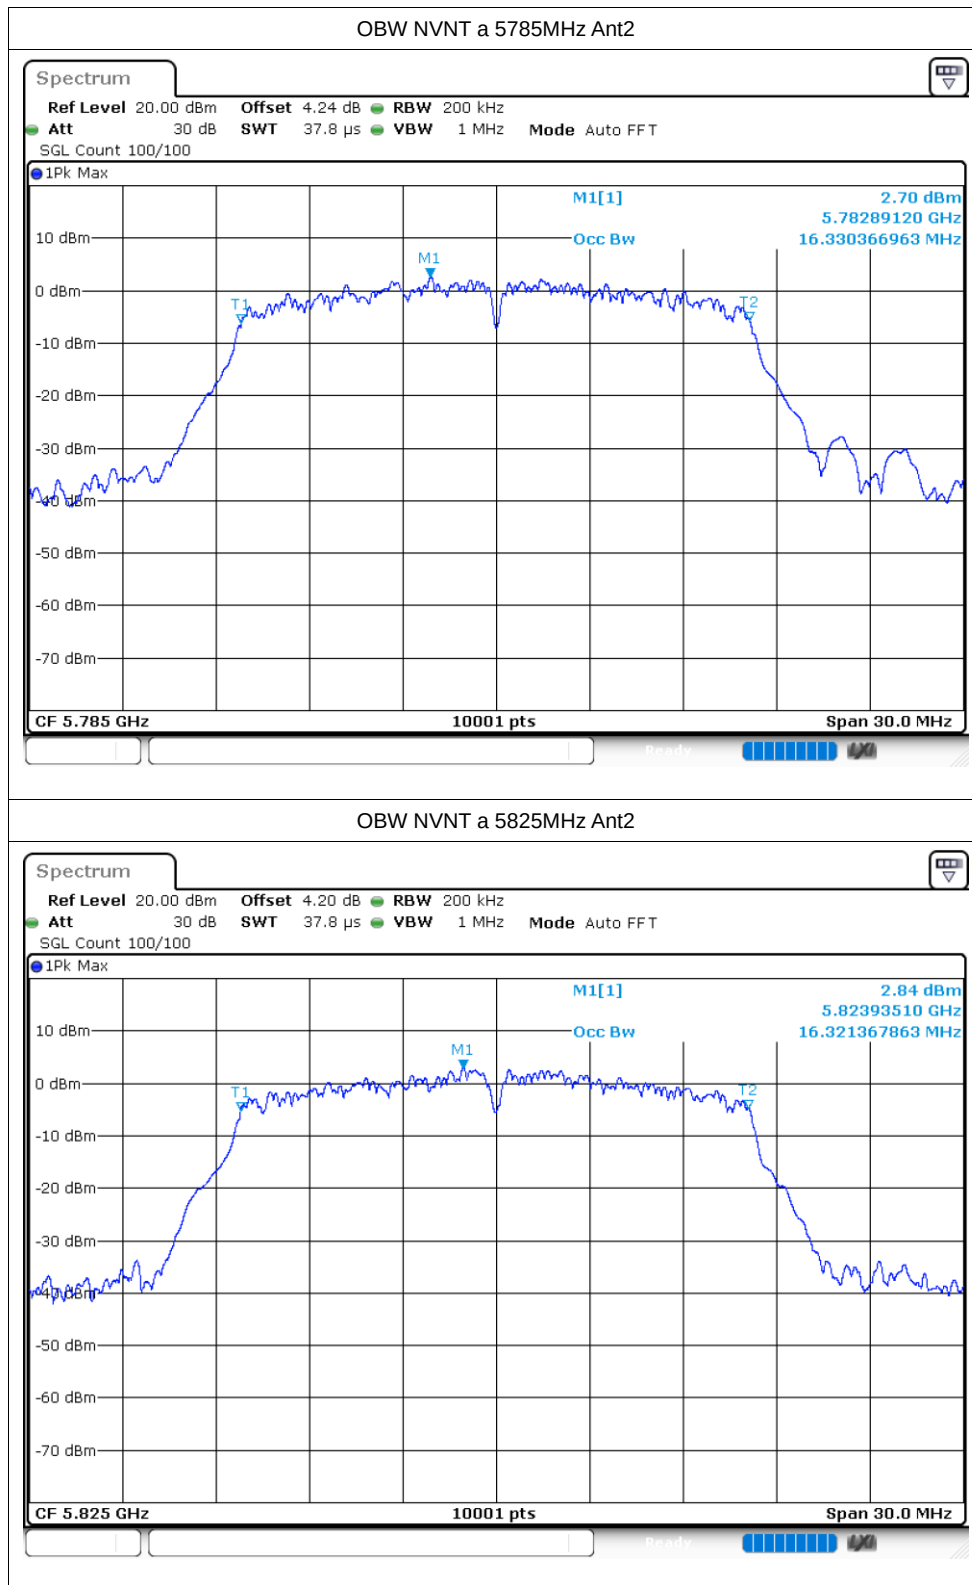


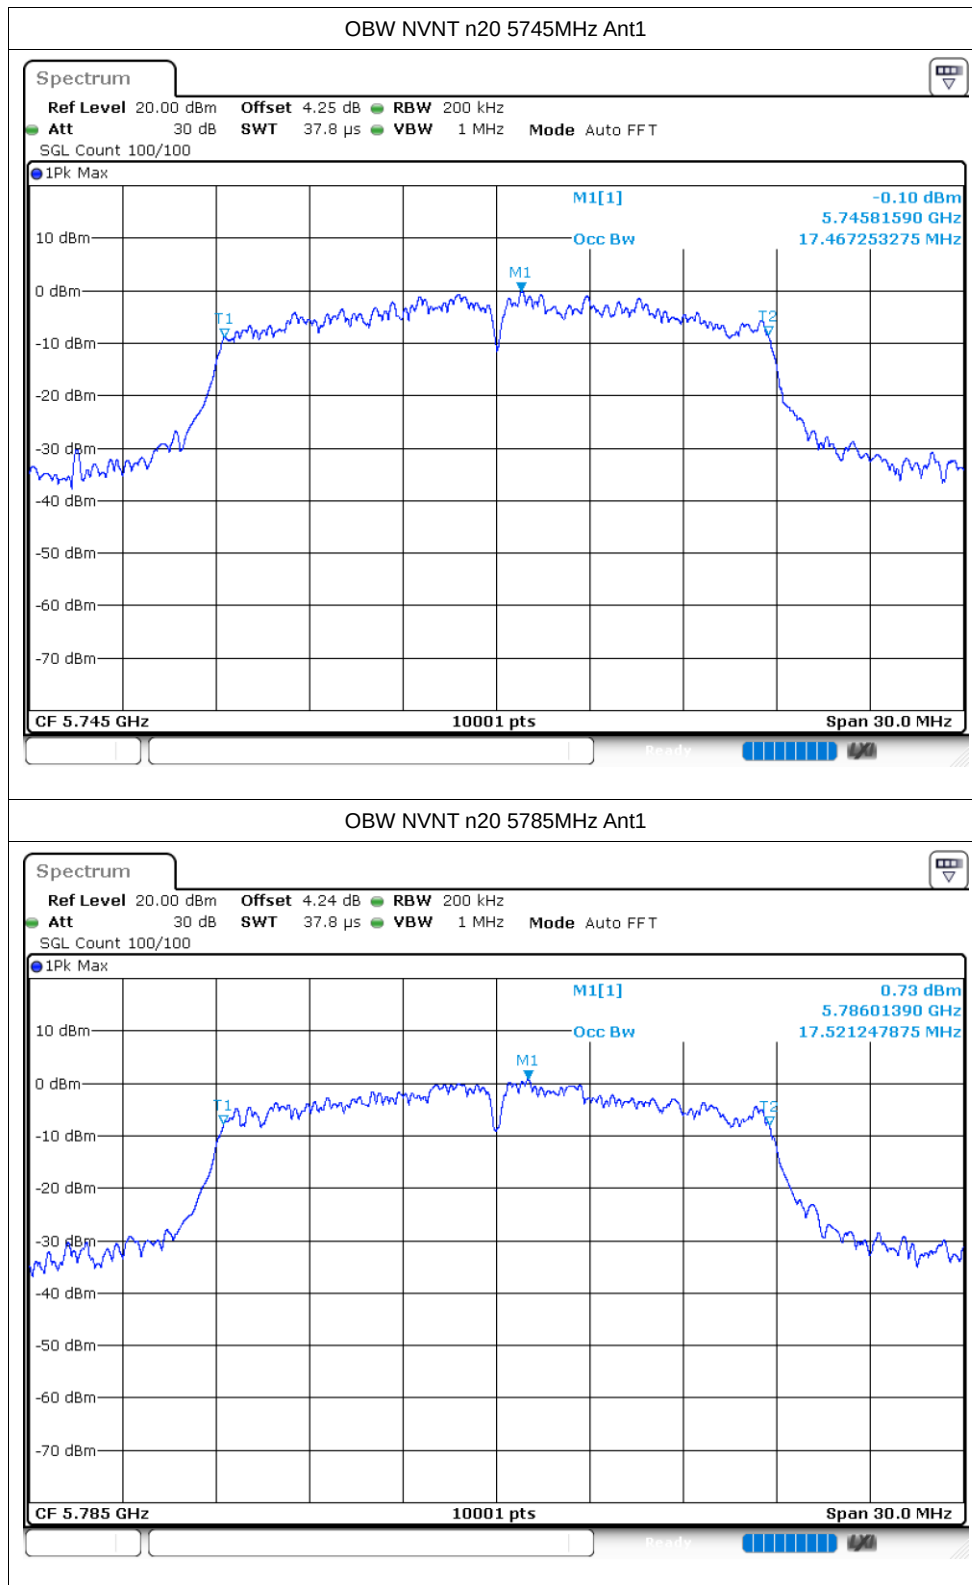


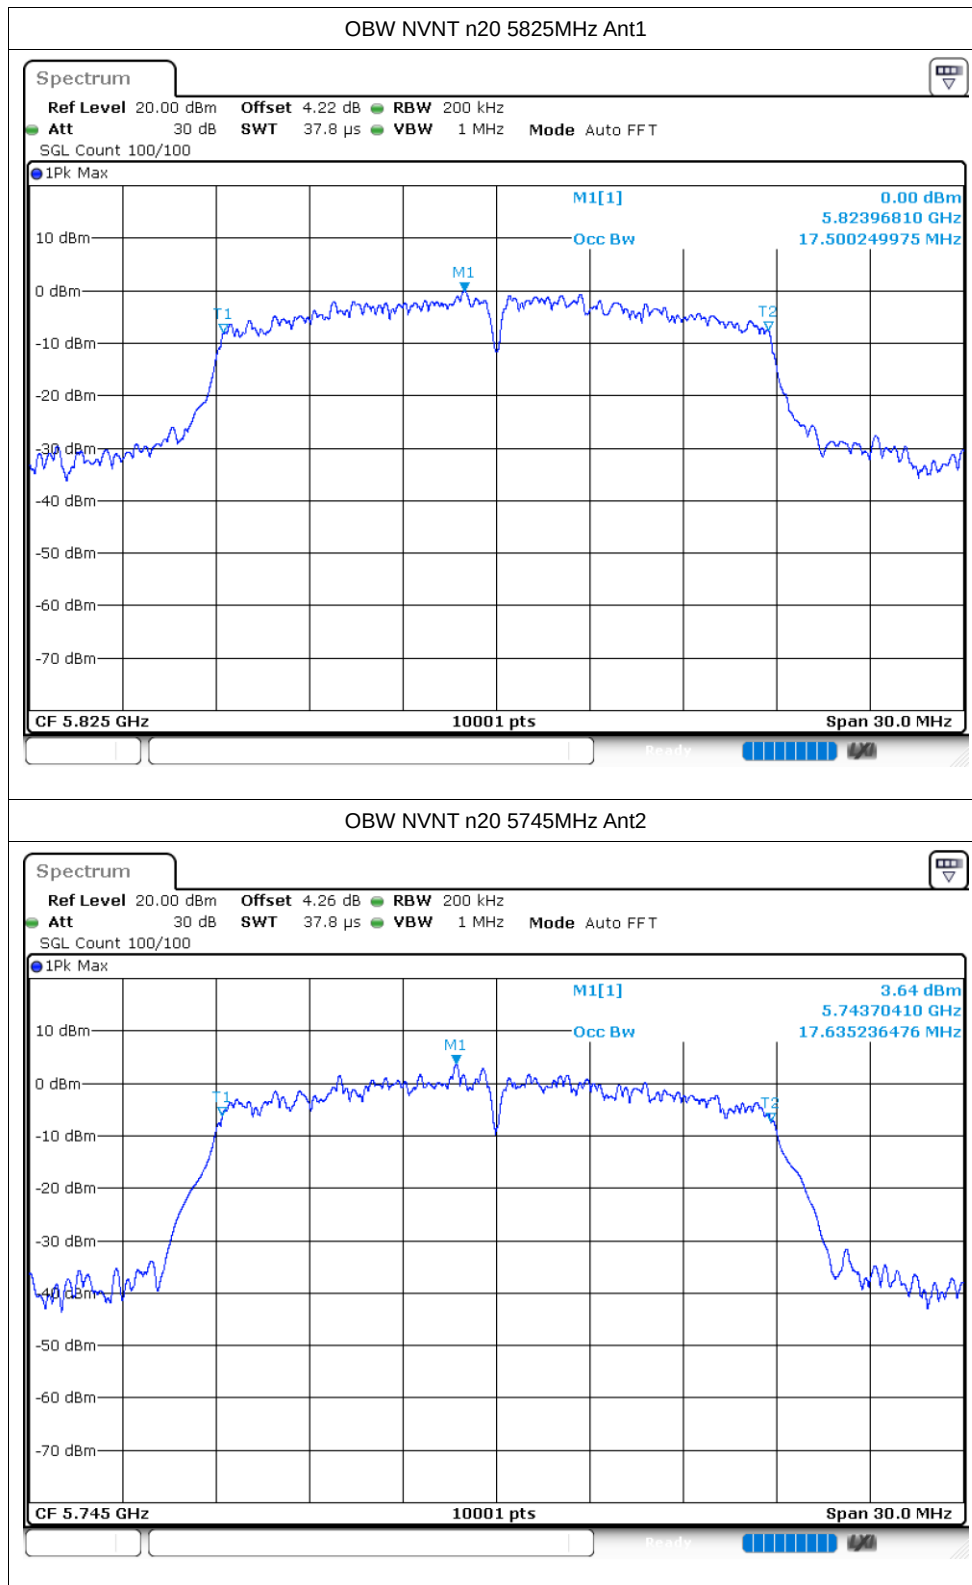


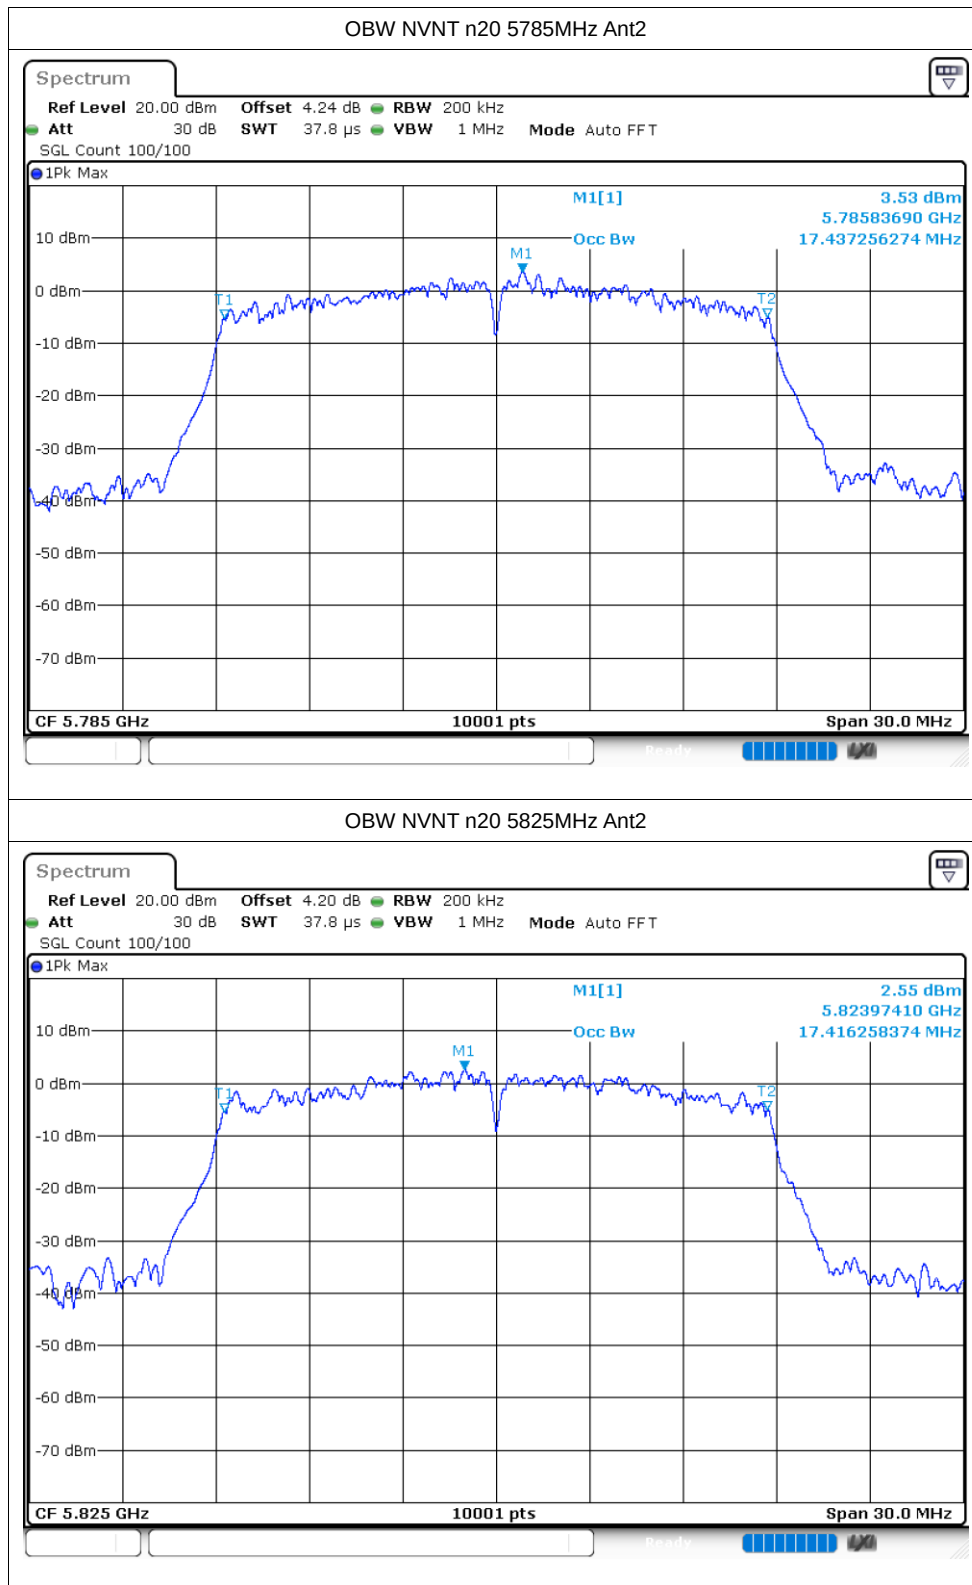


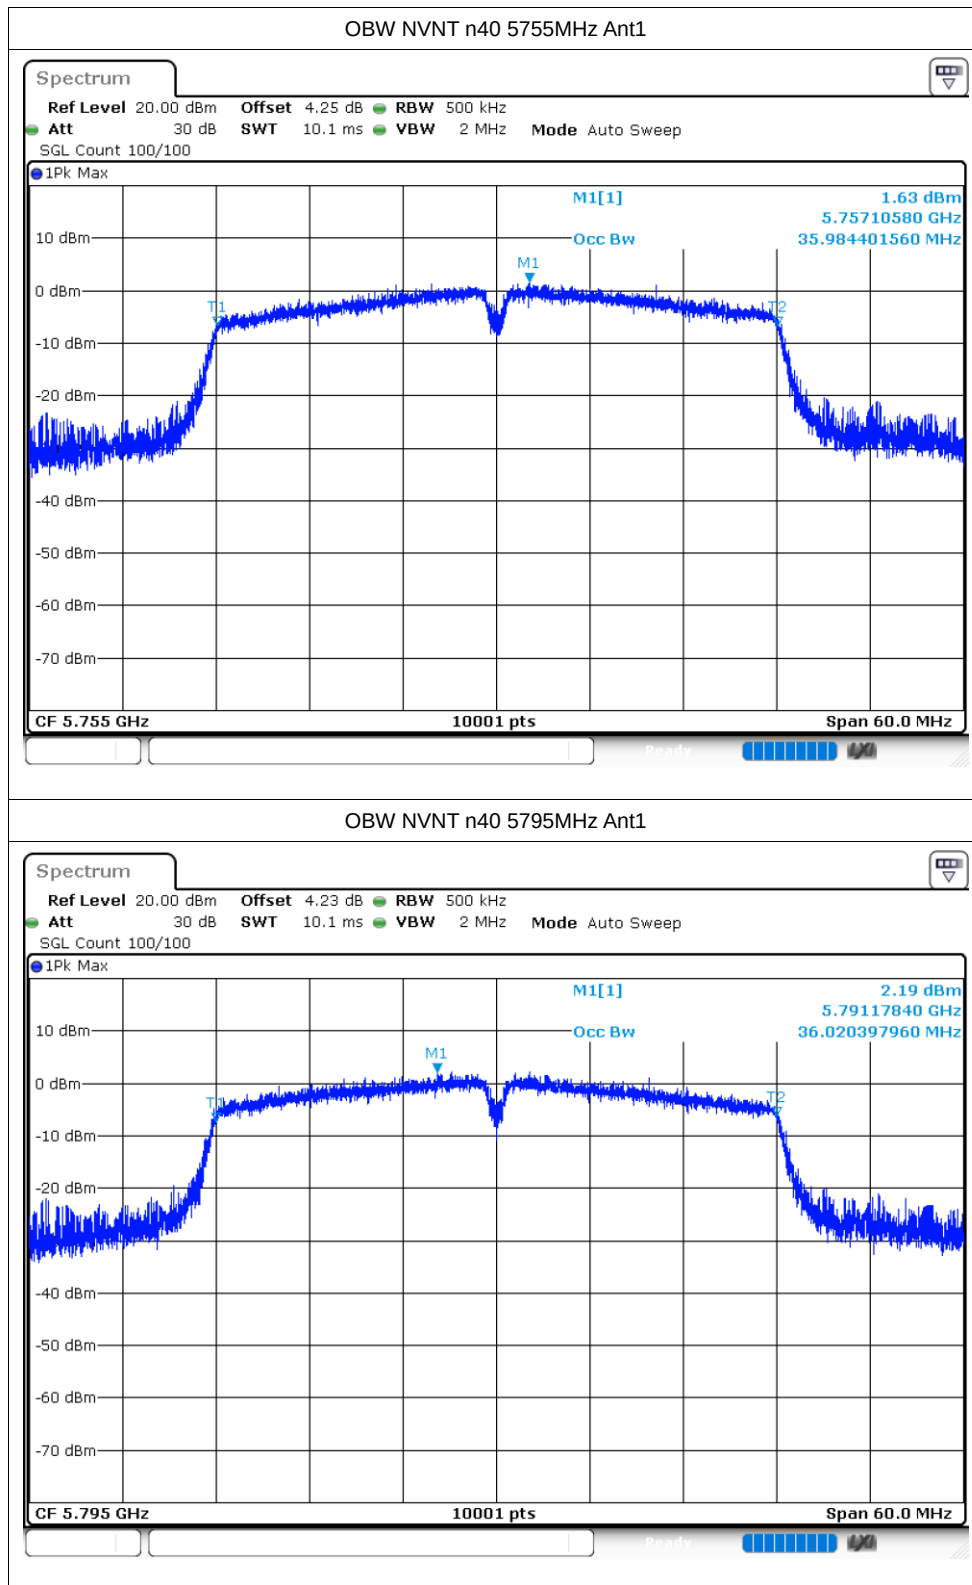


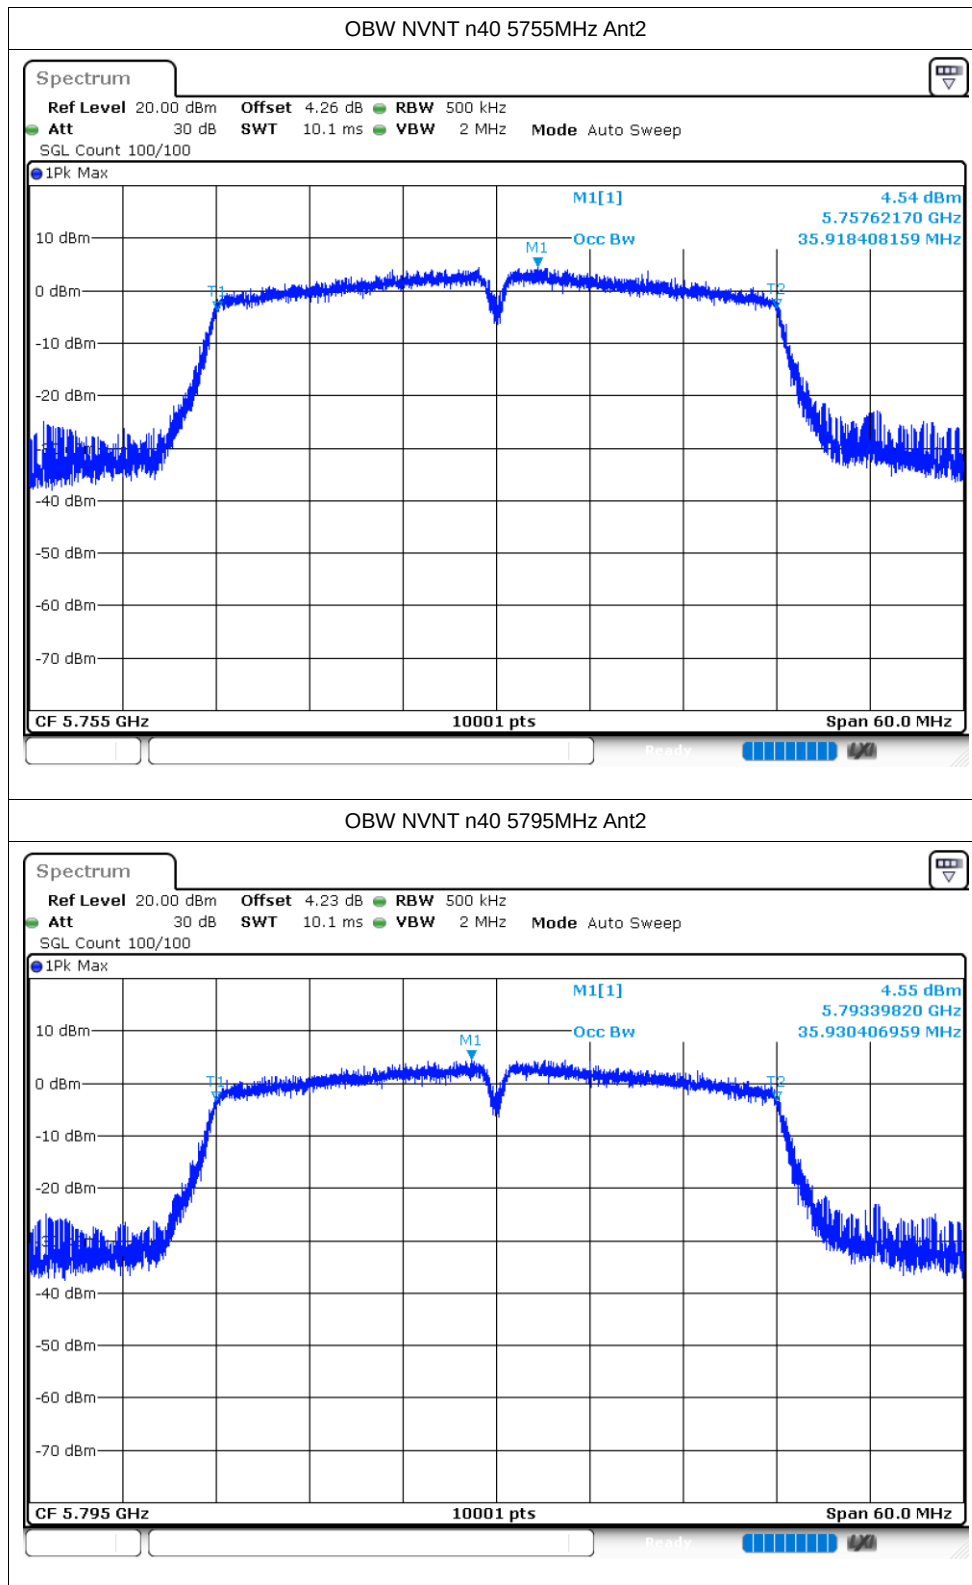


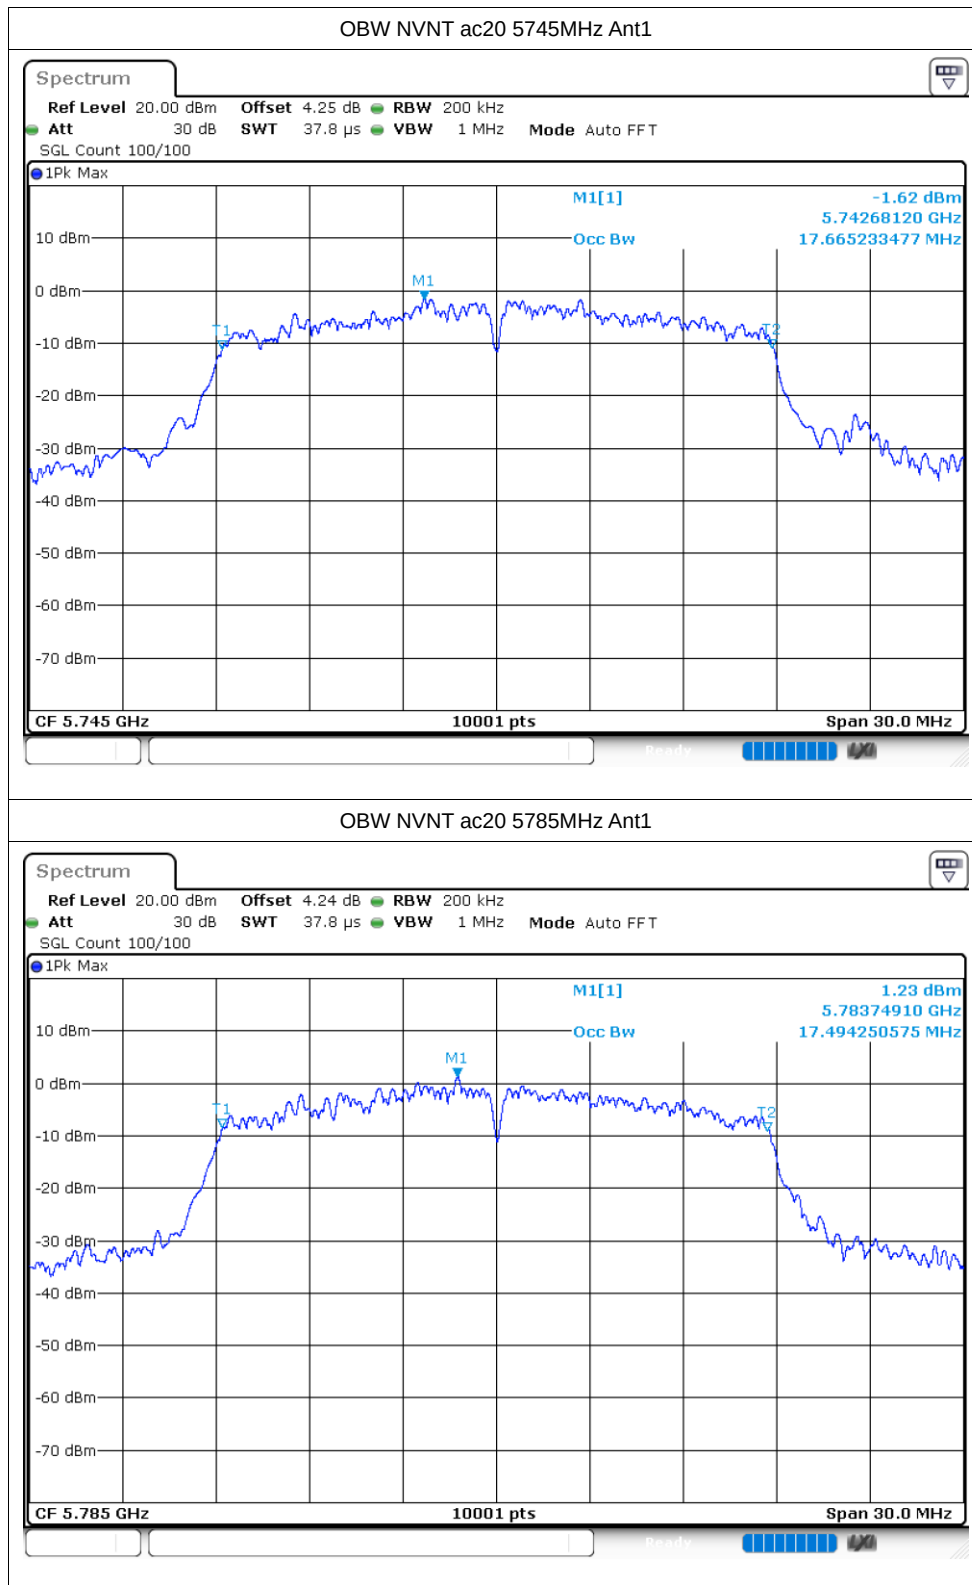


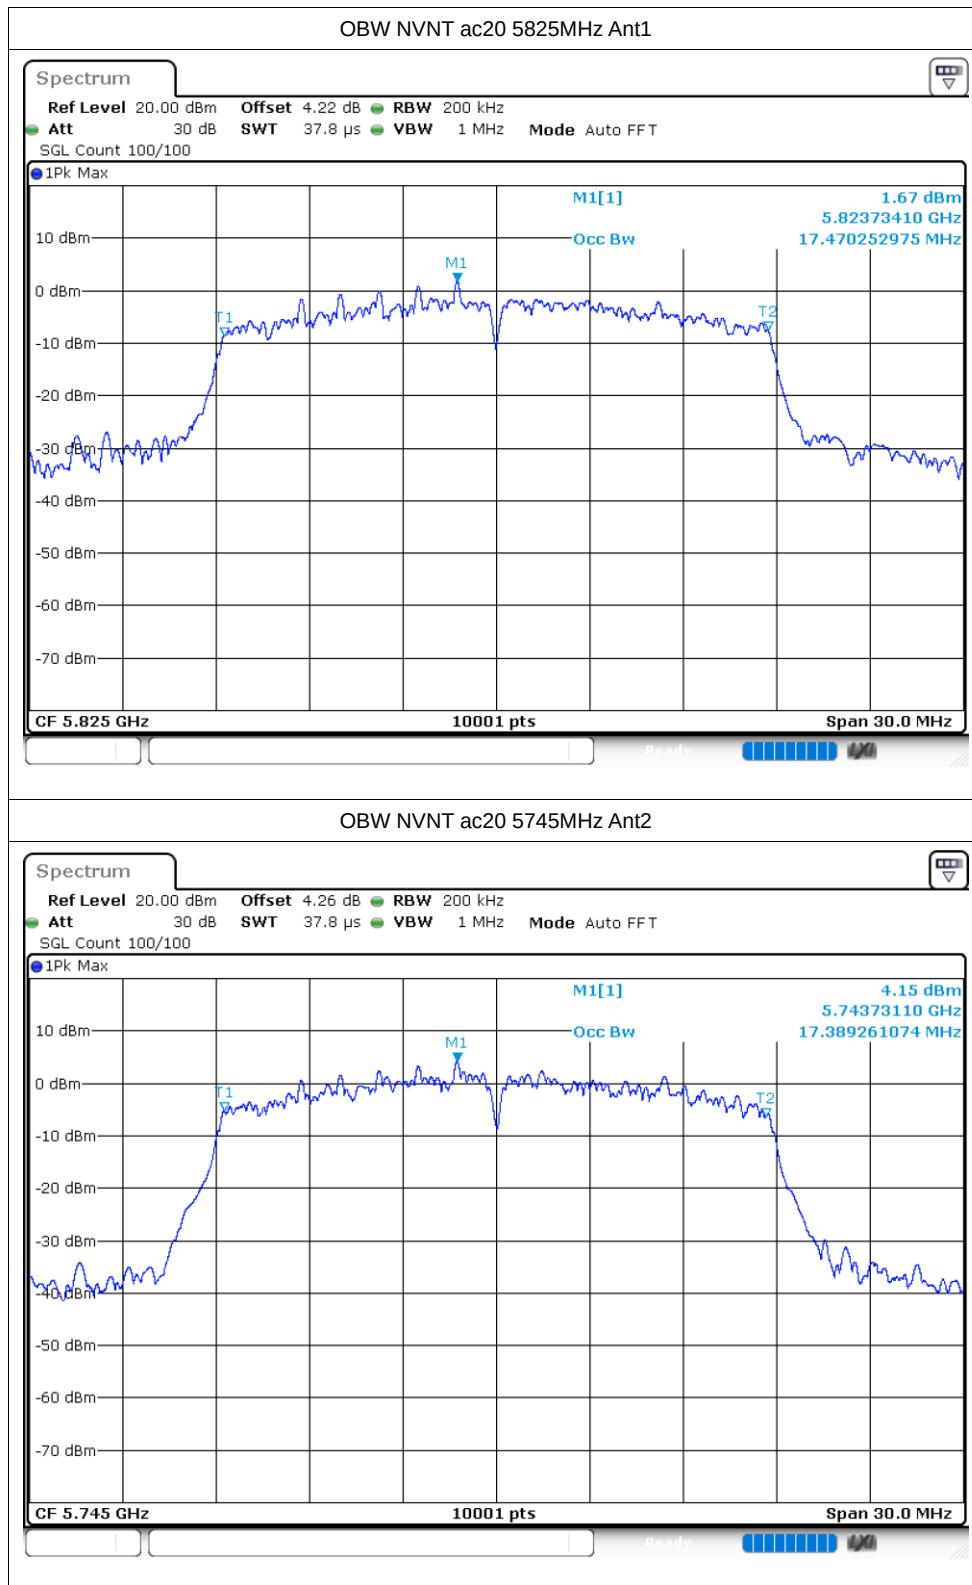


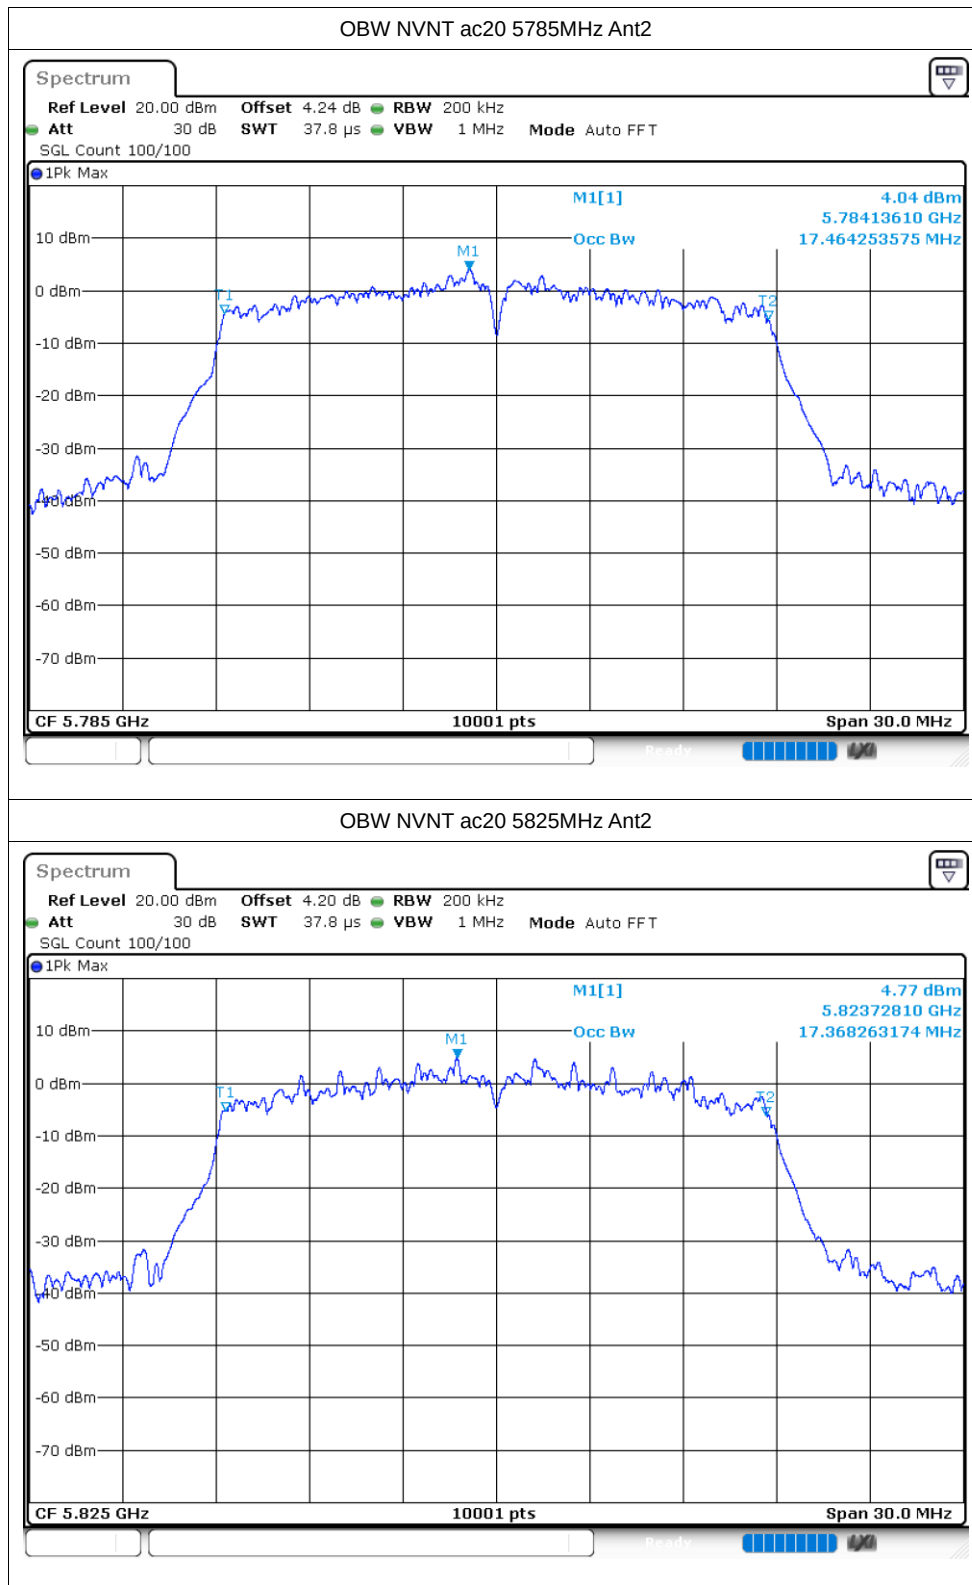


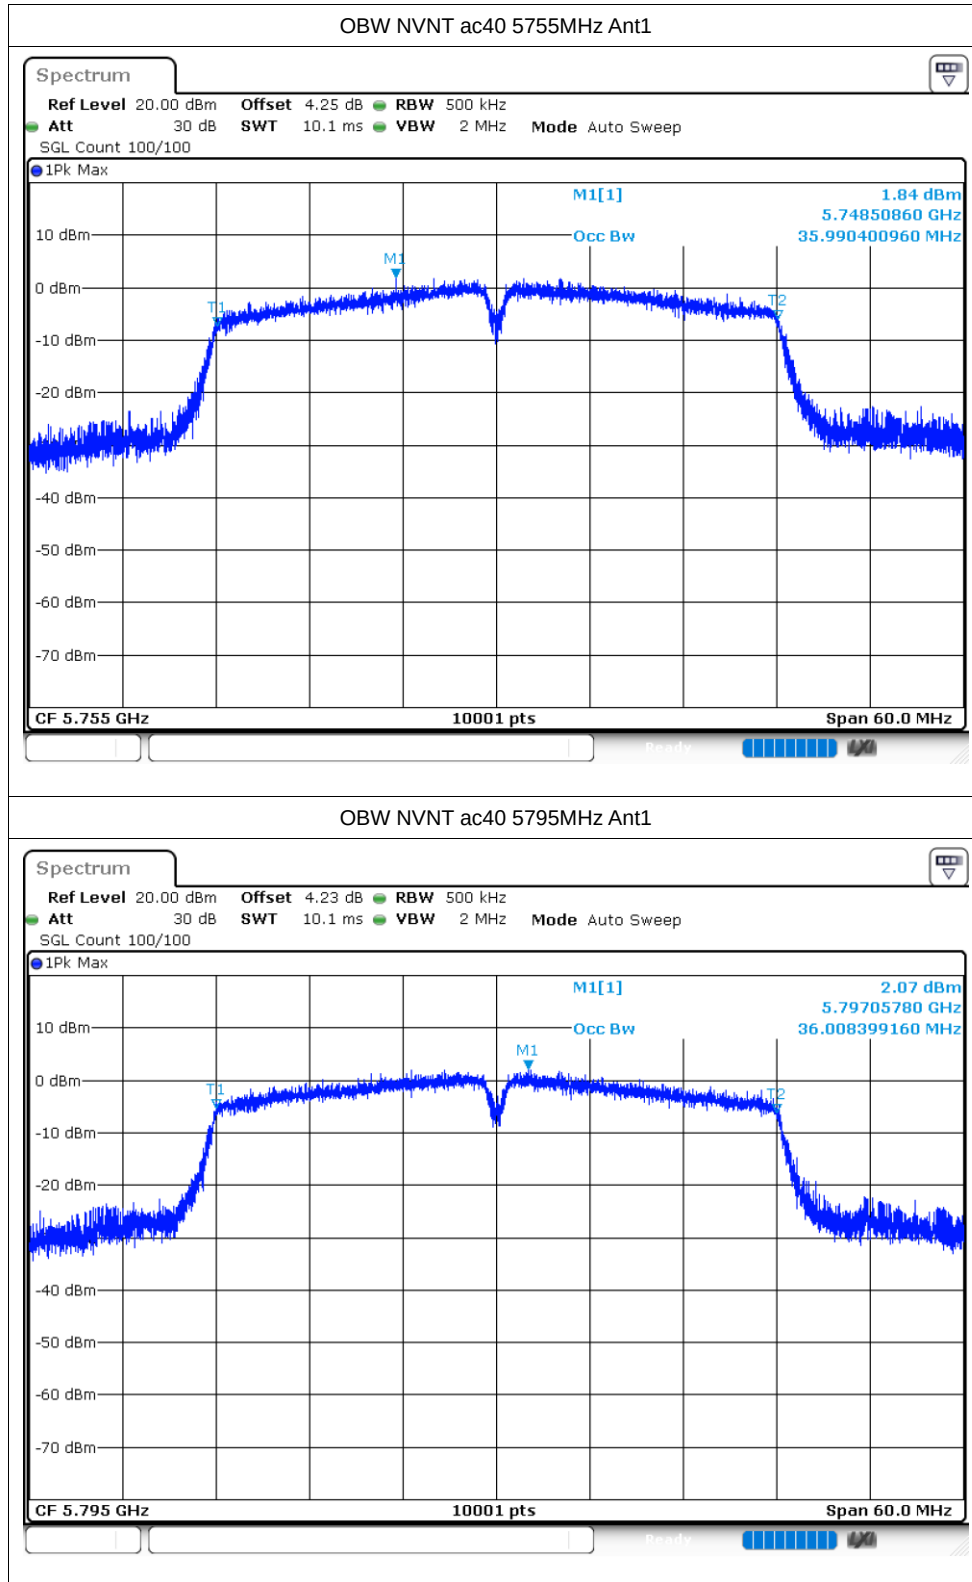


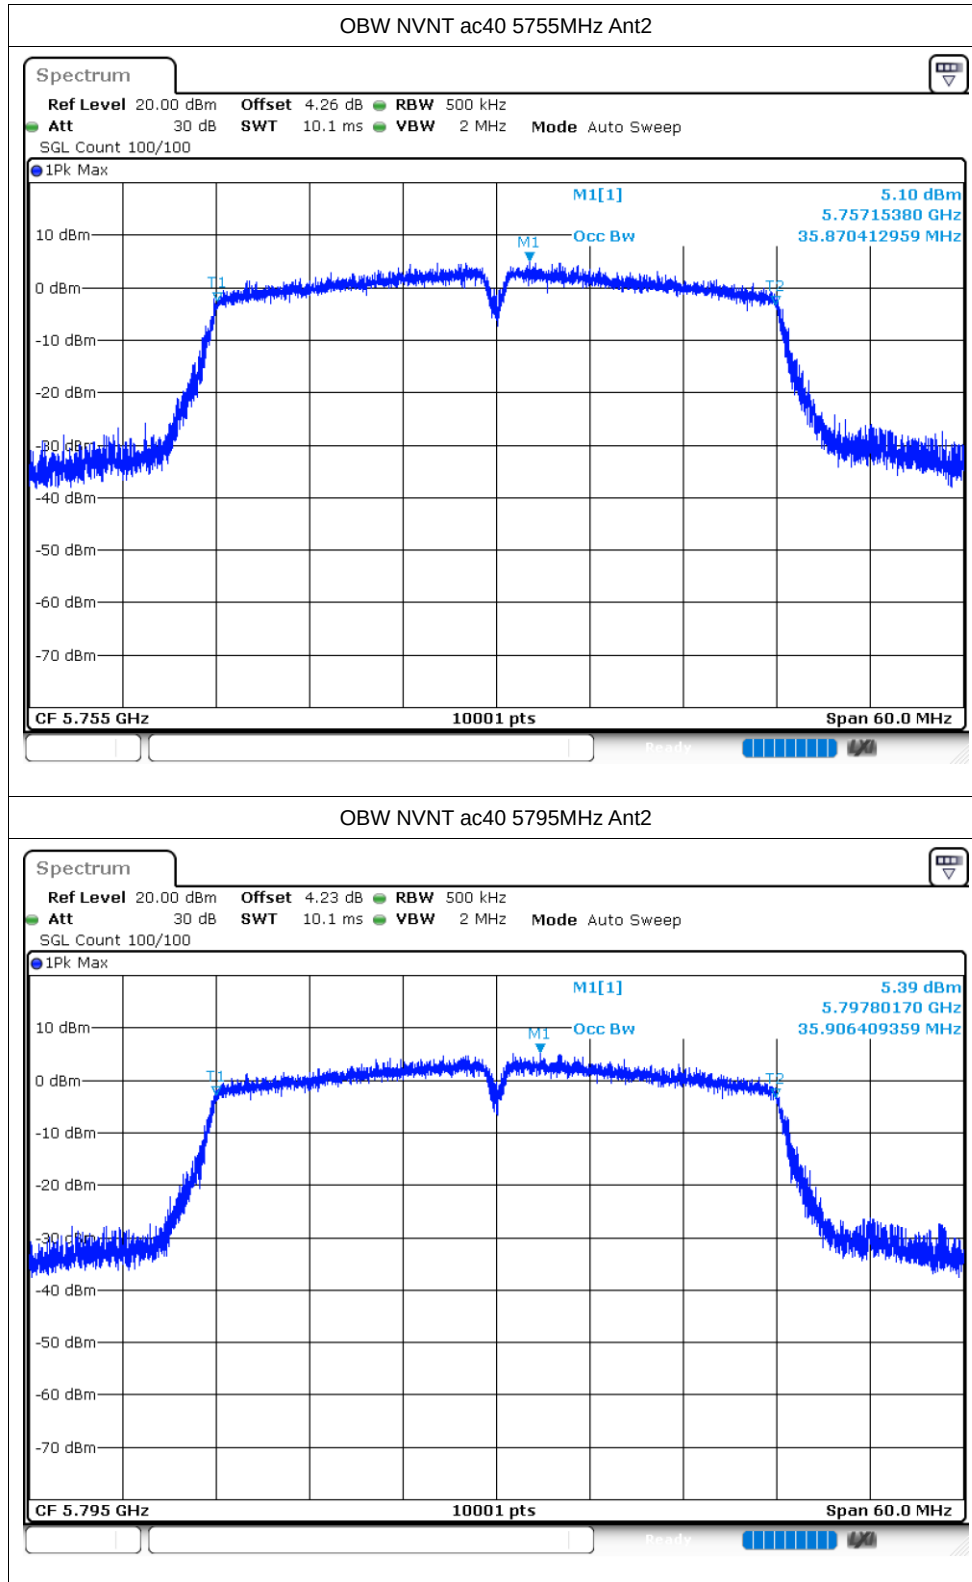


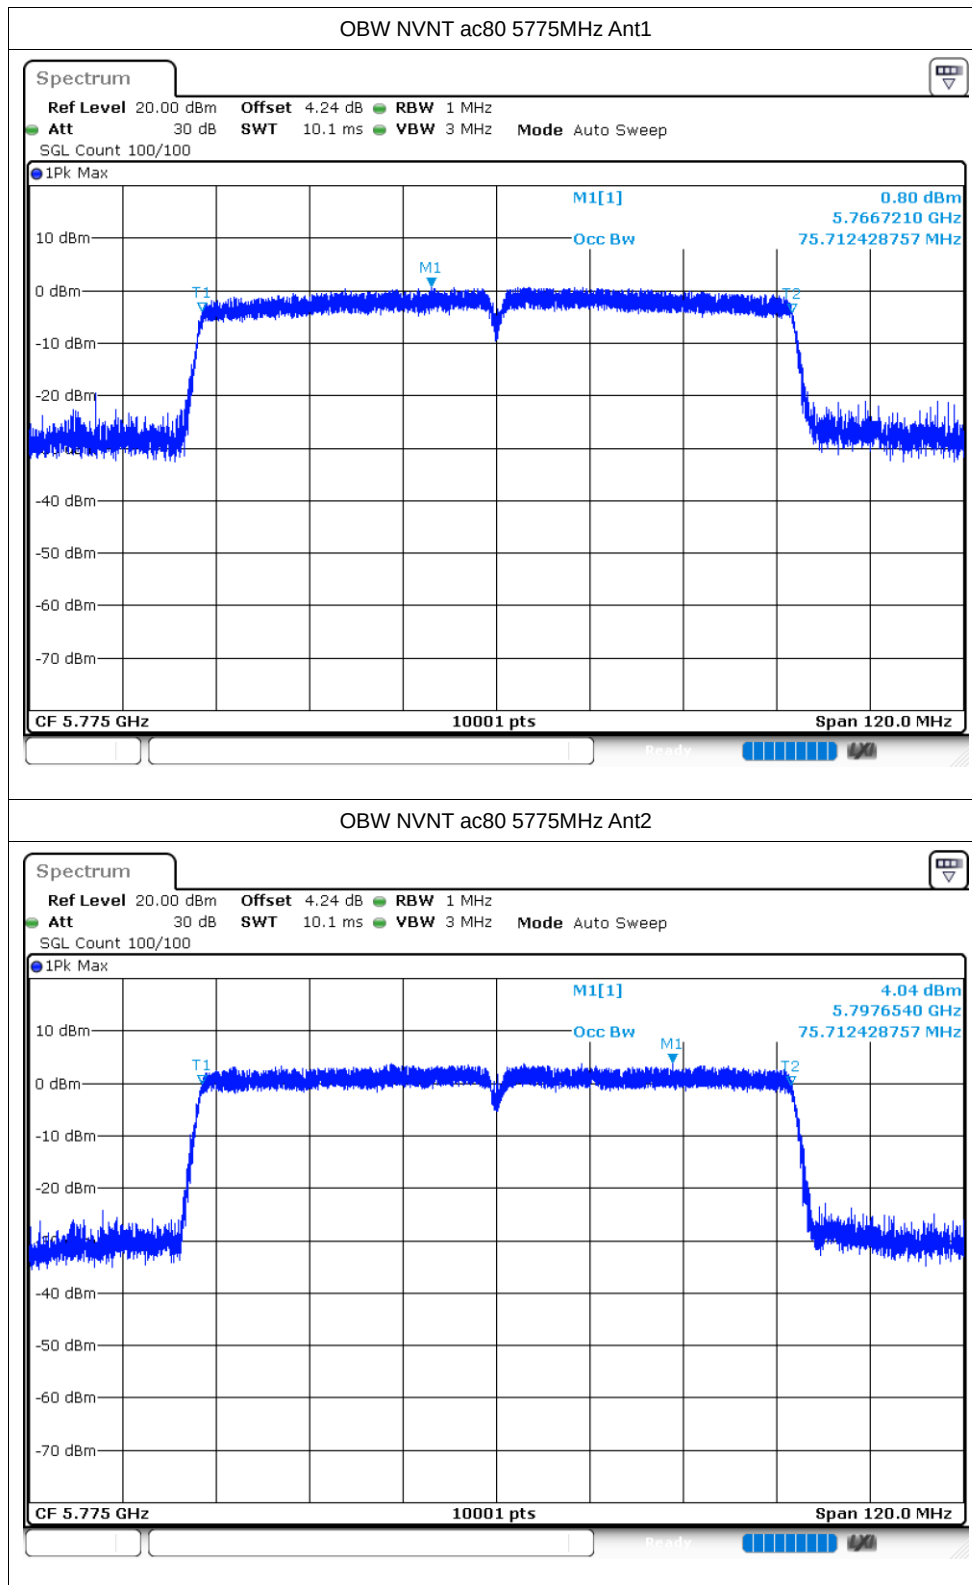


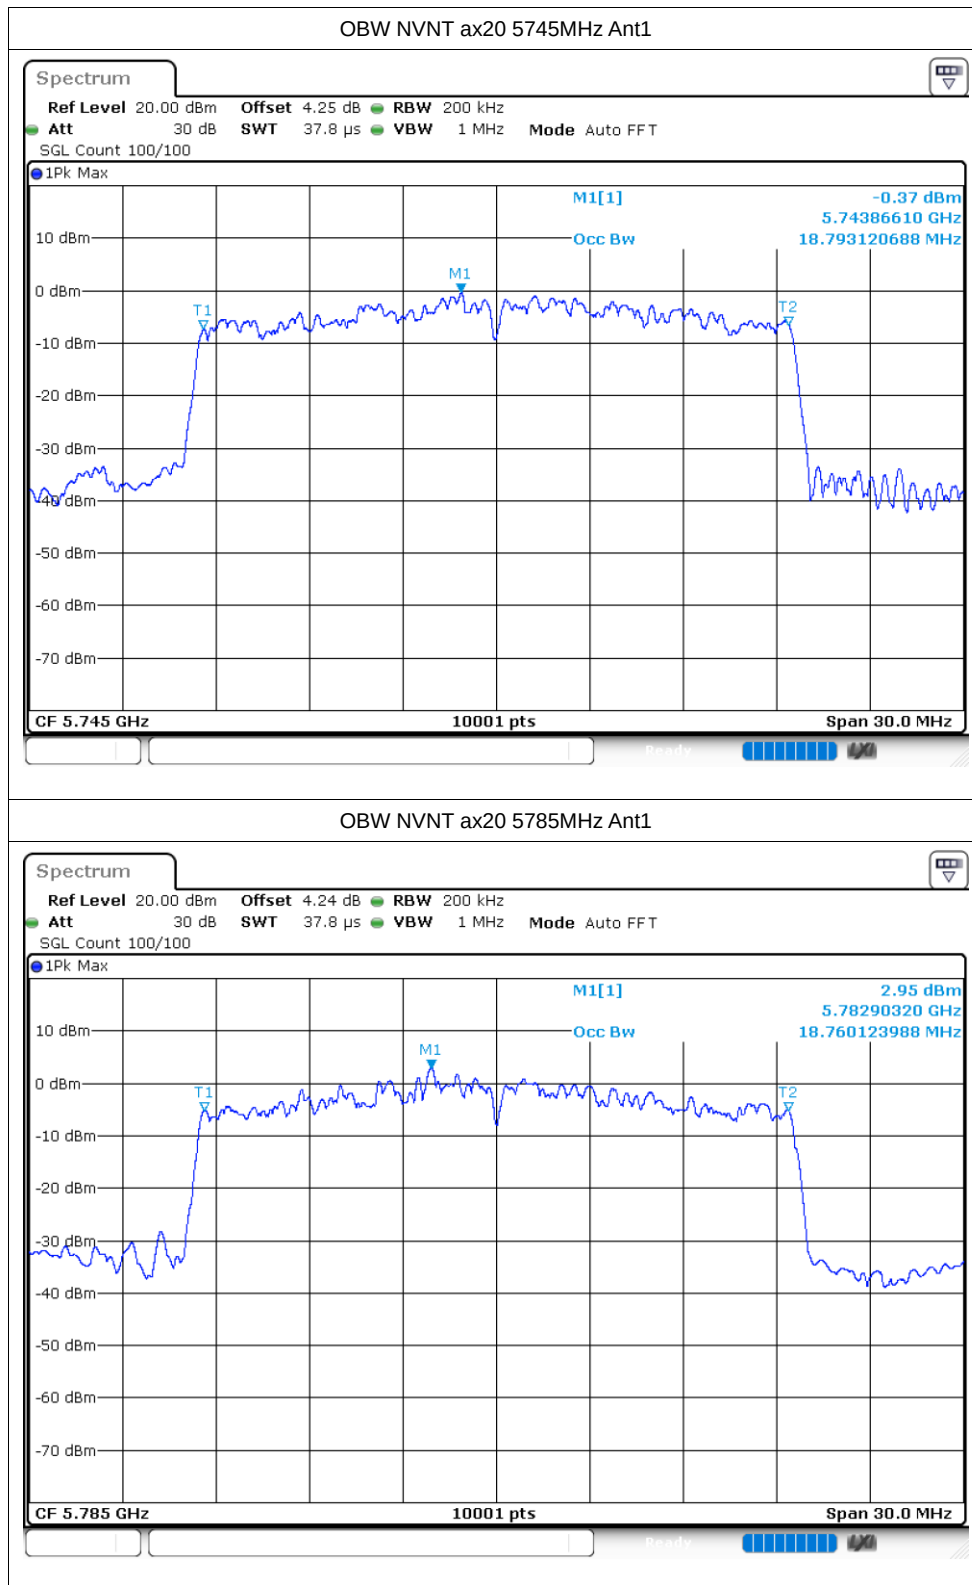


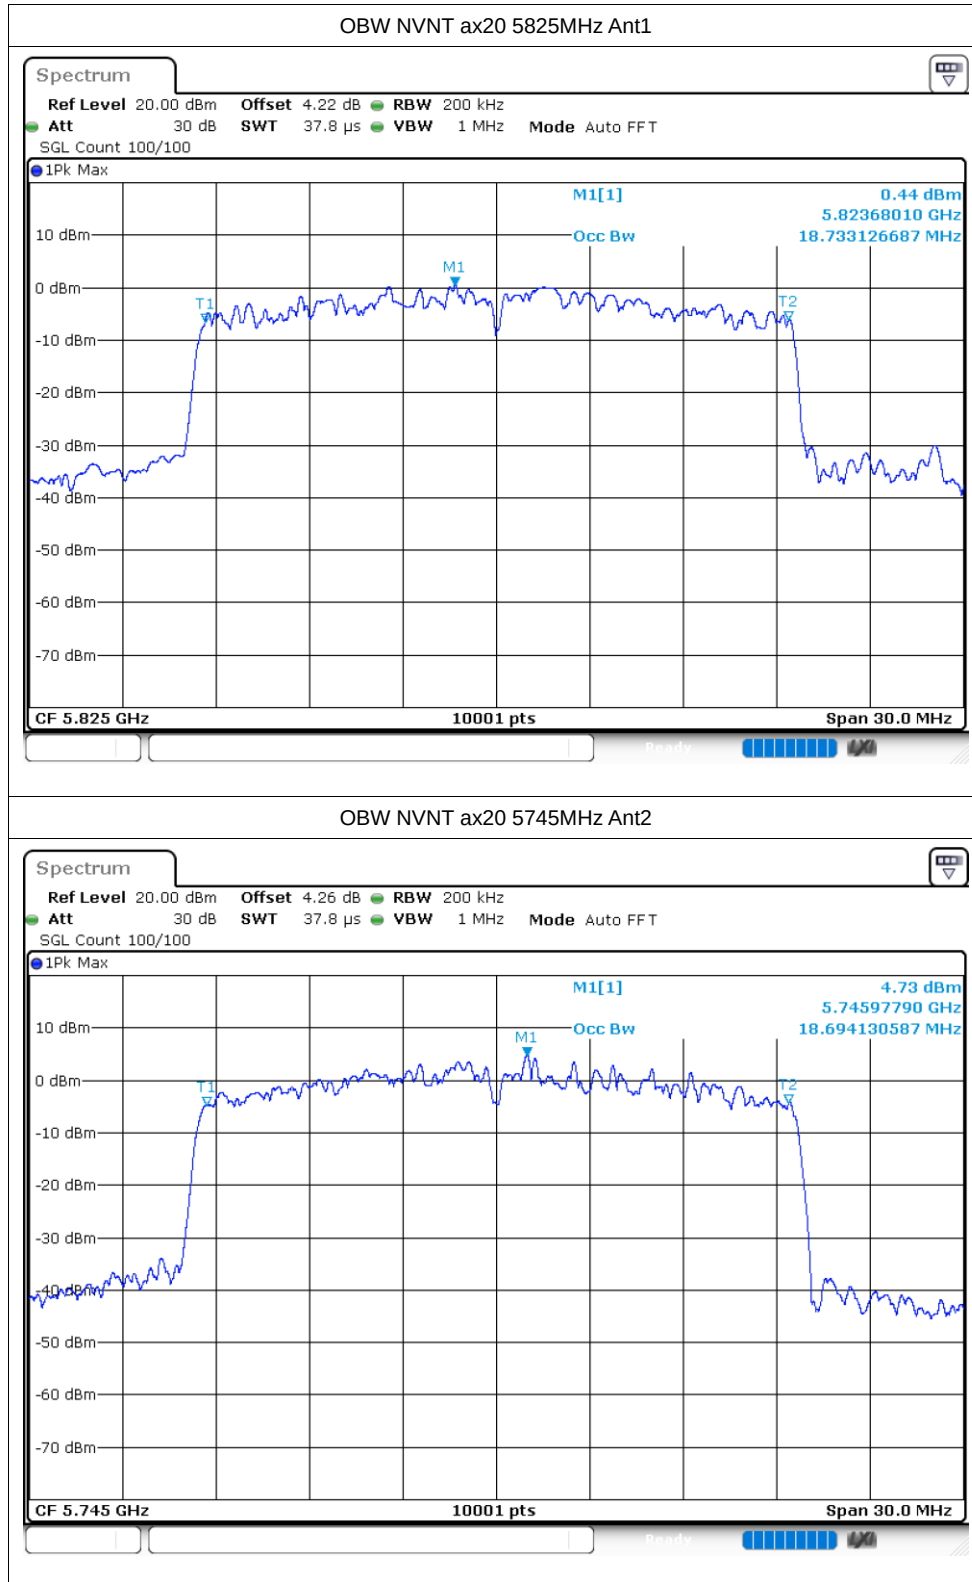

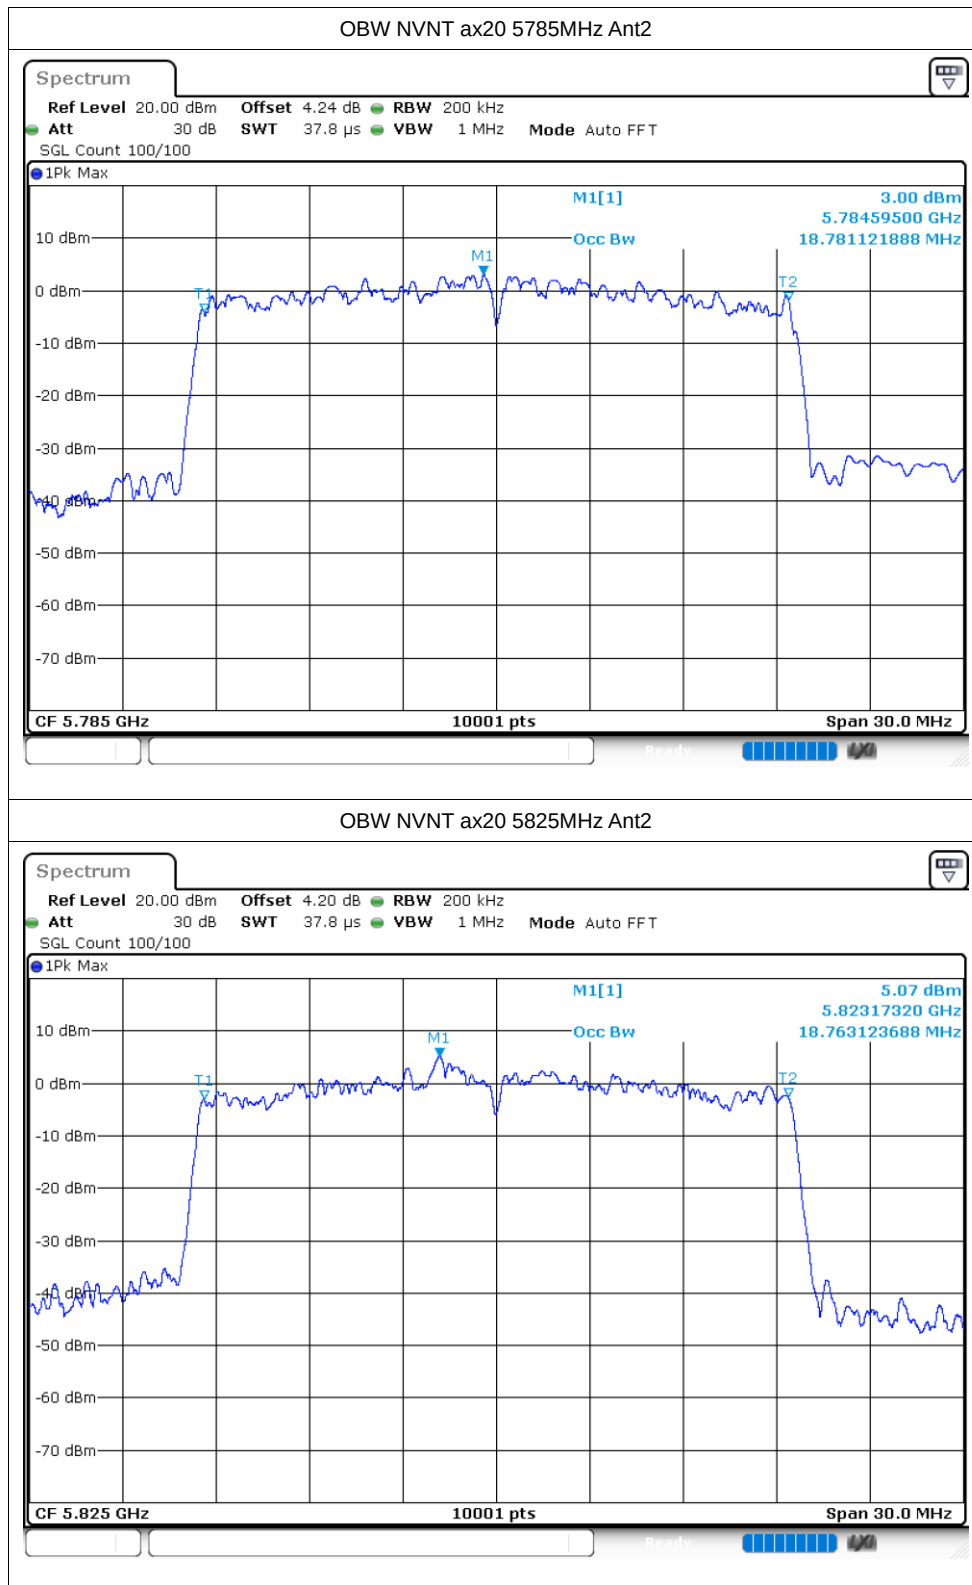

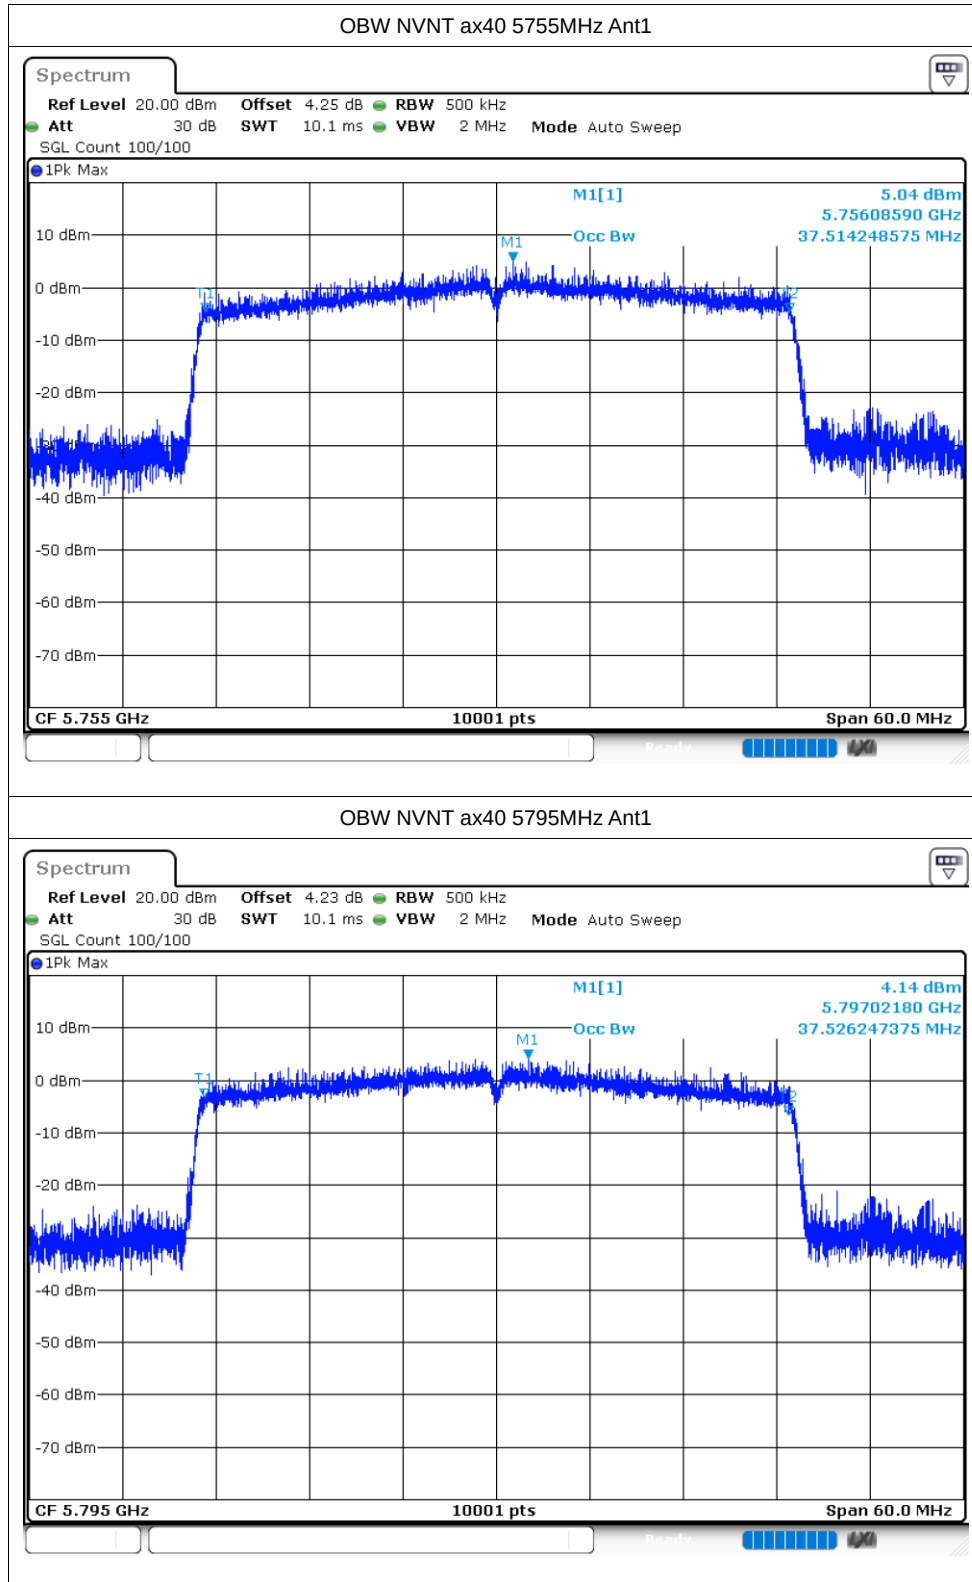

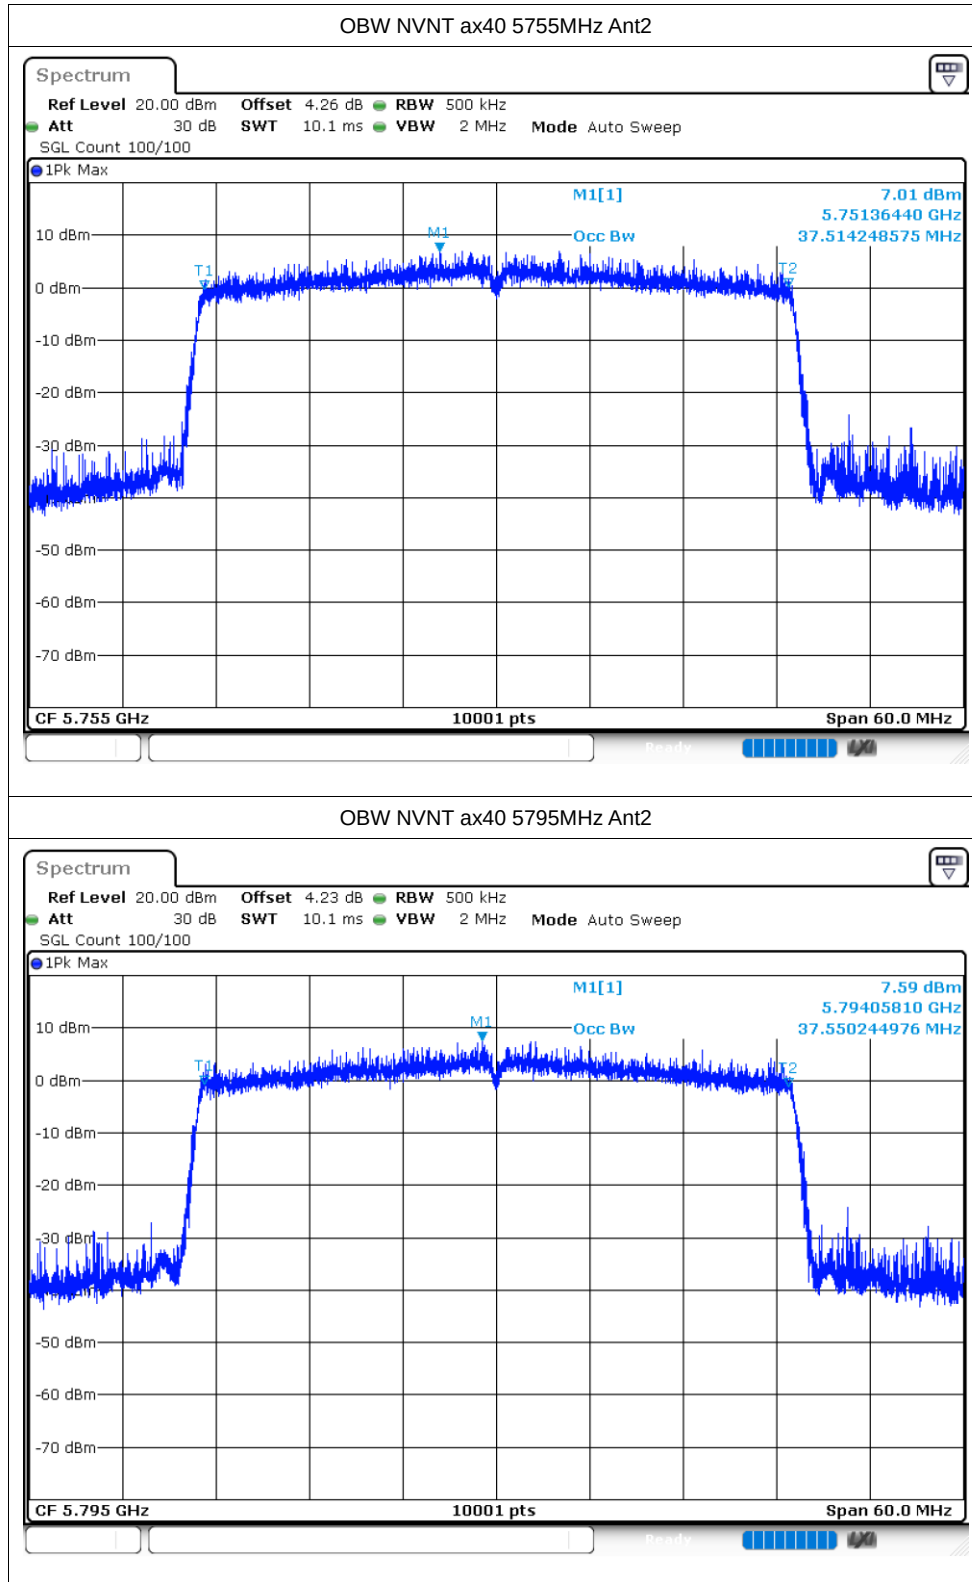

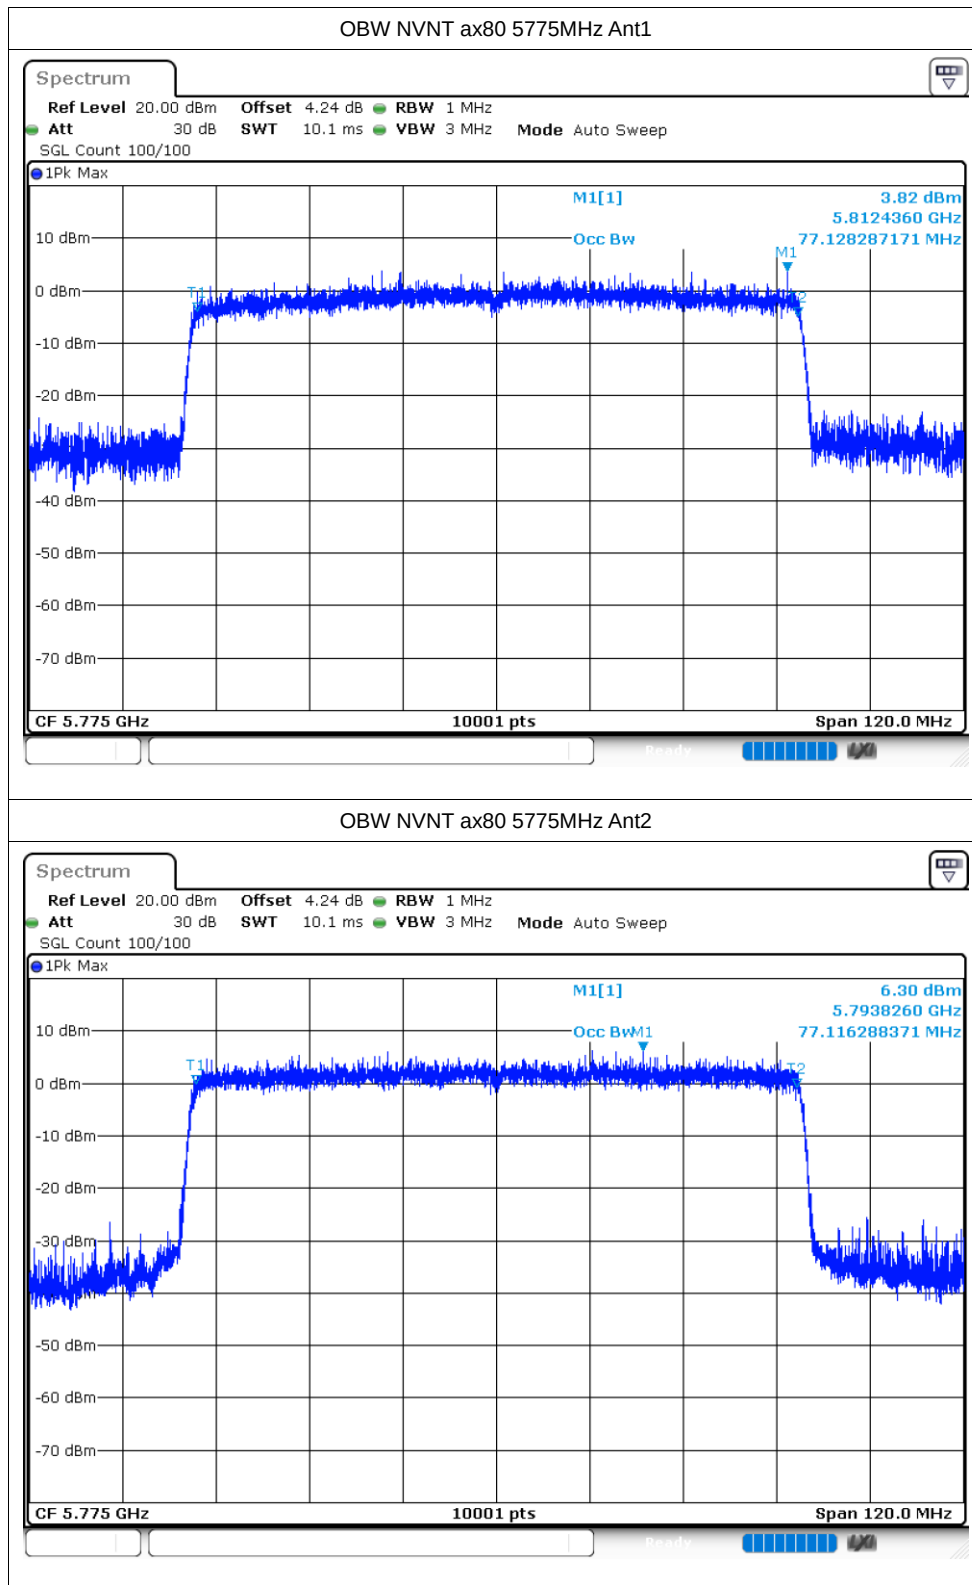


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-24.06	2.41	-21.65	30	Pass
NVNT	a	5785	Ant1	-23	2.43	-20.57	30	Pass
NVNT	a	5825	Ant1	-23.45	0.93	-22.52	30	Pass
NVNT	a	5745	Ant2	-23.73	2.42	-21.31	30	Pass
NVNT	a	5785	Ant2	-23.7	2.66	-21.04	30	Pass
NVNT	a	5825	Ant2	-22.89	2.62	-20.27	30	Pass
NVNT	n20	5745	Ant1	-26.86	2.74	-24.12	30	Pass
NVNT	n20	5785	Ant1	-25.66	2.6	-23.06	30	Pass
NVNT	n20	5825	Ant1	-25.81	0.95	-24.86	30	Pass
NVNT	n20	5745	Ant2	-25.28	2.73	-22.55	30	Pass
NVNT	n20	5785	Ant2	-23.49	2.78	-20.71	30	Pass
NVNT	n20	5825	Ant2	-21.7	2.78	-18.92	30	Pass
NVNT	n40	5755	Ant1	-32.56	1.96	-30.6	30	Pass
NVNT	n40	5795	Ant1	-34.07	1.49	-32.58	30	Pass
NVNT	n40	5755	Ant2	-34.08	4.44	-29.64	30	Pass
NVNT	n40	5795	Ant2	-31.99	4.48	-27.51	30	Pass
NVNT	ac20	5745	Ant1	-24.88	2.78	-22.1	30	Pass
NVNT	ac20	5785	Ant1	-25.54	2.71	-22.83	30	Pass
NVNT	ac20	5825	Ant1	-24.29	0	-24.29	30	Pass
NVNT	ac20	5745	Ant2	-24.95	2.61	-22.34	30	Pass
NVNT	ac20	5785	Ant2	-22.9	2.7	-20.2	30	Pass
NVNT	ac20	5825	Ant2	-24.43	2.77	-21.66	30	Pass
NVNT	ac40	5755	Ant1	-33.1	4.39	-28.71	30	Pass
NVNT	ac40	5795	Ant1	-32.18	4.39	-27.79	30	Pass
NVNT	ac40	5755	Ant2	-33.37	4.4	-28.97	30	Pass
NVNT	ac40	5795	Ant2	-34.78	4.39	-30.39	30	Pass
NVNT	ac80	5775	Ant1	-43.07	6.5	-36.57	30	Pass
NVNT	ac80	5775	Ant2	-40.37	6.5	-33.87	30	Pass
NVNT	ax20	5745	Ant1	-29.48	3.09	-26.39	30	Pass
NVNT	ax20	5785	Ant1	-28.44	3.28	-25.16	30	Pass
NVNT	ax20	5825	Ant1	-29.23	3.27	-25.96	30	Pass
NVNT	ax20	5745	Ant2	-27.11	3.15	-23.96	30	Pass
NVNT	ax20	5785	Ant2	-26.79	3.29	-23.5	30	Pass
NVNT	ax20	5825	Ant2	-26.94	3.3	-23.64	30	Pass
NVNT	ax40	5755	Ant1	-36.17	4.72	-31.45	30	Pass
NVNT	ax40	5795	Ant1	-34.2	5.02	-29.18	30	Pass
NVNT	ax40	5755	Ant2	-29.27	4.97	-24.3	30	Pass
NVNT	ax40	5795	Ant2	-33.19	4.9	-28.29	30	Pass
NVNT	ax80	5775	Ant1	-43.32	6.93	-36.39	30	Pass
NVNT	ax80	5775	Ant2	-43.6	6.95	-36.65	30	Pass

Test Graphs

PSD NVNT a 5745MHz Ant1

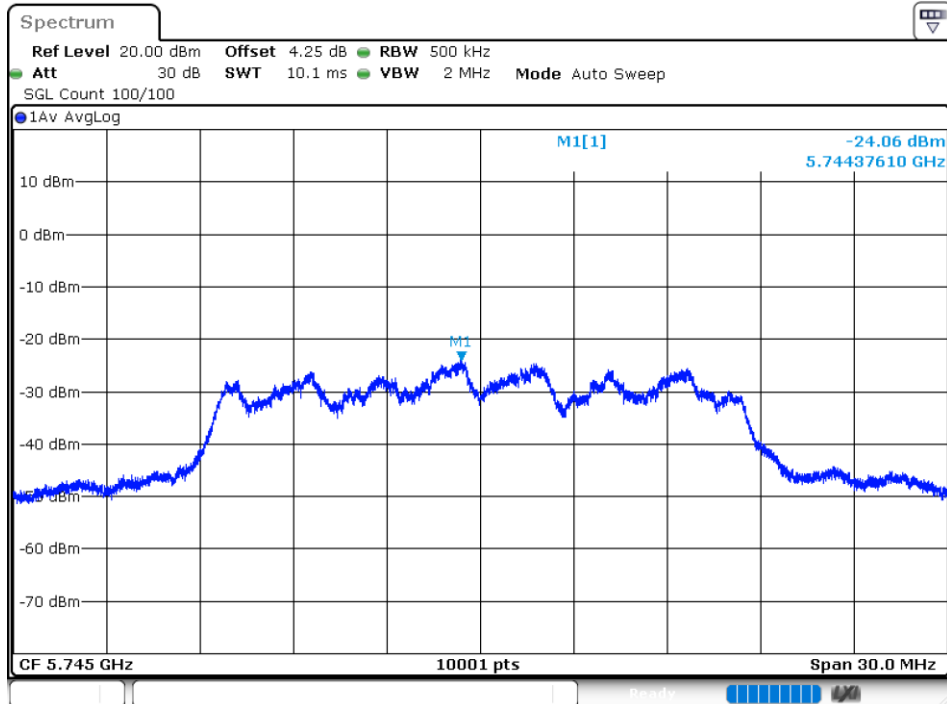

PSD NVNT a 5785MHz Ant1

