


RENOGY Core Series

Deep Cycle Lithium Iron Phosphate Battery
w/ Bluetooth Function

12.8V | 200Ah

RBT12200LFP-B

VERSION A0
February 24, 2025

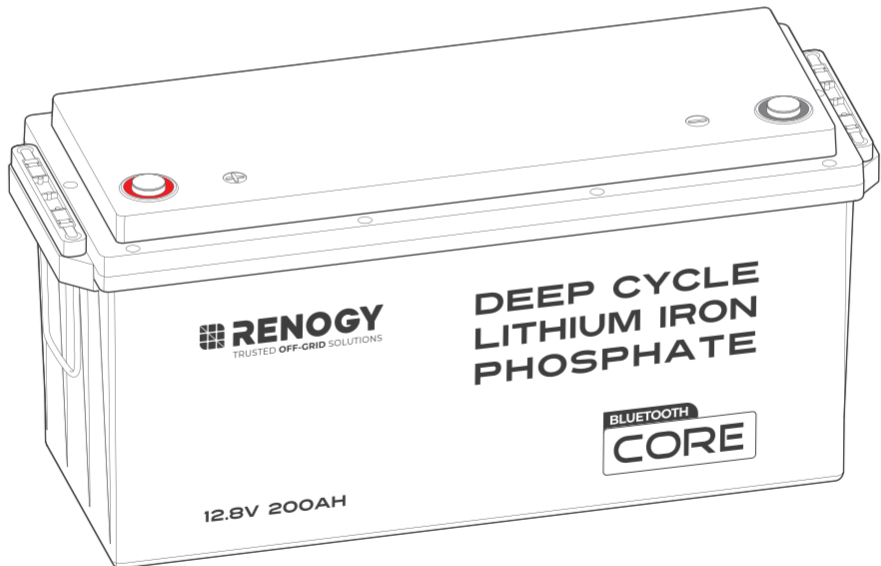

USER MANUAL

Before Getting Started

The user manual provides important operation and maintenance instructions for Renogy Core Series 12.8V 200Ah Deep Cycle Lithium Iron Phosphate Battery w/ Bluetooth Function (hereinafter referred to as battery).

Read the user manual carefully before operation and save it for future reference. Failure to observe the instructions or precautions in the user manual can result in electrical shock, serious injury, or death, or can damage the battery, potentially rendering it inoperable.

- Renogy ensures the accuracy, sufficiency, and the applicability of information in the user manual at the time of printing due to continual product improvements that may occur.
- Renogy assumes no responsibility or liability for personal and property losses, whether directly and indirectly, caused by the user's failure to install and use the product in compliance with the user manual.
- Renogy is not responsible or liable for any failure, damage, or injury resulting from repair attempts by unqualified personnel, improper installation, or inappropriate operation.
- The illustrations in the user manual are for demonstration purposes only. Details may appear slightly different depending on product revision and market region.
- Renogy reserves the right to change the information in the user manual without notice. For the latest user manual, visit [renogy.com](https://www.renogy.com).

Disclaimer

Renogy Core Series 12.8V 200Ah Deep Cycle Lithium Iron Phosphate Battery w/ Bluetooth Function User Manual © 2025 Renogy. All rights reserved.

RENOGY and **RENOGY** are registered trademarks of Renogy.

- All information in the user manual is subject to copyright and other intellectual property rights of Renogy and its licensors. The user manual may not be modified, reproduced, or copied, in whole or in part, without the prior written permissions of Renogy and its licensors.
- The registered trademarks in the user manual are the property of Renogy. The unauthorized use of the trademarks is strictly prohibited.

Online Manual



User Manual



Table of Contents

Symbols Used	1
Introduction	1
Key Features.....	1
SKU	1
What's In the Box?.....	2
Required Tools & Accessories	2
Get to Know Lithium Iron Phosphate Battery	3
Dimensions	3
How to Size Battery Adapter Cables?.....	3
Secure the Battery (Optional).....	4
Step 1. Plan a Mounting Site	5
Step 2. Wear Insulating Gloves	5
Step 3. Remove the Dust Cover.....	6
Step 4. Check the Battery	6
Step 5. Run the Battery Adapter Cables Through the Insulating Sleeves.....	6
Step 6. Install Battery Terminals	7
Step 7. Install the Insulating Sleeves	7
Step 8. Connect the Battery to Power Supply Devices	8
How to Connect Batteries in Series or Parallel	9
Calculate Battery Voltage and Current in Series and Parallel Connections	9
Balance Batteries Prior to Connection	10
Series Connection vs. Parallel Connection – Installation Steps	11
Battery Cell Balancing.....	13
Remote, 24/7 Monitoring.....	13
Short-Range Monitoring via DC Home App	13
Wireless Long-Range Monitoring.....	14
Charging/Discharging Parameter Settings.....	14
Battery Charging and Discharging Logic.....	15
Charging Logic.....	15
Discharging Logic	16
How to Estimate the Battery SOC?.....	16
Battery Management System	16
Troubleshooting.....	17

Specifications 18

 General 18

 Operation Parameters 18

Maintenance & Storage..... 19

 Inspection 19

 Cleaning 19

 Checking Voltage 19

 Storage 19

 Replacement20

Important Safety Instructions.....20

 General20

 Battery Safety20

Renogy Support 21

Battery Recycling22

Symbols Used

The following symbols are used throughout the user manual to highlight important information.

-  **WARNING:** Indicates a potentially dangerous condition which could result in injury or death.
-  **CAUTION:** Indicates a critical procedure for safe and proper installation and operation.
-  **NOTE:** Indicates an important step or tip for optimal performance.

Introduction

The Renogy Core Series 12.8V 200Ah Deep Cycle Lithium Iron Phosphate Battery w/ Bluetooth Function is designed for the drop-in replacement of deep-cycle lead-acid batteries with its standard Battery Council International (BCI) group size.

Weighing only half of the lead-acid counterparts, the battery can be safely discharged to 100% Depth of Discharge (DOD), delivering twice the energy. Manufactured with automotive grade battery cells, the battery features the highest safety standards and an extended 5000+ cycle life. In addition, the reliable Battery Management System (BMS) provides comprehensive protection to the battery.

Key Features


- **Unparalleled Performance**
Features a greater energy density, a deeper discharge capability, a higher round-trip efficiency, and a faster charging speed in a smaller size over counterparts in the market.
- **Uncompromising Quality**
Ensures an exceptional lifespan with more than 5000 cycles (80% DOD), a continuous charge current of 200A and a continuous discharge current of 200A, and a wide range of operating temperatures with the automotive grade battery cells.
- **Reliable Protection Mechanisms**
Designed with a sturdy internal structure for RV use, and includes multiple levels of protection such as low temperature cut-off and precise balancing through the battery management system.
- **Higher Capacity than Competitors**
212Ah instead of 200Ah, for a longer-lasting application.
- **Real-time Monitoring**
You can easily get the battery information through the DC Home app (free of charge) or Renogy ONE Core (sold separately) at any time.
- **Easy to Expand**
Upgrades to lithium batteries seamlessly with the standard BCI group sizes; up to 16 batteries in 4 series and 4 parallels system connection delivering a maximum of 48V (51.2V) 800Ah with 40.96 kWh.

SKU


Renogy Core Series 12.8V 200Ah Deep Cycle Lithium Iron Phosphate Battery w/ Bluetooth Function	RBT12200LFP-B-G1
--	------------------

What's In the Box?

Renogy Core Series 12.8V 200Ah
Deep Cycle Lithium Iron Phosphate Battery
w/ Bluetooth Function × 1

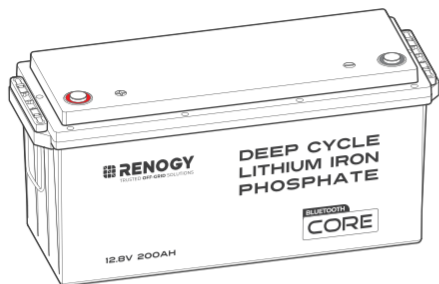

User Manual × 1



M8*1.25*20 mm

Insulating Sleeve × 2

Long Terminal Bolt × 2



Make sure that all accessories are complete and free of any signs of damage.


Required Tools & Accessories



Wrench (17/32 in)



Battery Adapter Cables × 2



Insulating Gloves



Multimeter




Prior to installing and configuring the battery, prepare the recommended tools, components, and accessories.




For how to size battery adapter cables, refer to [“How to Size Battery Adapter Cables?”](#) in this manual.

Get to Know Lithium Iron Phosphate Battery

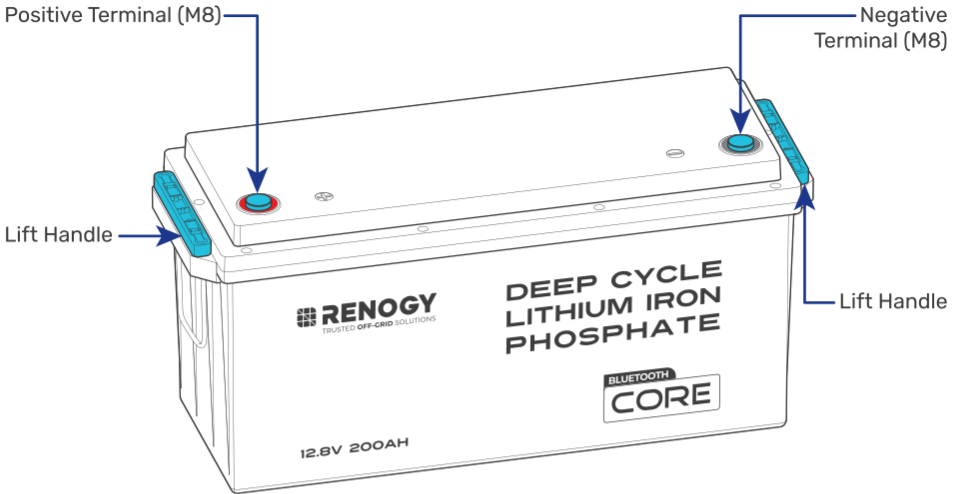

Dimensions

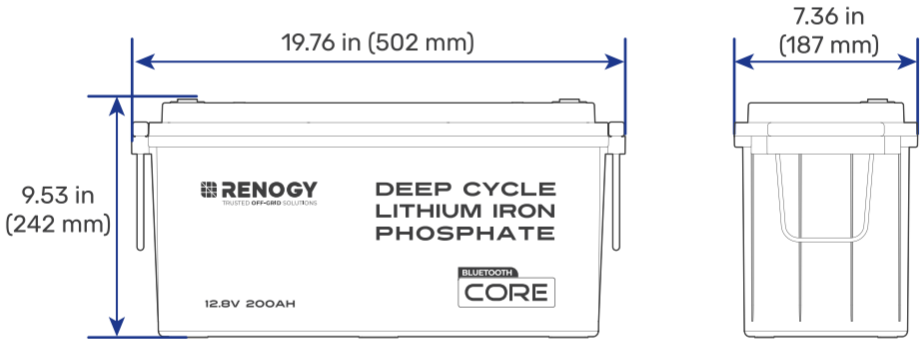

 Dimension tolerance: ± 0.2 in (0.5 mm)

How to Size Battery Adapter Cables?

Use appropriately sized Battery Adapter Cables (sold separately) based on expected loads. Refer to the table below for copper cable ampacities with different gauge sizes for up to 13 feet (4 m) cables. Cables longer than 13 feet (4 m) may require thicker gauge wires to prevent excessive voltage drop in undersized wiring.

Cable Gauge Size	Ampacity	Cable Gauge Size	Ampacity
14 AWG (2.08 mm ²)	25A	1 AWG (42.41 mm ²)	145A
12 AWG (3.33 mm ²)	30A	1/0 AWG (53.49 mm ²)	170A
10 AWG (5.26 mm ²)	40A	2/0 AWG (67.43 mm ²)	195A


Cable Gauge Size	Ampacity	Cable Gauge Size	Ampacity
8 AWG (8.37 mm ²)	55A	3/0 AWG (85.01 mm ²)	225A
6 AWG (13.3 mm ²)	75A	4/0 AWG (107.22 mm ²)	260A
4 AWG (21.15 mm ²)	95A	300 kcmil (152.1 mm ²)	320A
3 AWG (26.67 mm ²)	115A	400 kcmil (202.8 mm ²)	380A
2 AWG (33.62 mm ²)	130A	500 kcmil (253.5 mm ²)	430A

i The above values are from the NEC Table 310.16 for copper cables rated at 194°F (90°C), operating at an ambient temperature of no more than 86°F (30°C). Please note that wire gauge standards may vary due to factors such as temperature and installation conditions. In actual applications, it is recommended to refer to the latest NEC standards.


Secure the Battery (Optional)

Securing the battery prevents damage to the battery from loose cables and bumps. You can purchase the following accessories and components on demand.


Recommended Components & Tools



Battery Tray




Tie Down Strap



Mounting Screws × 4


i Alternative mounting methods are allowed to meet the requirements of specific applications.

We recommend installing the battery on the bottom. However, you can also mount it on all sides of the battery except the top side that has two terminals.

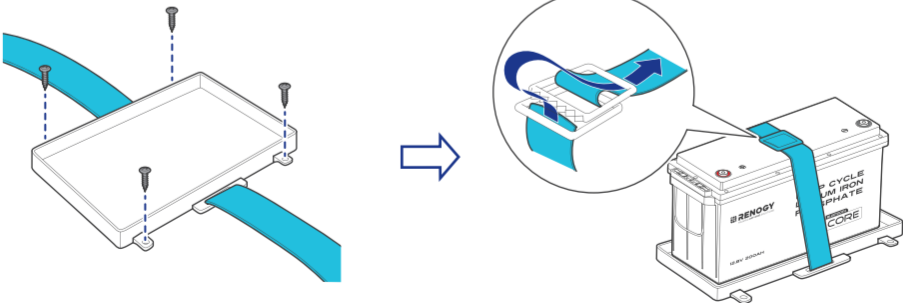

Step 1. Plan a Mounting Site

For optimal battery performance, it is recommended to install the battery in a clean, cool, and dry location, free from any accumulation of water, oil, or dirt. Accumulation of such materials on the battery can lead to current leakage, self-discharge, and even short-circuiting.

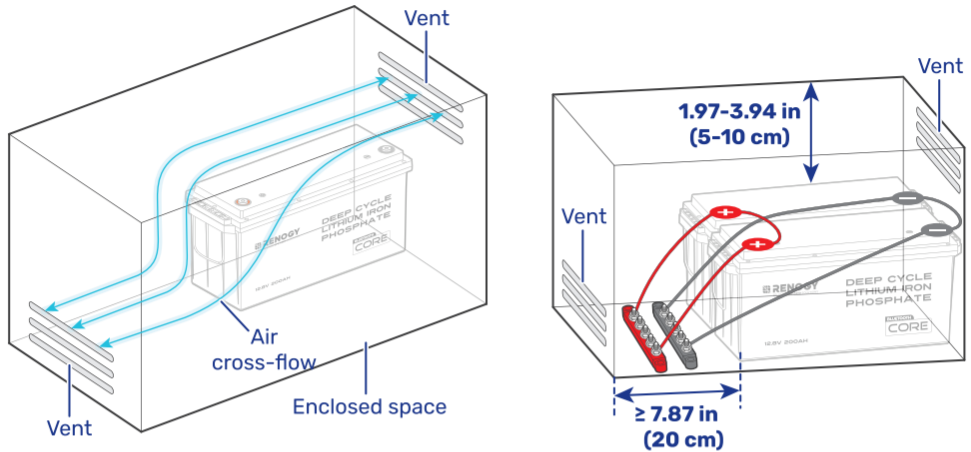

Charge: 32°F to 122°F / 0°C to 50°C
Discharge: -4°F to 131°F / -20°C to 55°C



10% to 95%




Sufficient air flow must be provided to prevent excessive heat build-up and to minimize temperature variation between the connected batteries.




This user manual takes a battery as an example to illustrate how to install the battery. Similar rules apply to scenarios involving multiple batteries.


Step 2. Wear Insulating Gloves

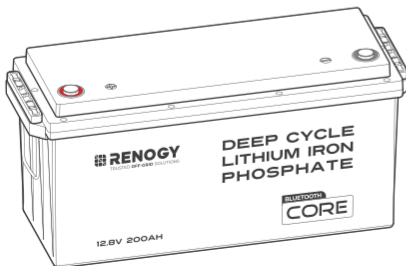

Insulating
Gloves

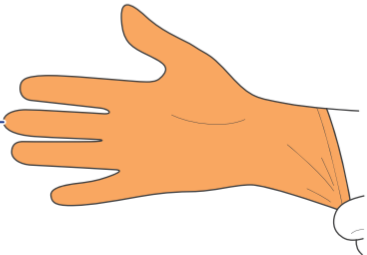

Step 3. Remove the Dust Cover

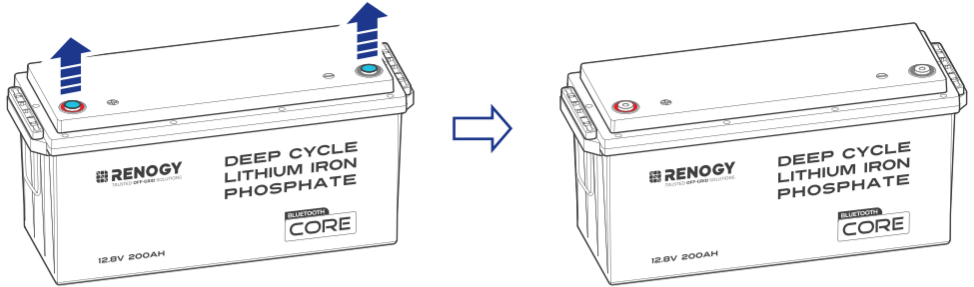


Step 4. Check the Battery


Inspect the battery for any visible damage including cracks, dents, deformation, and other visible abnormalities. All connector contacts shall be clean, free of dirt and corrosion, and dry.

- ⚠ Do not touch the exposed electrolytes or powder if the battery is damaged.
- ⚠ If any uncovered electrolyte or powder comes into contact with your skin or eyes, flush the area immediately with plenty of clean water and seek medical attention.

Step 5. Run the Battery Adapter Cables Through the Insulating Sleeves

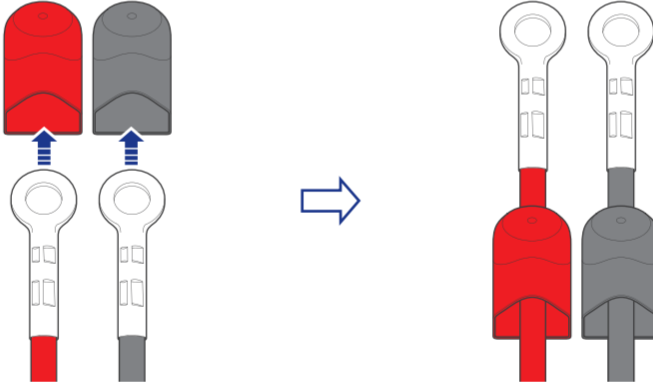


Step 6. Install Battery Terminals

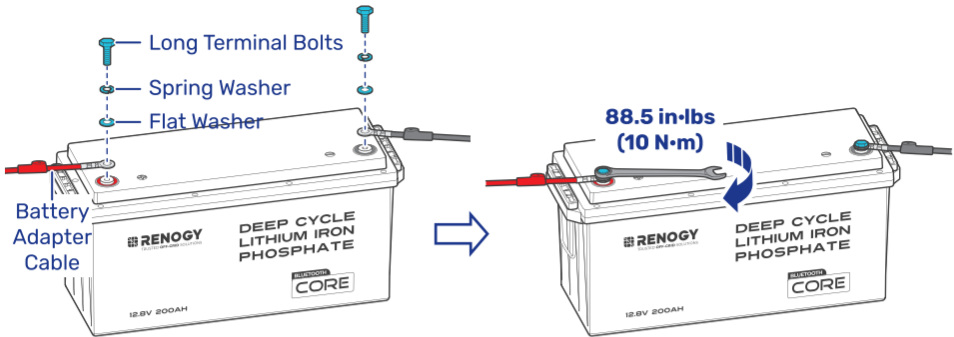

- ⚠️ Ensure the cable lug and the top surface of the terminal are in contact, and place the washers on top of the lug. Do not place a washer between a battery terminal and a cable lug to avoid high resistance and excessive heating.
- ⚠️ Avoid short-circuiting the battery terminals to prevent irreversible damage to the system and battery caused by current bursts.
- ⚠️ Verify polarity before wiring to avoid irreversible battery damage due to polarity reversal.
- ℹ️ To ensure safe and reliable operation of the system, please follow the manufacturer's recommended torque specifications when securing cable connections. Over-tightening can result in terminal breakage, while loose connections can lead to terminal meltdown or fire. When securing multiple cable lugs on a single battery terminal, use the included Long Terminal.

Step 7. Install the Insulating Sleeves

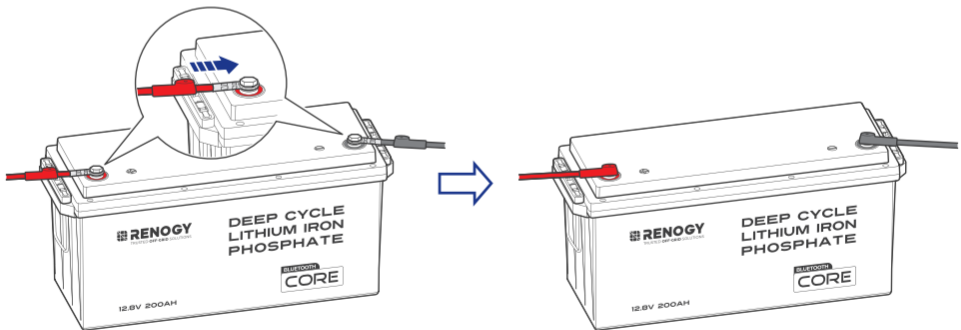


Step 8. Connect the Battery to Power Supply Devices

You can connect the battery to a distribution panel or power supply devices such as an inverter, a DC-DC battery charger, and a charge controller.


⚠ Please use circuit breakers, fuses, or disconnects appropriately sized by a certified electrician, licensed installers, or regional code authorities to protect all electrical equipment.

i For details about series and parallel battery connections, refer to “[How to Connect Batteries in Series or Parallel](#)” in this manual.


■ For a Single Battery

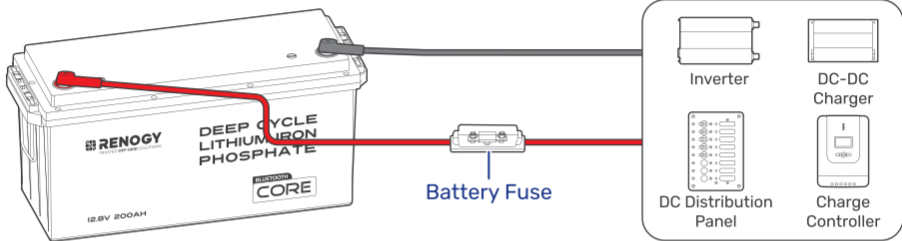

■ For Batteries in Parallel

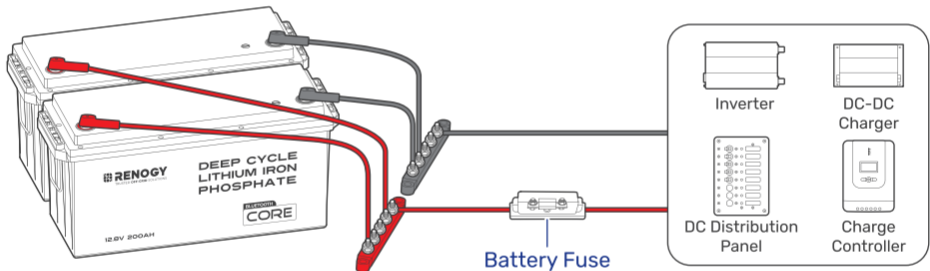

■ For Batteries in Series

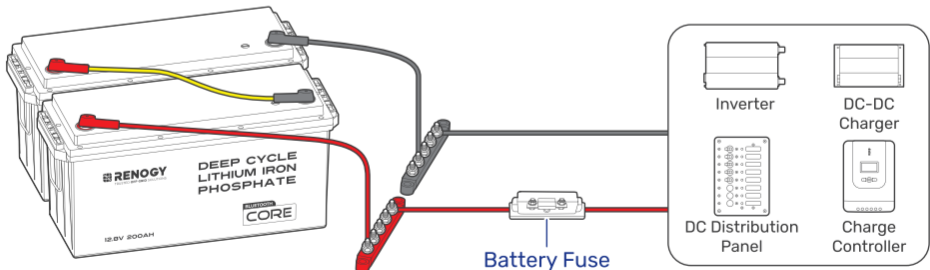

How to Connect Batteries in Series or Parallel


Calculate Battery Voltage and Current in Series and Parallel Connections

You can connect up to eight batteries in a parallel group or four batteries in a series group.


When connecting batteries in series or parallel, the following conditions must be satisfied:

1. All batteries should be from the same brand, as lithium batteries from different brands may have distinct BMS designs.
2. All batteries must be identical, with matching capacity (Ah) and BMS specifications (A).
3. All batteries should have been purchased around the same time (within one month).
4. The cables between each connected battery should be of equal length to ensure that all batteries can work equally together.

You can connect up to 8 batteries in a single parallel group or 4 batteries in a single series group.

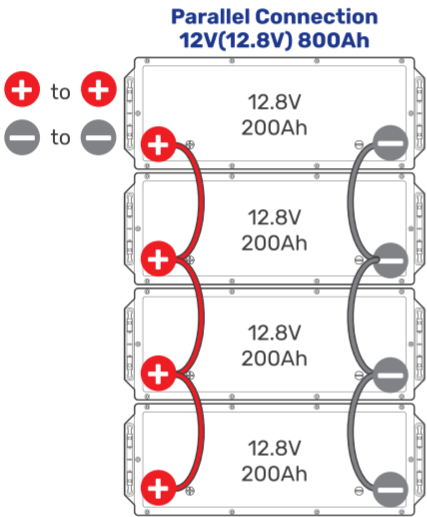

System Voltage	System current
12.8V	Sum of the individual battery currents

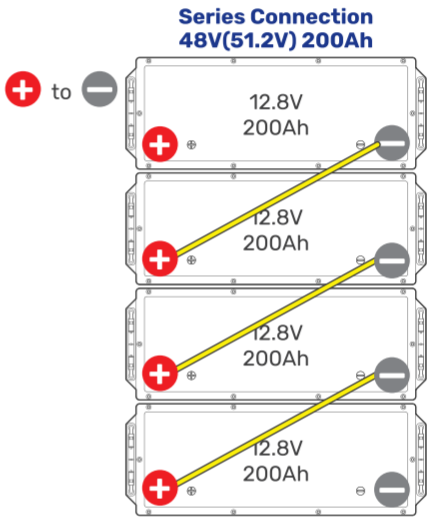

System Voltage	System current
Sum of the individual battery voltages	200A

- Long terminal bolts (M8 * 1.25 * 20 mm) should be used to secure the battery adapter cables. The recommended torque is 70.8 in·lbs (8 N·m).
- Do not connect batteries with different chemistries, rated capacities, nominal voltages, brands, or models in parallel or in series. This can result in potential damage to the batteries and the connected devices, and can also pose safety risks.
- Avoid connecting batteries that have been purchased for more than half a year. Over time, batteries can degrade and their performance may decrease, which can affect their ability to deliver reliable power and may lead to safety hazards.
- Carefully consider the number of batteries connected in parallel or series to avoid risks such as unbalanced charging or overcharging.