

TECHNICAL DATA

Voltage.....120V~60Hz
Max.power.....10A 1200W
Transmission frequency.....433.92MHz
Remote battery.....12V (23A)



WIRELESS REMOTE CONTROL SOCKET



Intertek
5010333


ENERGY
SAVING

BN-LINK INC.

12991 Leffingwell Avenue, Santa Fe Springs
E-mail: support@bn-link.com
Http://www.bn-link.com
Hours: 9AM - 5PM PST, Mon - Fri
Designed in California Made in China

Please keep this manual
www.bn-link.com

PRODUCTS VIEW

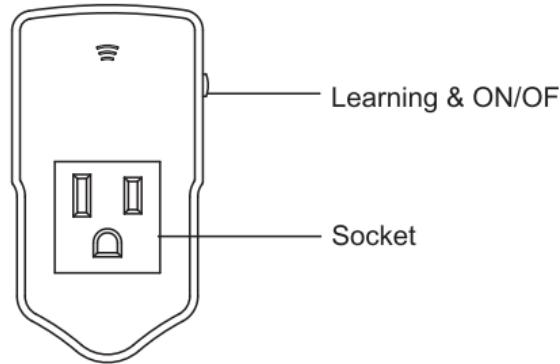

FEATURES

- Easily controlled by the remote control from up to 100 feet in line-of-sight.
- Separate on and off buttons on the remote control.
- Outlets will remain powered off after a power outage to save energy.
- Power output up to 1200W at 120V(60Hz).
- Low power consumption, reduces energy use and extends product life by up to 15%.
- Manual pairing and unpairing.

SETUP

- Install one 12V/23A battery in the remote control's battery compartment, making sure the polarity of the battery is correct.
- Plug each outlet switch into a socket and plug a device or appliance into each outlet.
- Press the on/off buttons for the respective channel on the remote control to operate the outlet switch.

NOTES

- Regularly change the battery in the remote control for best performance. If you find the outlet switches are not responding or the LED indicator on the remote control becomes dim, the battery should be replaced. Always dispose of old batteries properly with consideration for the environment.
- Make sure the battery and outlets are installed firmly and correctly for safe operation.
- These outlet switches are for indoor use

only. Avoid exposure to high temperature sources, strong sunlight and moisture.

The outlets are best used in air as with good air circulation.

- Do not exceed the maximum load current of 10A(Approximately 1200W).

PROGRAMMING THE OUTLETS

Notes: The outlets are pre-programmed for immediate use, but the configuration can be customized to meet your needs.

To program a remote control transmitter and outlets switch receiver:

1. Remove the outlet receiver from the power socket, then plug the outlet receiver back into the power socket.
2. Press and hold the “Learning & ON/OFF” button till the indicator start to flash.
3. Release the “Learning & ON/OFF” button, press and hold the corresponding “ON” button on the remote until you hear a “click”.

4. The indicator will stop flashing indicating that pairing is successful.

RESETTING AN OUTLET

Should you wish to unpair an outlet receiver from the remote, or if your outlets are unresponsive to the remote, the outlets can be reset following below steps.

1. Remove the outlet receiver from the power socket.
2. Press and hold “Learning & ON/OFF” button on the outlet receiver.
3. While still holding the button, plug the outlet receiver to a power socket and wait to see the indicator to flash.
4. When the indicator stops flashing, you may release the button, and the reset process is now complete.
5. You may program the outlet after resetting.

TROUBLESHOOTING

In the case that one or more of the outlet receivers do not respond to the remote control, please follow the steps given below to resolve the issue:

1. Check to see if the battery of the remote is low and needs replacement.
2. Make sure that the outlet receiver correctly placed in the power socket.
3. Make sure that the outlet receiver is used in an area with proper air circulation to avoid overheating.
4. Reset and program the outlet(s).

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.