



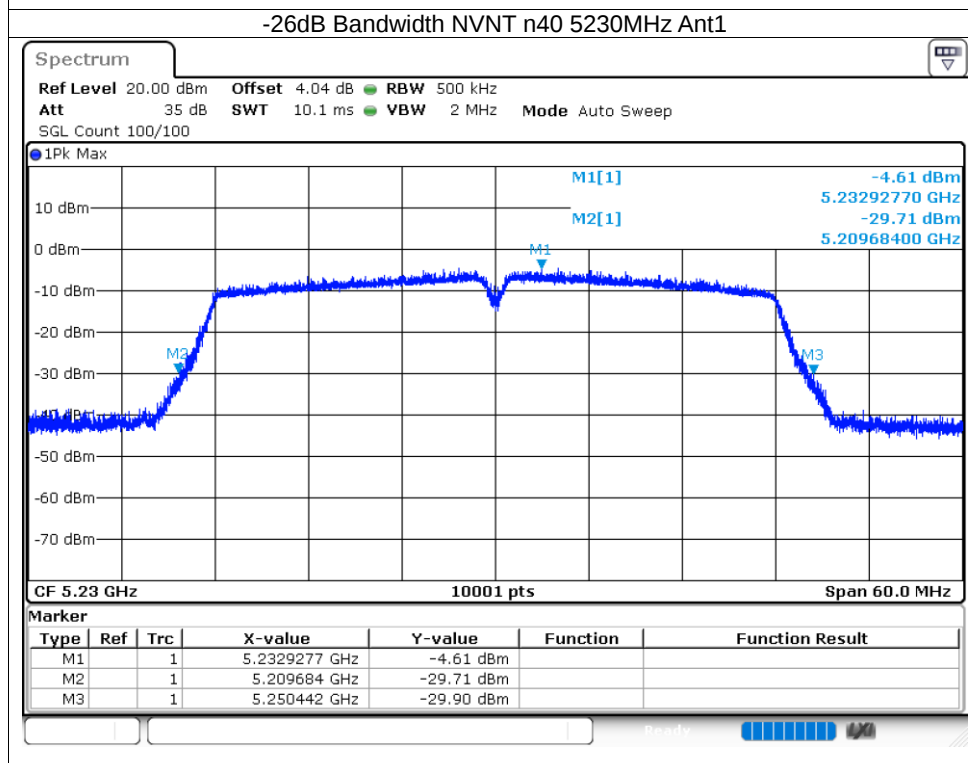
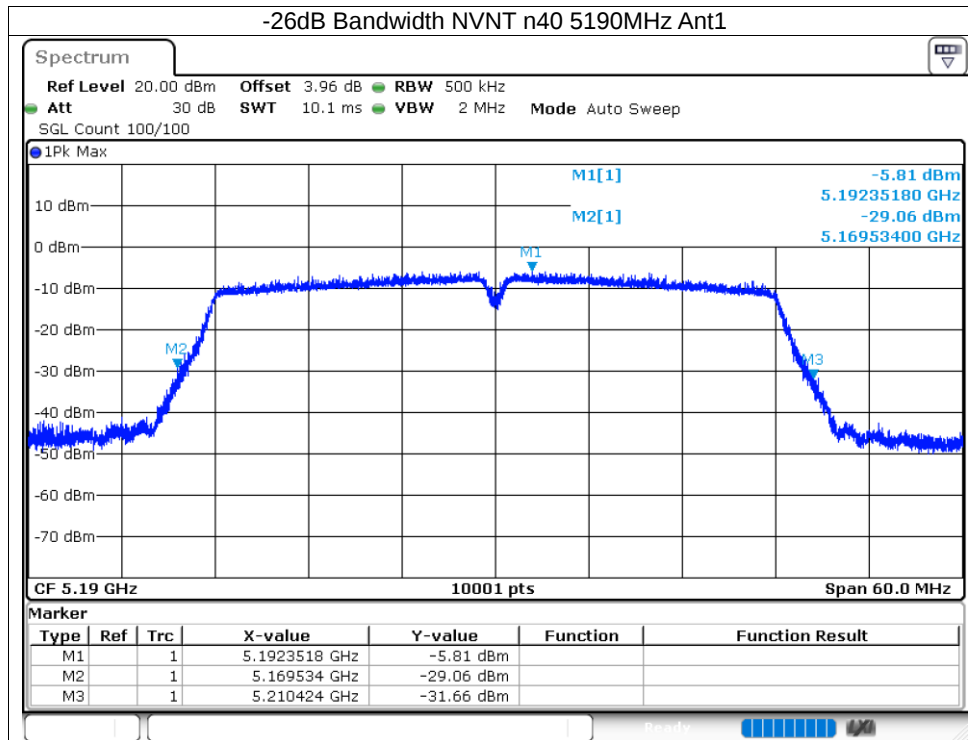
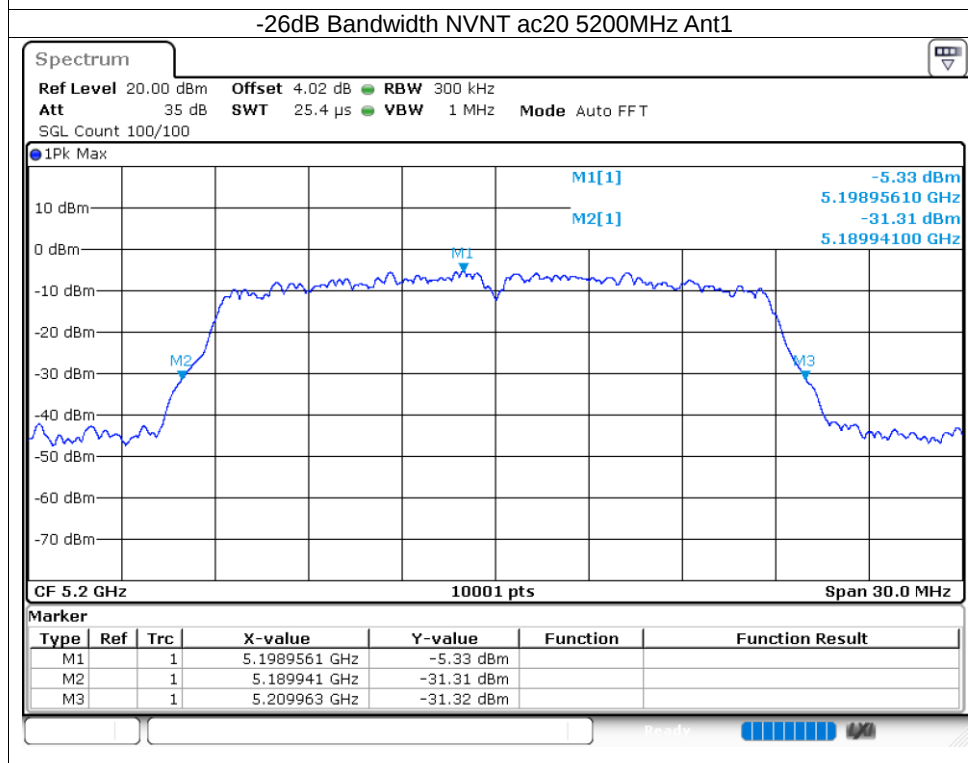
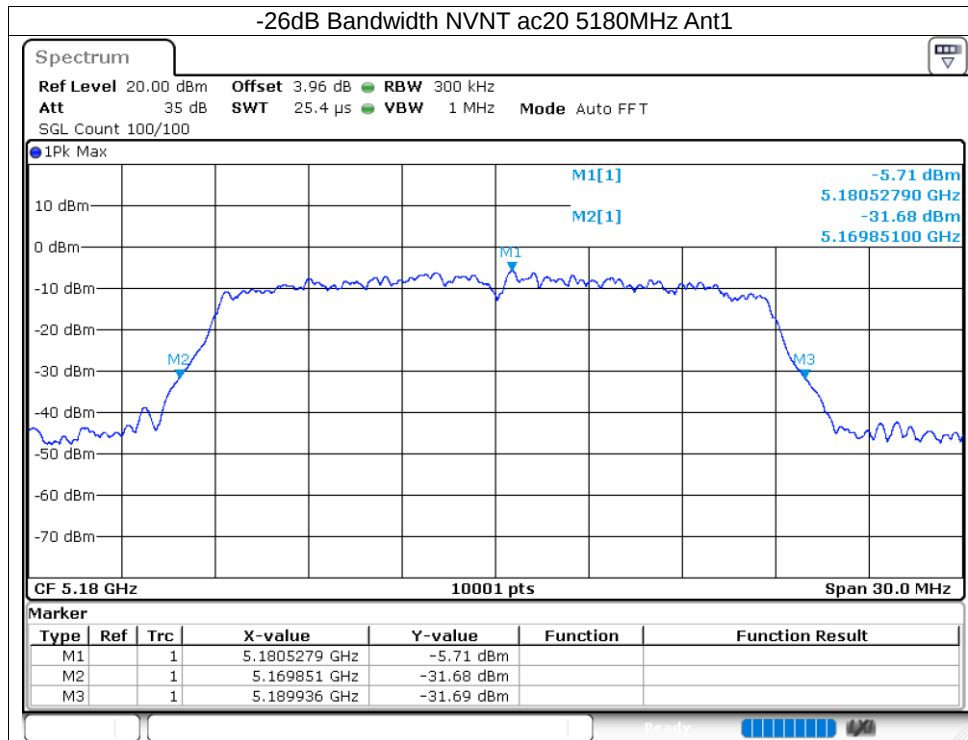


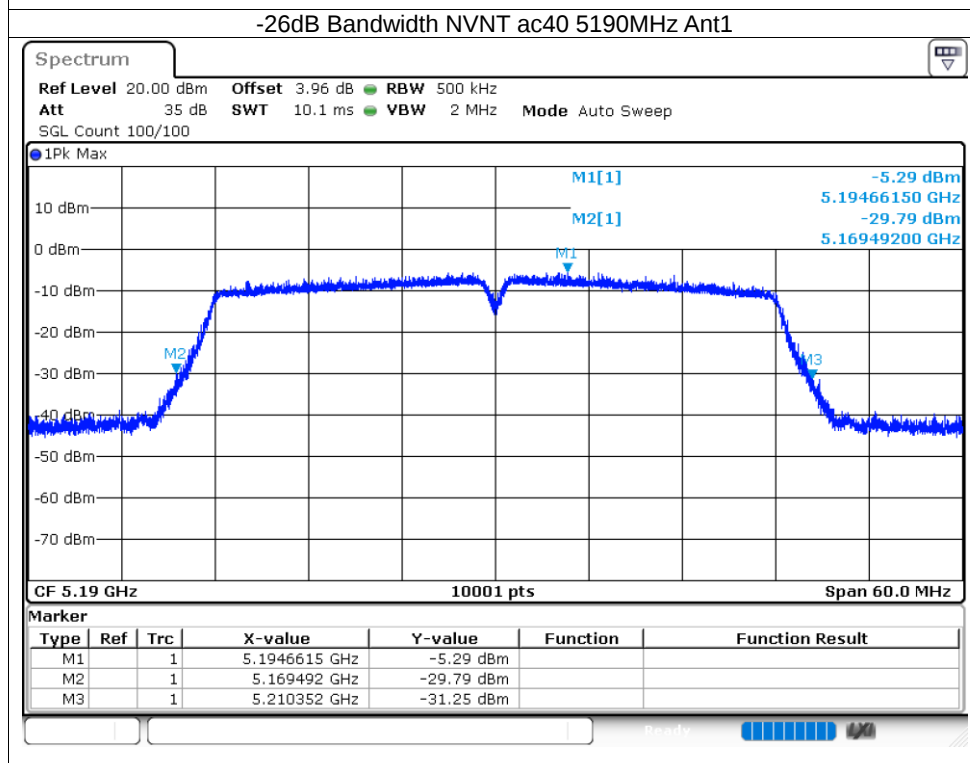

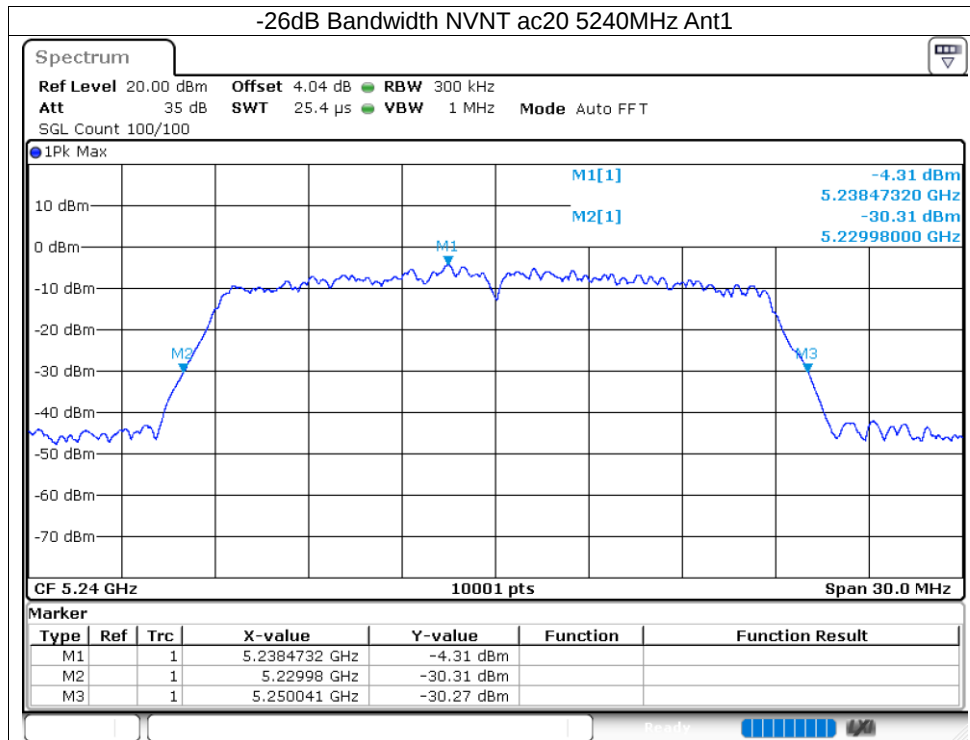



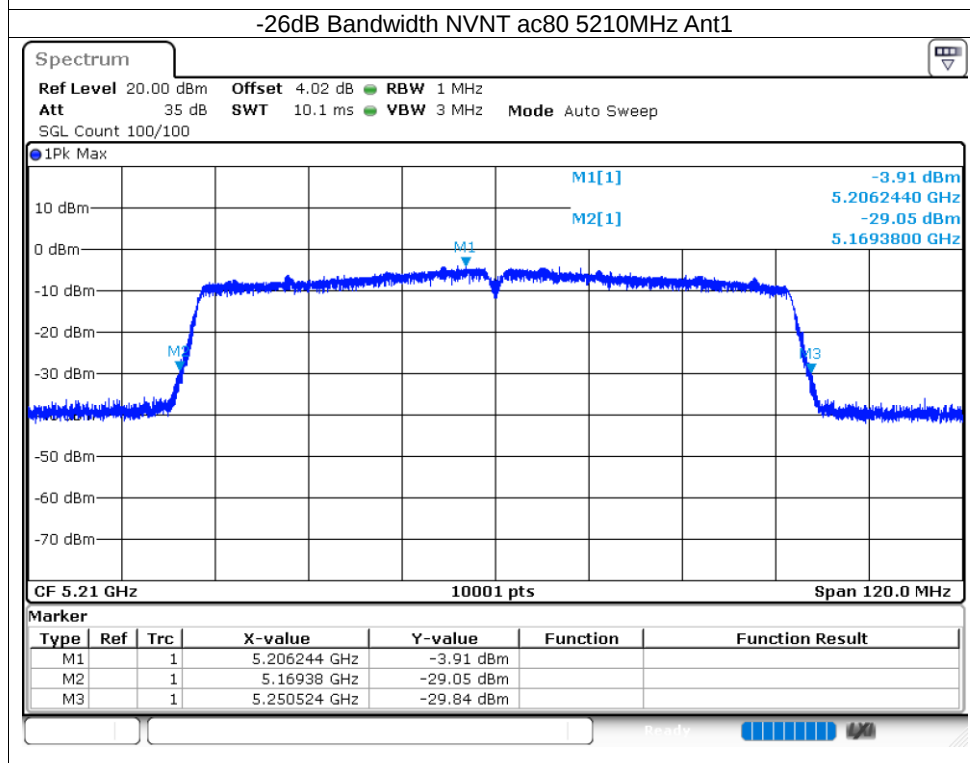



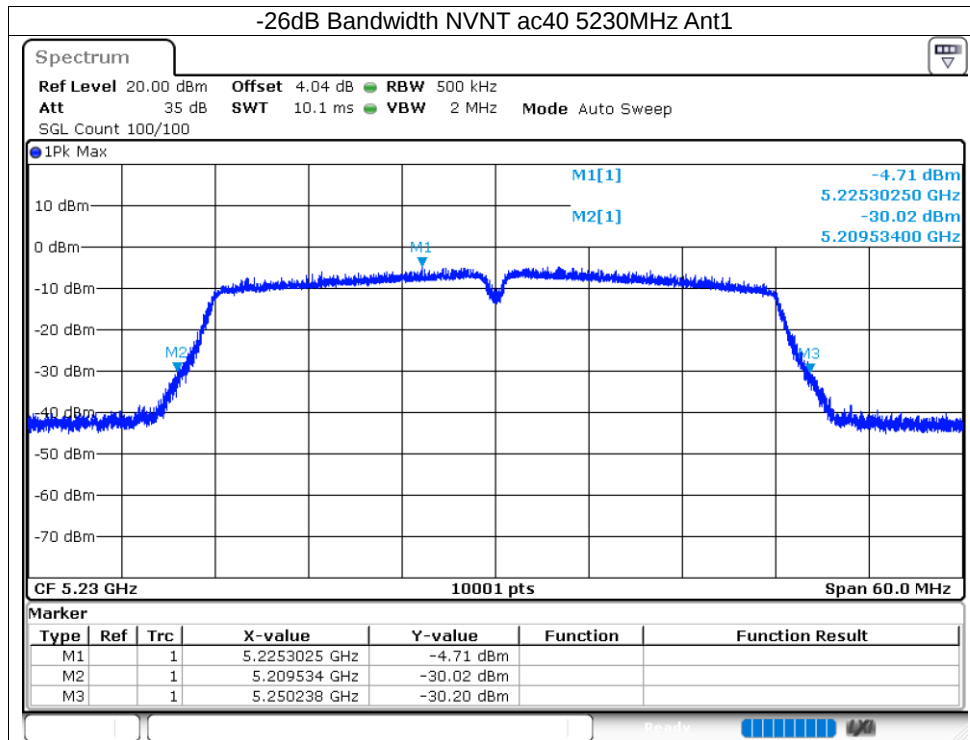




5.1.4 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.492
NVNT	a	5200	Ant1	16.414
NVNT	a	5240	Ant1	16.303
NVNT	n20	5180	Ant1	17.542
NVNT	n20	5200	Ant1	17.551
NVNT	n20	5240	Ant1	17.479
NVNT	n40	5190	Ant1	36.134
NVNT	n40	5230	Ant1	36.026
NVNT	ac20	5180	Ant1	17.575
NVNT	ac20	5200	Ant1	17.533
NVNT	ac20	5240	Ant1	17.5
NVNT	ac40	5190	Ant1	36.134
NVNT	ac40	5230	Ant1	36.014
NVNT	ac80	5210	Ant1	75.244


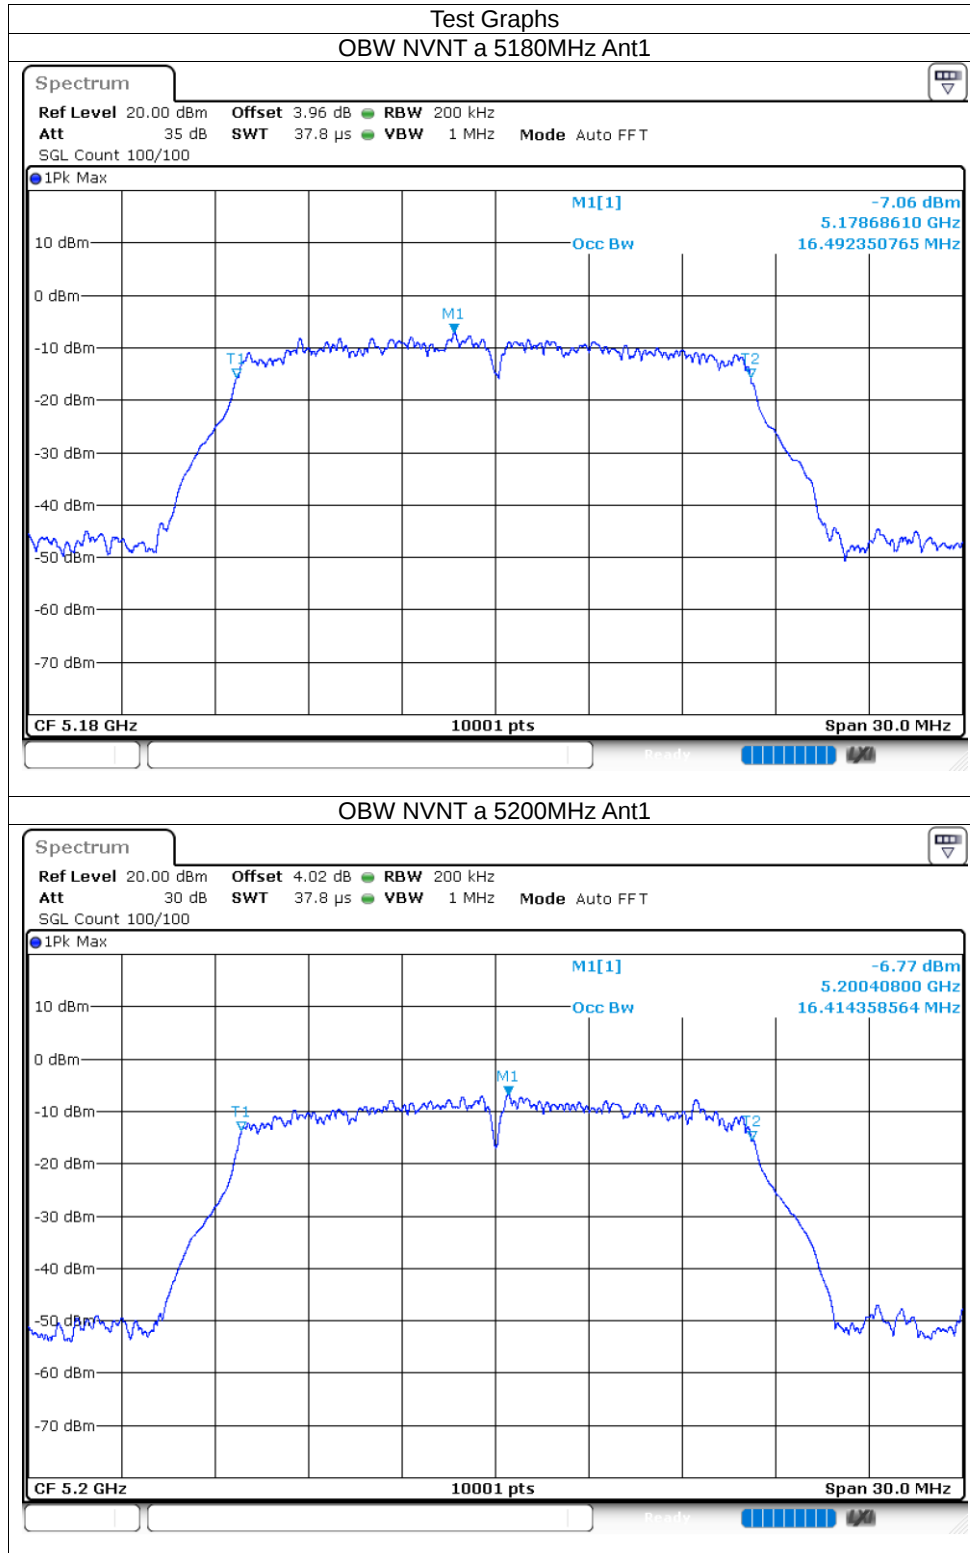


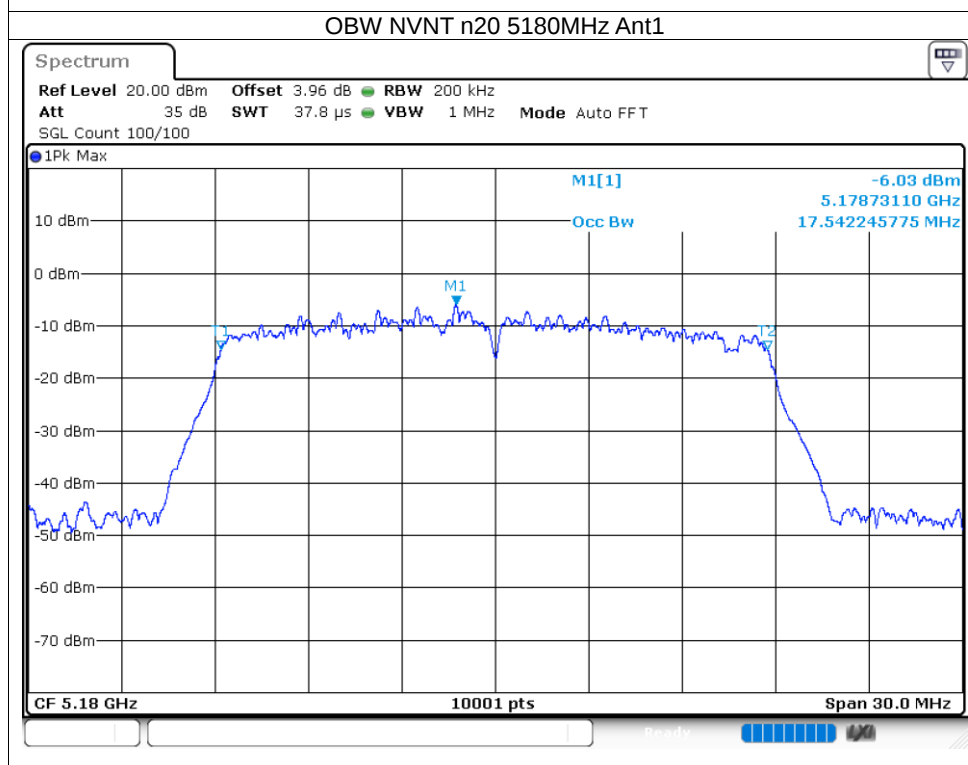
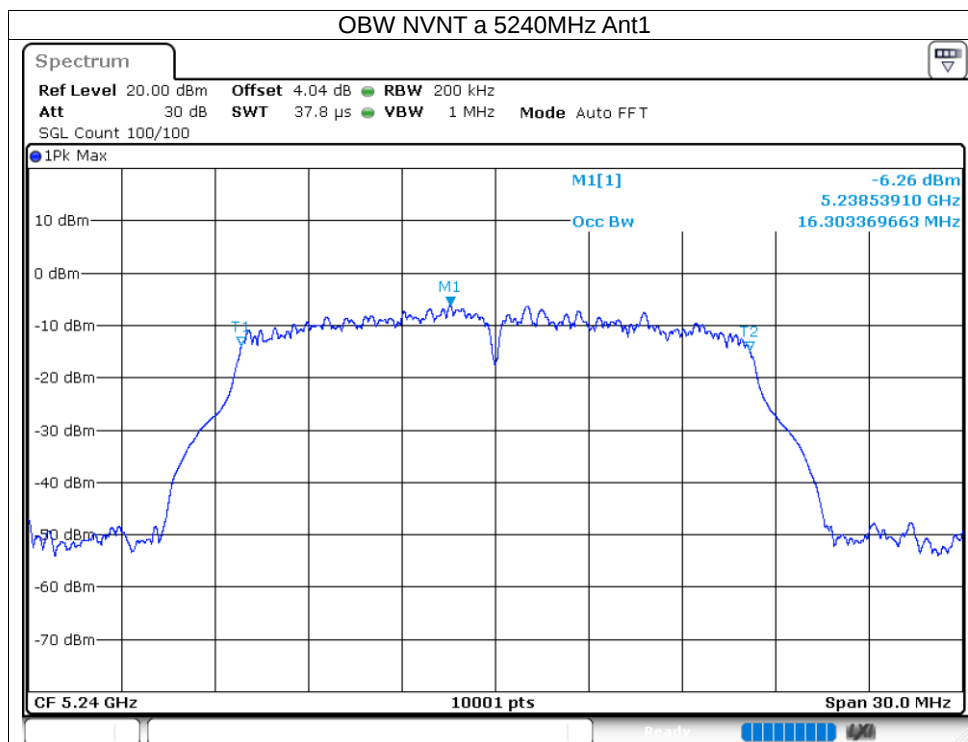


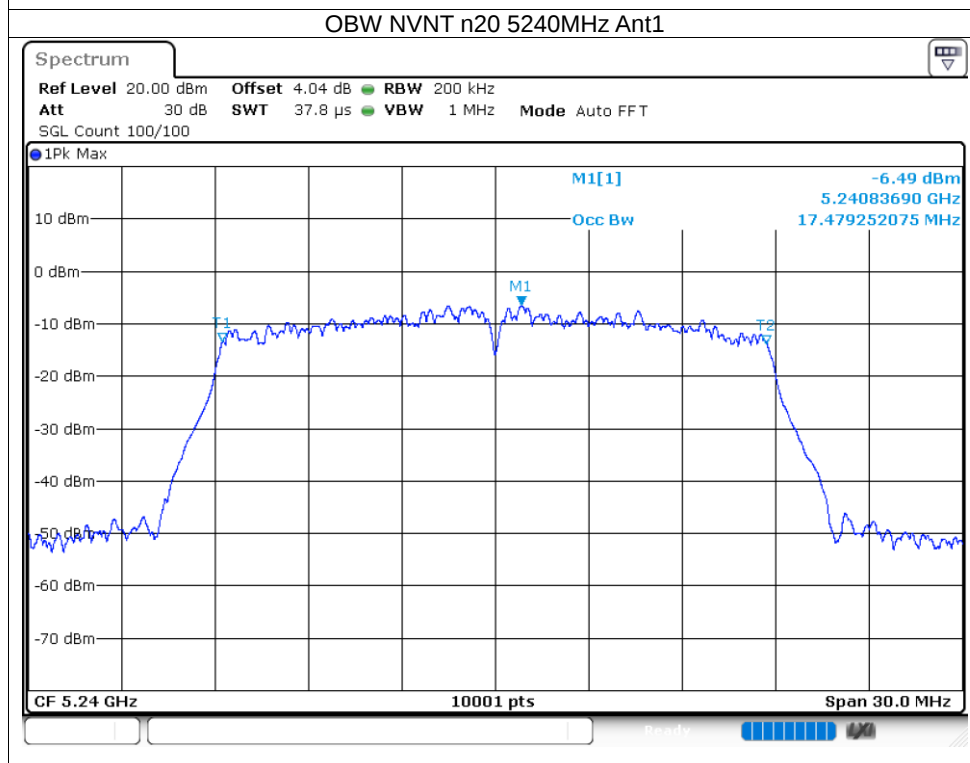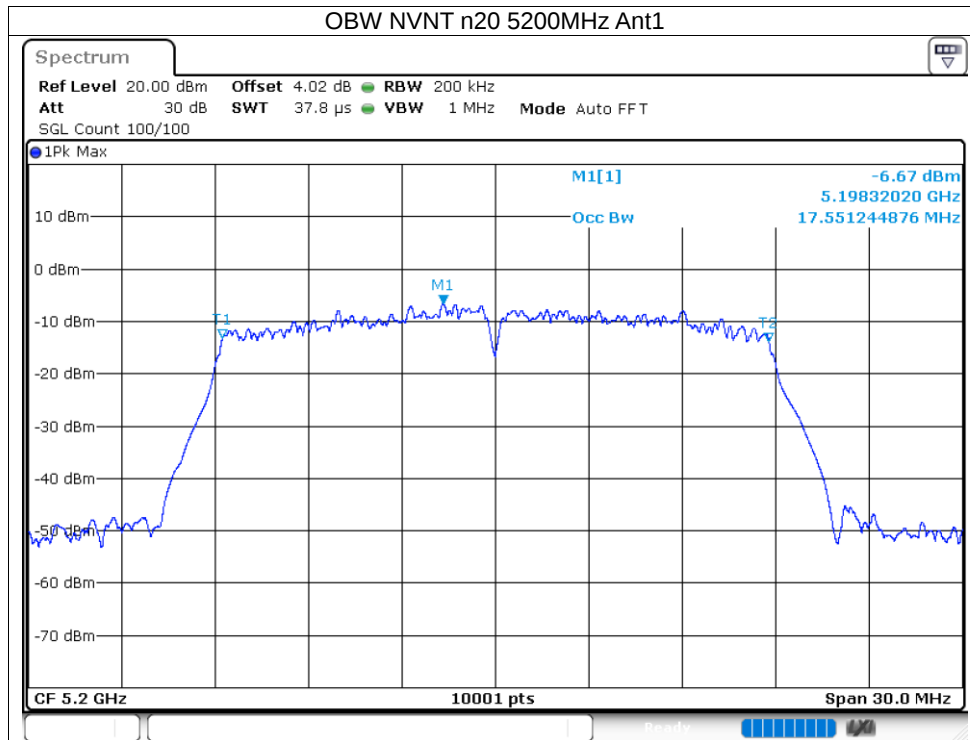

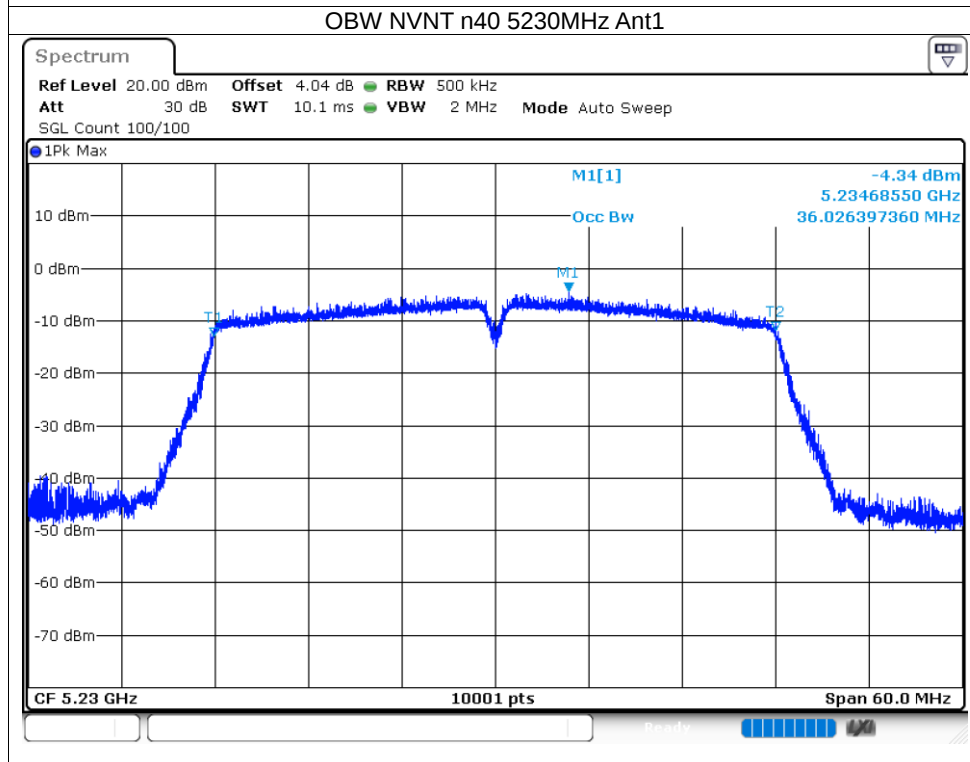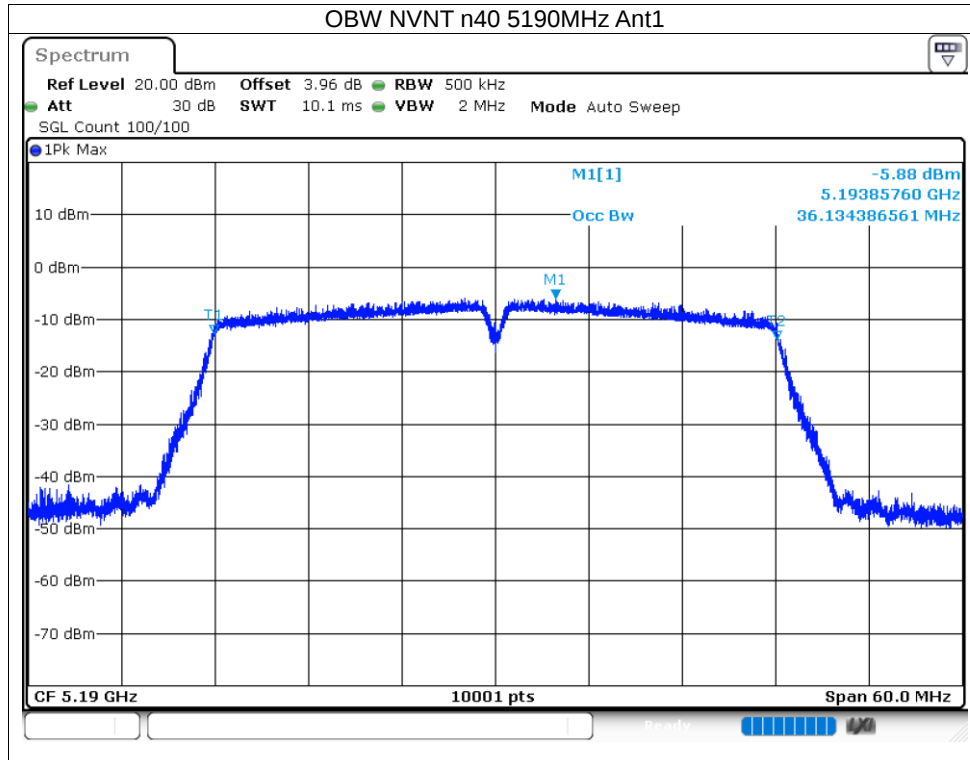

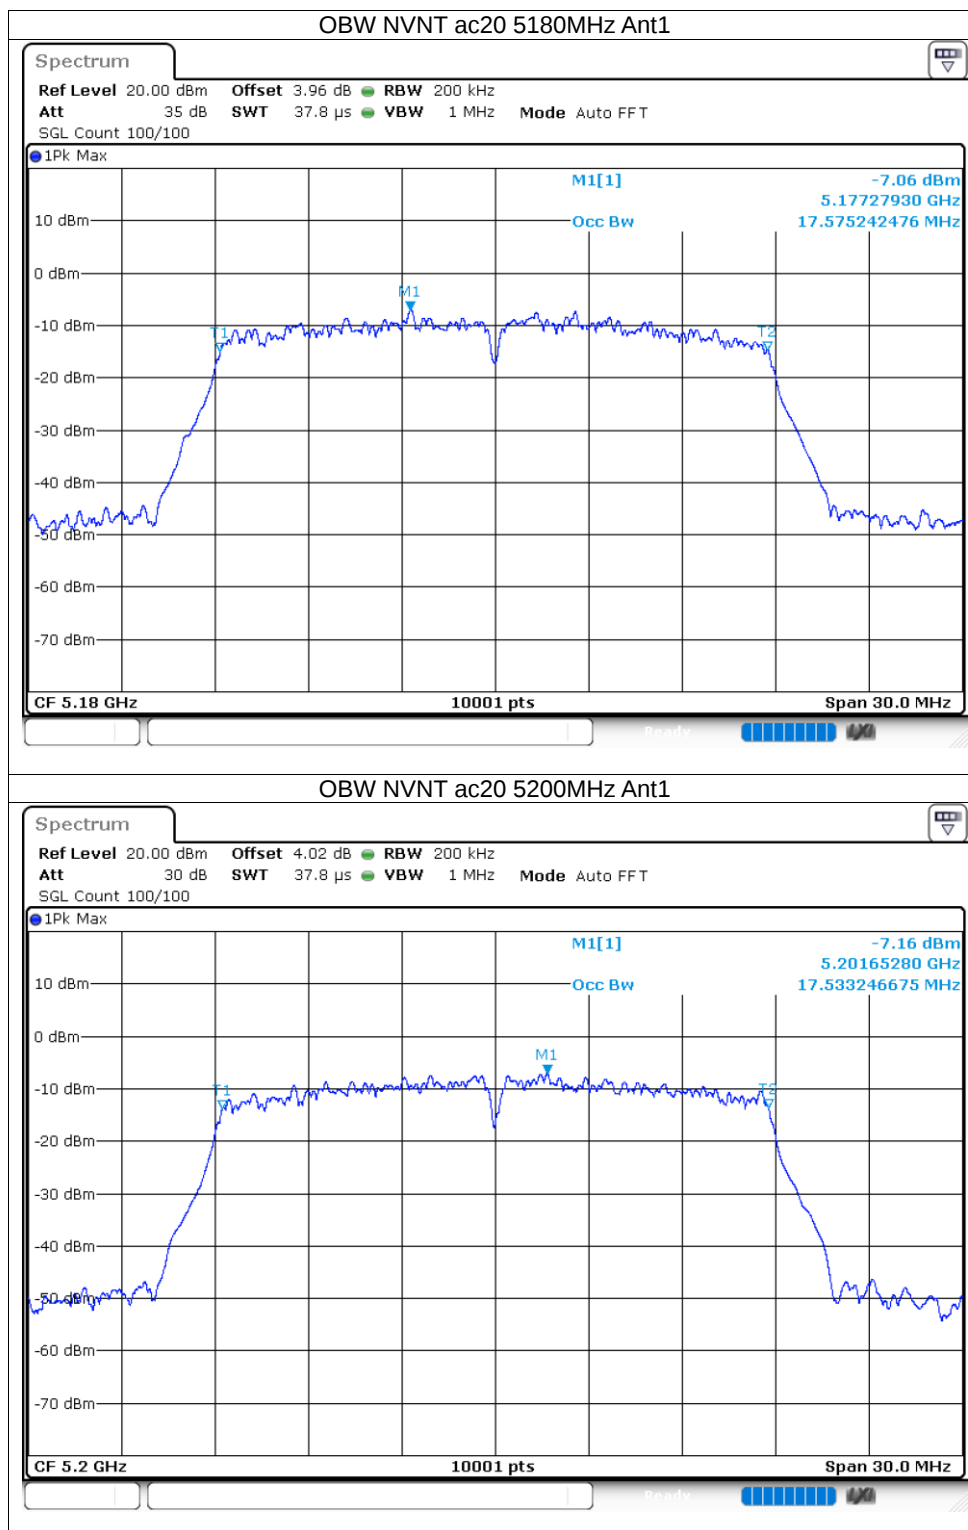


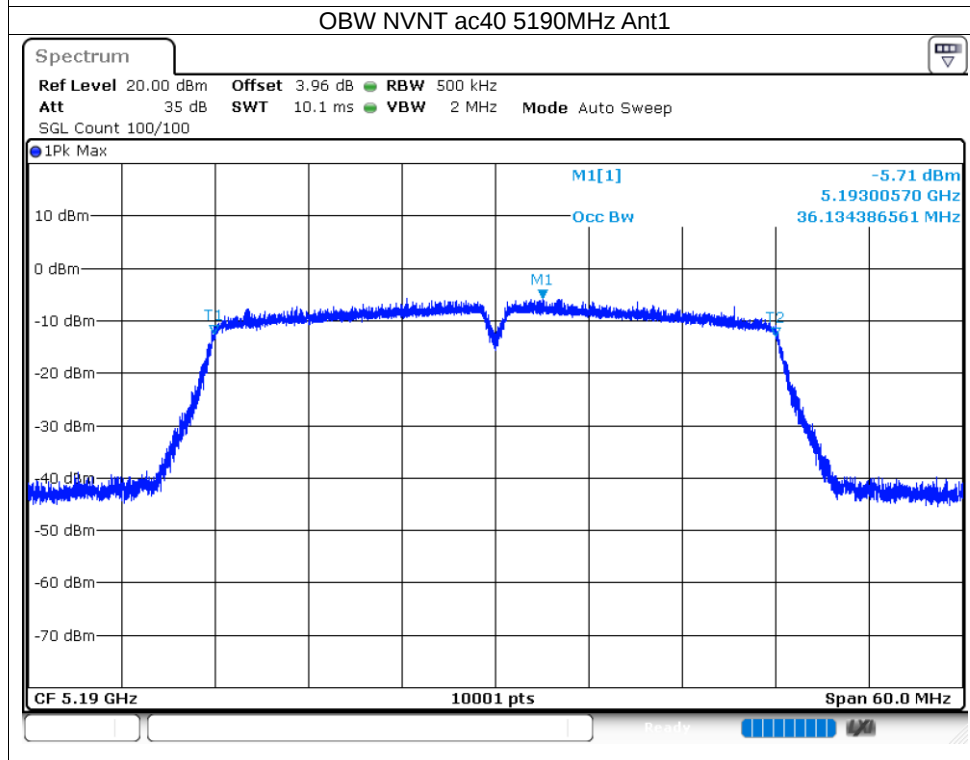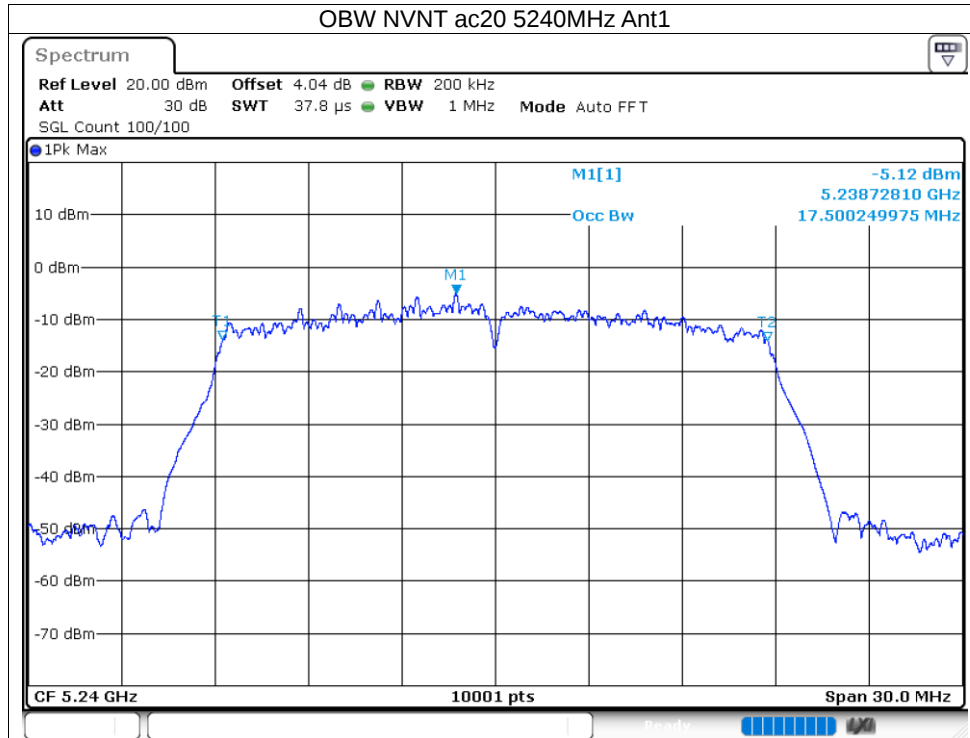


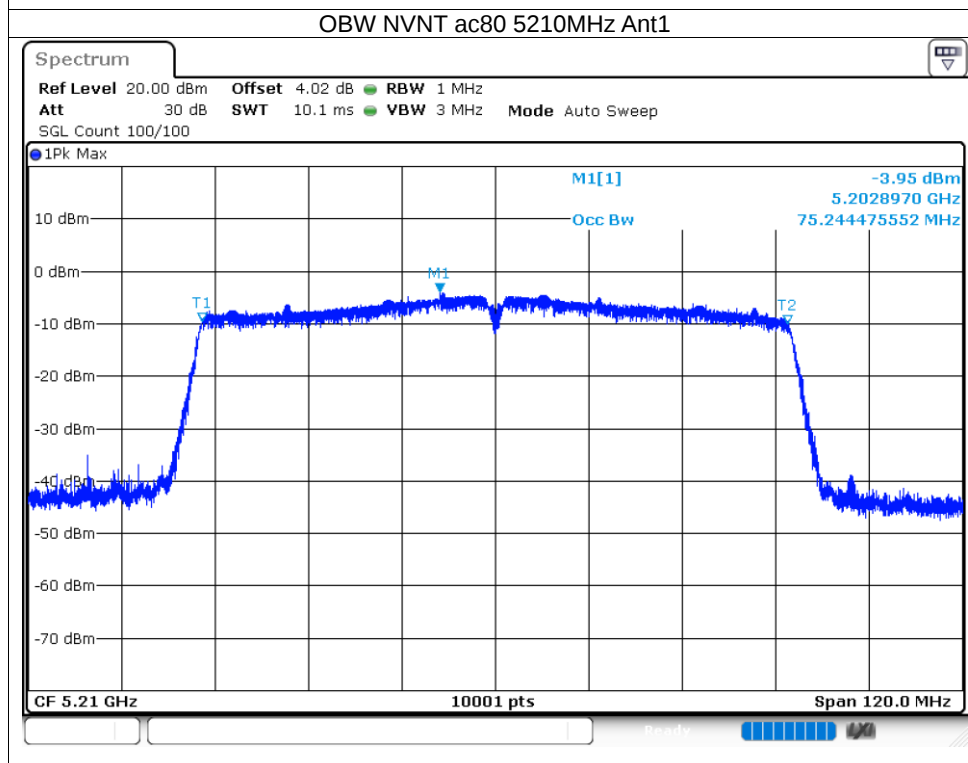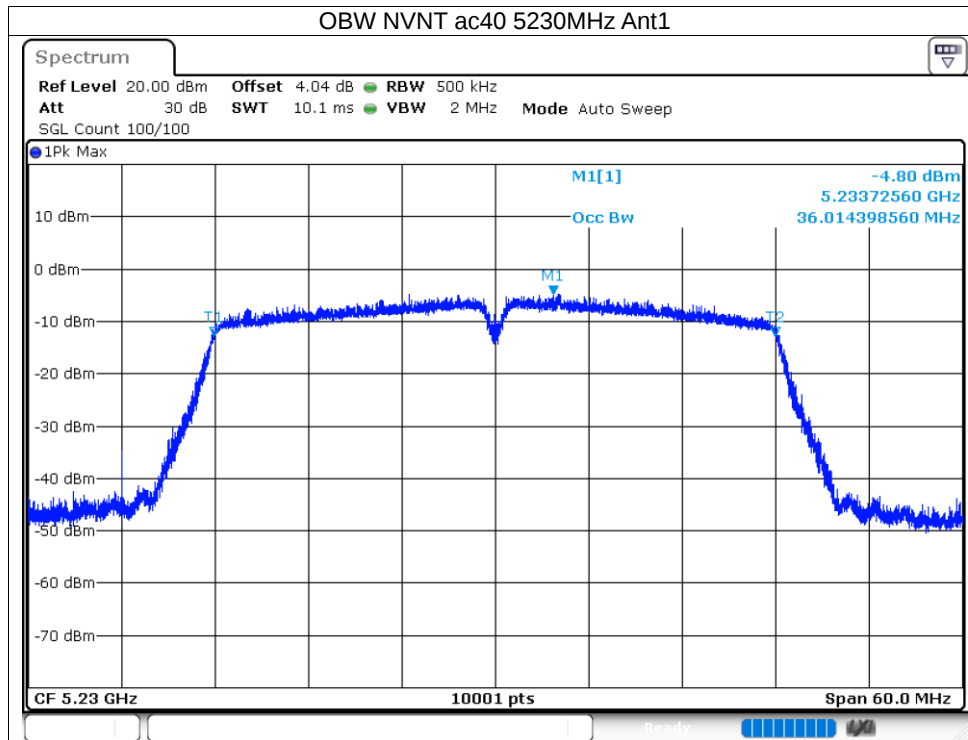




5.1.5 Maximum Power Spectral Density Level



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-0.87	0.08	-0.79	11	Pass
NVNT	a	5200	Ant1	-0.61	0.08	-0.53	11	Pass
NVNT	a	5240	Ant1	-0.2	0.08	-0.12	11	Pass
NVNT	n20	5180	Ant1	-0.73	0.09	-0.64	11	Pass
NVNT	n20	5200	Ant1	-0.42	0.09	-0.33	11	Pass
NVNT	n20	5240	Ant1	-0.18	0.09	-0.09	11	Pass
NVNT	n40	5190	Ant1	-4.4	0.16	-4.24	11	Pass
NVNT	n40	5230	Ant1	-3.49	0.16	-3.33	11	Pass
NVNT	ac20	5180	Ant1	-1.52	0.09	-1.43	11	Pass
NVNT	ac20	5200	Ant1	-0.88	0.09	-0.79	11	Pass
NVNT	ac20	5240	Ant1	-0.54	0.08	-0.46	11	Pass
NVNT	ac40	5190	Ant1	-4.08	0.16	-3.92	11	Pass
NVNT	ac40	5230	Ant1	-3.72	0.16	-3.56	11	Pass
NVNT	ac80	5210	Ant1	-6.05	0.47	-5.58	11	Pass


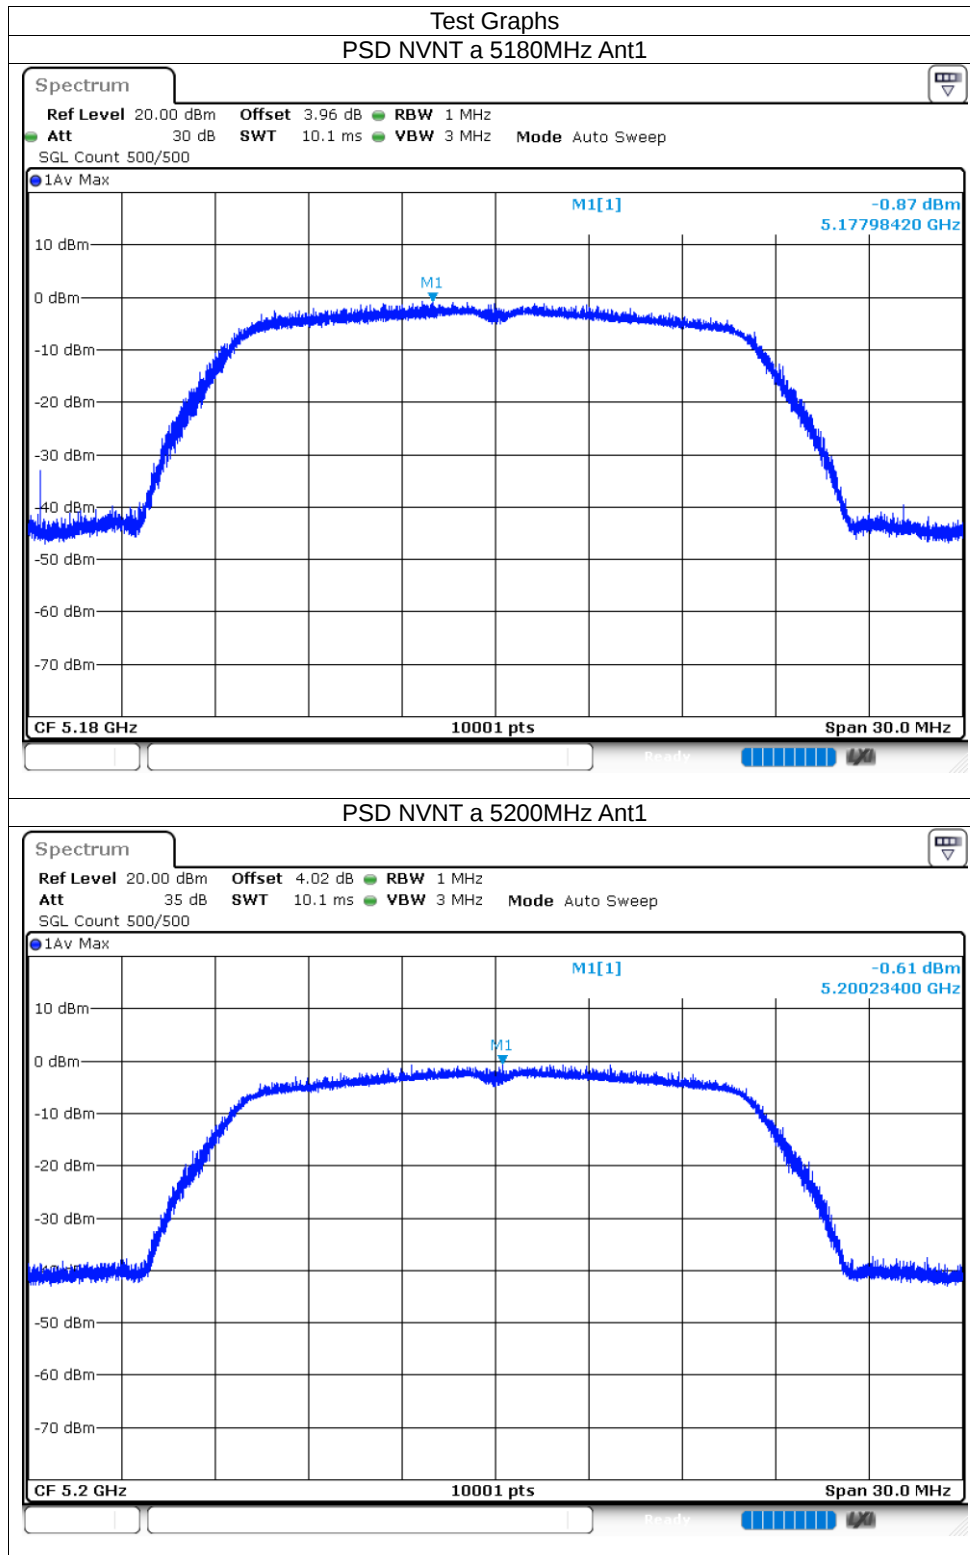



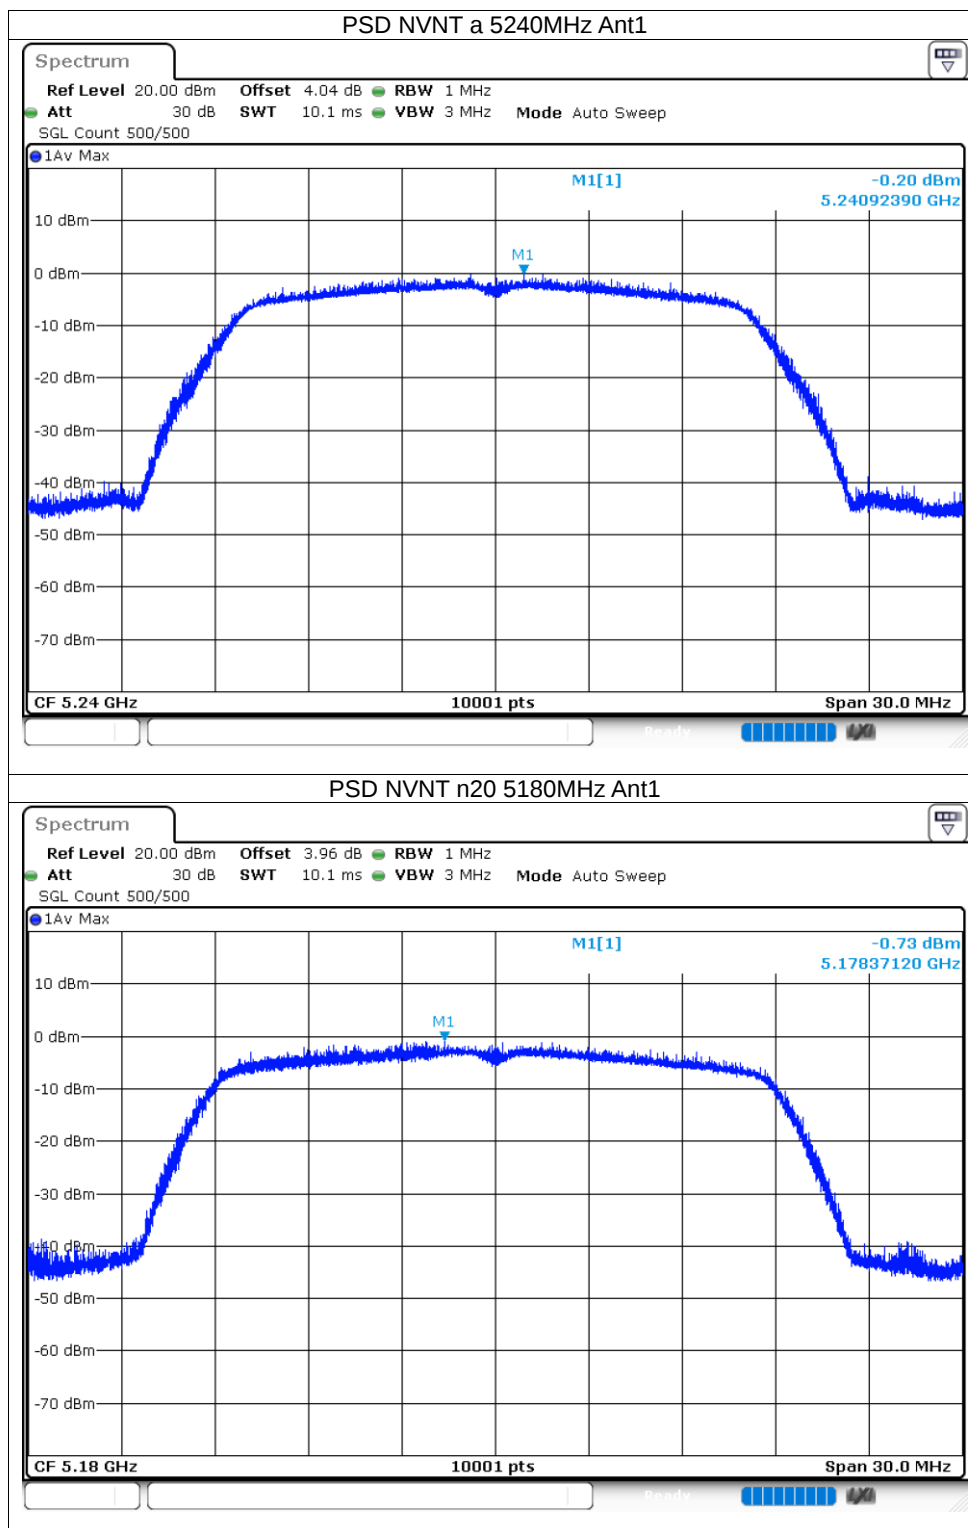


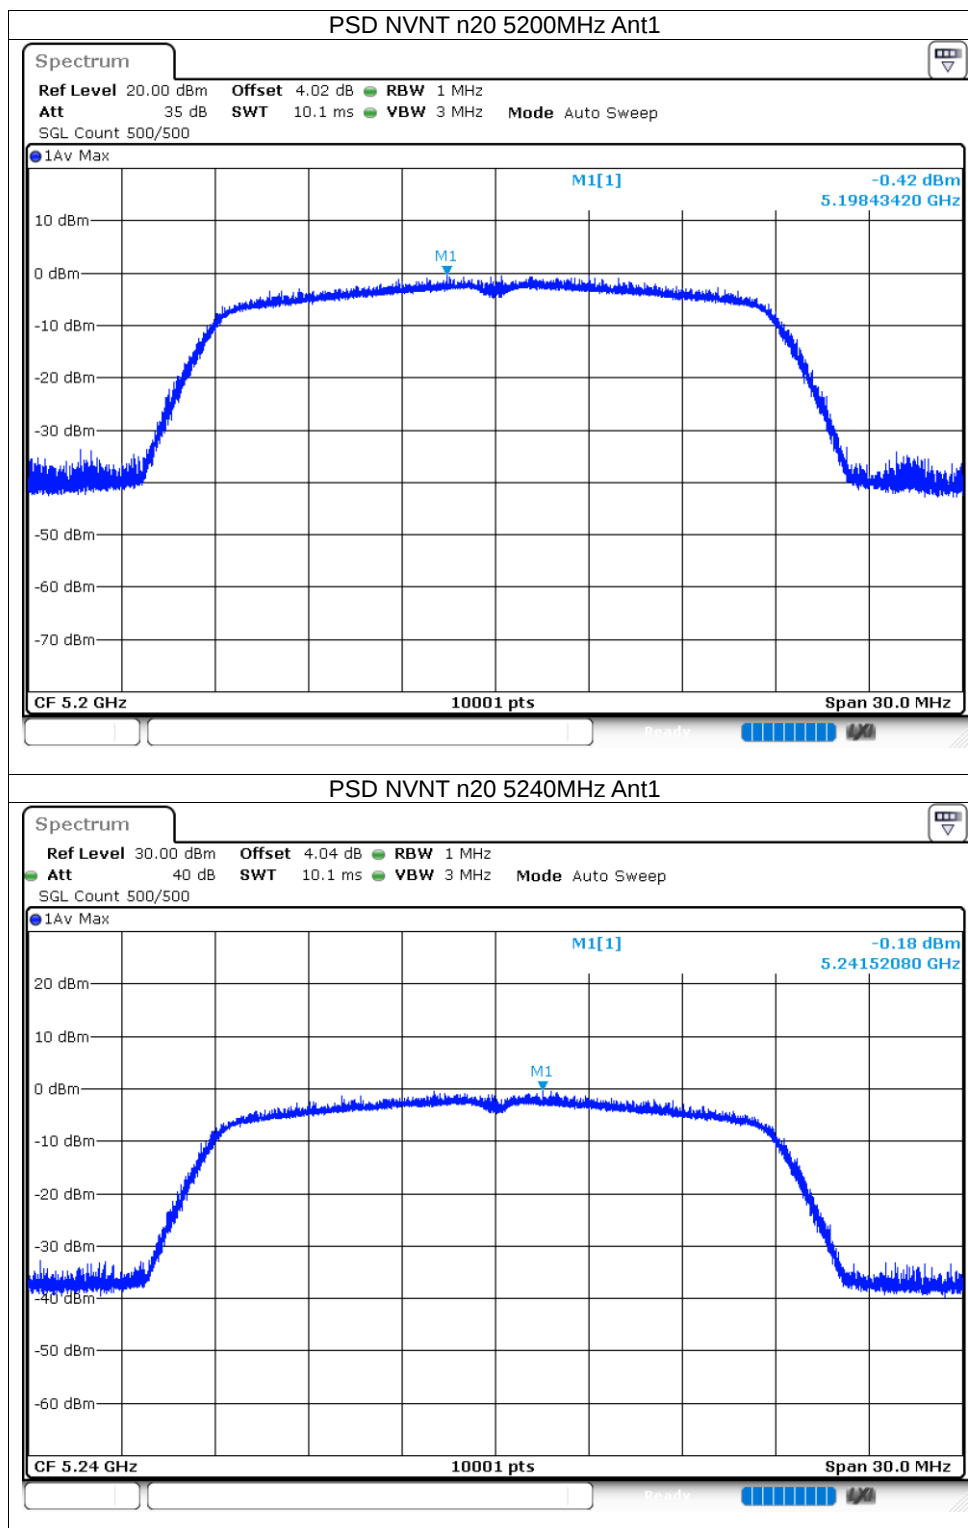

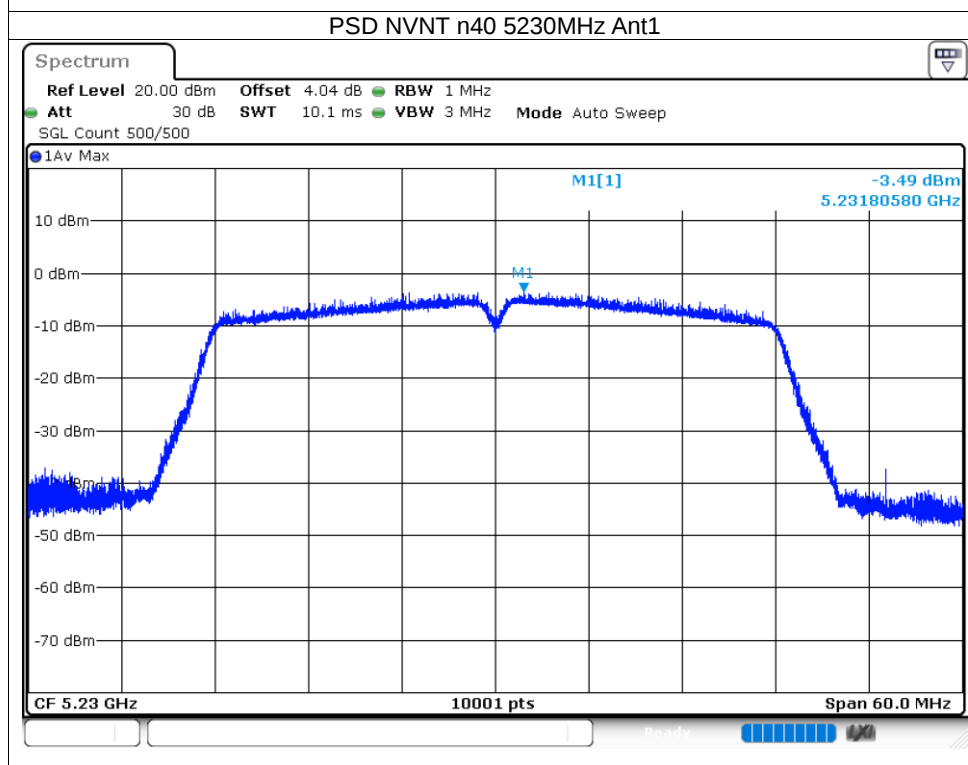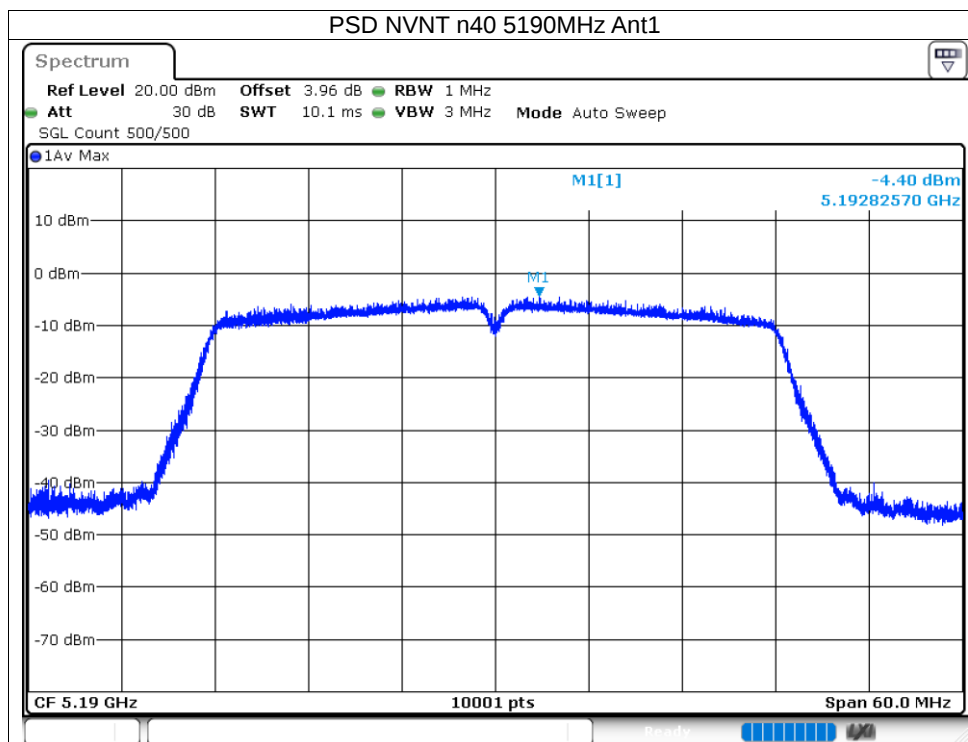

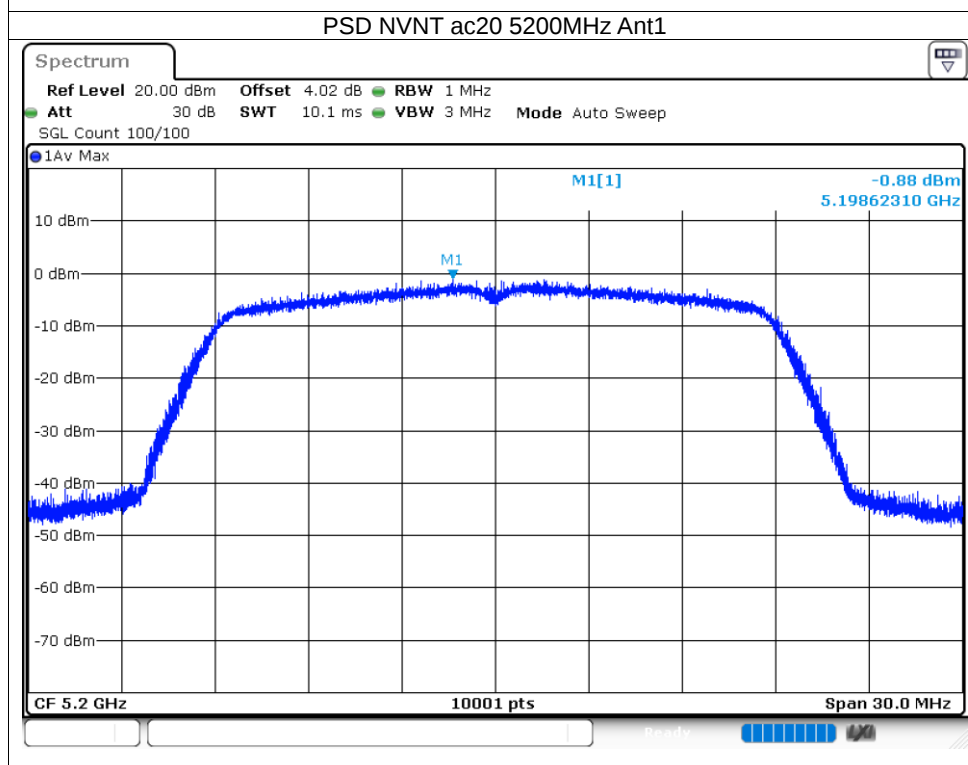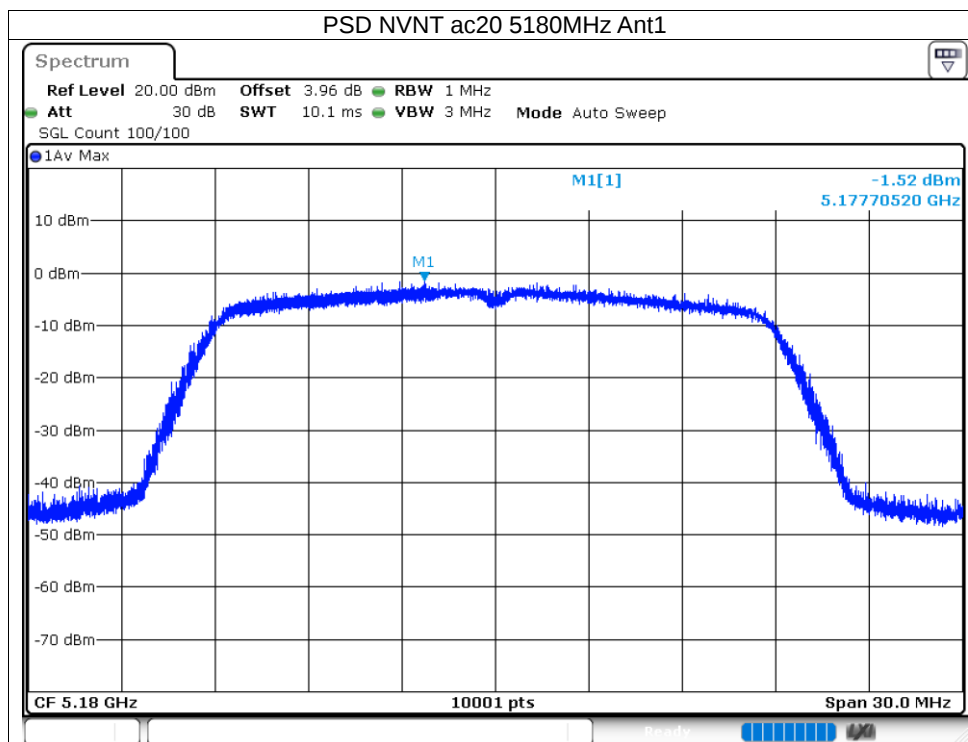


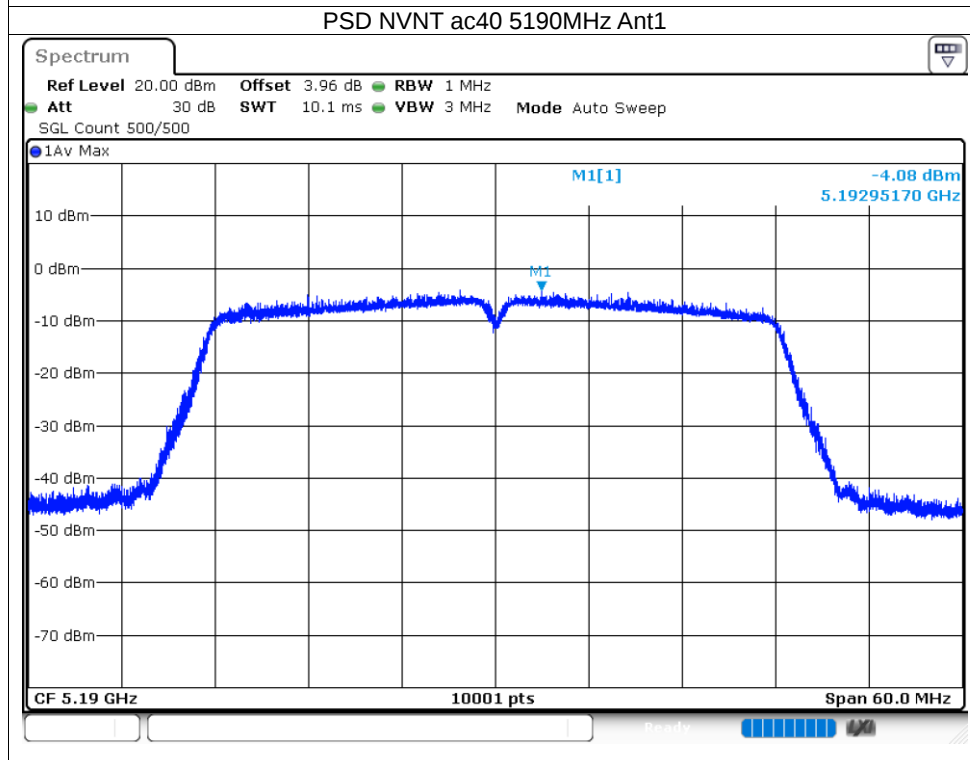
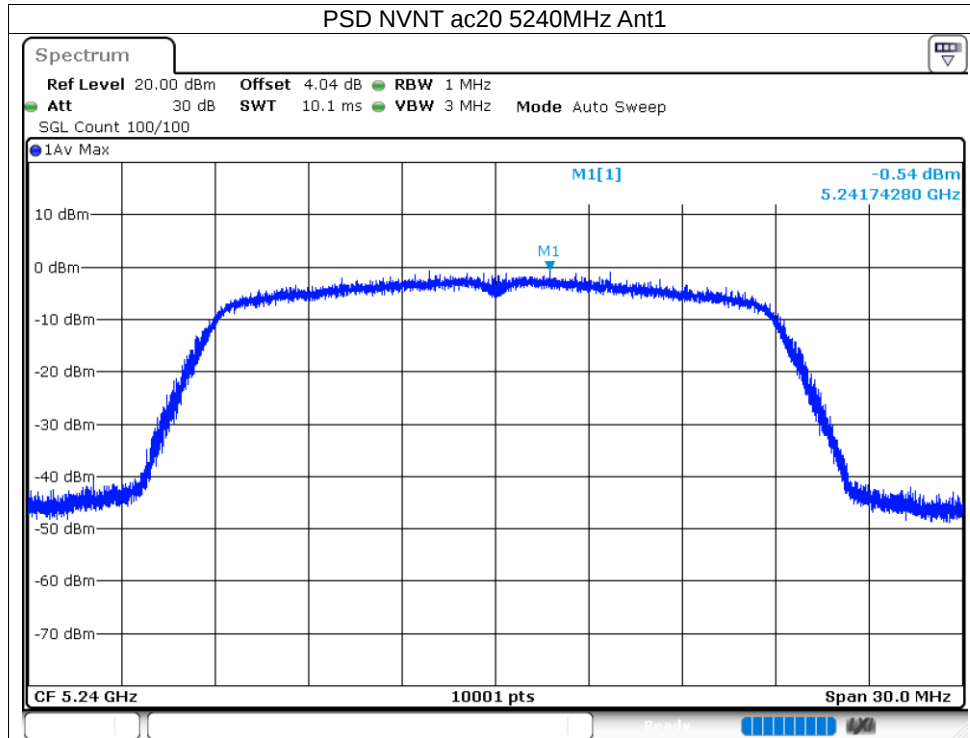


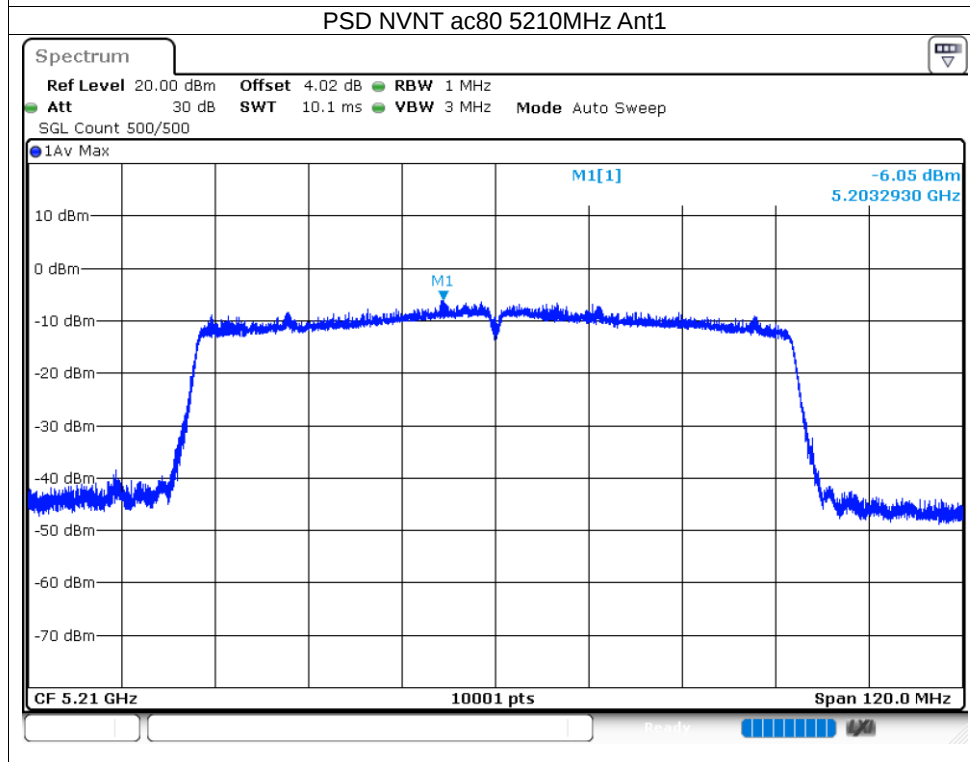
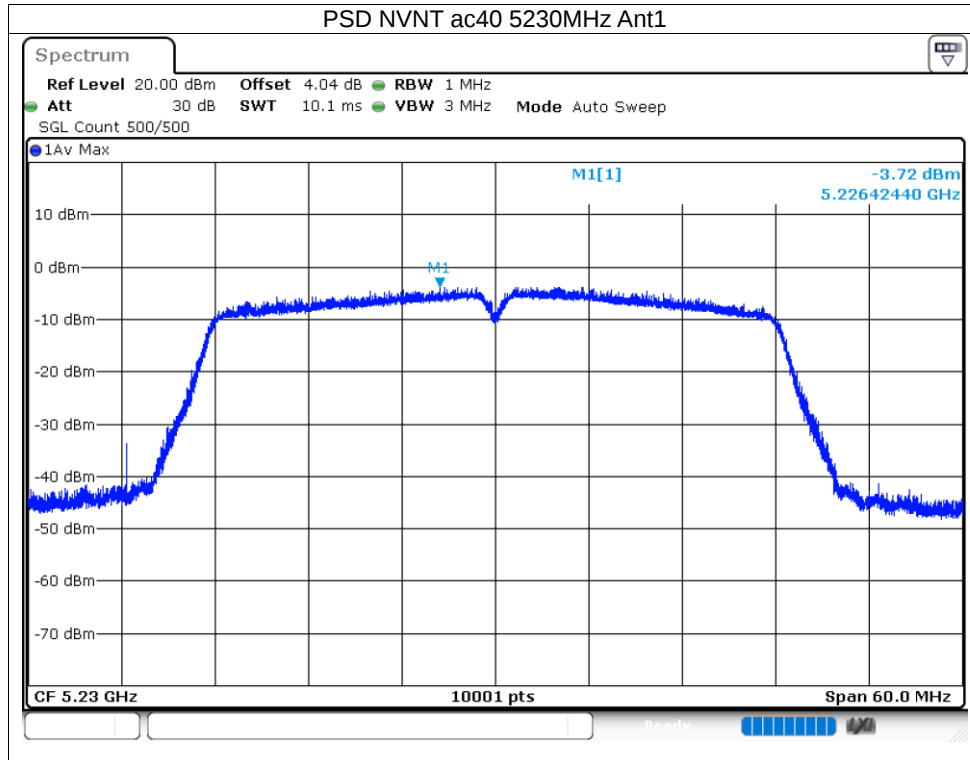




5.1.6 Band Edge



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-42.82	-27	Pass
NVNT	a	5240	Ant1	-43.7	-27	Pass
NVNT	n20	5180	Ant1	-43.54	-27	Pass
NVNT	n20	5240	Ant1	-43.63	-27	Pass
NVNT	n40	5190	Ant1	-43.81	-27	Pass
NVNT	n40	5230	Ant1	-43.57	-27	Pass
NVNT	ac20	5180	Ant1	-44	-27	Pass
NVNT	ac20	5240	Ant1	-43.99	-27	Pass
NVNT	ac40	5190	Ant1	-43.61	-27	Pass
NVNT	ac40	5230	Ant1	-44.14	-27	Pass
NVNT	ac80	5210	Ant1	-44.19	-27	Pass

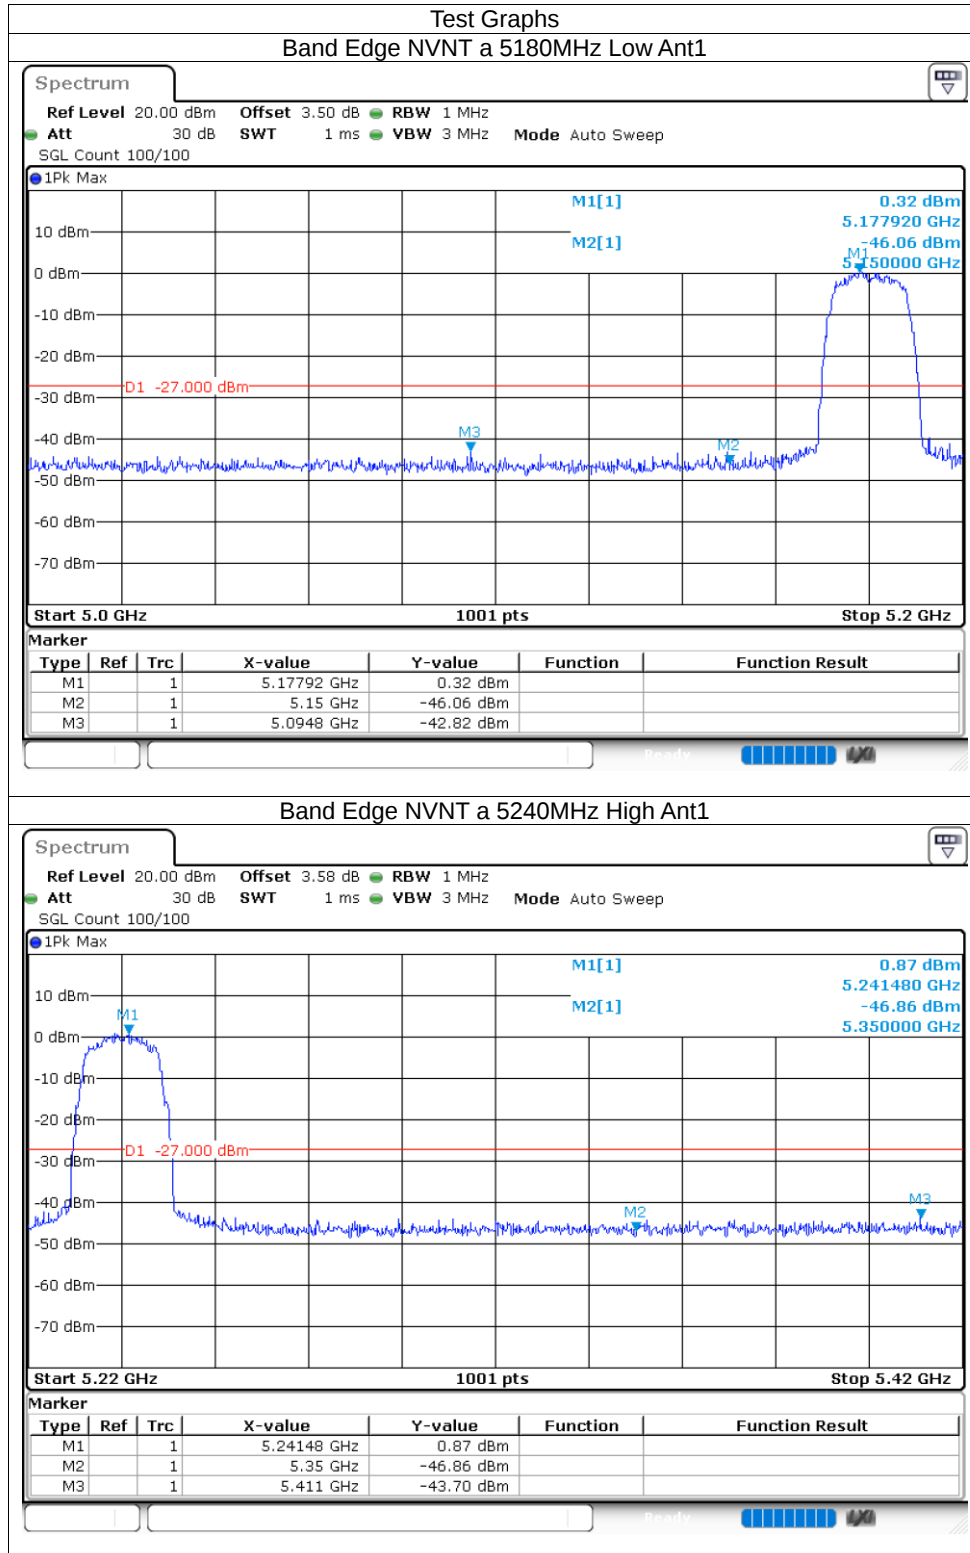


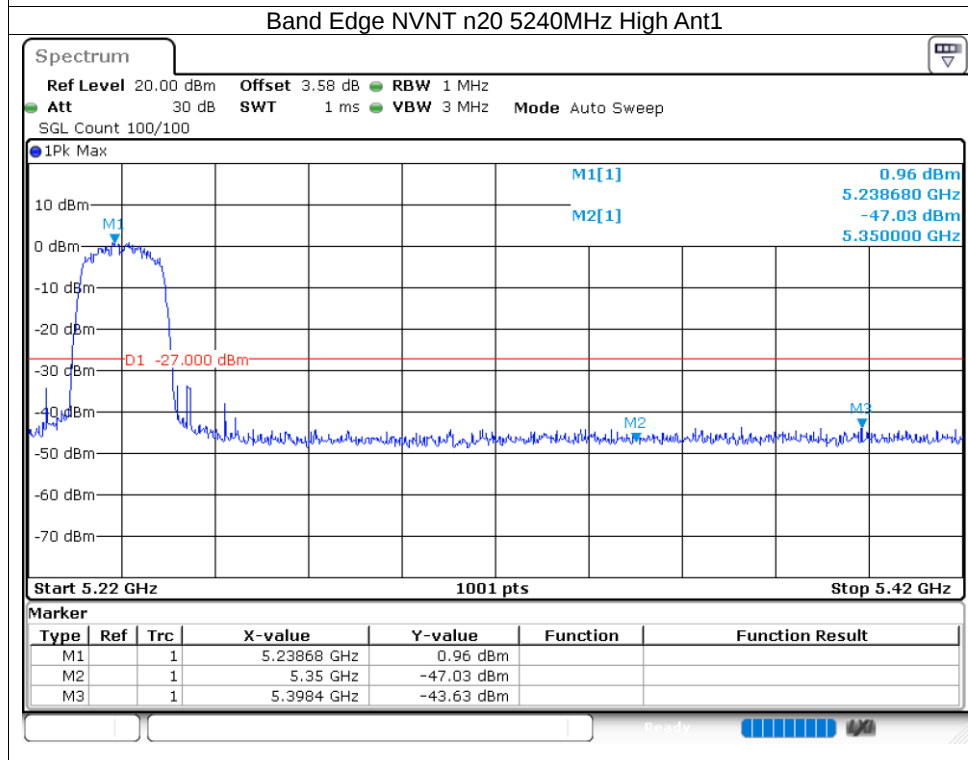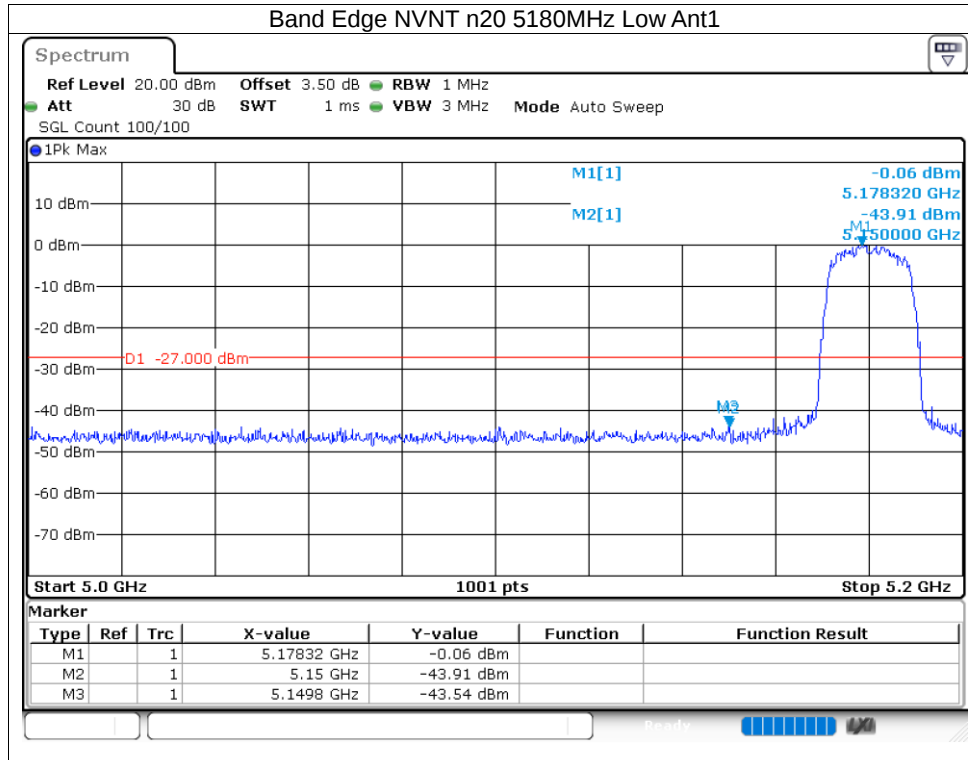

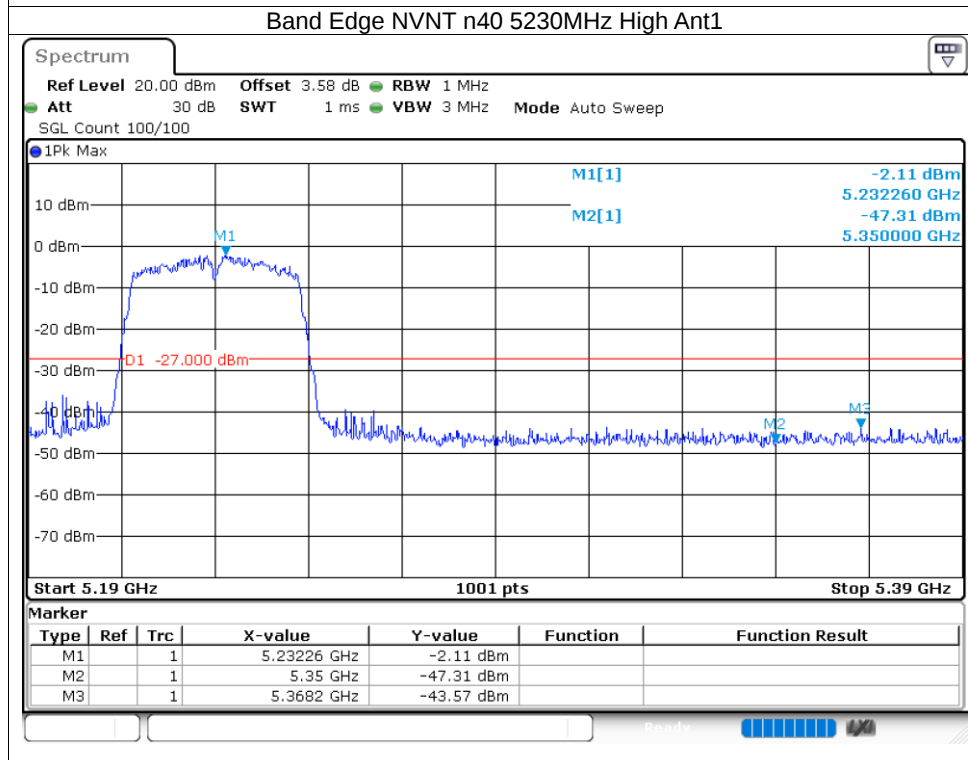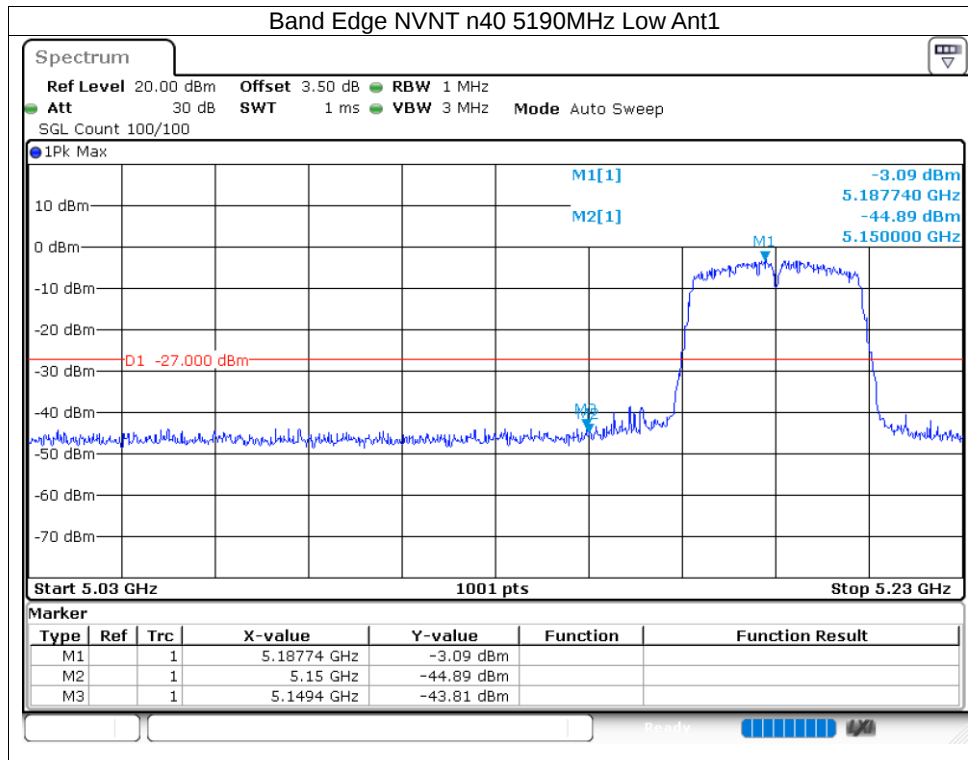

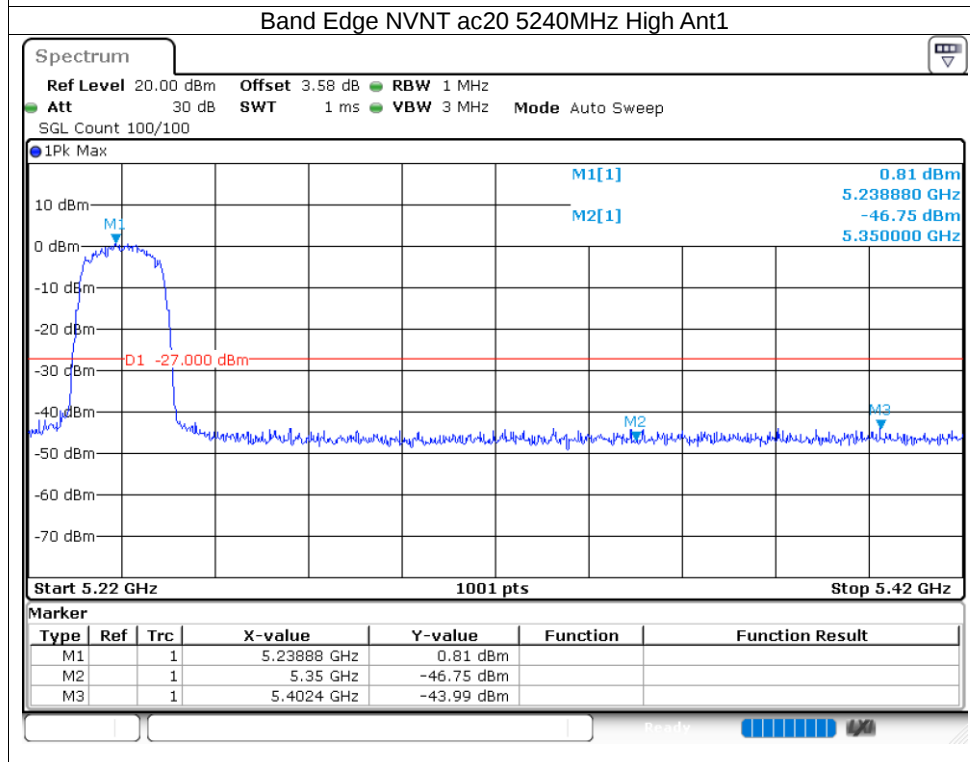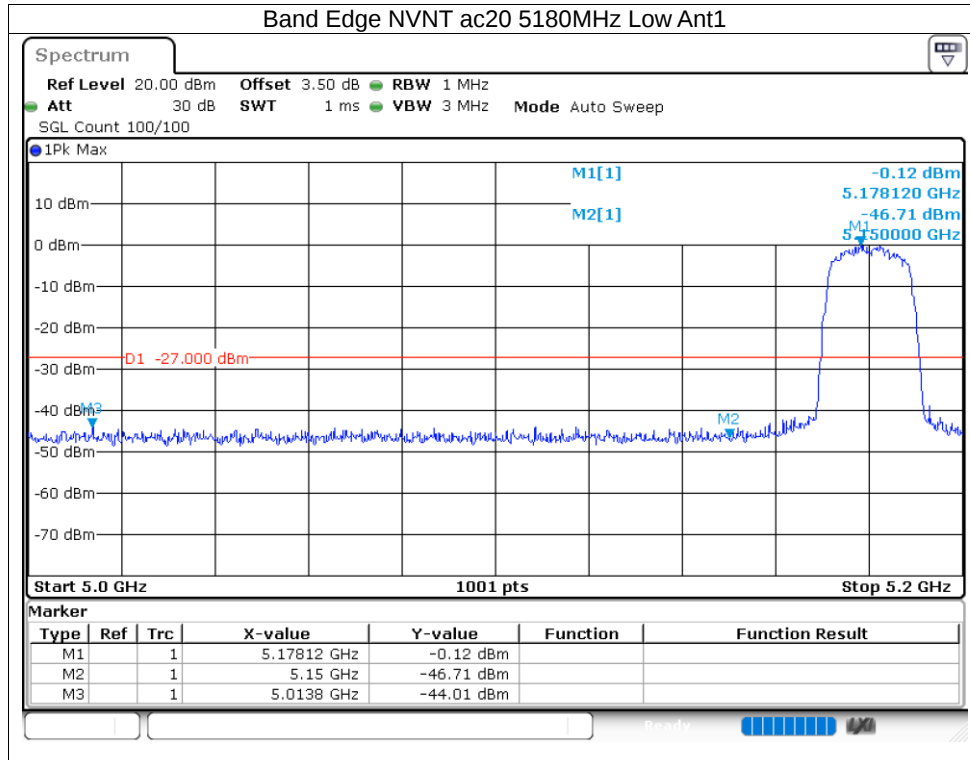


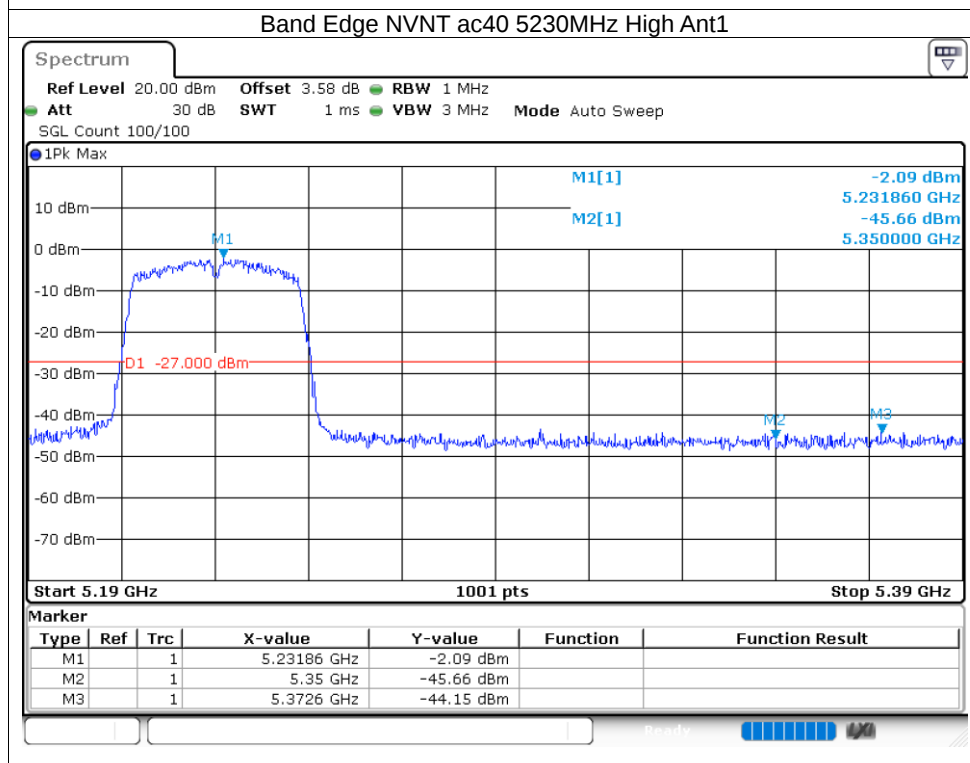
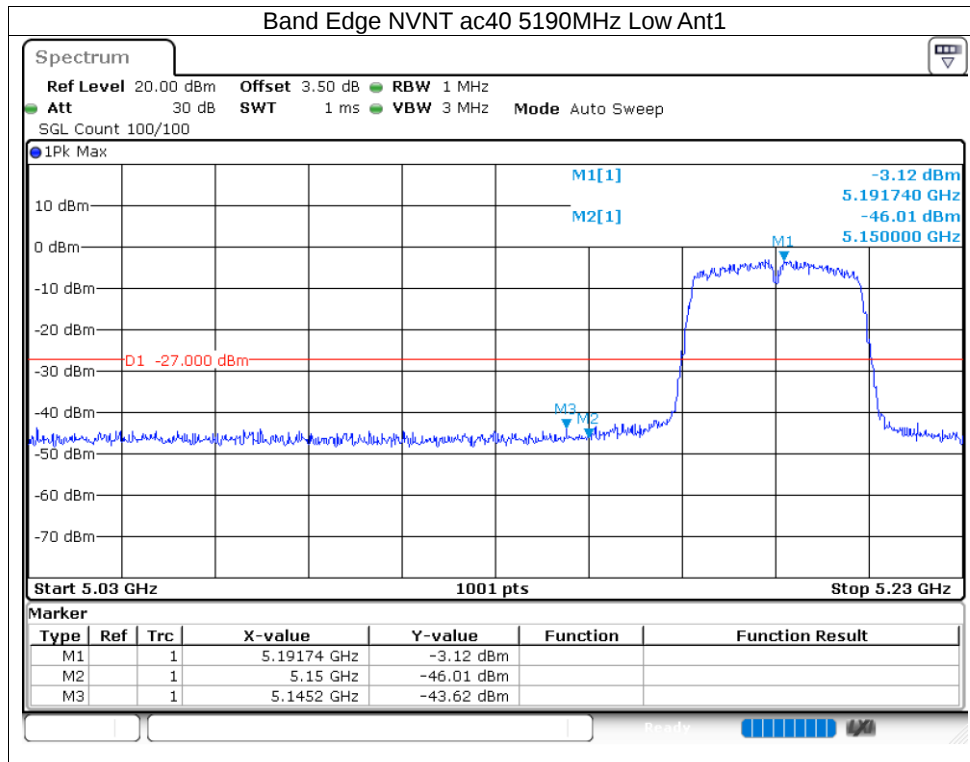



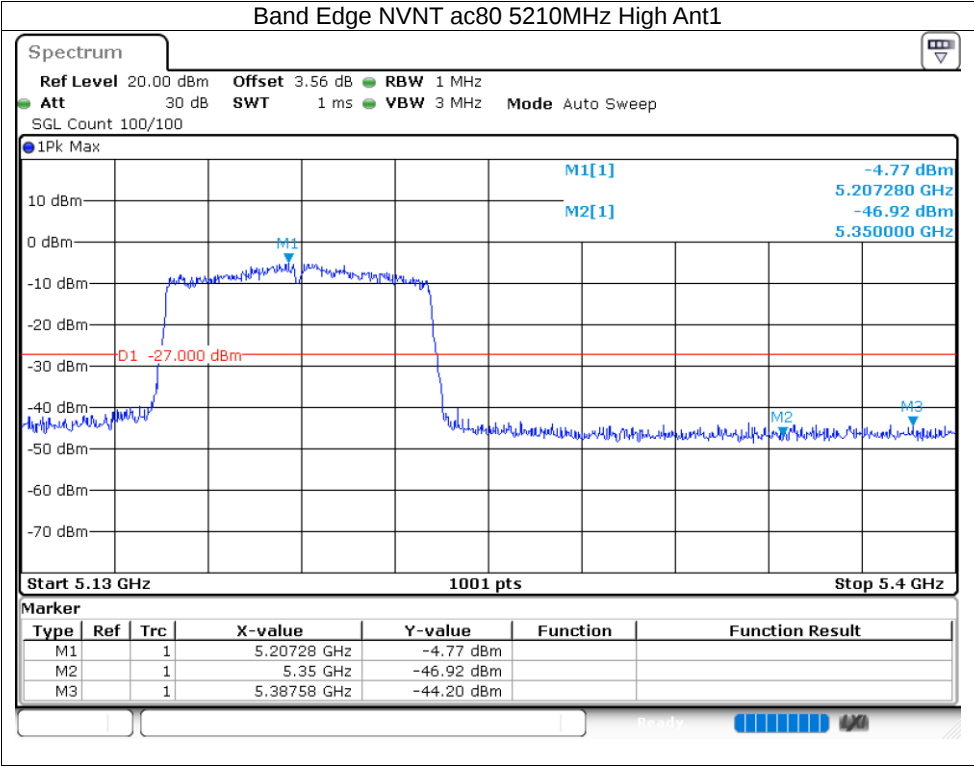




5.1.7 Conducted RF Spurious Emission



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-34.85	-27	Pass
NVNT	a	5200	Ant1	-34.62	-27	Pass
NVNT	a	5240	Ant1	-33.45	-27	Pass
NVNT	n20	5180	Ant1	-32.79	-27	Pass
NVNT	n20	5200	Ant1	-35.26	-27	Pass
NVNT	n20	5240	Ant1	-34.9	-27	Pass
NVNT	n40	5190	Ant1	-35.11	-27	Pass
NVNT	n40	5230	Ant1	-35.31	-27	Pass
NVNT	ac20	5180	Ant1	-34.54	-27	Pass
NVNT	ac20	5200	Ant1	-35.8	-27	Pass
NVNT	ac20	5240	Ant1	-35.3	-27	Pass
NVNT	ac40	5190	Ant1	-31.07	-27	Pass
NVNT	ac40	5230	Ant1	-35.35	-27	Pass
NVNT	ac80	5210	Ant1	-34.69	-27	Pass


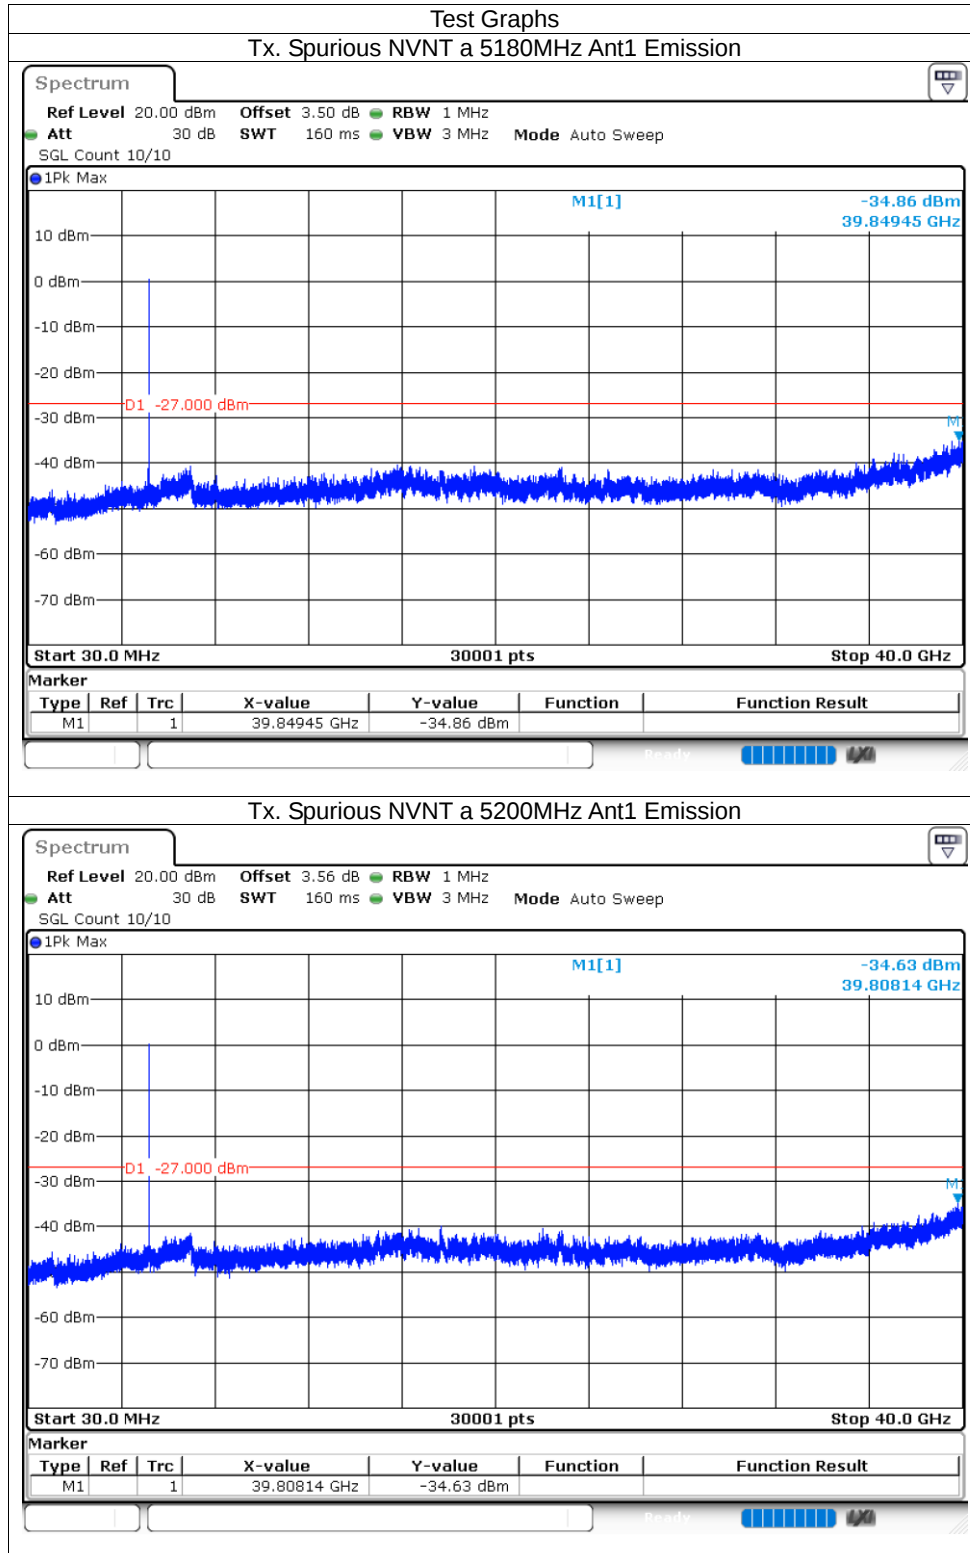


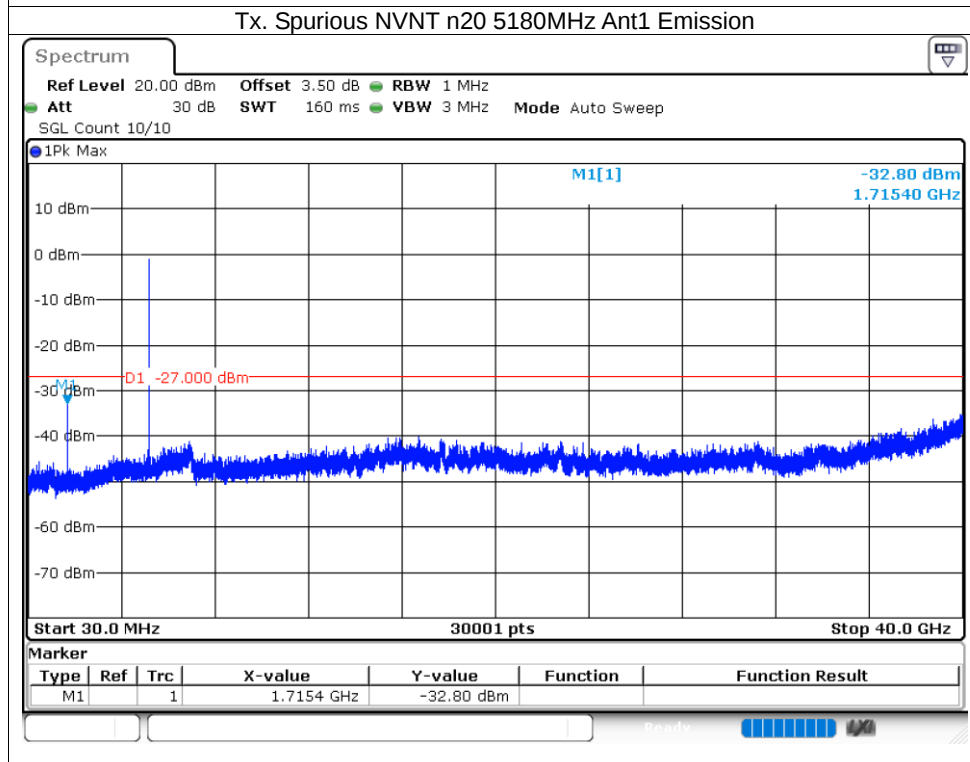
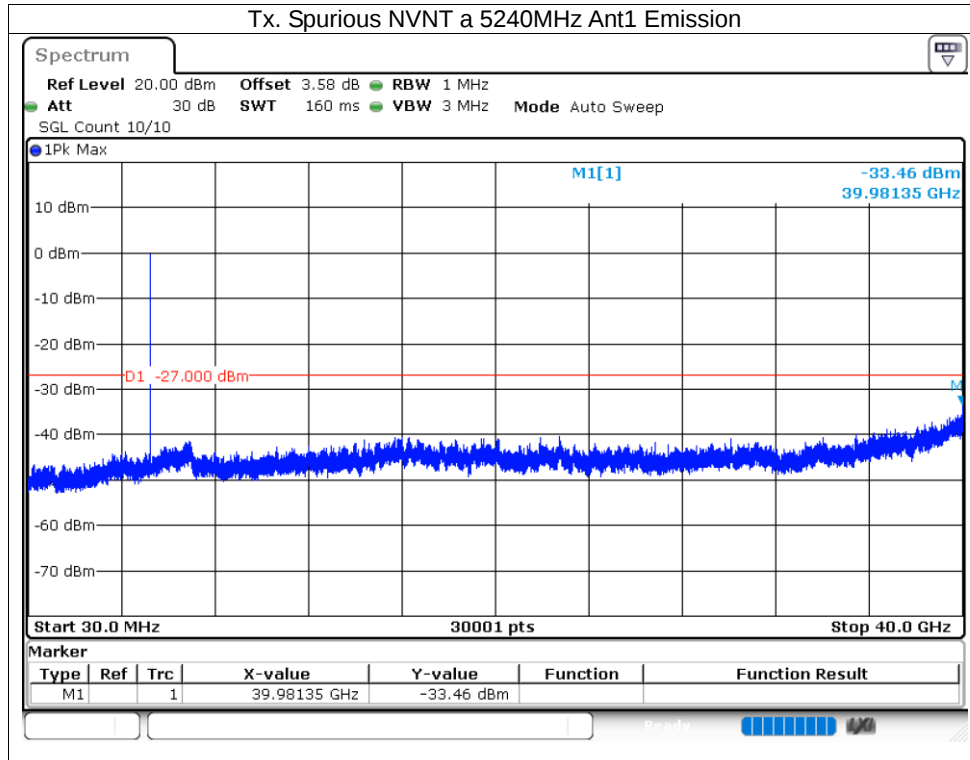


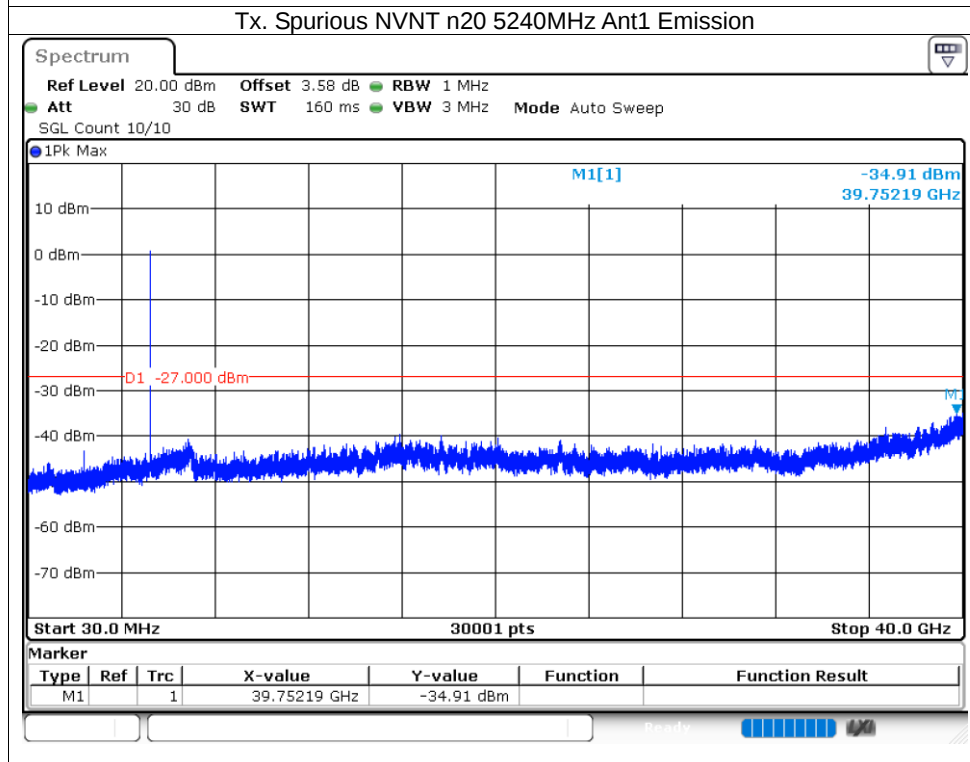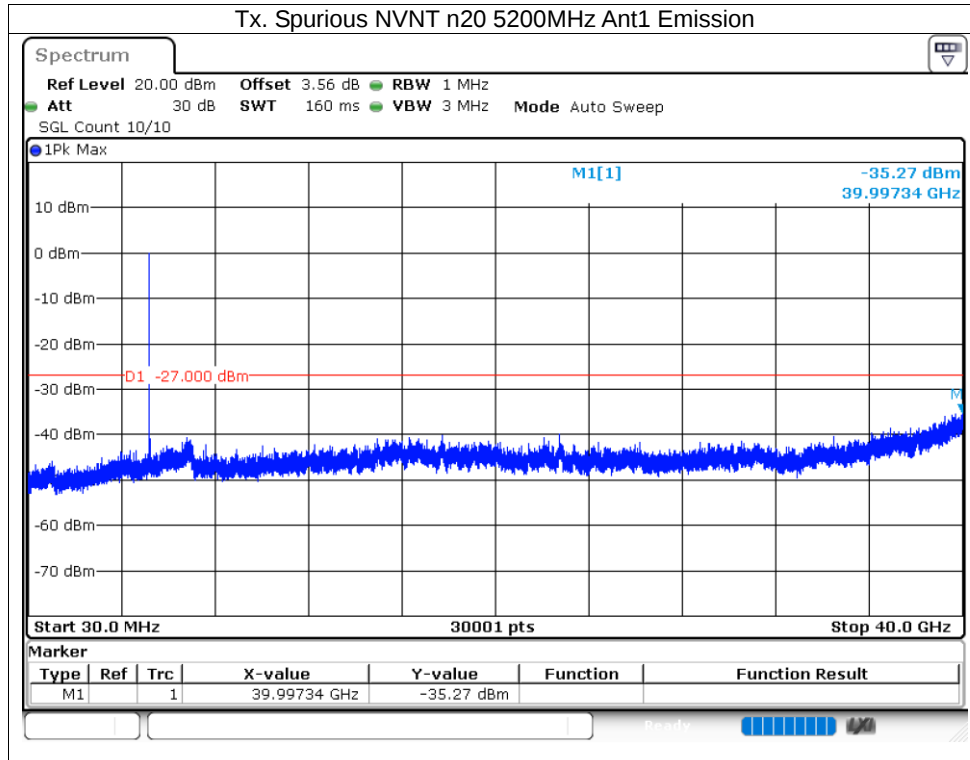

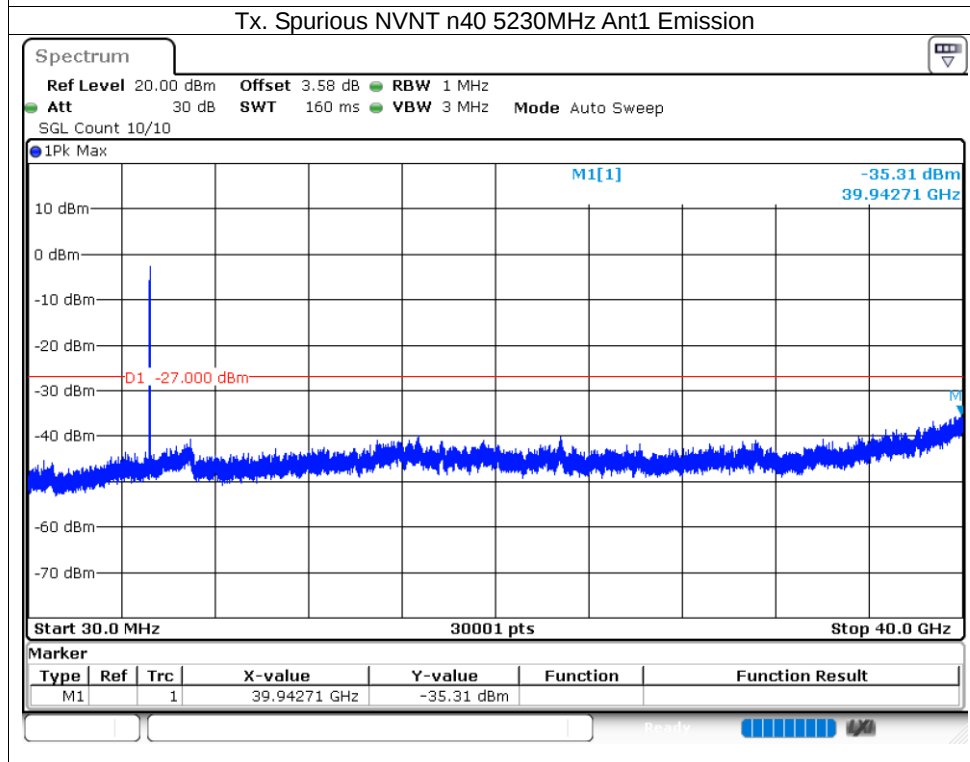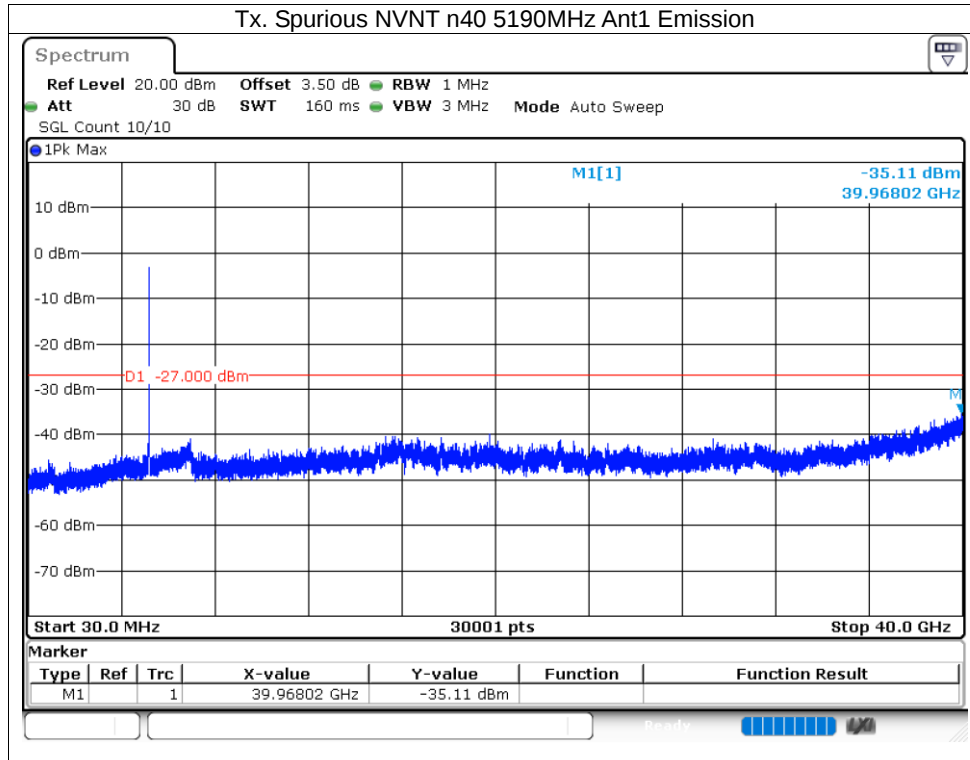

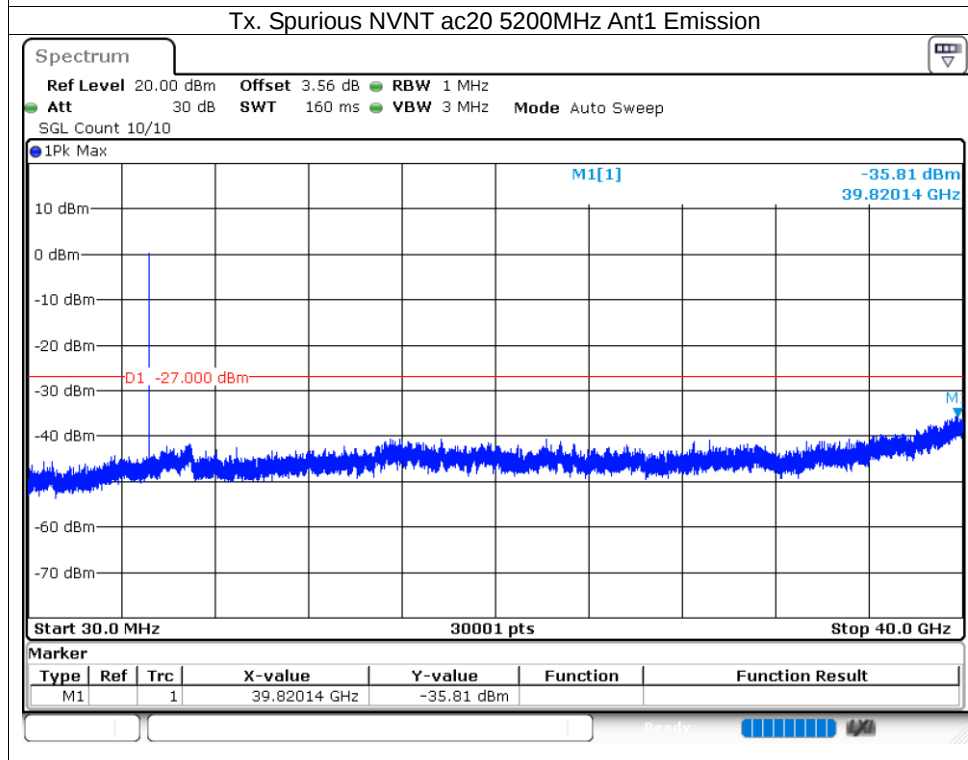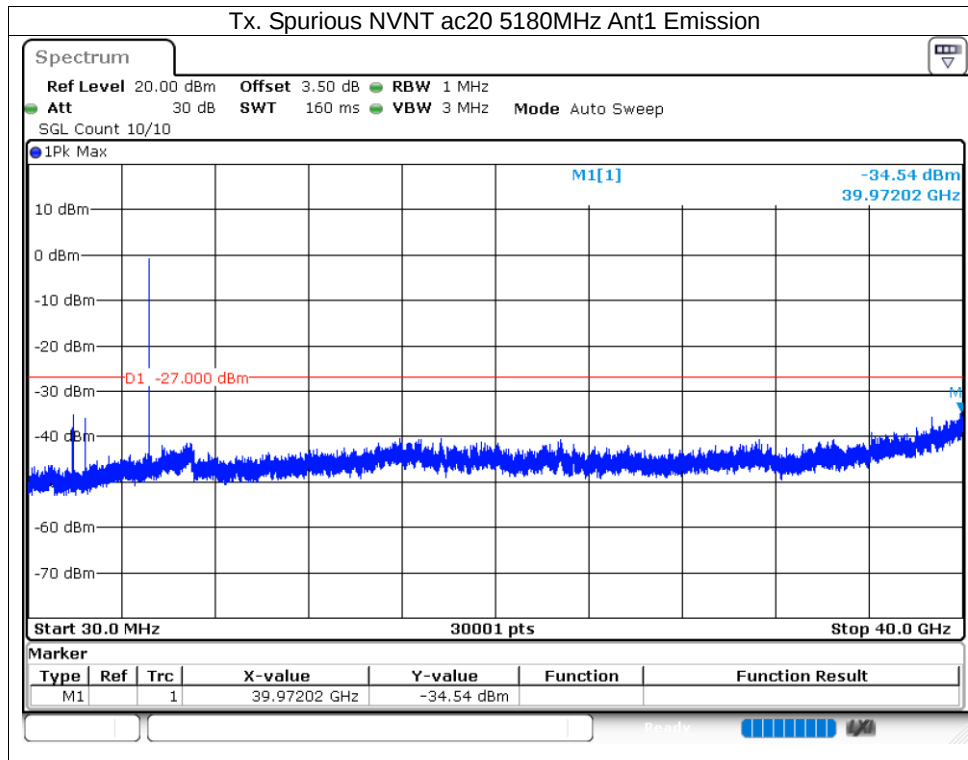

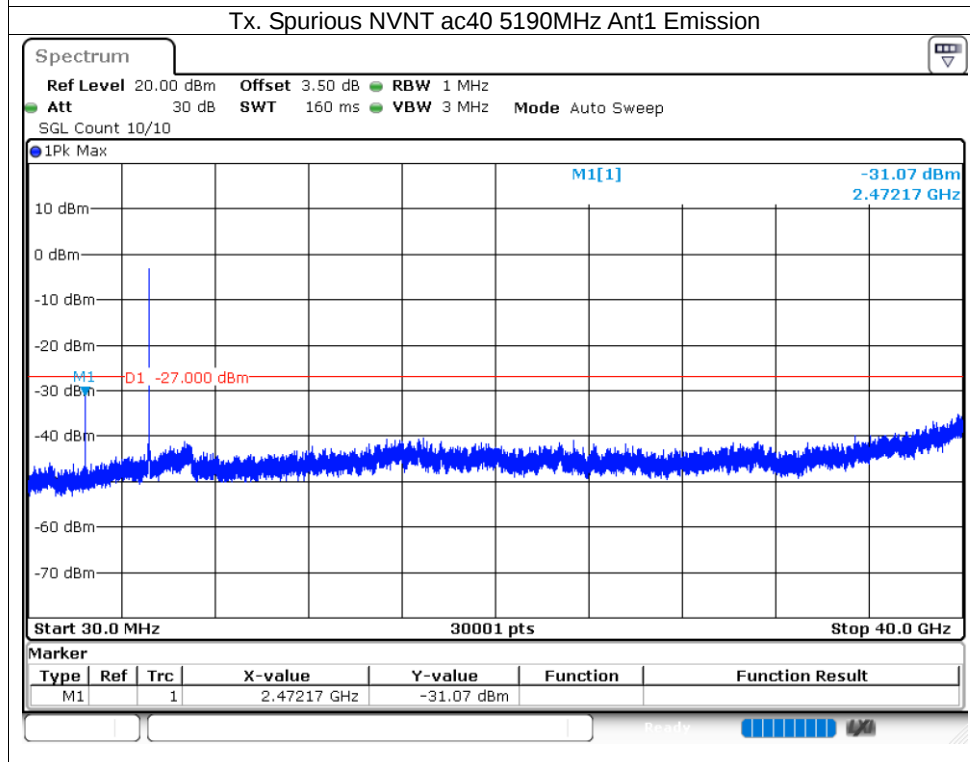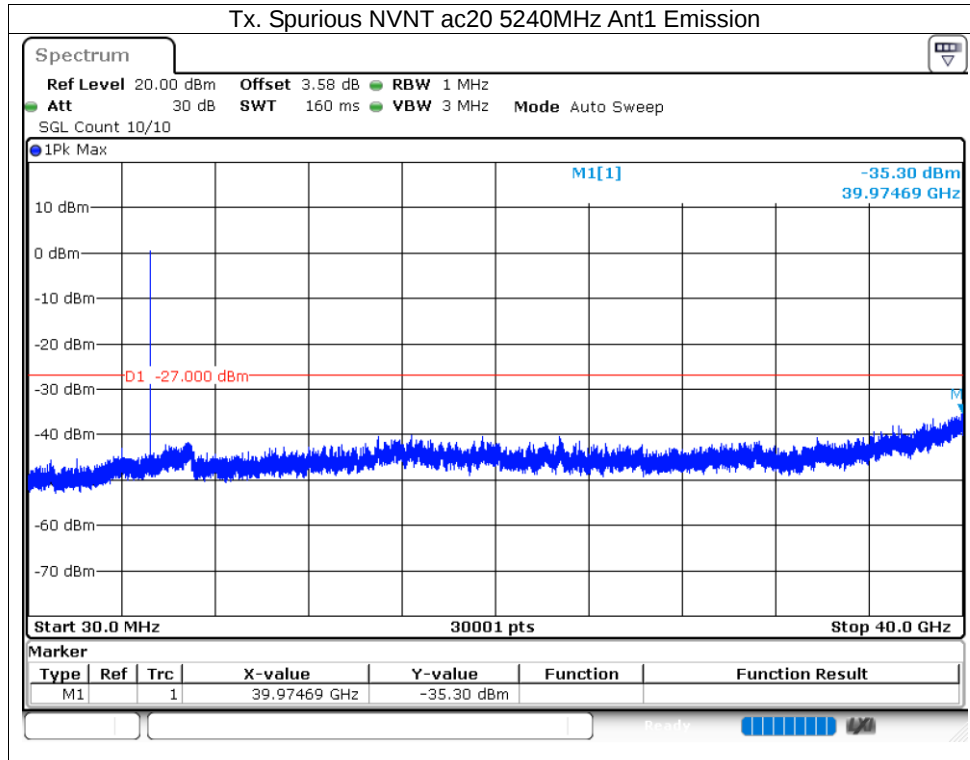

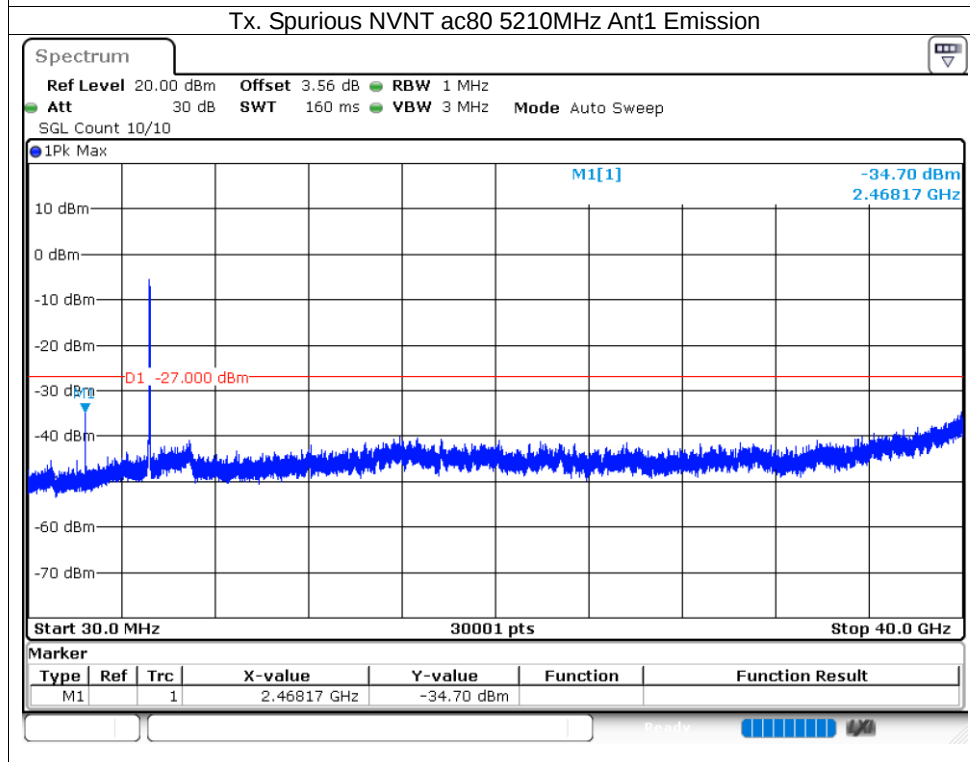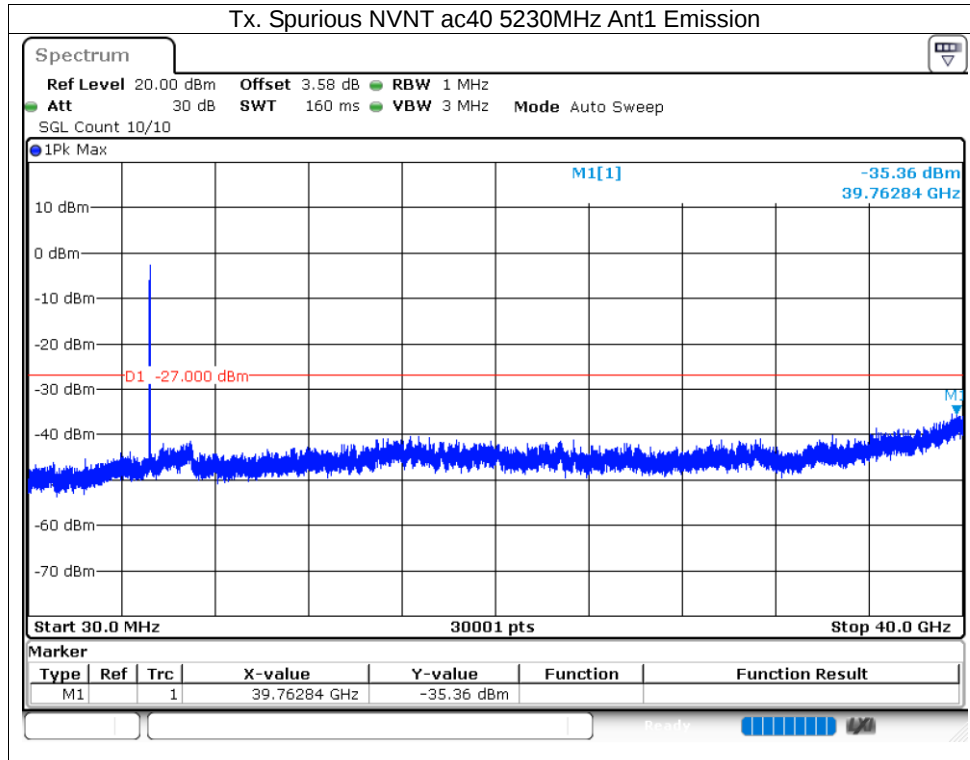

5.8G WIFI

5.2.1 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	98.18	0.08	0.72
NVNT	a	5785	Ant1	98.19	0.08	0.72
NVNT	a	5825	Ant1	98.2	0.08	0.72
NVNT	n20	5745	Ant1	98.04	0.09	0.77
NVNT	n20	5785	Ant1	98.04	0.09	0.77
NVNT	n20	5825	Ant1	98.06	0.09	0.77
NVNT	n40	5755	Ant1	93.79	0.28	1.56
NVNT	n40	5795	Ant1	96.33	0.16	1.54
NVNT	ac20	5745	Ant1	98.08	0.08	0.76
NVNT	ac20	5785	Ant1	98.06	0.09	0.76
NVNT	ac20	5825	Ant1	98.09	0.08	0.76
NVNT	ac40	5755	Ant1	96.34	0.16	1.54
NVNT	ac40	5795	Ant1	96.38	0.16	1.54
NVNT	ac80	5775	Ant1	61.49	2.11	50

