




## 5.2G:


### Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5180            | Ant1    | 98.18          | 0.08                   | 0.72      |
| NVNT      | a    | 5200            | Ant1    | 98.17          | 0.08                   | 0.72      |
| NVNT      | a    | 5240            | Ant1    | 98.18          | 0.08                   | 0.72      |
| NVNT      | n20  | 5180            | Ant1    | 98.05          | 0.09                   | 0.77      |
| NVNT      | n20  | 5200            | Ant1    | 98.09          | 0.08                   | 0.77      |
| NVNT      | n20  | 5240            | Ant1    | 98.06          | 0.09                   | 0.77      |
| NVNT      | n40  | 5190            | Ant1    | 96.32          | 0.16                   | 1.54      |
| NVNT      | n40  | 5230            | Ant1    | 96.35          | 0.16                   | 1.54      |
| NVNT      | ac20 | 5180            | Ant1    | 98.08          | 0.08                   | 0.76      |
| NVNT      | ac20 | 5200            | Ant1    | 98.06          | 0.09                   | 0.76      |
| NVNT      | ac20 | 5240            | Ant1    | 98.07          | 0.08                   | 0.76      |
| NVNT      | ac40 | 5190            | Ant1    | 96.36          | 0.16                   | 1.54      |
| NVNT      | ac40 | 5230            | Ant1    | 96.39          | 0.16                   | 1.52      |
| NVNT      | ac80 | 5210            | Ant1    | 93.13          | 0.31                   | 3.12      |

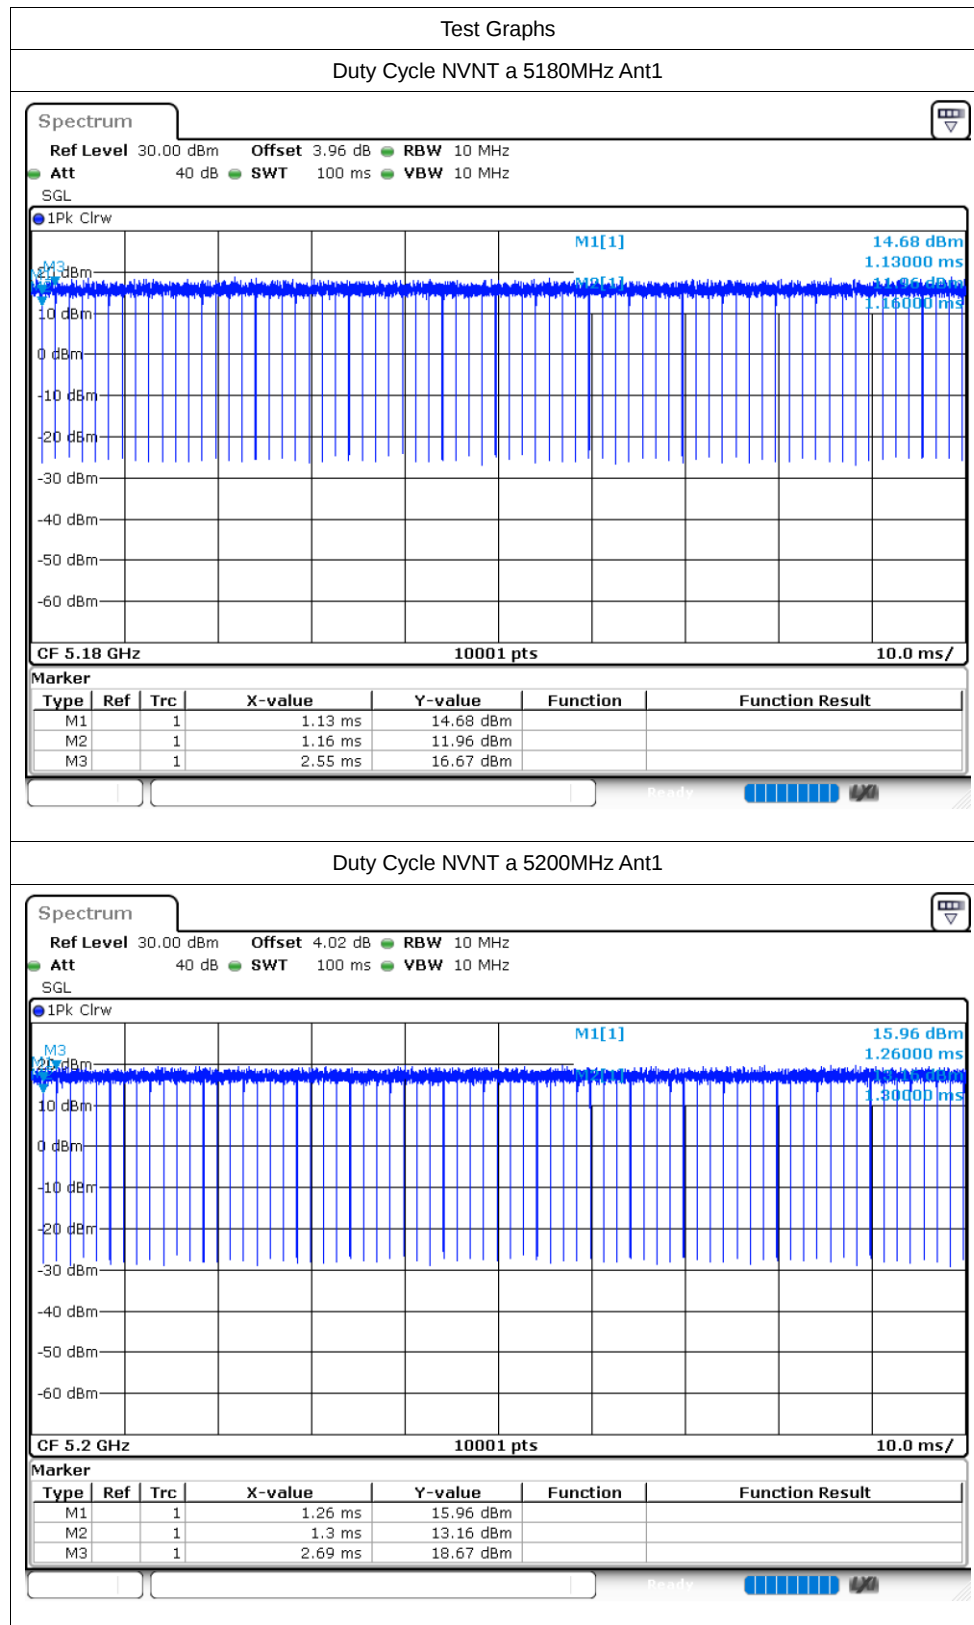


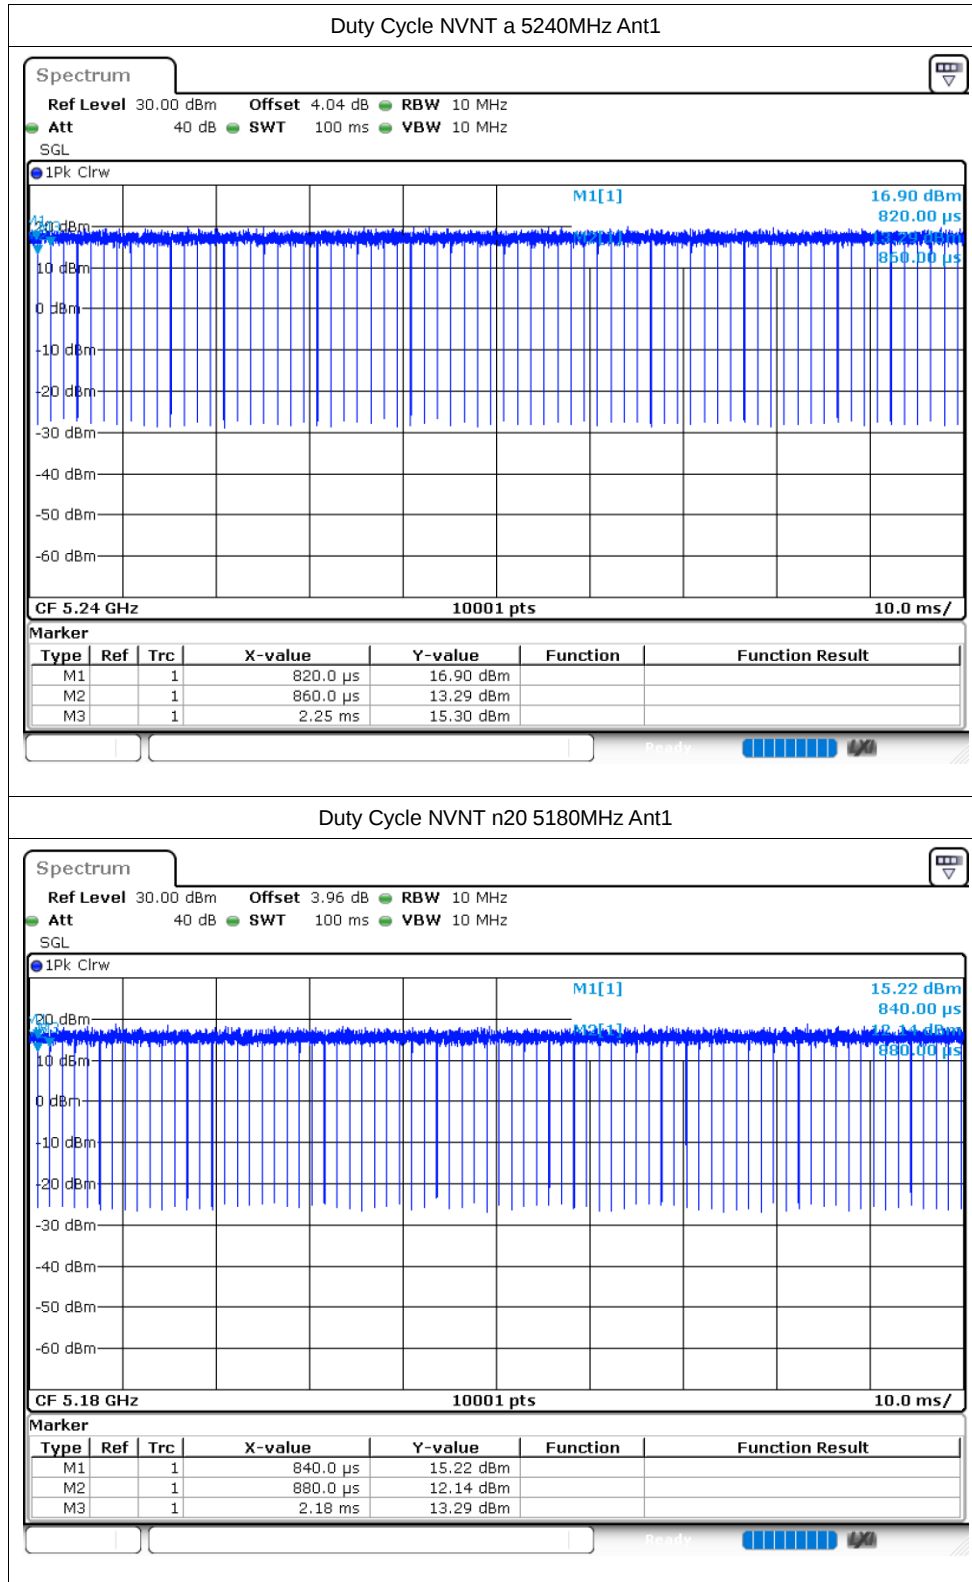


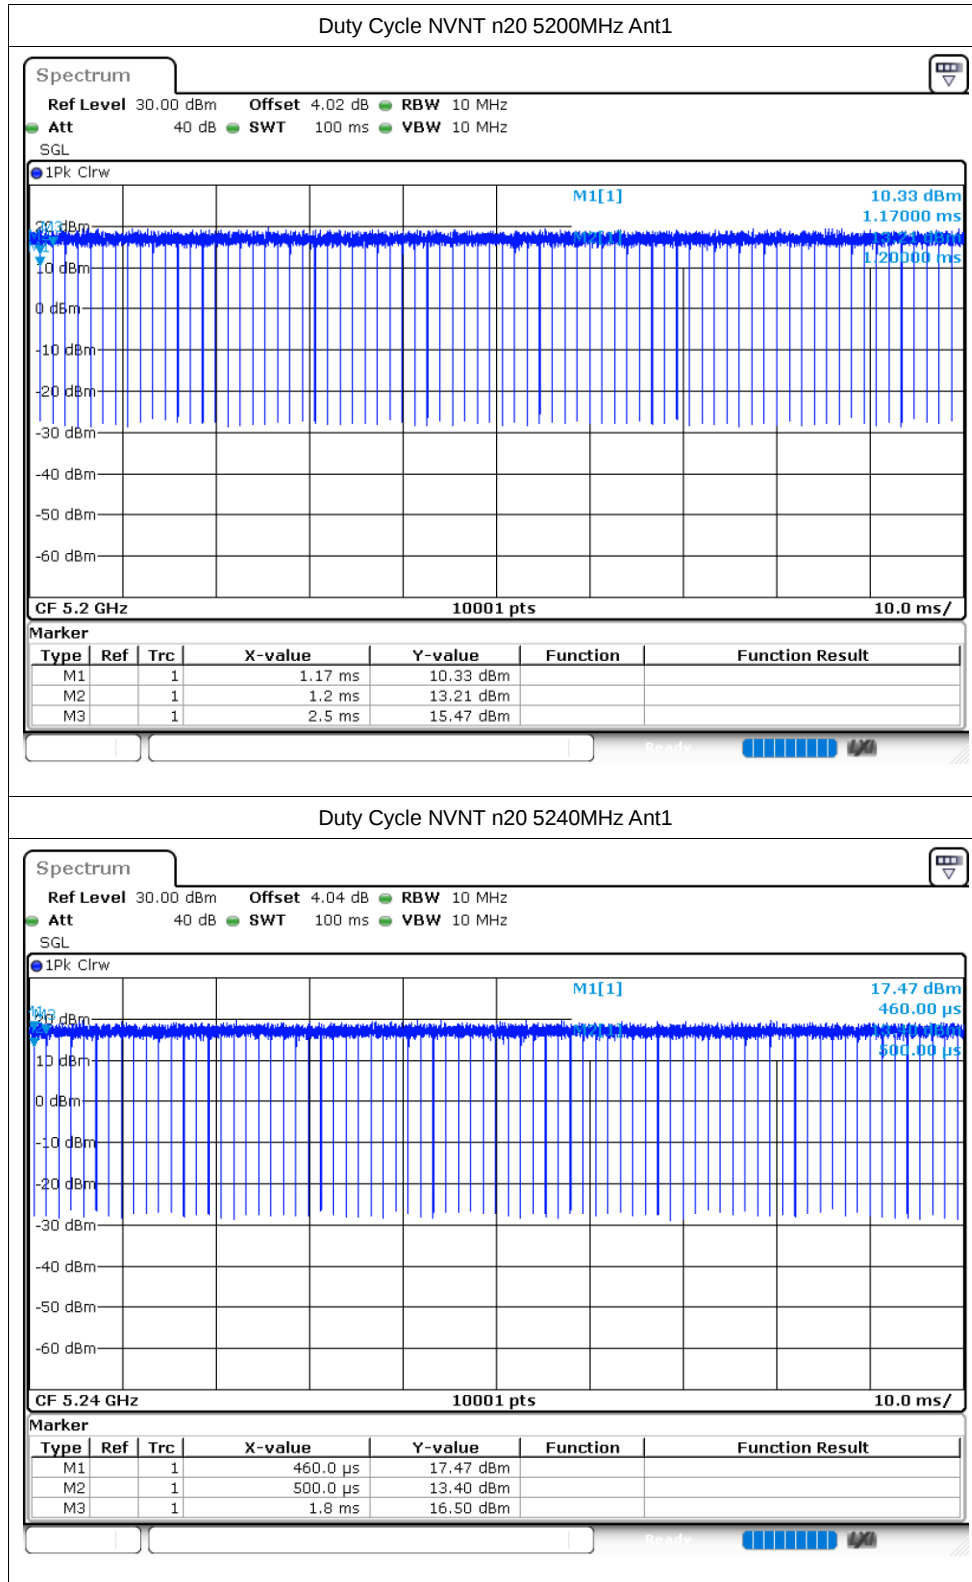

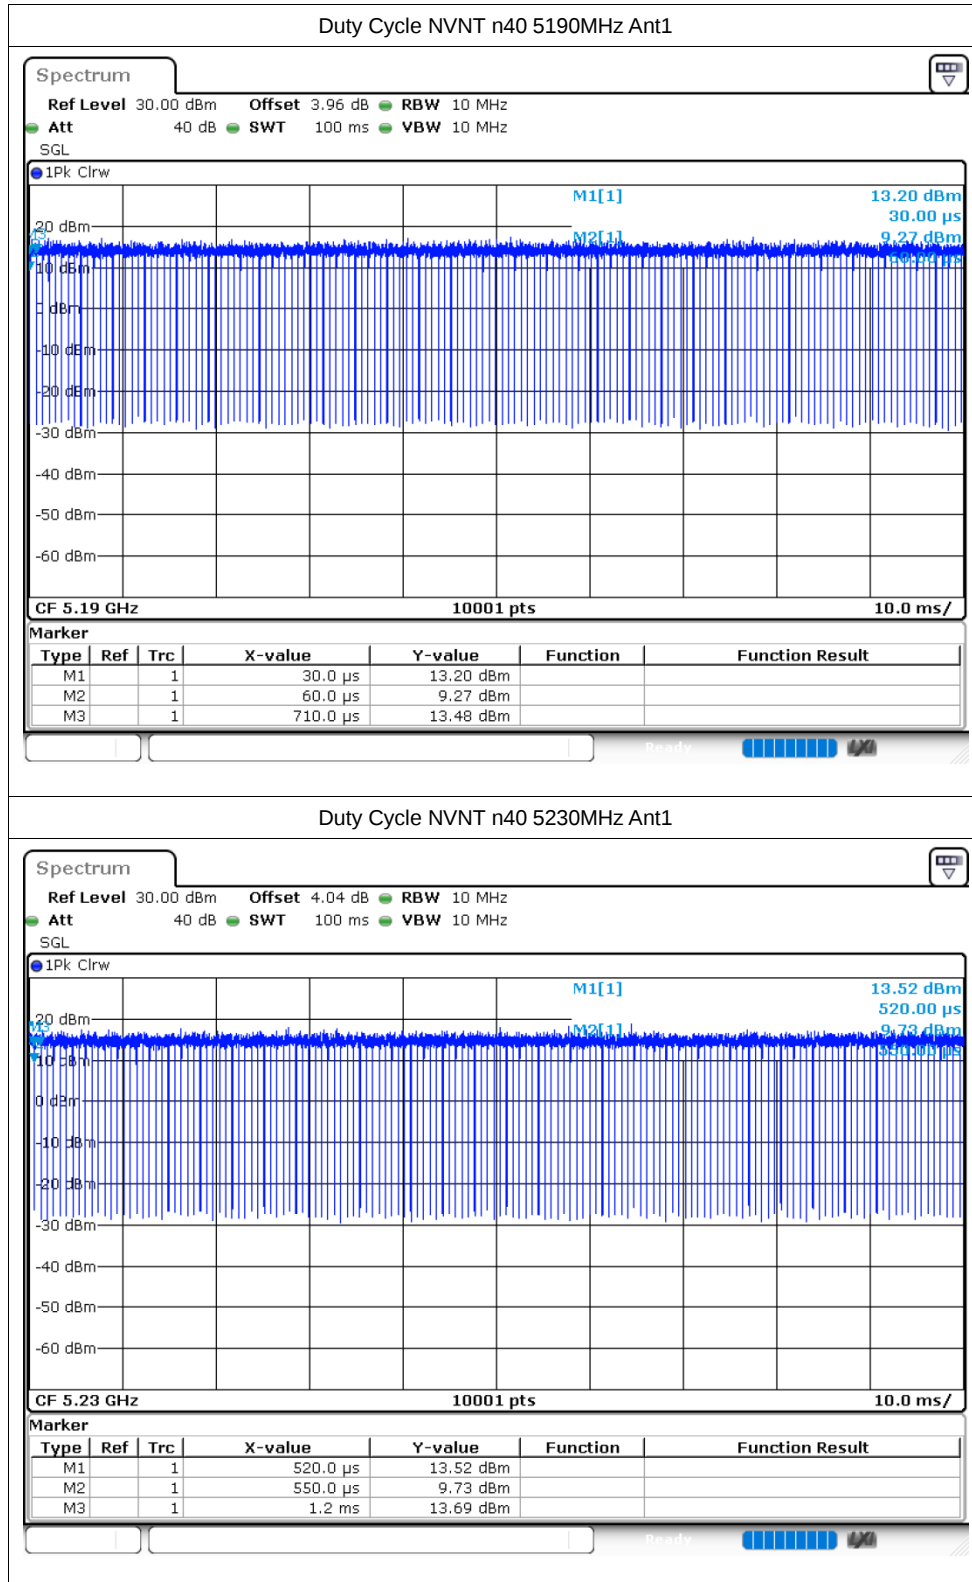

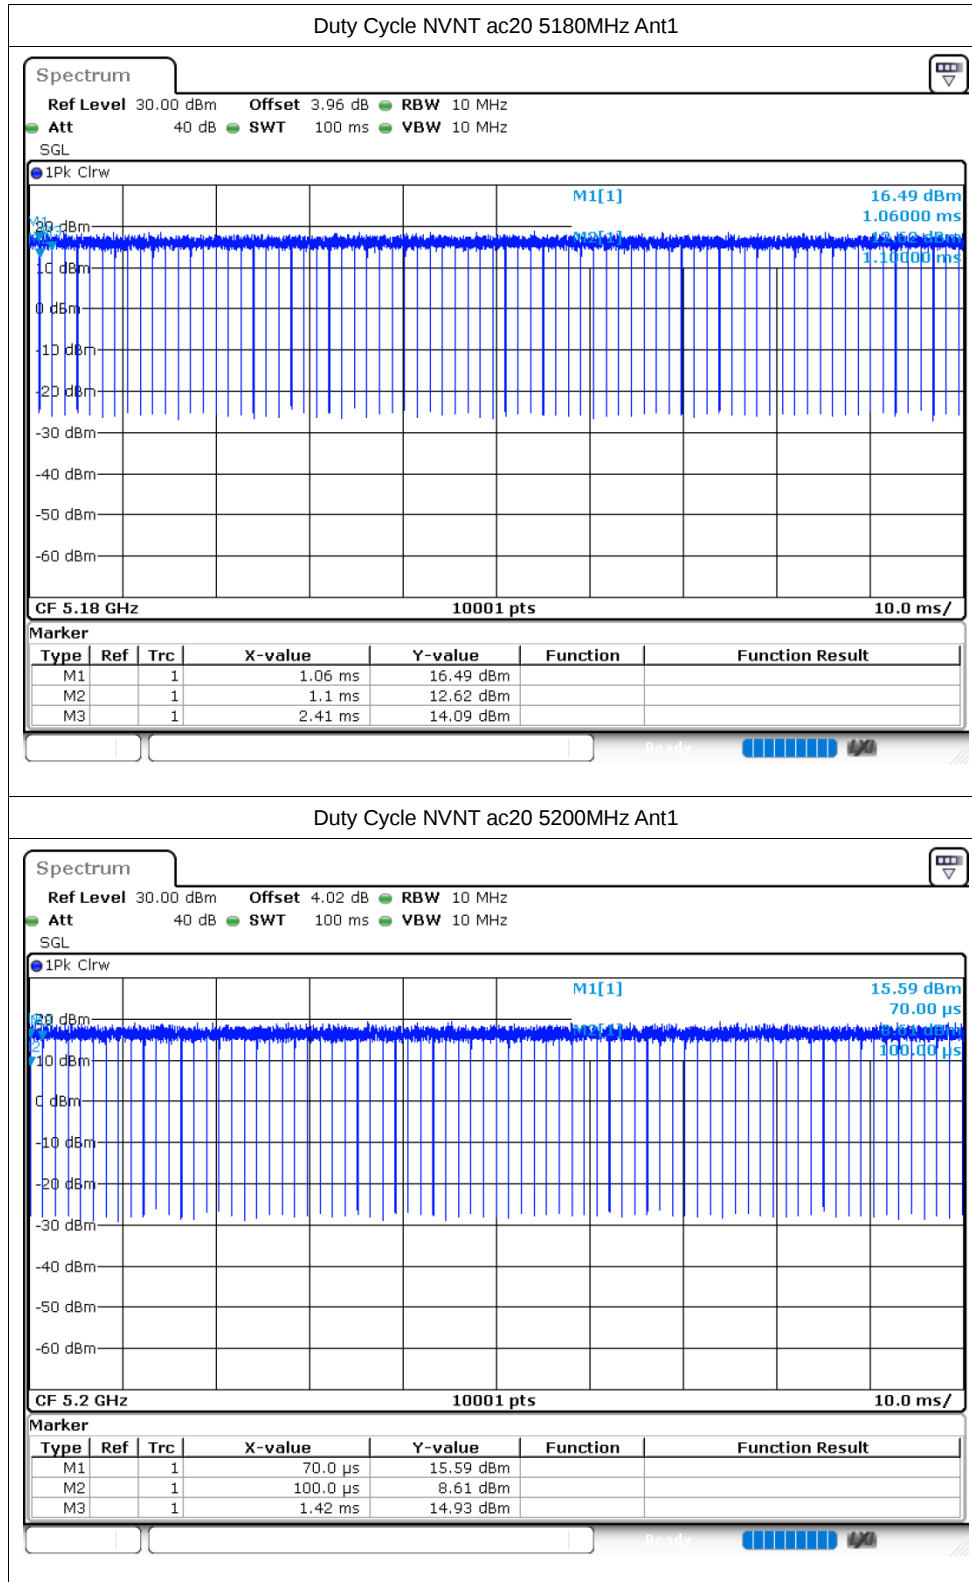

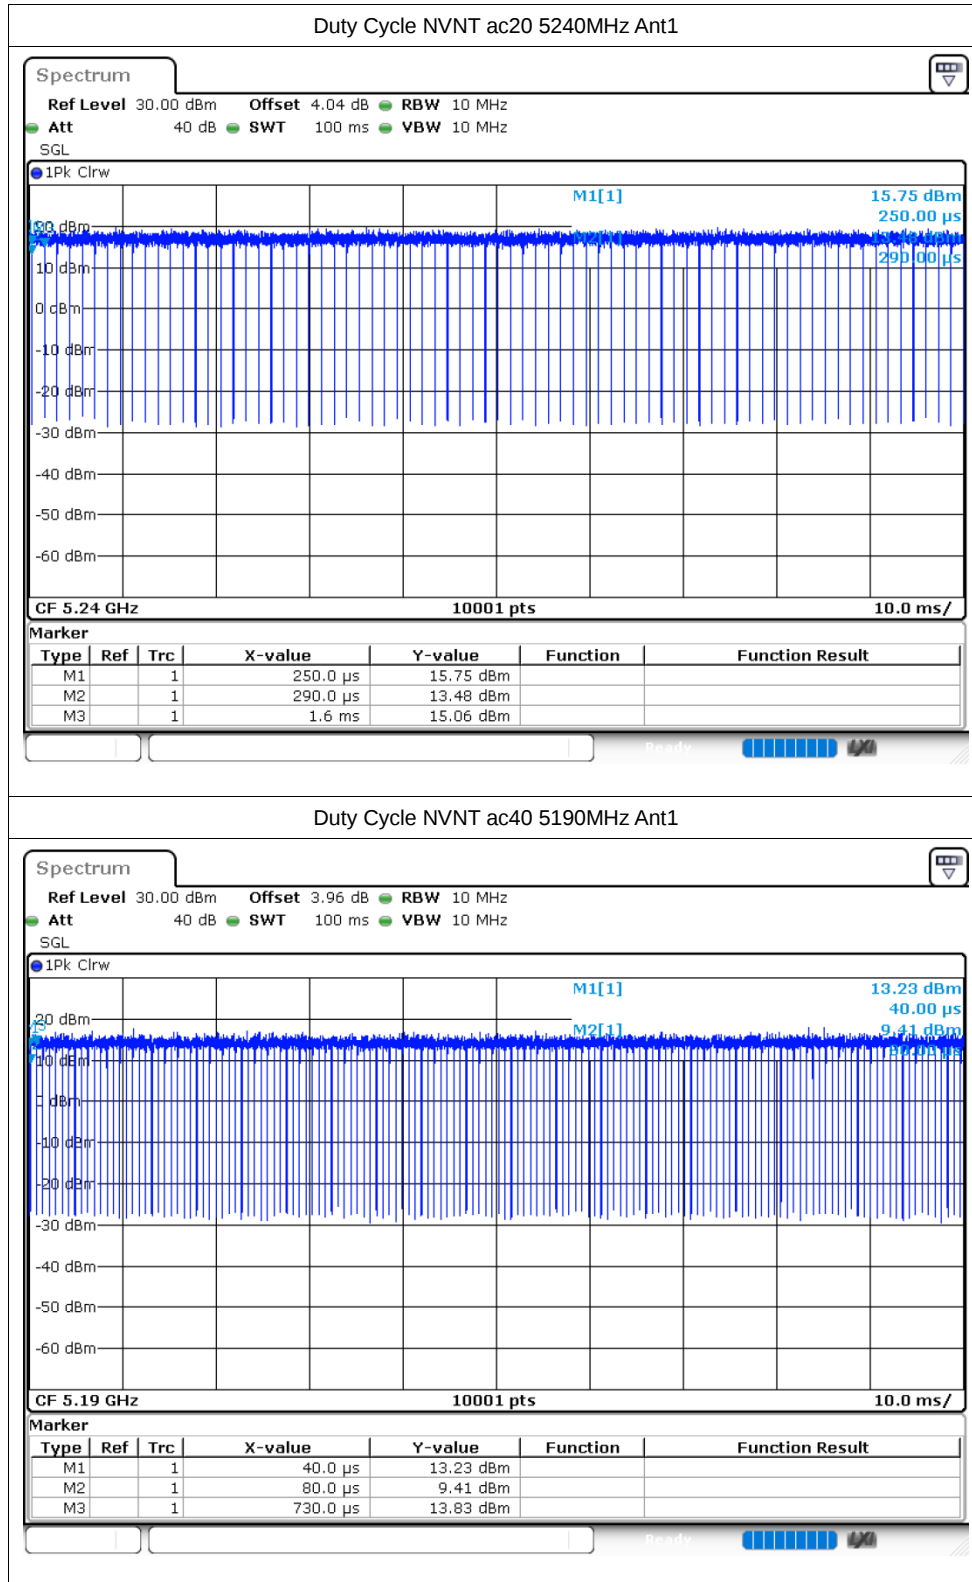

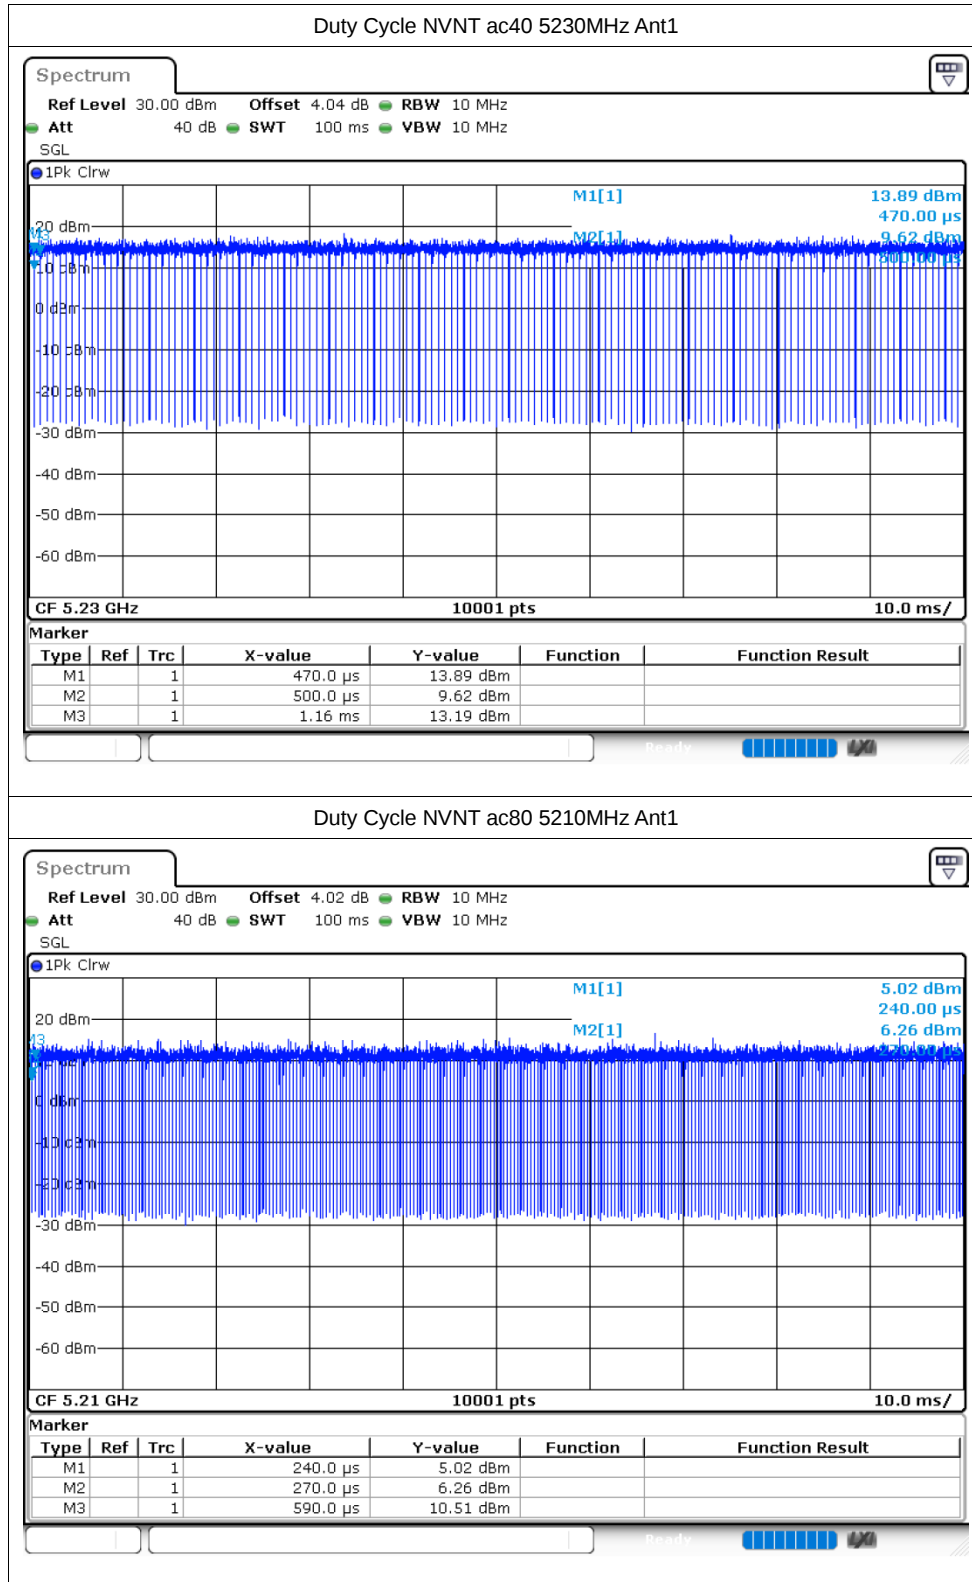

## Maximum Conducted Output Power

| Condition | Mode | Frequency<br>(MHz) | Antenna | Conducted Power<br>(dBm) | Limit<br>(dBm) | Verdict |
|-----------|------|--------------------|---------|--------------------------|----------------|---------|
| NVNT      | a    | 5180               | Ant1    | 12.06                    | 24             | Pass    |
| NVNT      | a    | 5200               | Ant1    | 12.71                    | 24             | Pass    |
| NVNT      | a    | 5240               | Ant1    | 12.79                    | 24             | Pass    |
| NVNT      | n20  | 5180               | Ant1    | 11.95                    | 24             | Pass    |
| NVNT      | n20  | 5200               | Ant1    | 12.48                    | 24             | Pass    |
| NVNT      | n20  | 5240               | Ant1    | 12.58                    | 24             | Pass    |
| NVNT      | n40  | 5190               | Ant1    | 12.34                    | 24             | Pass    |
| NVNT      | n40  | 5230               | Ant1    | 12.67                    | 24             | Pass    |
| NVNT      | ac20 | 5180               | Ant1    | 12.44                    | 24             | Pass    |
| NVNT      | ac20 | 5200               | Ant1    | 12.04                    | 24             | Pass    |
| NVNT      | ac20 | 5240               | Ant1    | 12.75                    | 24             | Pass    |
| NVNT      | ac40 | 5190               | Ant1    | 12.34                    | 24             | Pass    |
| NVNT      | ac40 | 5230               | Ant1    | 12.62                    | 24             | Pass    |
| NVNT      | ac80 | 5210               | Ant1    | 12.34                    | 24             | Pass    |

## -26dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|---------|
| NVNT      | a    | 5180            | Ant1    | 20.091                 | Pass    |
| NVNT      | a    | 5200            | Ant1    | 19.914                 | Pass    |
| NVNT      | a    | 5240            | Ant1    | 19.728                 | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 19.902                 | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 20.154                 | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 20.247                 | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 41.922                 | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 41.904                 | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 20.304                 | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 20.172                 | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 20.289                 | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | 44.694                 | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | 41.148                 | Pass    |
| NVNT      | ac80 | 5210            | Ant1    | 89.34                  | Pass    |


Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

Spectrum

Ref Level 20.00 dBm Offset 3.96 dB RBW 300 kHz  
Att 35 dB SWT 25.4  $\mu$ s VBW 1 MHz Mode Auto FFT  
SGL Count 100/100

1Pk Max

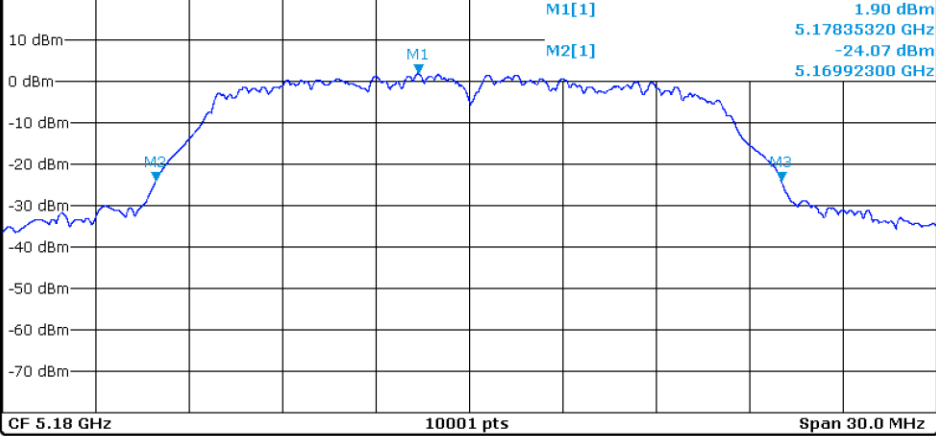



-26dB Bandwidth NVNT a 5200MHz Ant1


Spectrum


Ref Level 20.00 dBm Offset 4.02 dB RBW 300 kHz  
Att 35 dB SWT 25.4  $\mu$ s VBW 1 MHz Mode Auto FFT  
SGL Count 100/100


1Pk Max

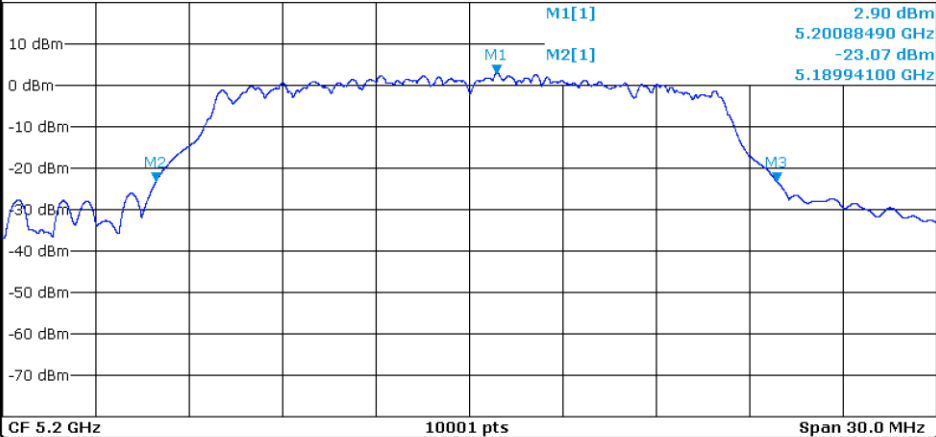


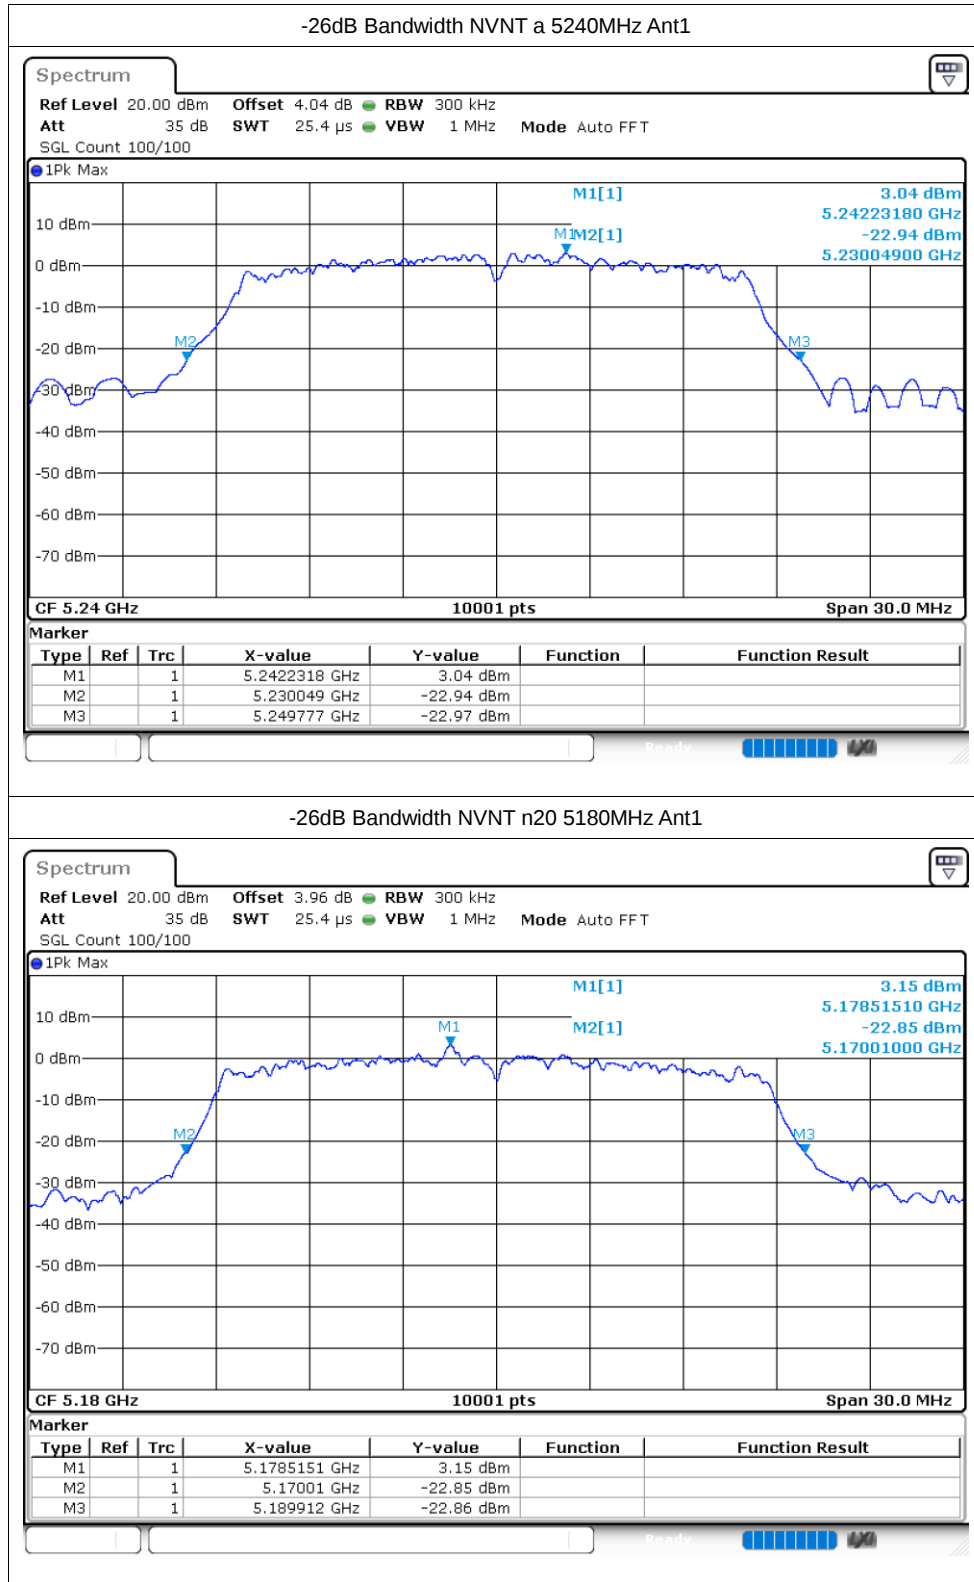


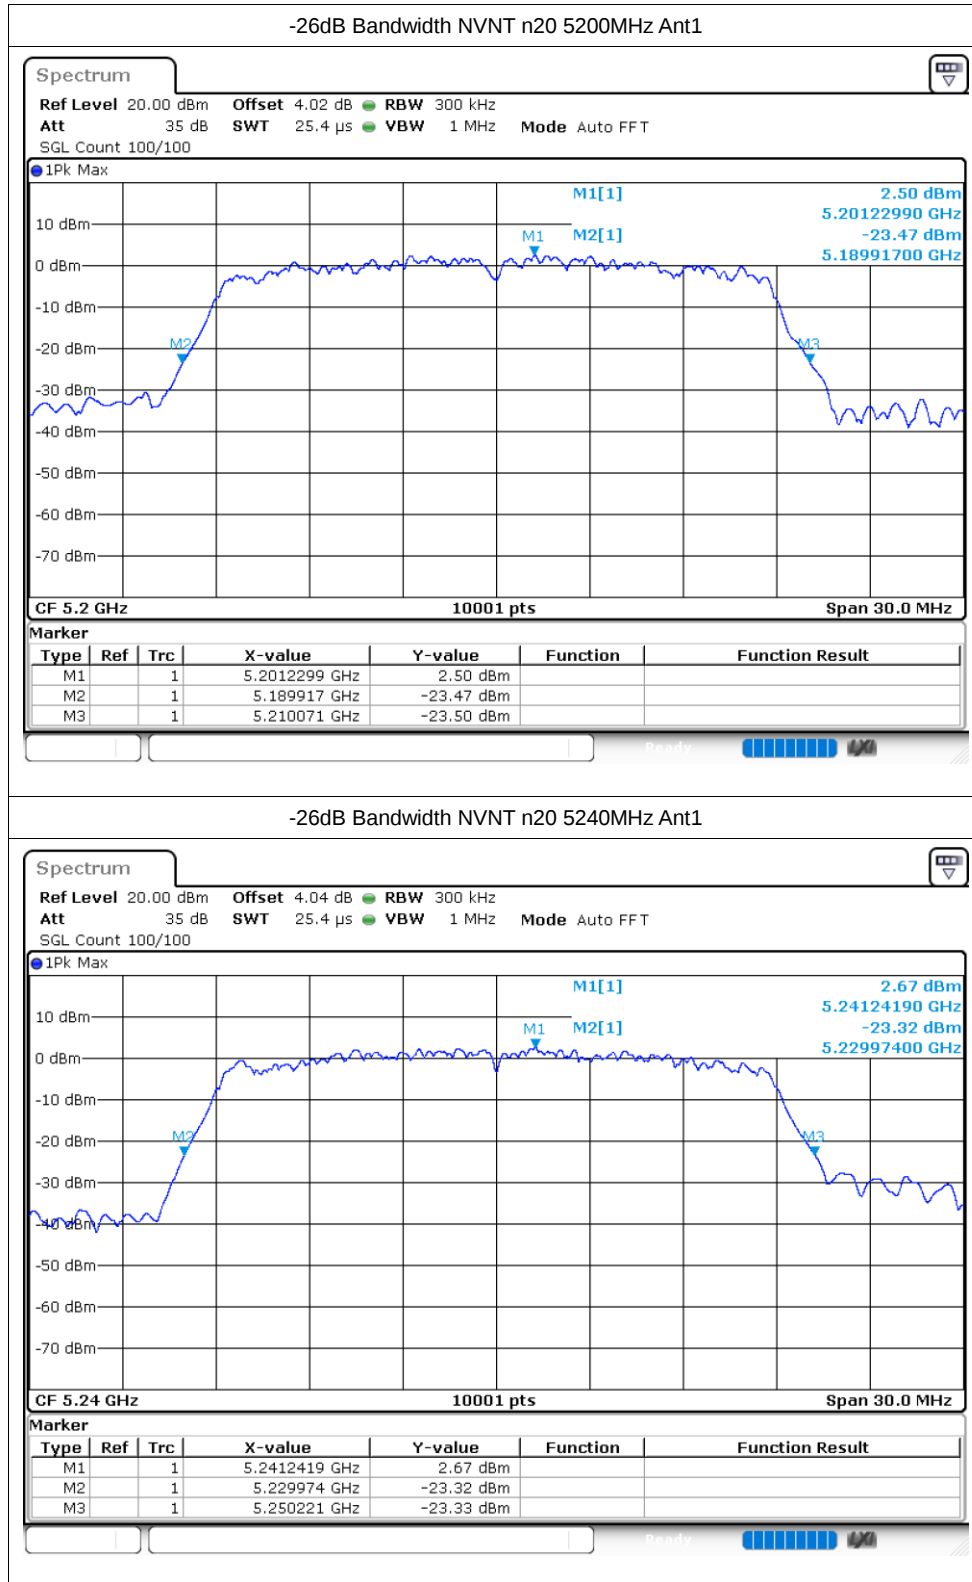

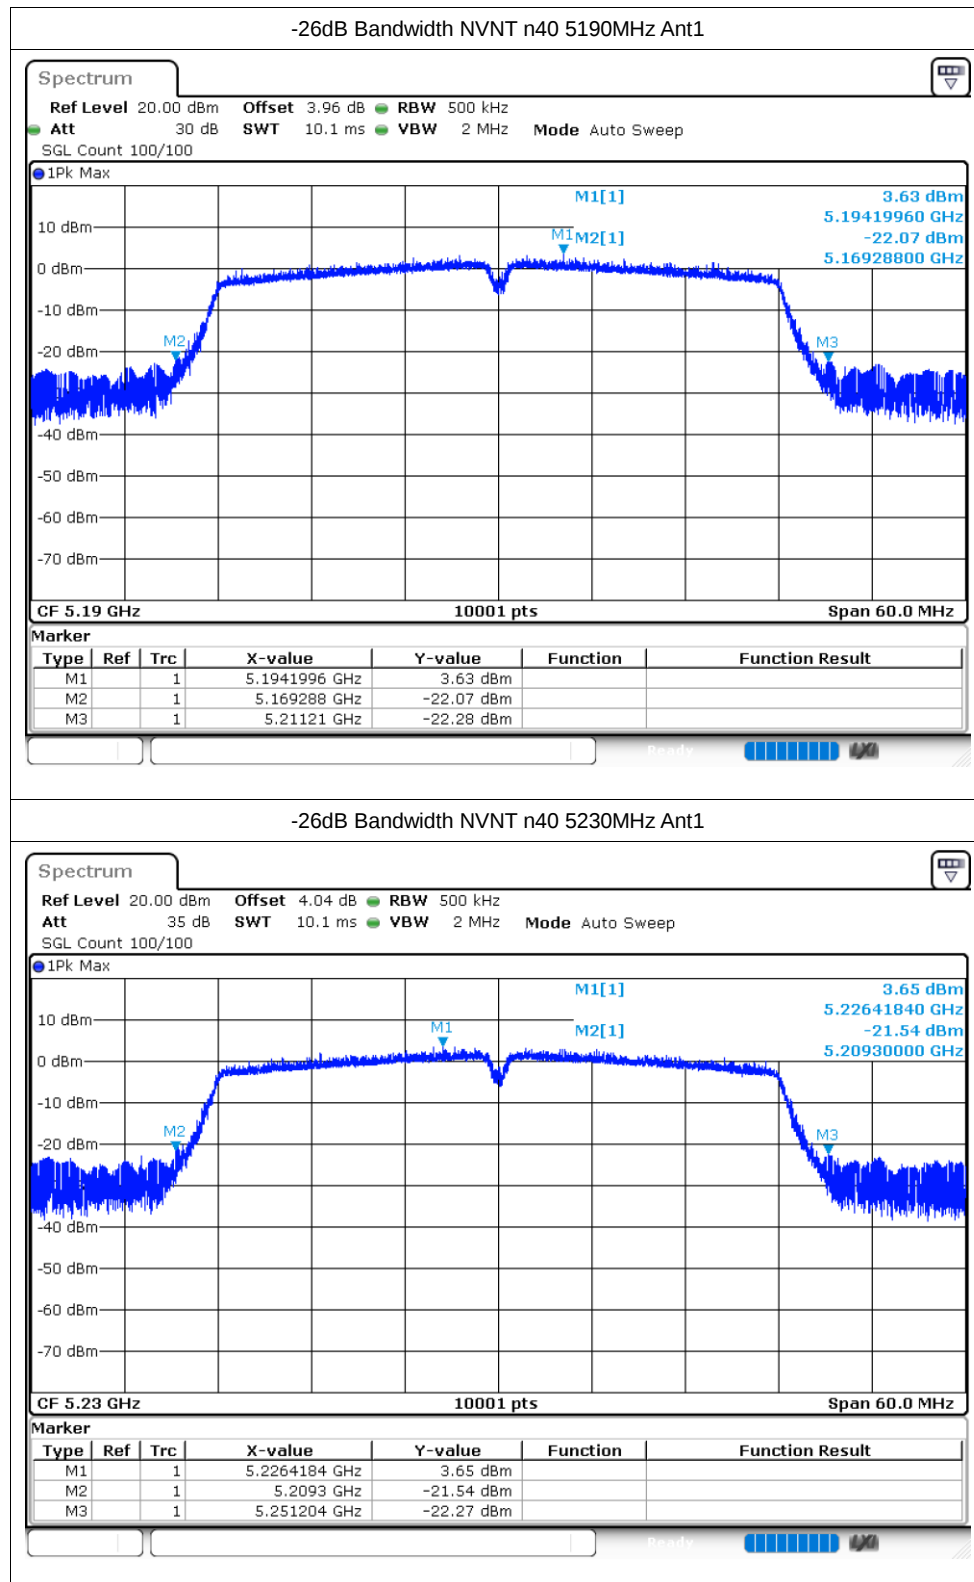

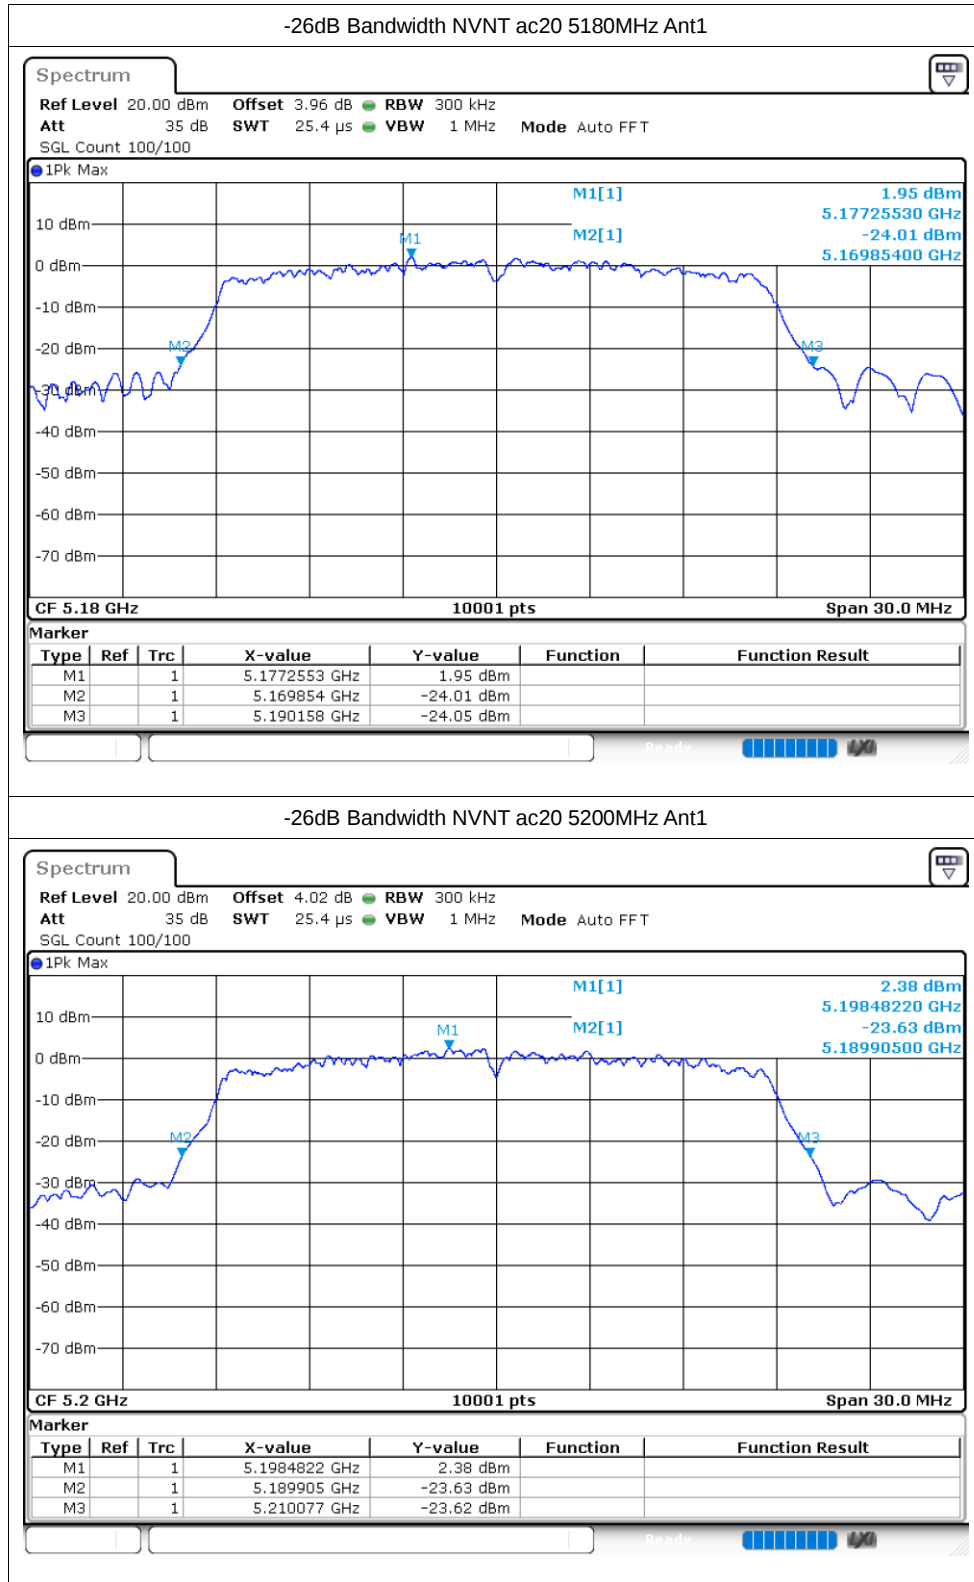

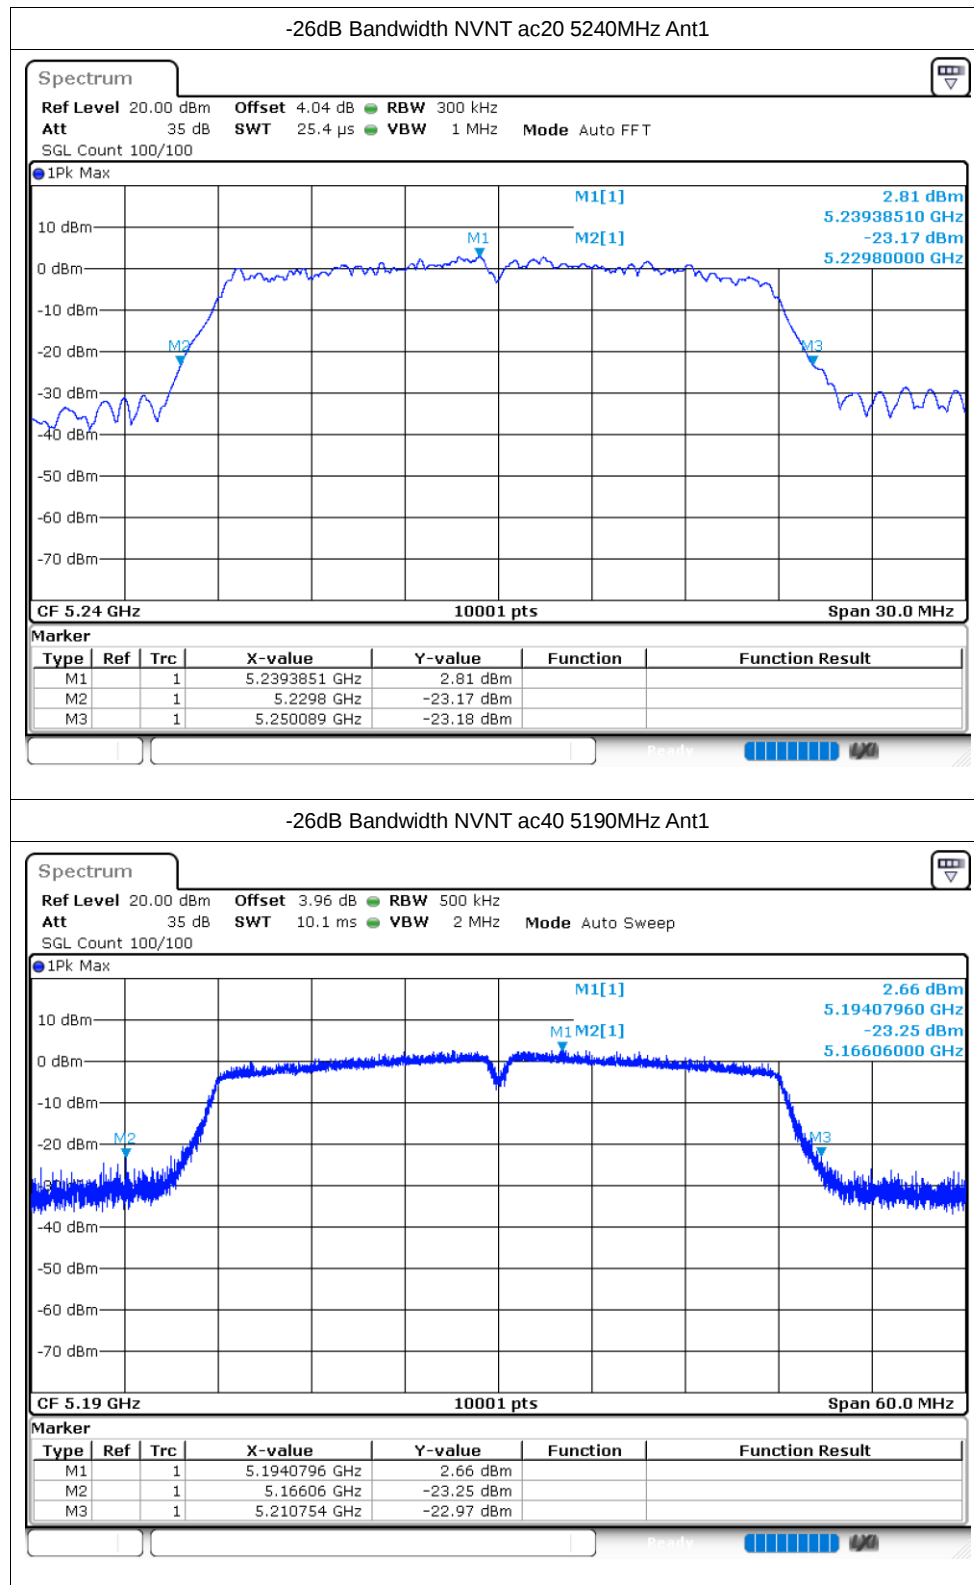

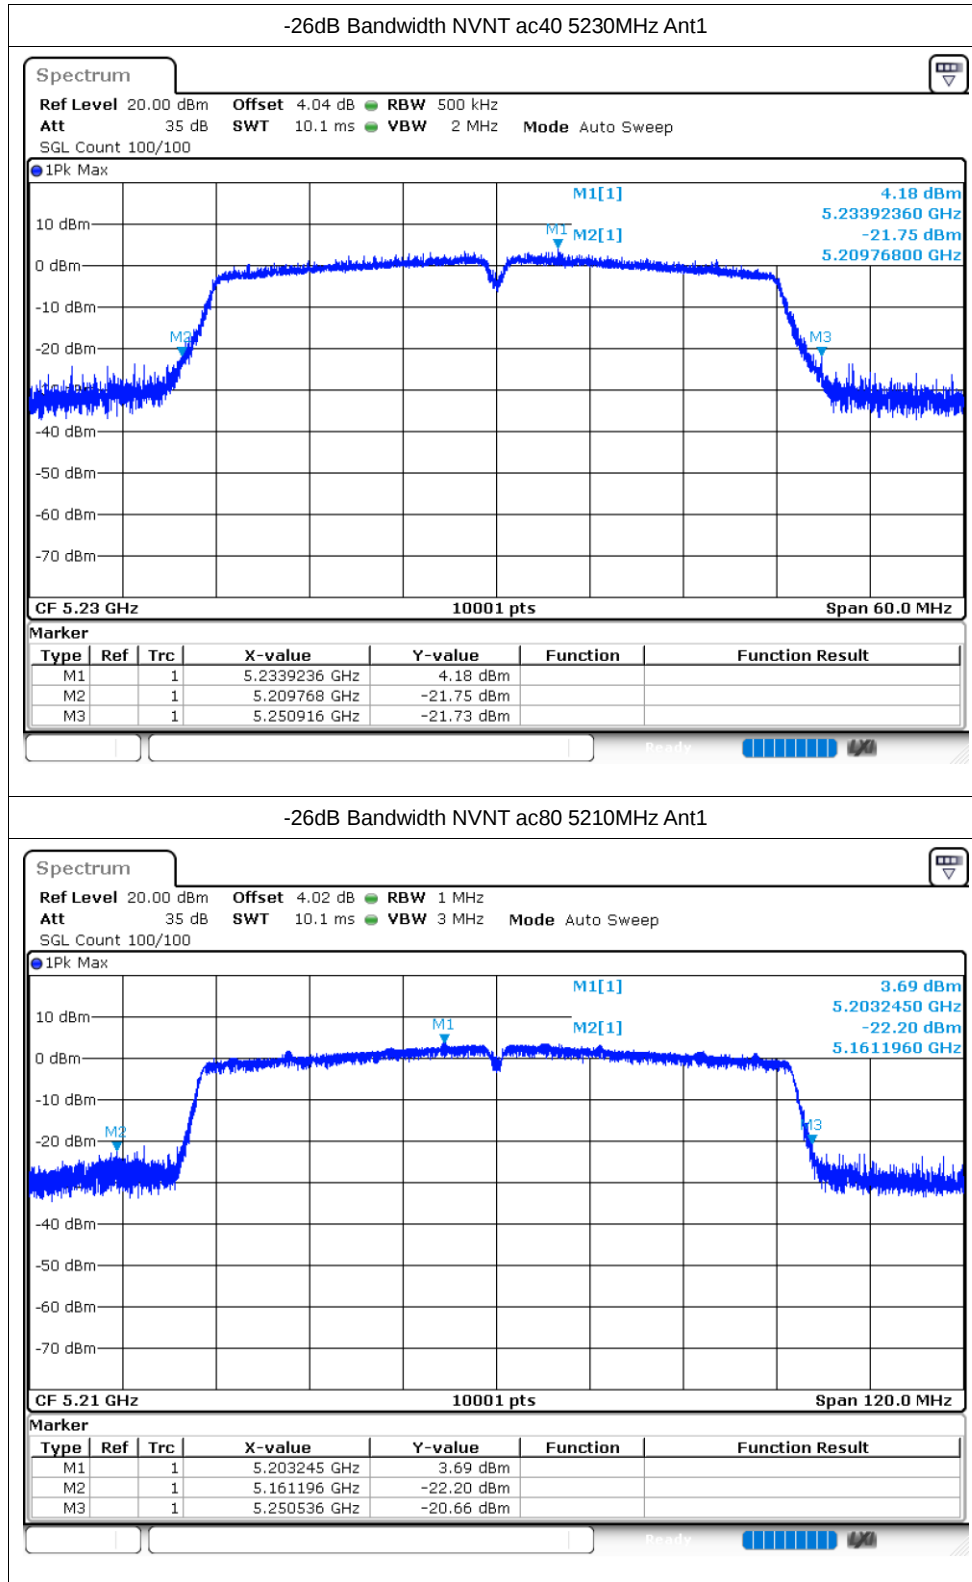


## Occupied Channel Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT      | a    | 5180            | Ant1    | 16.492        |
| NVNT      | a    | 5200            | Ant1    | 16.315        |
| NVNT      | a    | 5240            | Ant1    | 16.447        |
| NVNT      | n20  | 5180            | Ant1    | 17.62         |
| NVNT      | n20  | 5200            | Ant1    | 17.584        |
| NVNT      | n20  | 5240            | Ant1    | 17.575        |
| NVNT      | n40  | 5190            | Ant1    | 36.116        |
| NVNT      | n40  | 5230            | Ant1    | 36.098        |
| NVNT      | ac20 | 5180            | Ant1    | 17.572        |
| NVNT      | ac20 | 5200            | Ant1    | 17.524        |
| NVNT      | ac20 | 5240            | Ant1    | 17.614        |
| NVNT      | ac40 | 5190            | Ant1    | 36.05         |
| NVNT      | ac40 | 5230            | Ant1    | 36.056        |
| NVNT      | ac80 | 5210            | Ant1    | 75.244        |


# Test Graphs


## OBW NVNT a 5180MHz Ant1

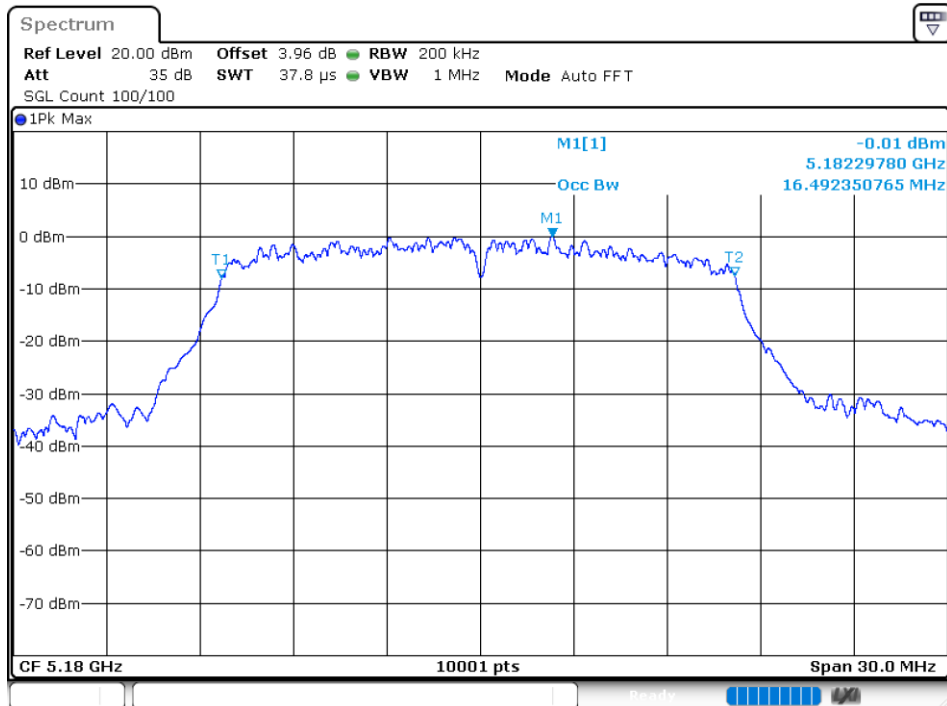



## OBW NVNT a 5200MHz Ant1

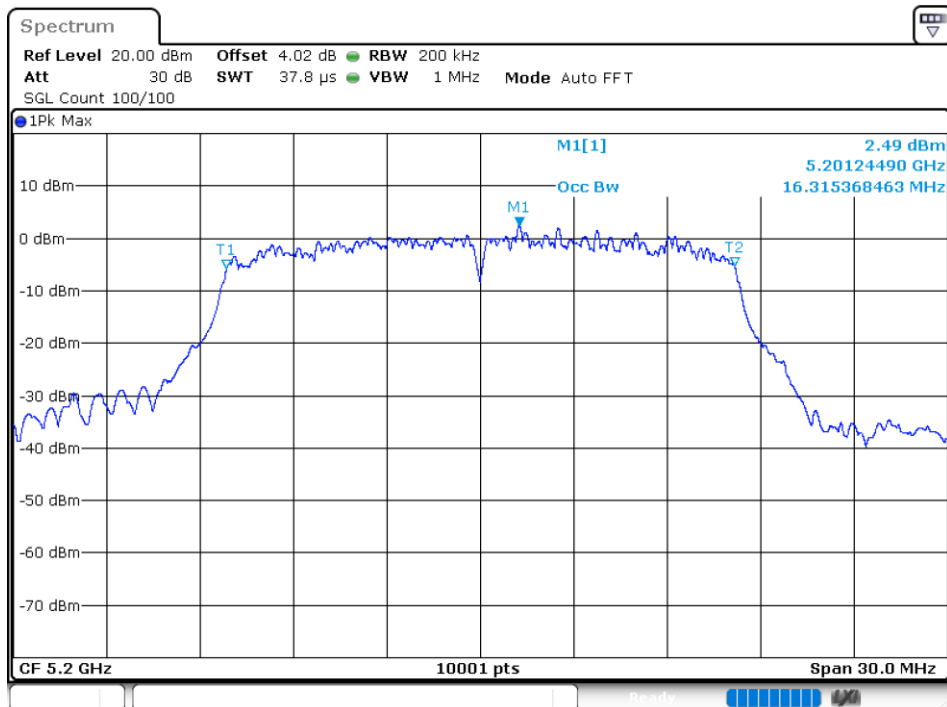


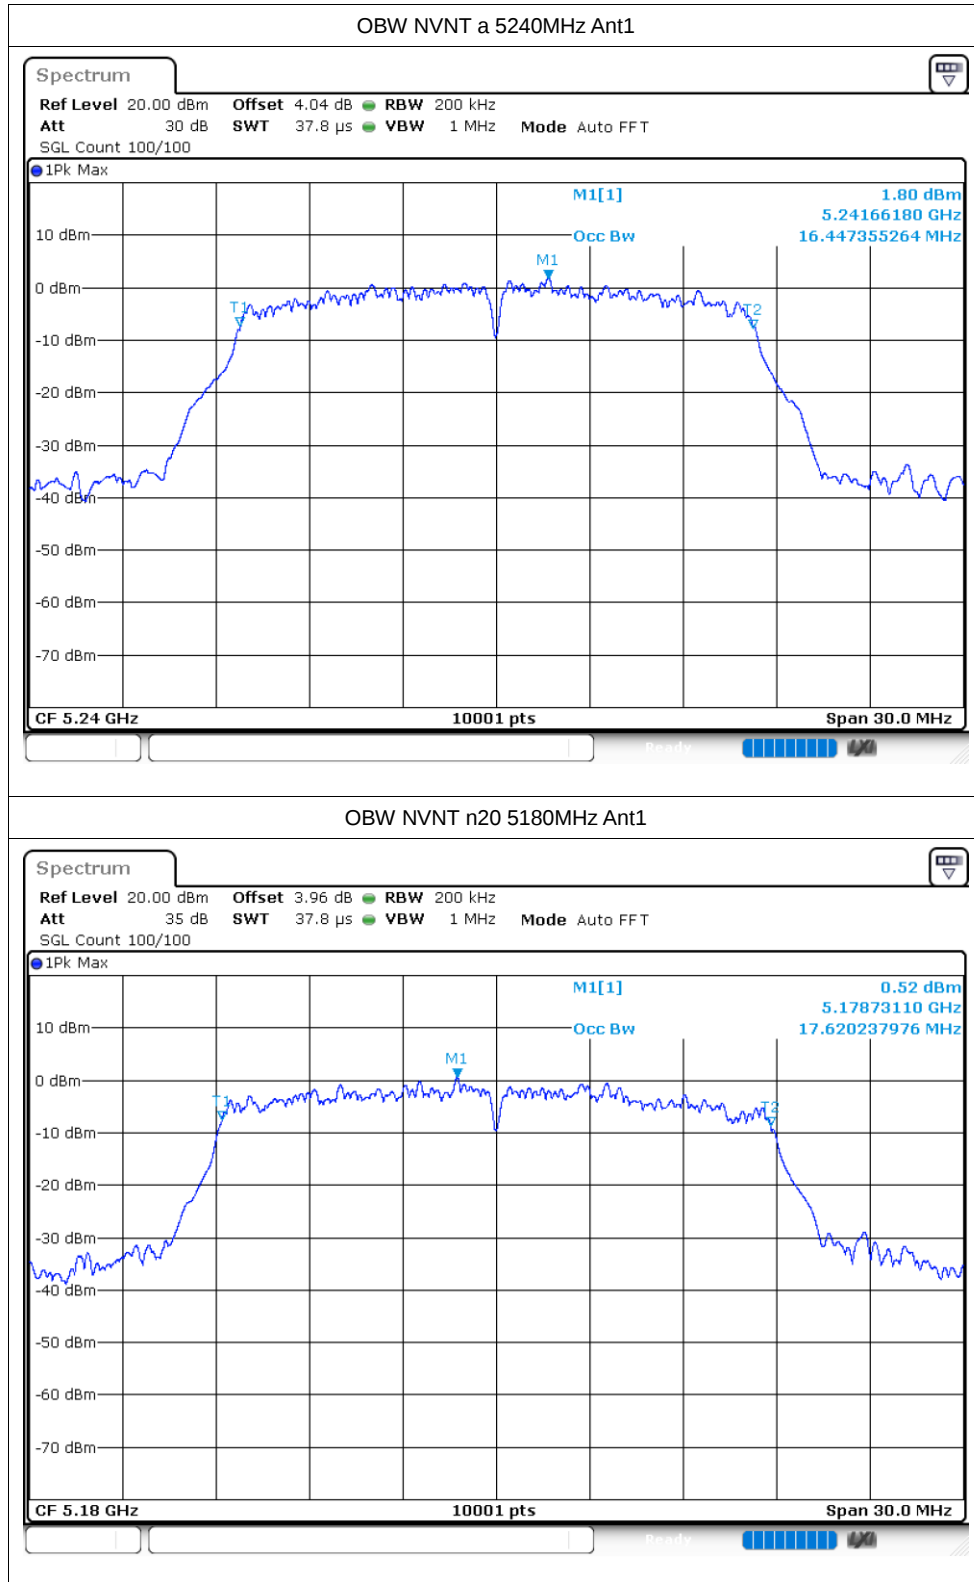


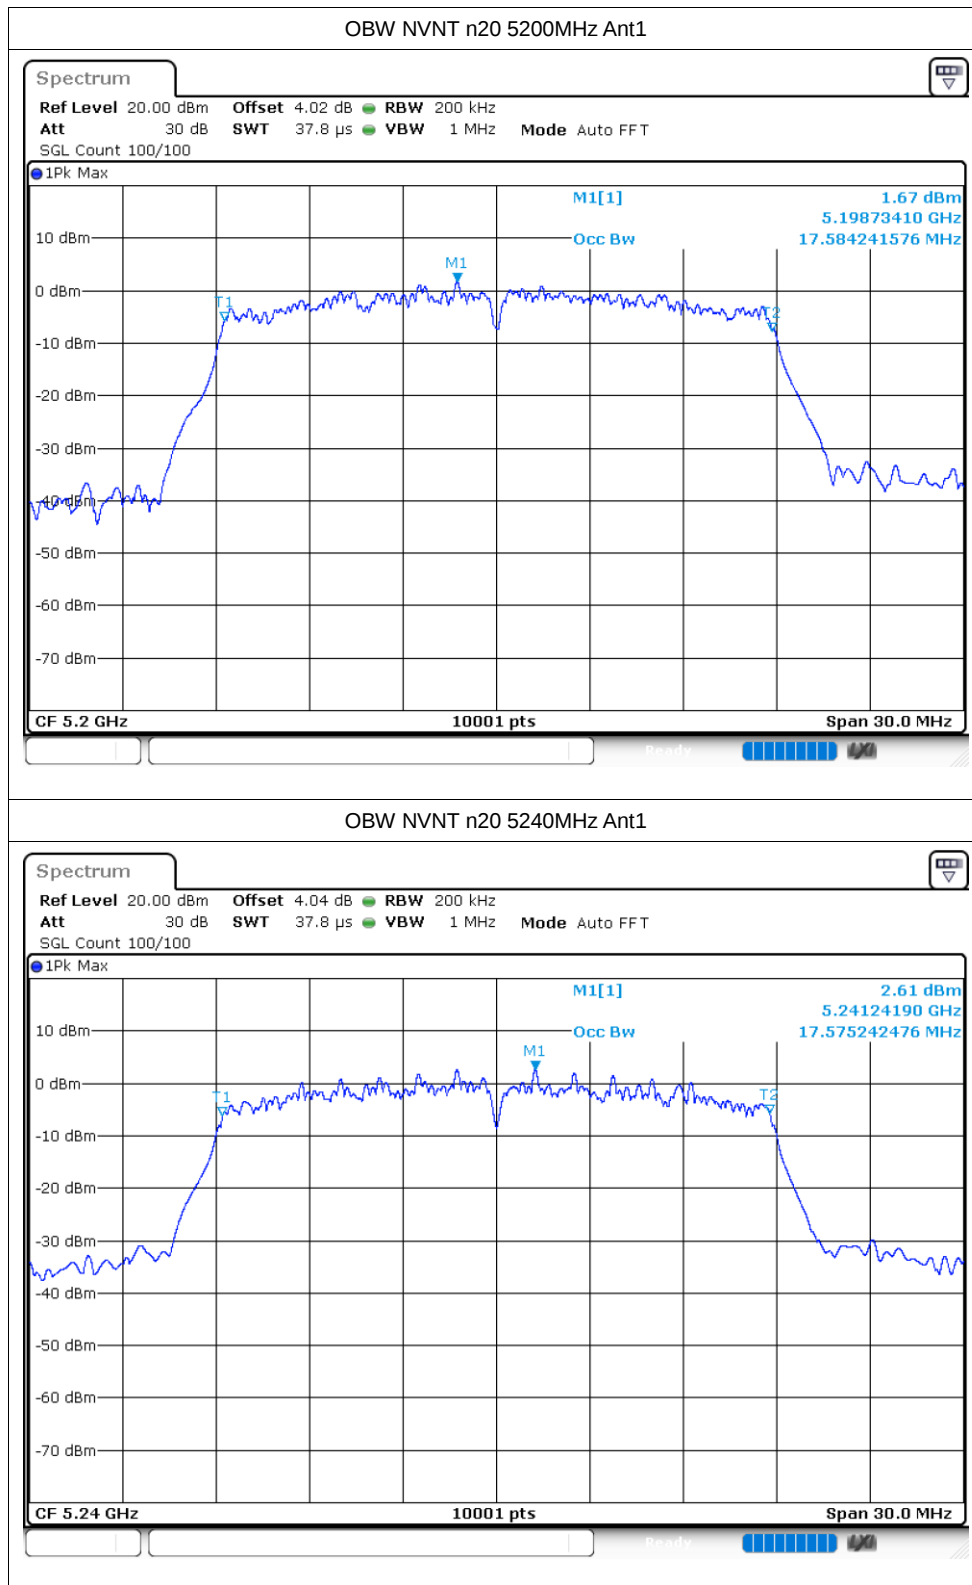

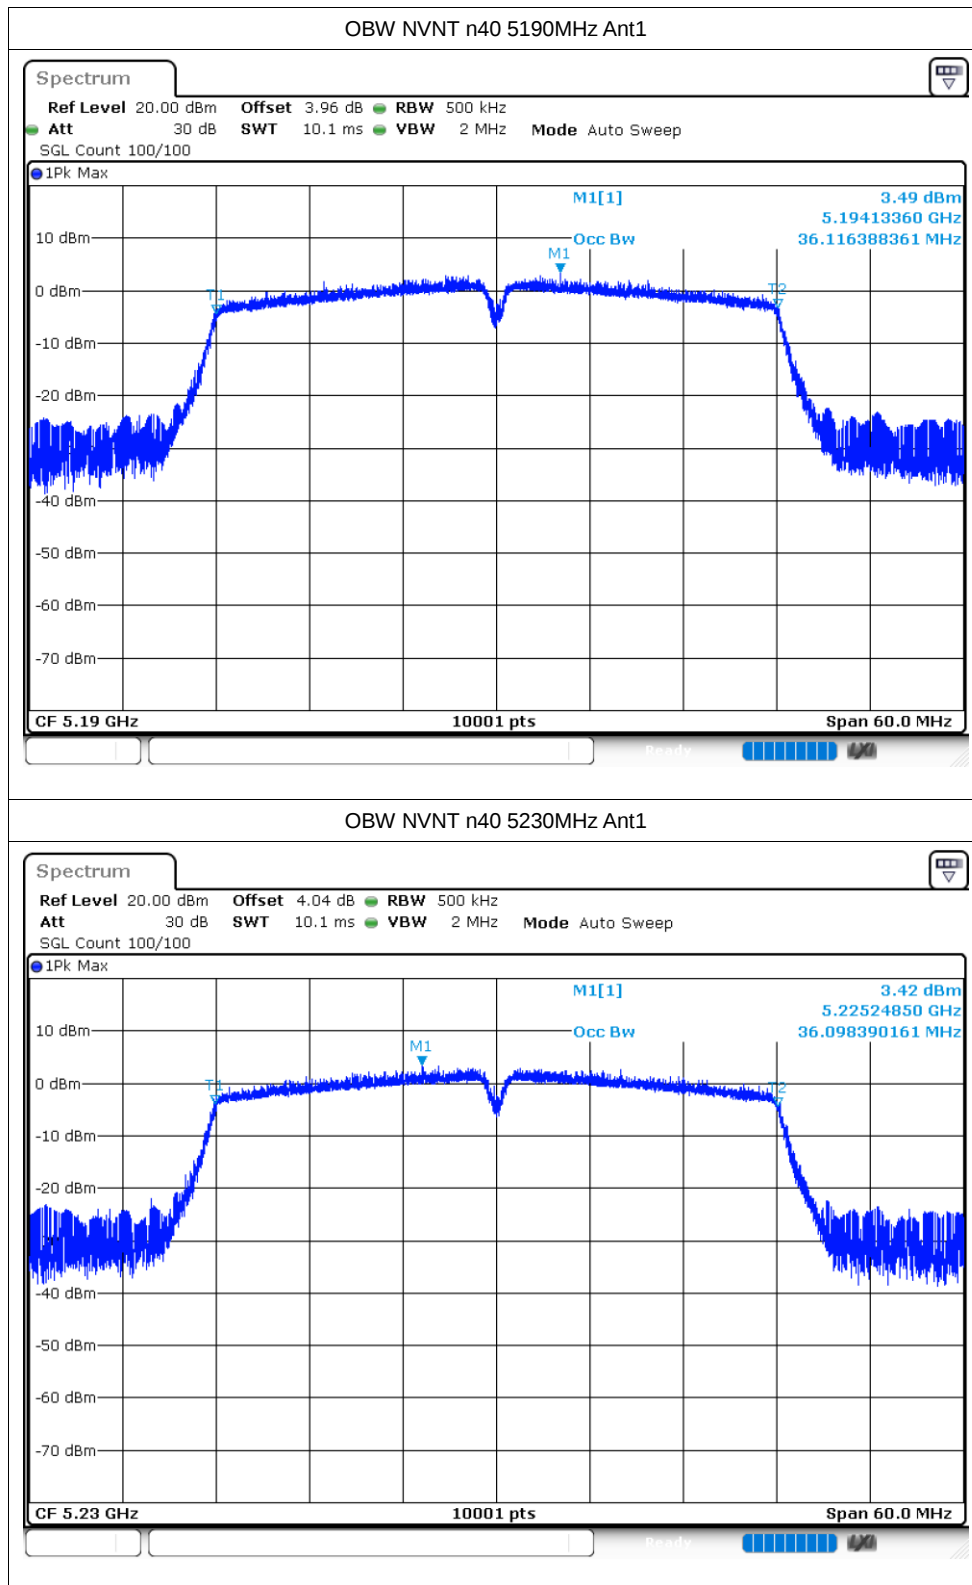

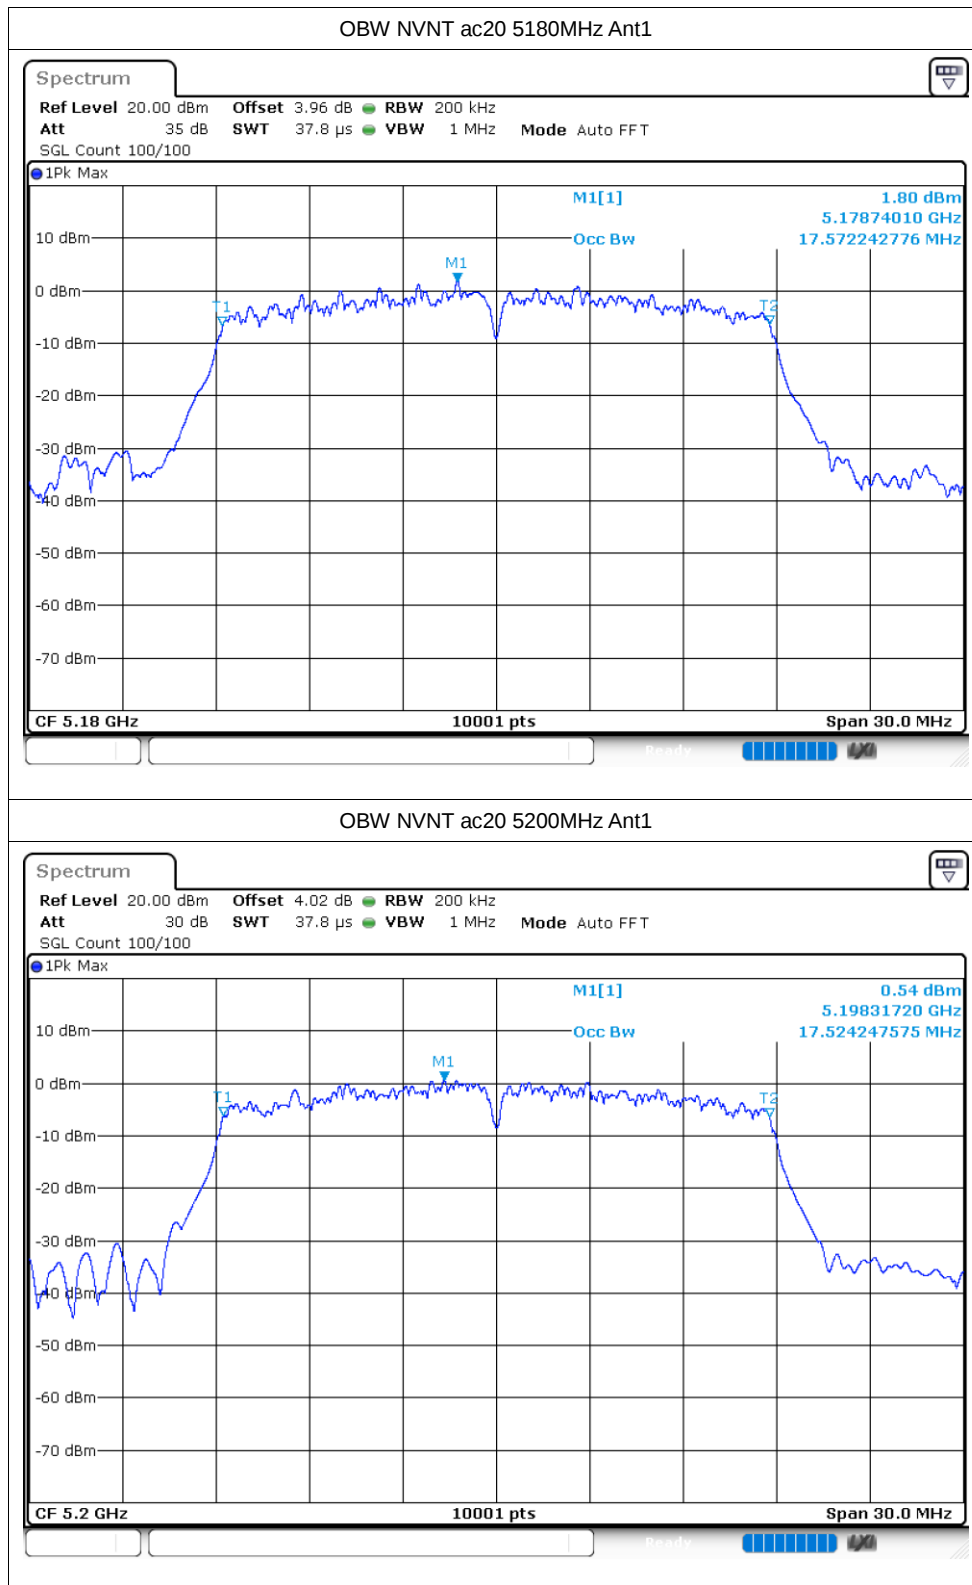

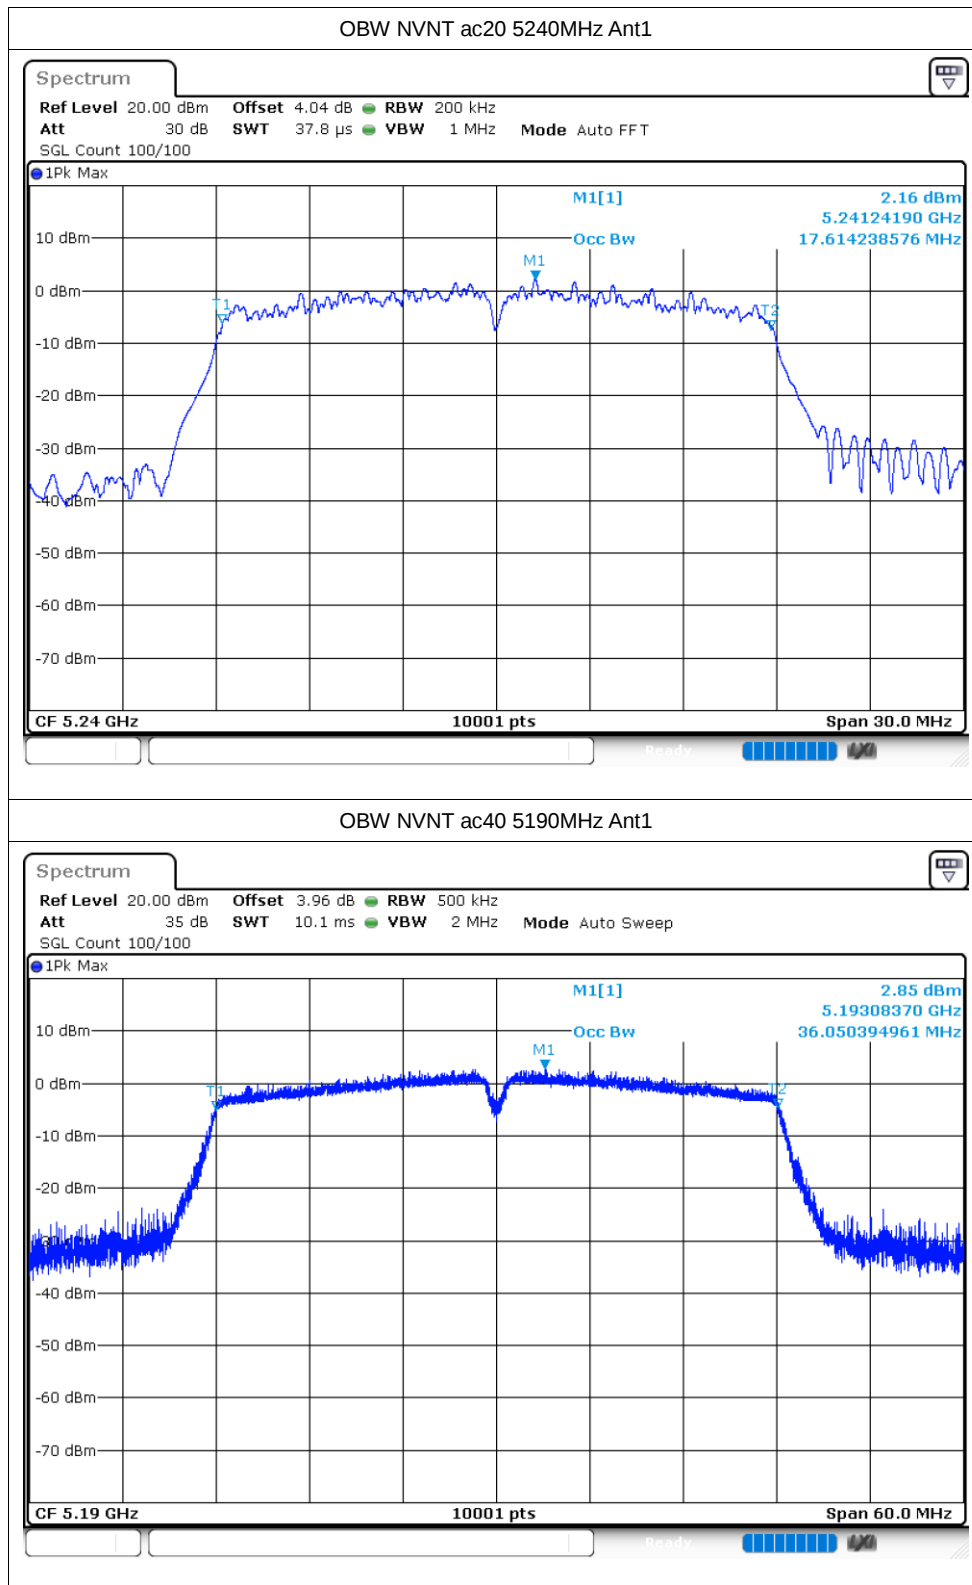

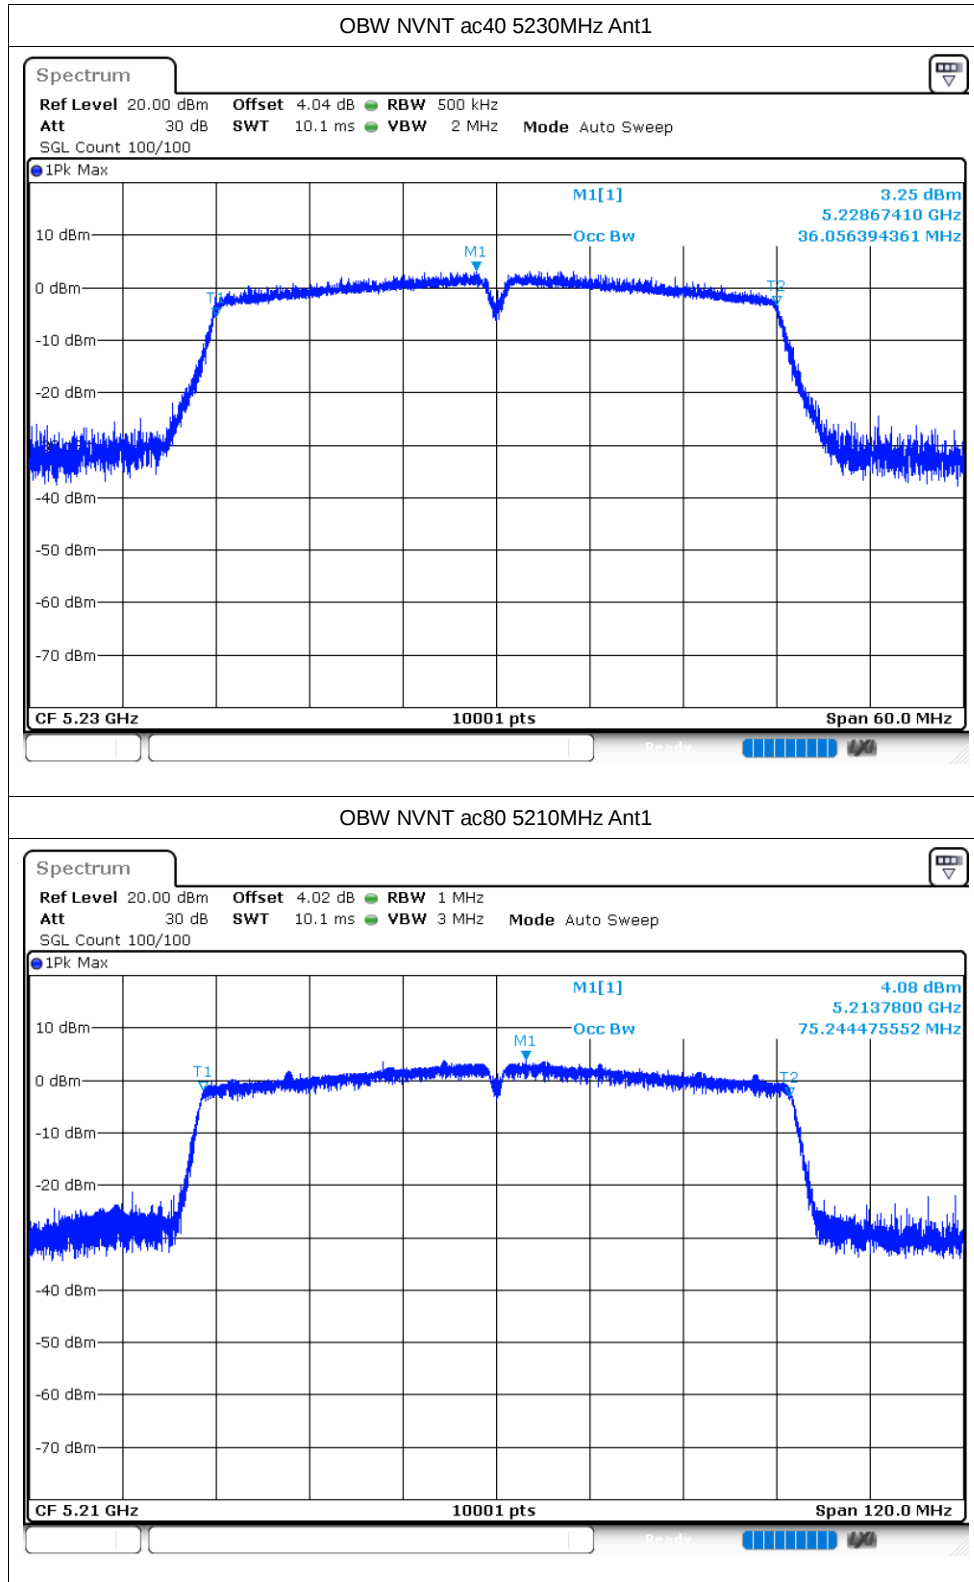


## Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm) | Duty Factor (dB) | Total PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------------|------------------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | -1.56               | 0.08             | -1.48           | 11          | Pass    |
| NVNT      | a    | 5200            | Ant1    | -0.5                | 0.08             | -0.42           | 11          | Pass    |
| NVNT      | a    | 5240            | Ant1    | -0.58               | 0.08             | -0.5            | 11          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | -1.67               | 0.09             | -1.58           | 11          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | -0.94               | 0.08             | -0.86           | 11          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | -0.77               | 0.09             | -0.68           | 11          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -5.35               | 0.16             | -5.19           | 11          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -4.79               | 0.16             | -4.63           | 11          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | -0.33               | 0.08             | -0.25           | 11          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | -0.22               | 0.09             | -0.13           | 11          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 0.5                 | 0.08             | 0.58            | 11          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -4.8                | 0.16             | -4.64           | 11          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -4.84               | 0.16             | -4.68           | 11          | Pass    |
| NVNT      | ac80 | 5210            | Ant1    | -9.82               | 0.31             | -9.51           | 11          | Pass    |


# Test Graphs


## PSD NVNT a 5180MHz Ant1

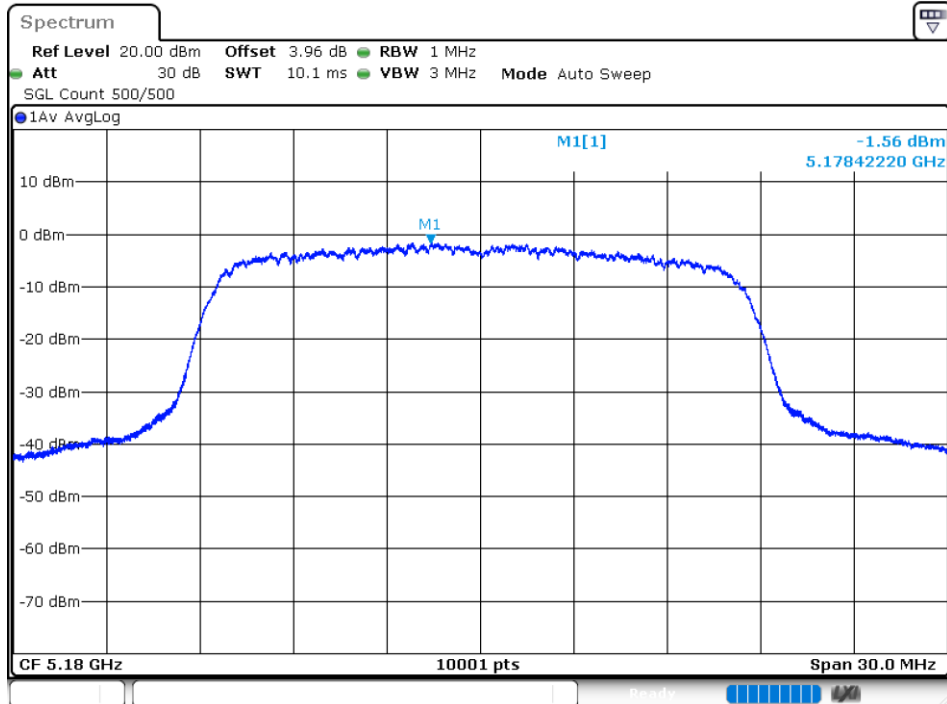



## PSD NVNT a 5200MHz Ant1

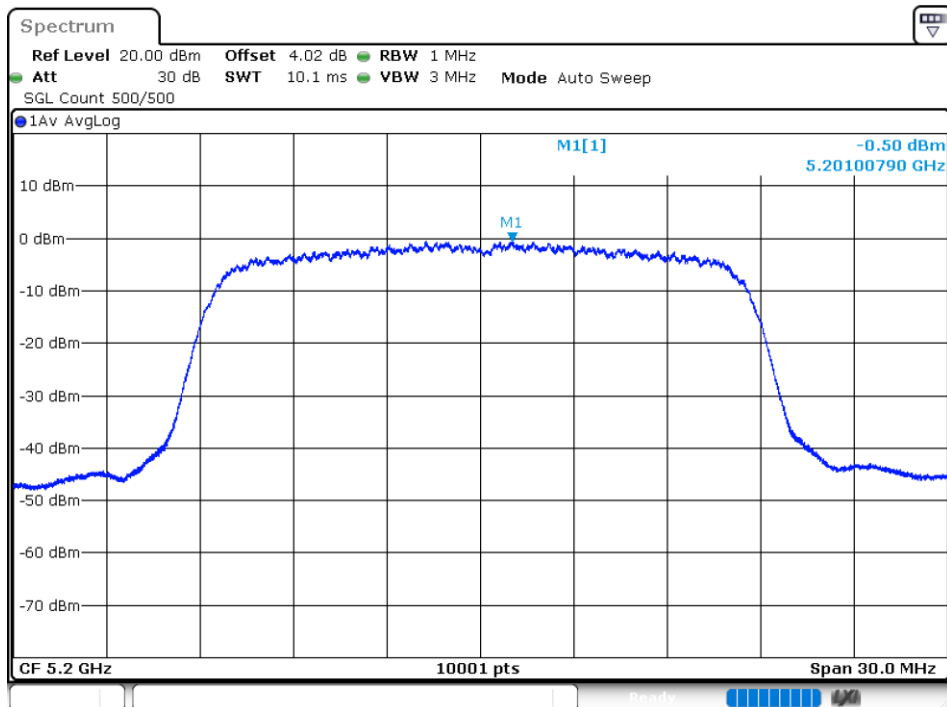


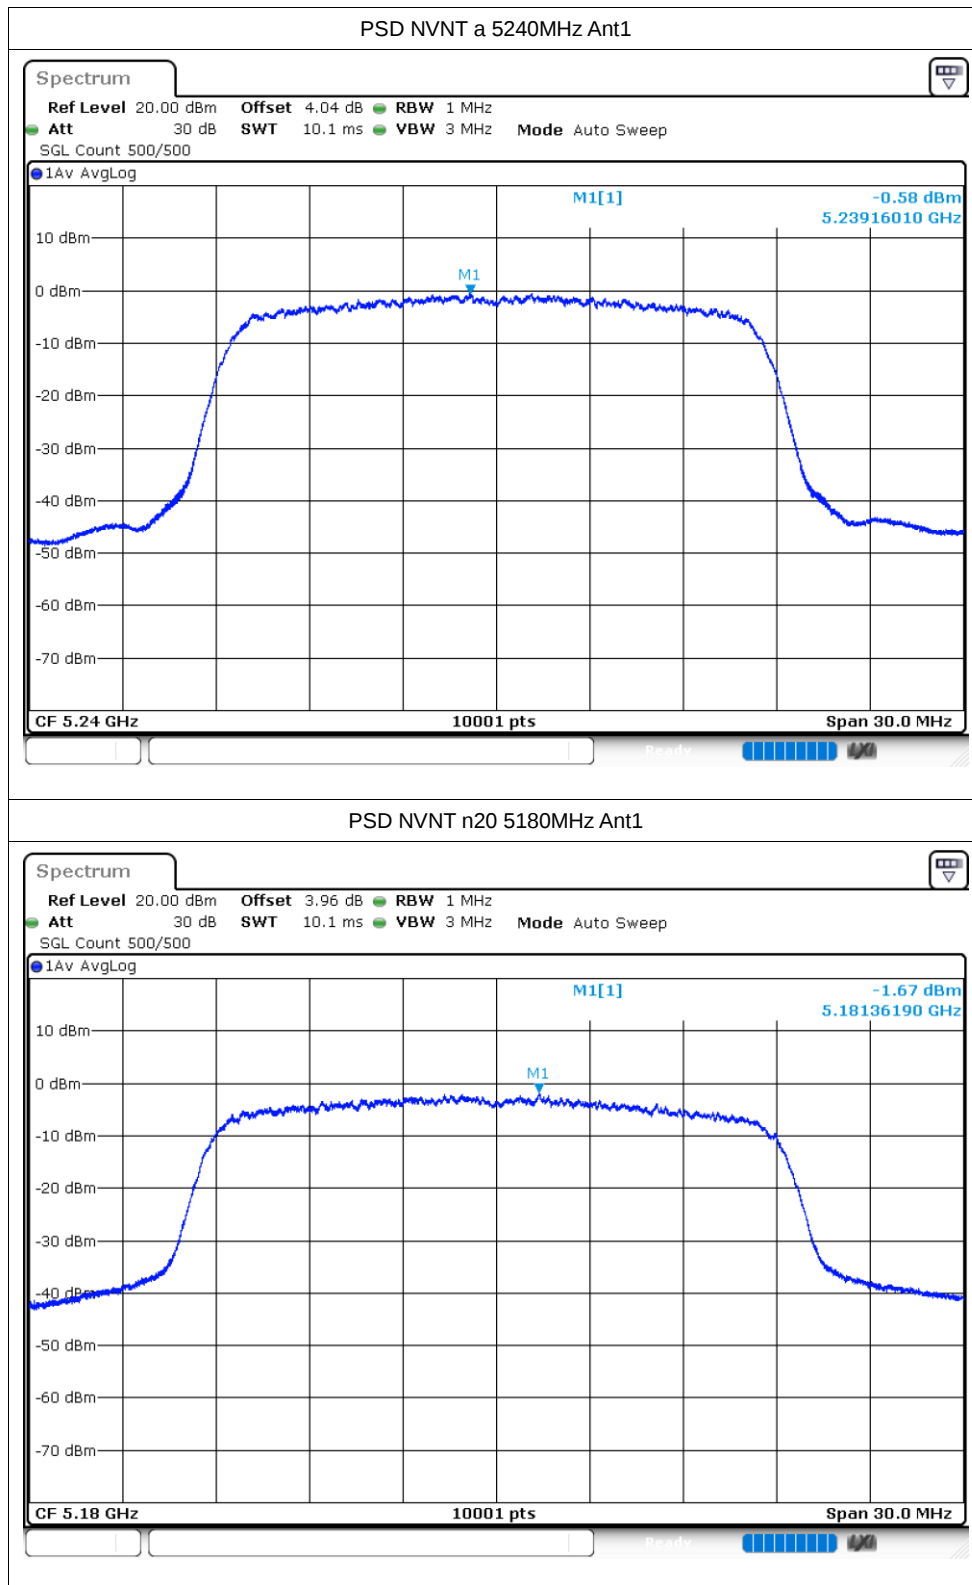


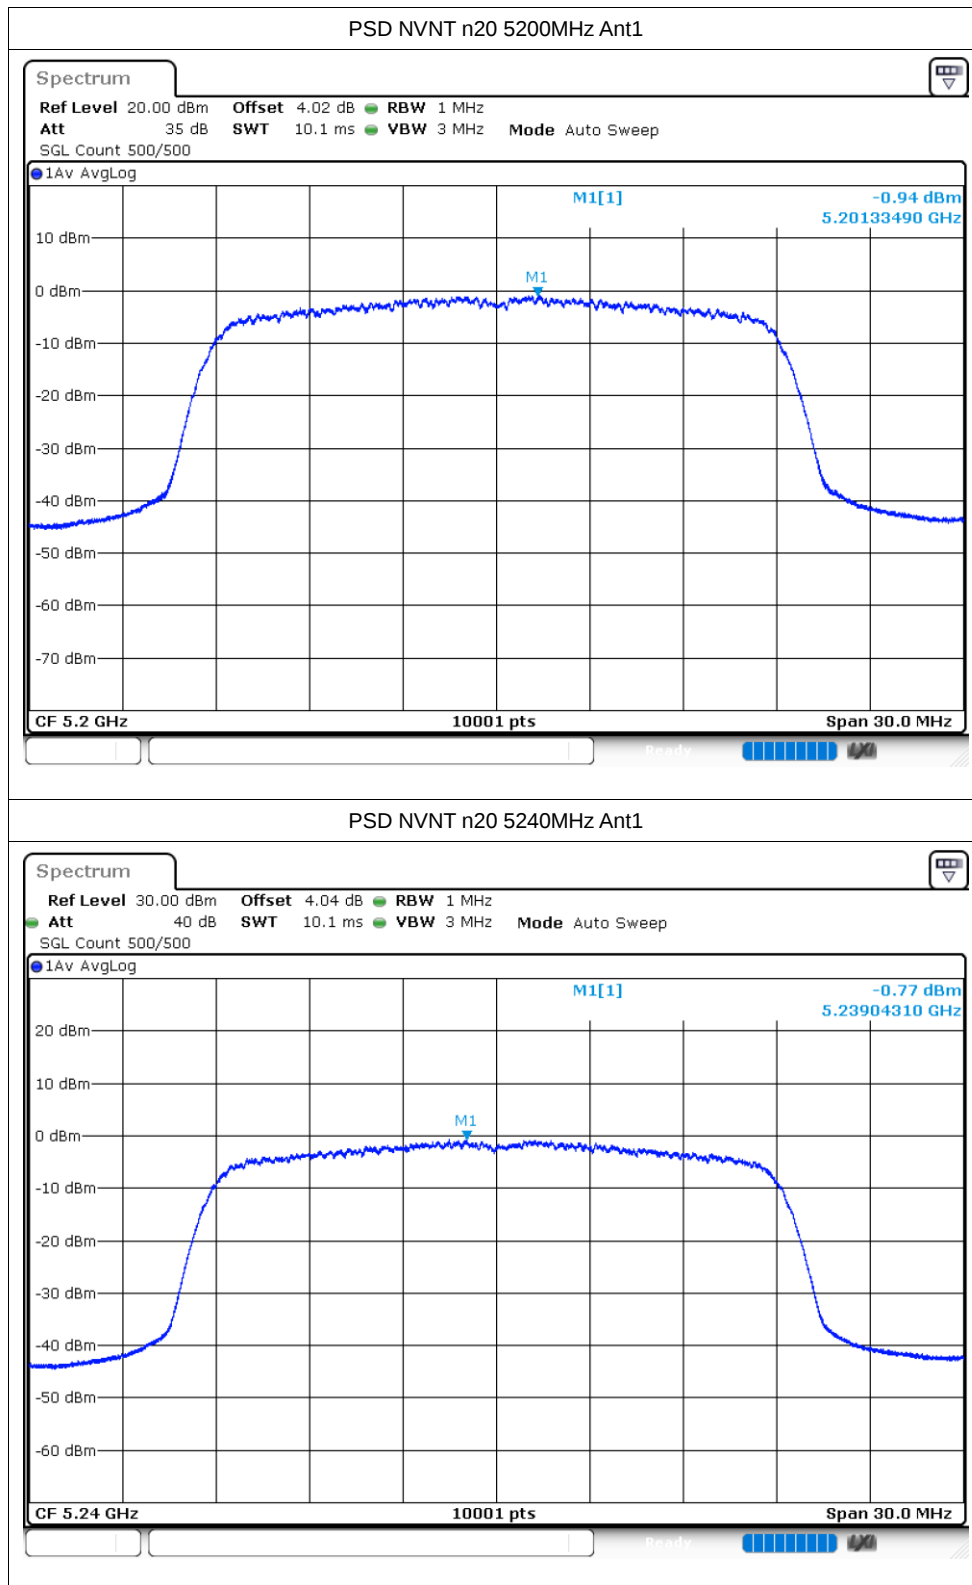

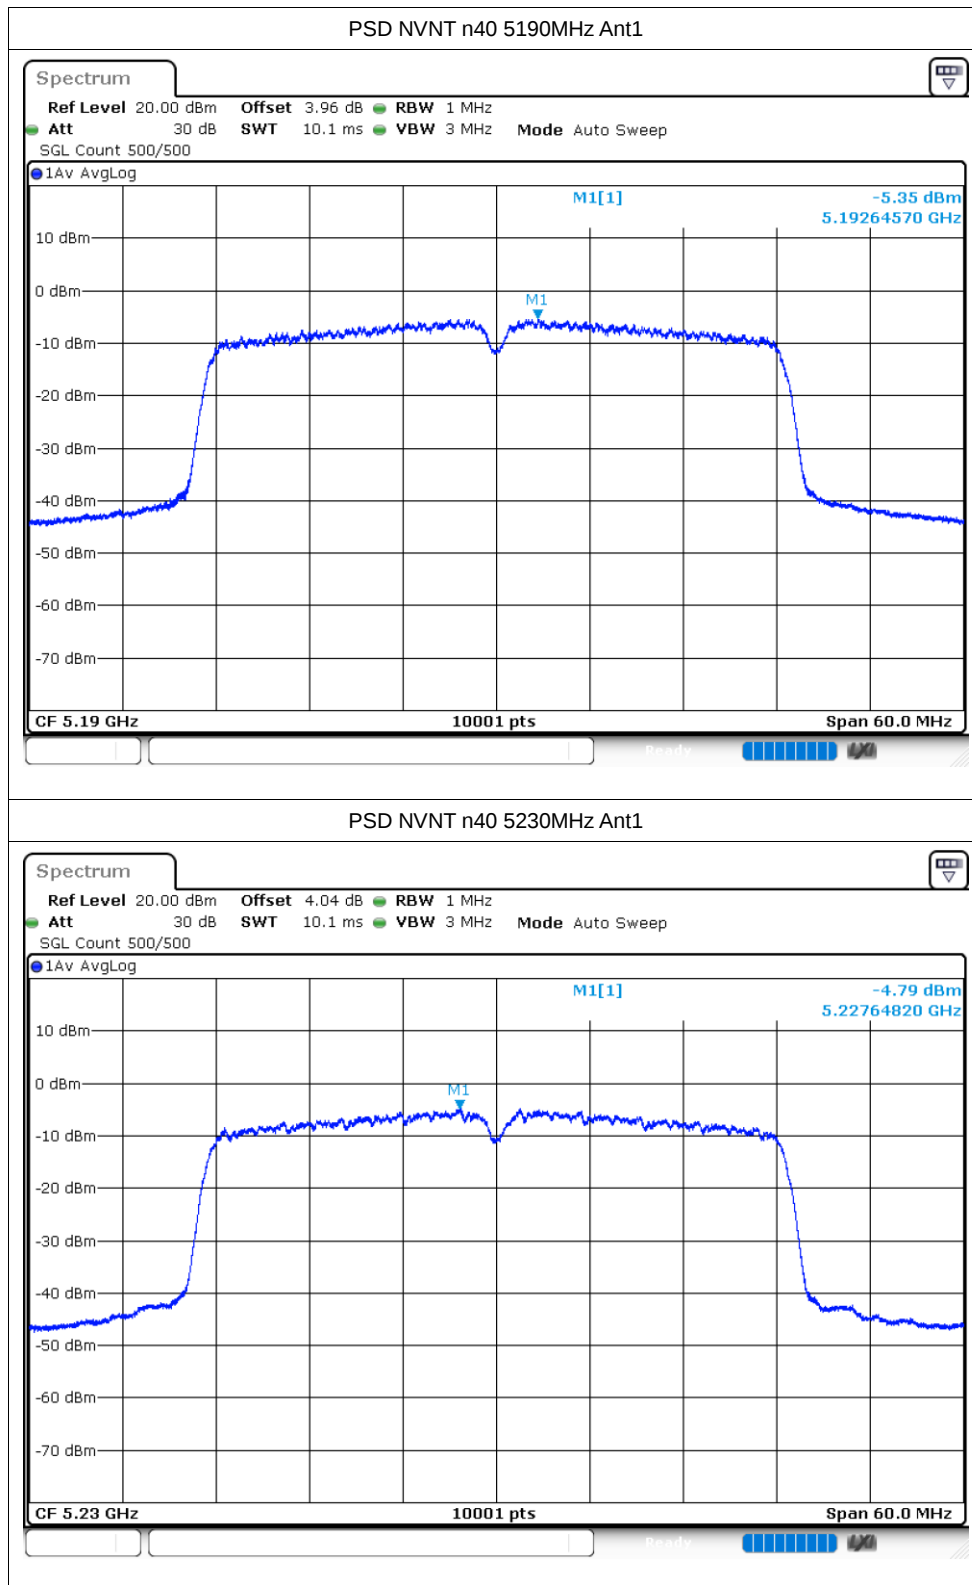

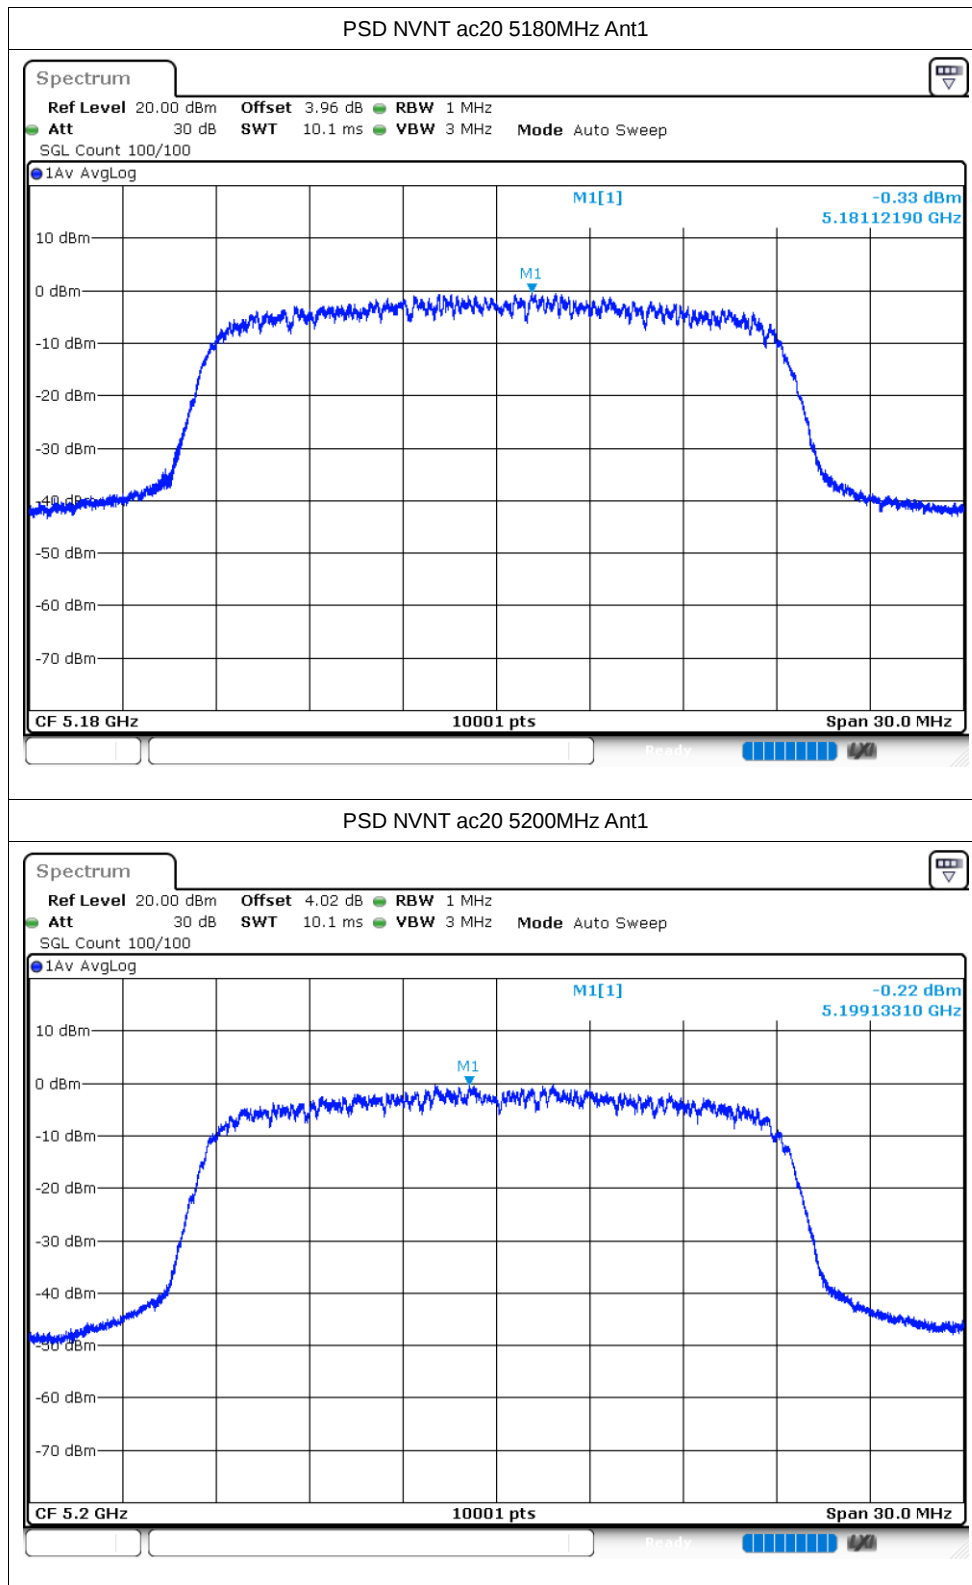

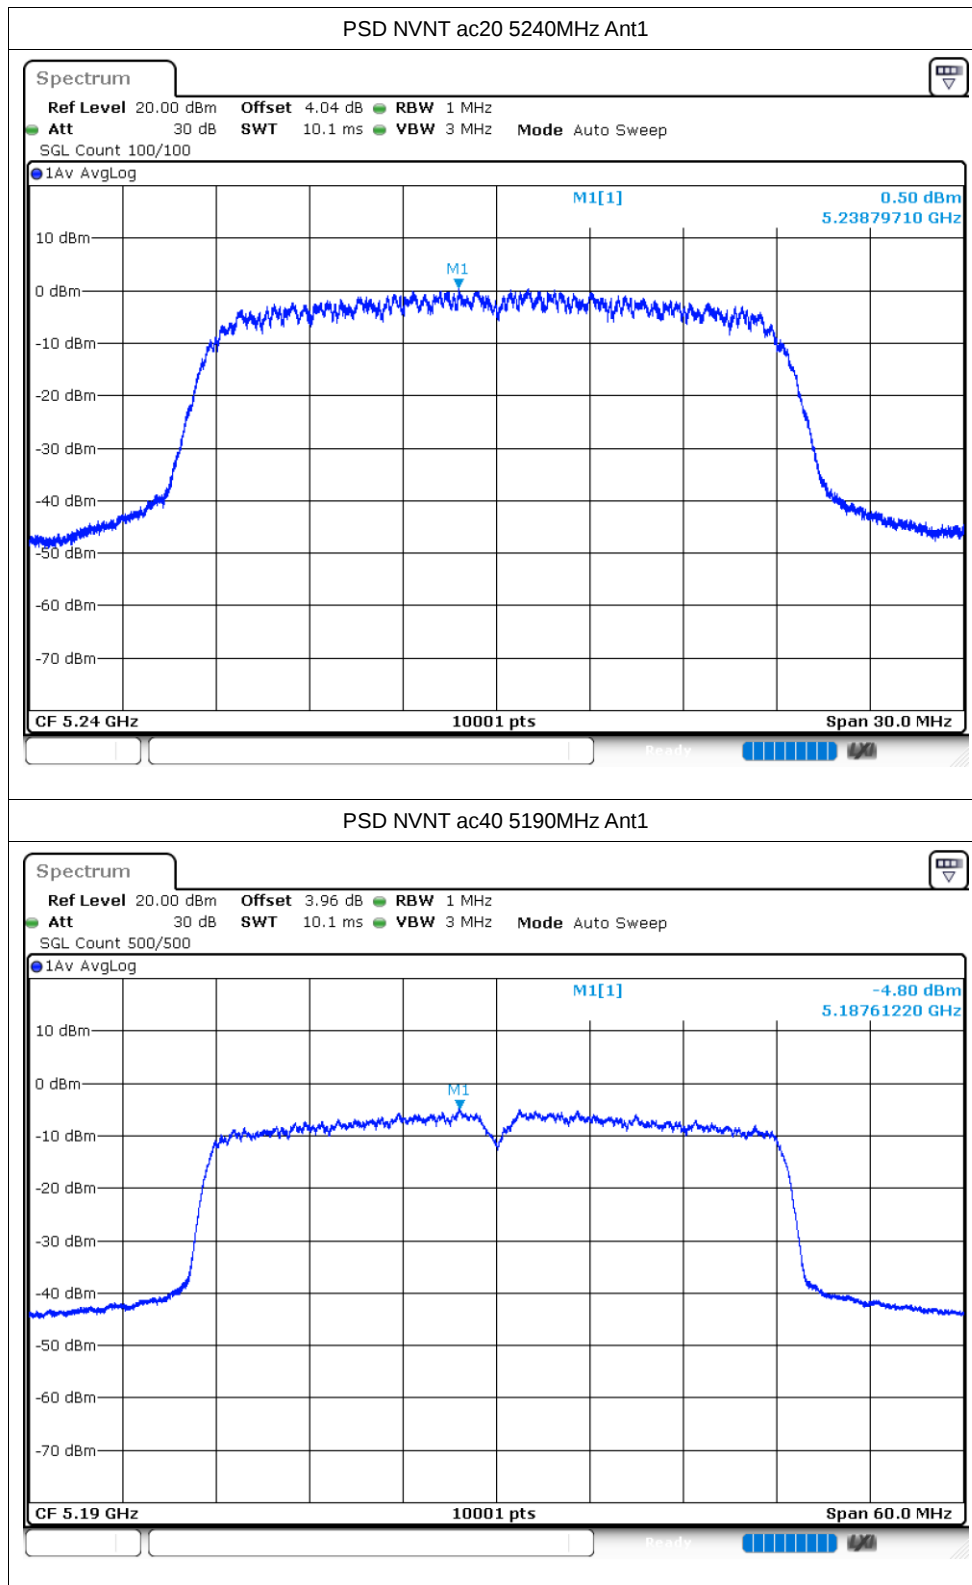

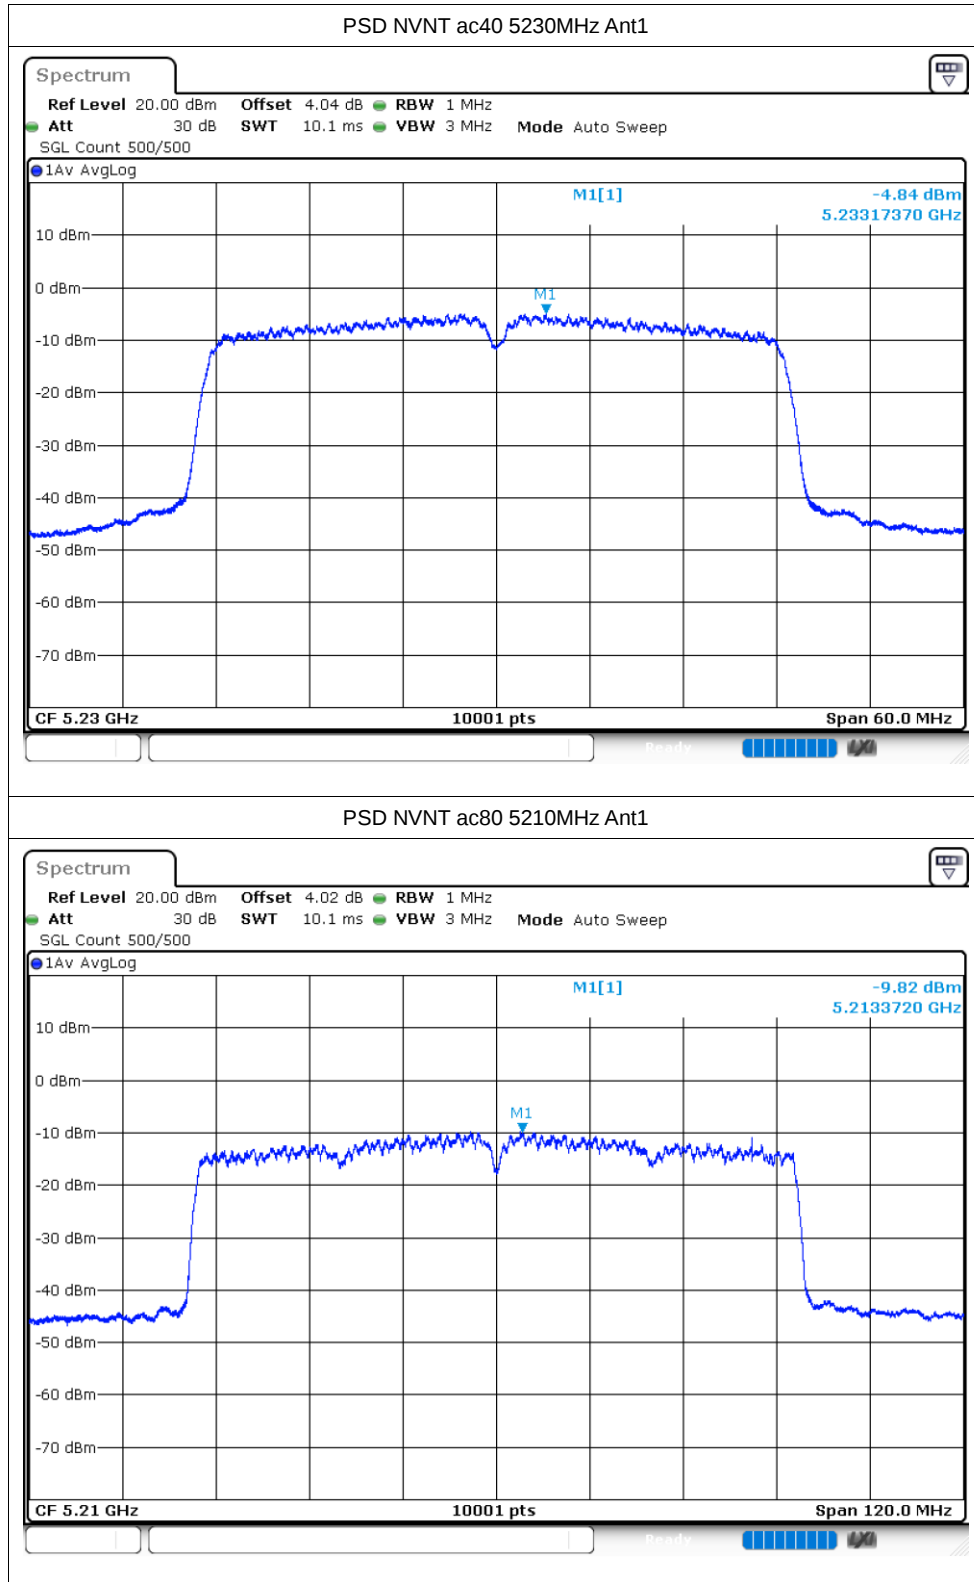


## Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | -38.2           | -27         | Pass    |
| NVNT      | a    | 5240            | Ant1    | -41.4           | -27         | Pass    |
| NVNT      | n20  | 5180            | Ant1    | -34.71          | -27         | Pass    |
| NVNT      | n20  | 5240            | Ant1    | -42.11          | -27         | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -27.14          | -27         | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -42.59          | -27         | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | -36.59          | -27         | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | -41.44          | -27         | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -29.57          | -27         | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -42.4           | -27         | Pass    |
| NVNT      | ac80 | 5210            | Ant1    | -41.99          | -27         | Pass    |
| NVNT      | ac80 | 5210            | Ant1    | -27.51          | -27         | Pass    |


# Test Graphs


## Band Edge NVNT a 5180MHz Low Ant1

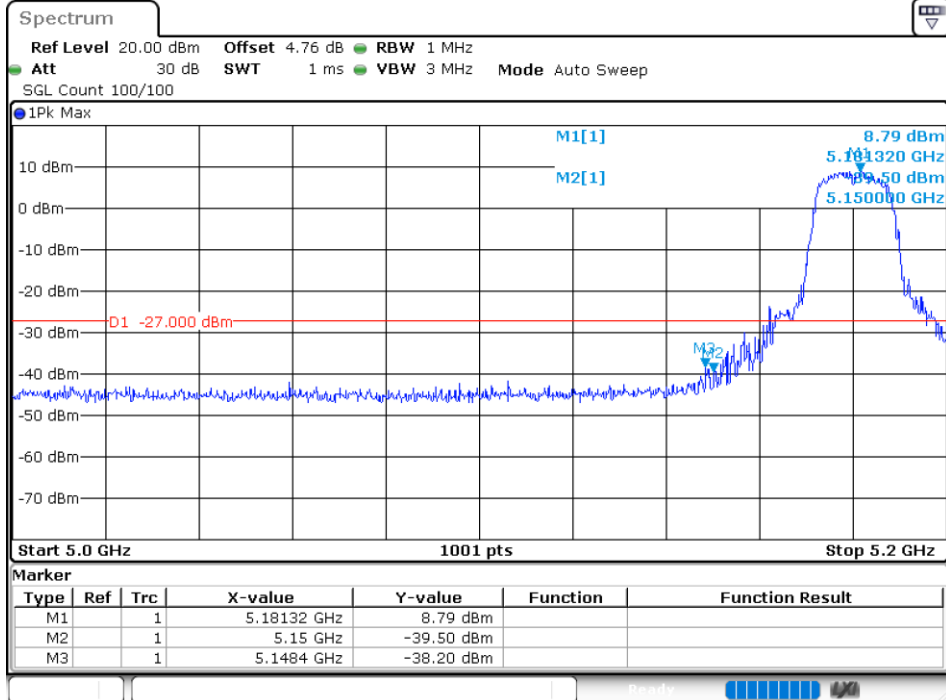



## Band Edge NVNT a 5240MHz High Ant1




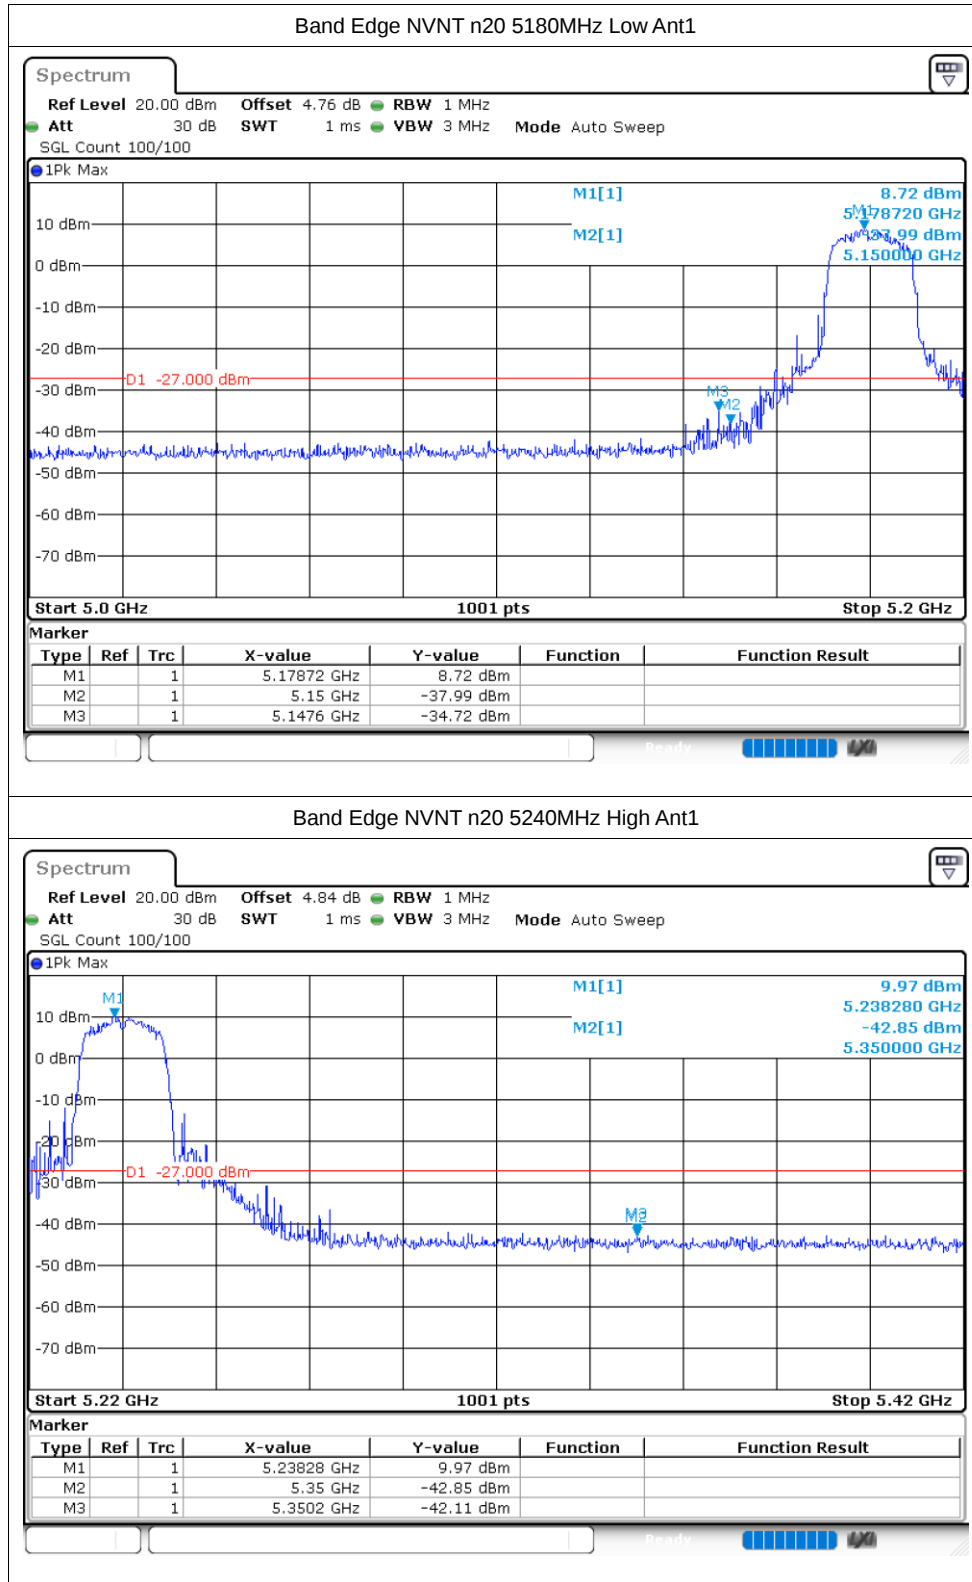

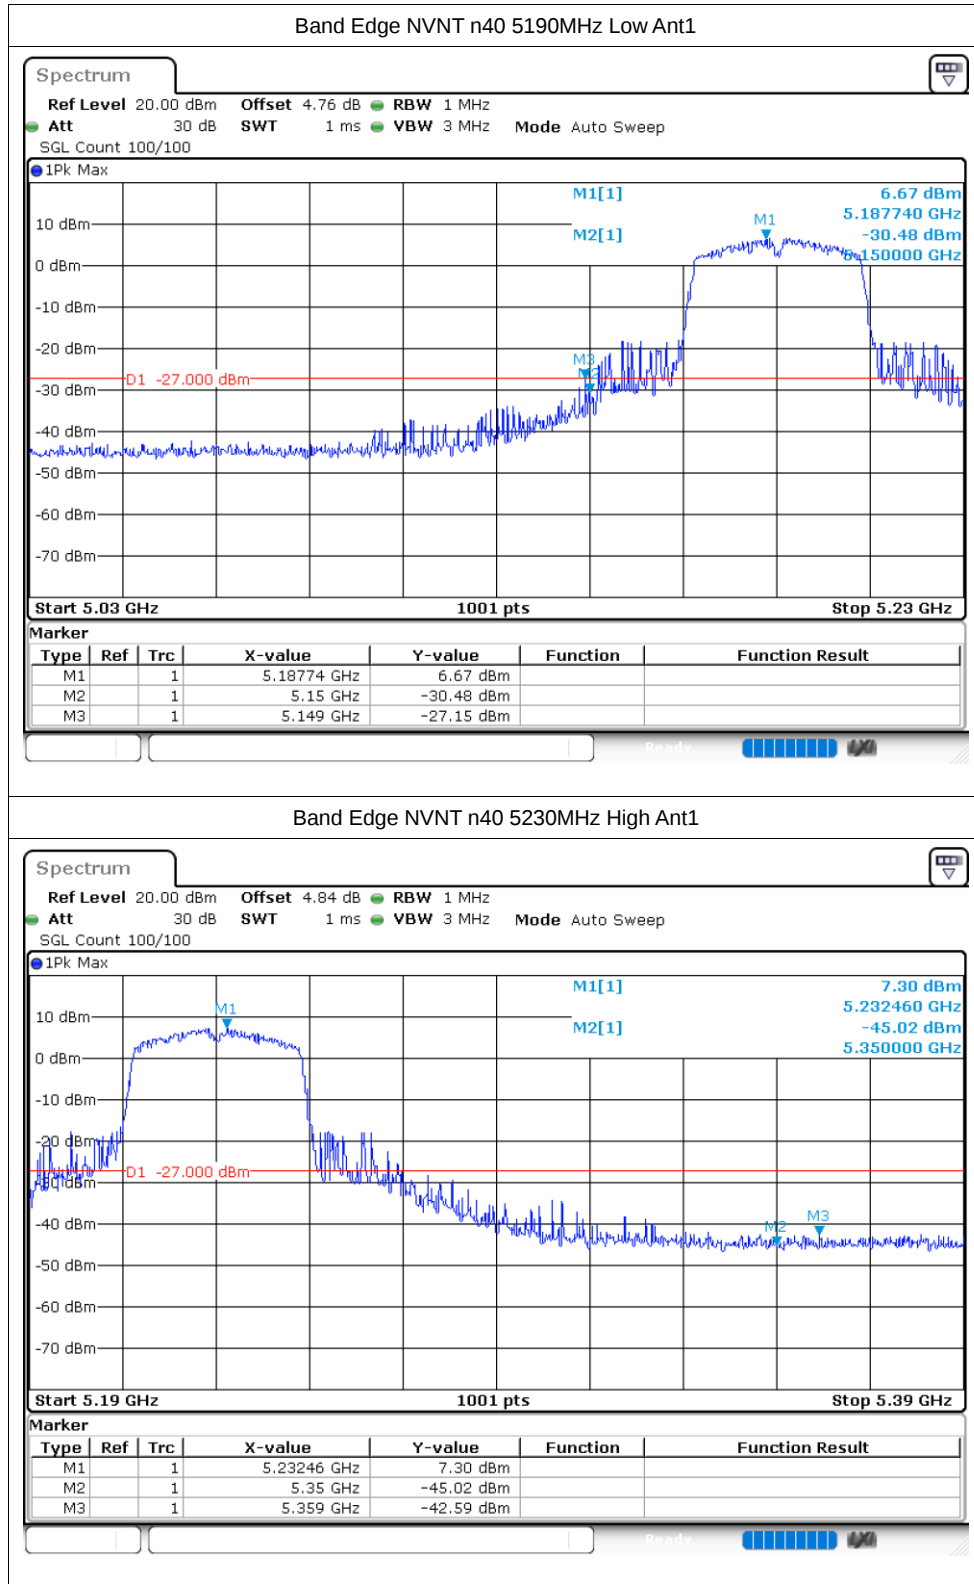

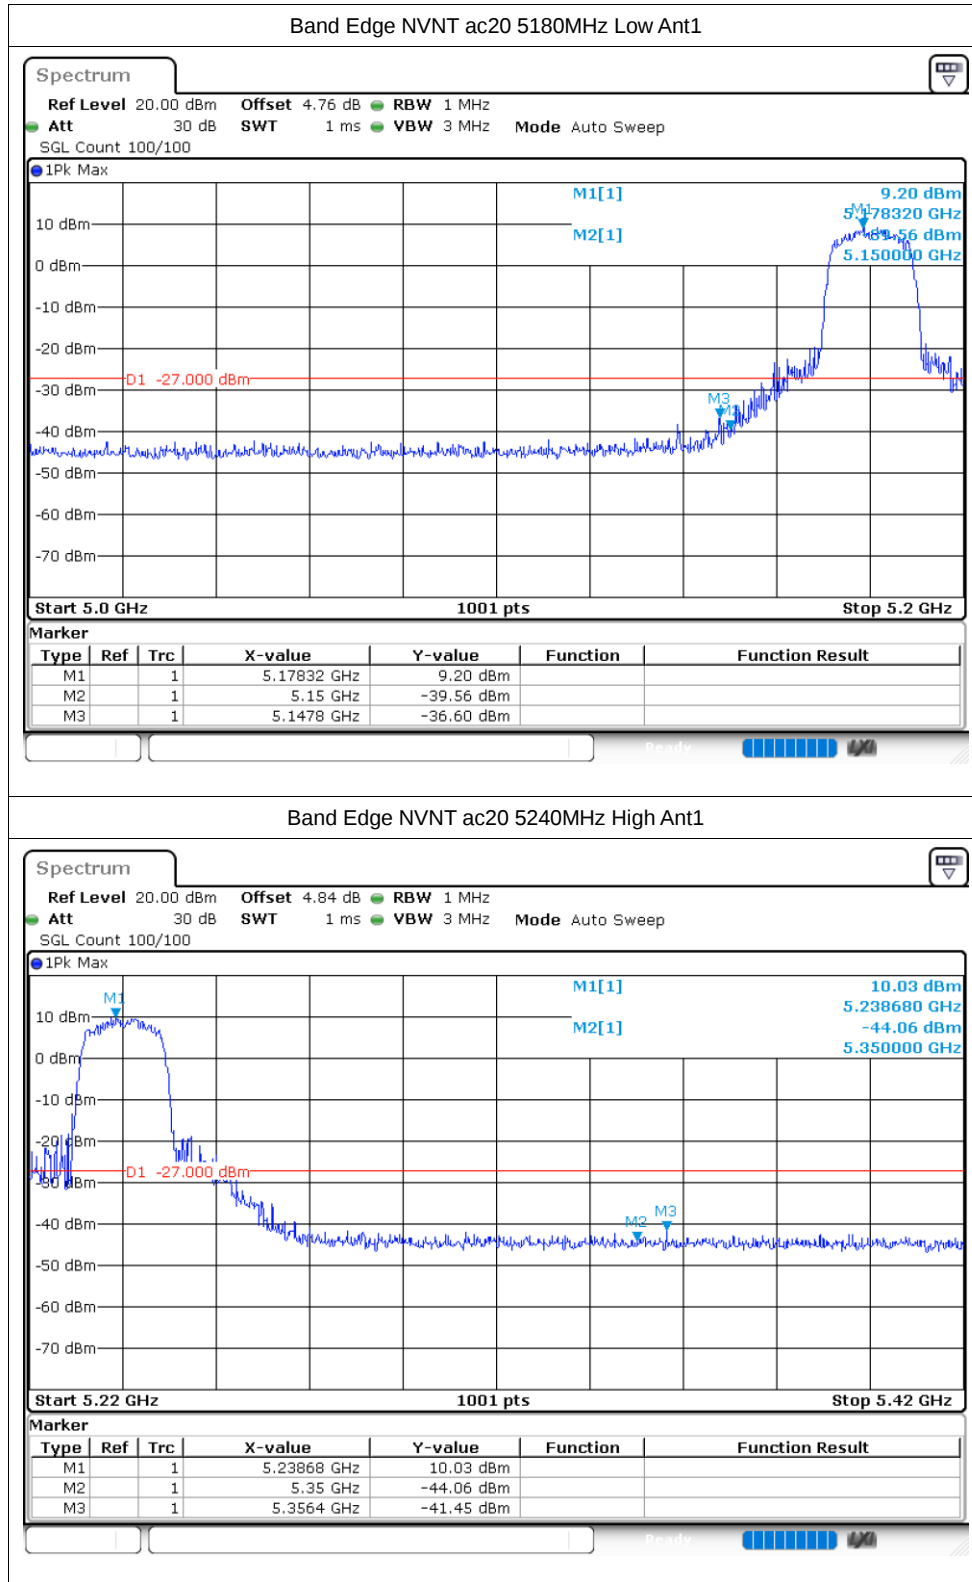

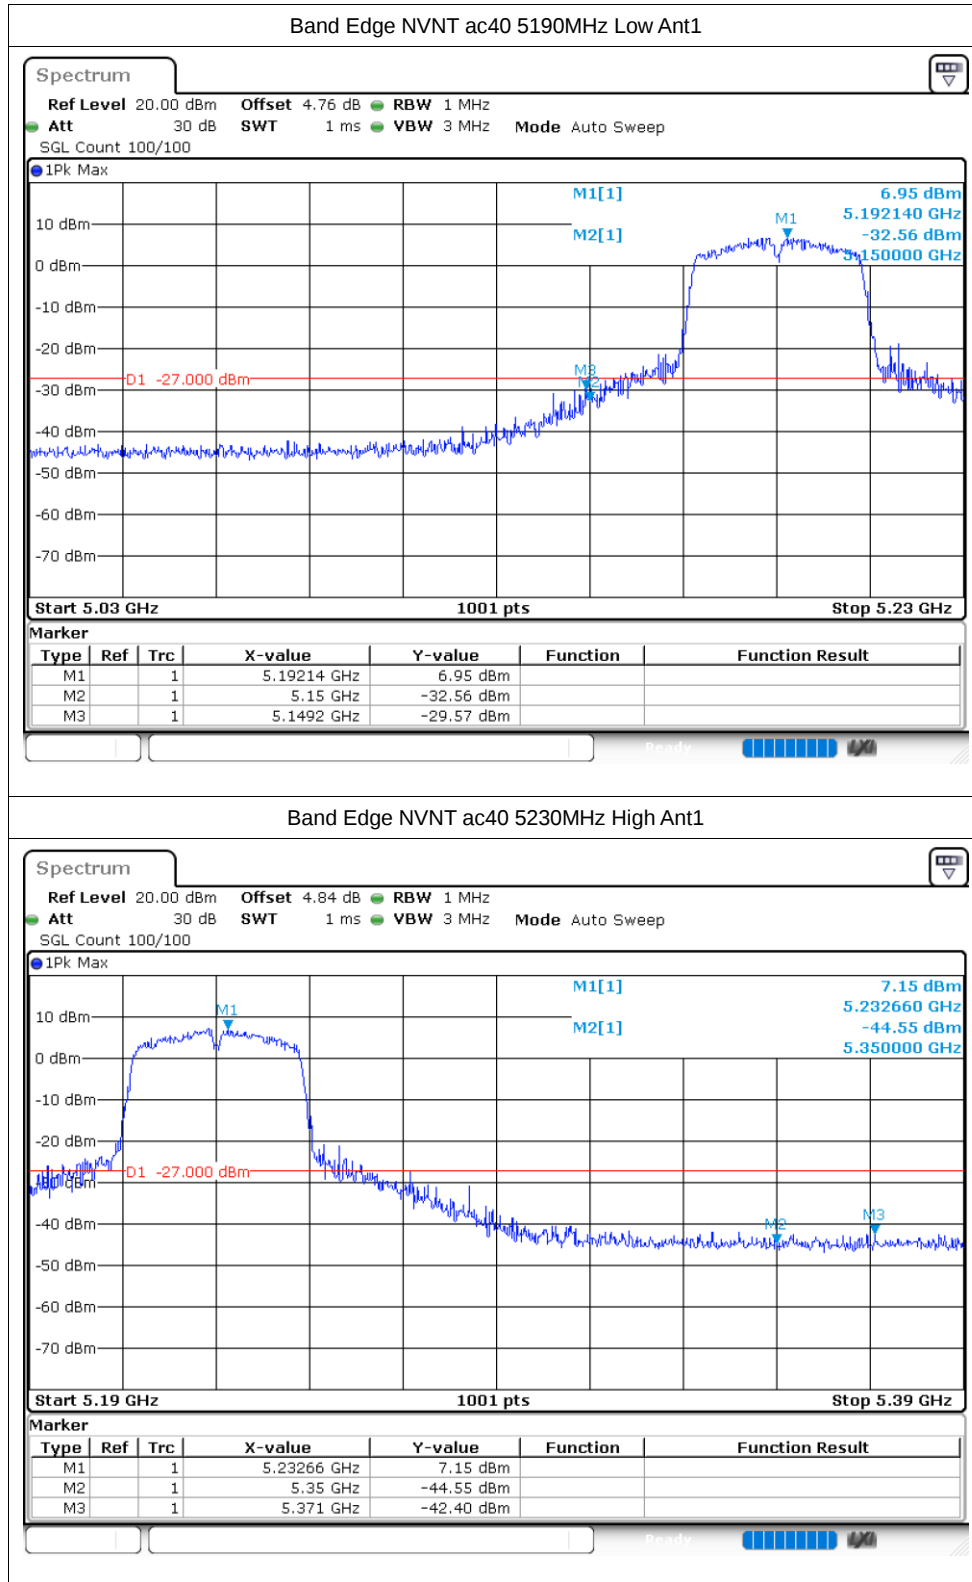

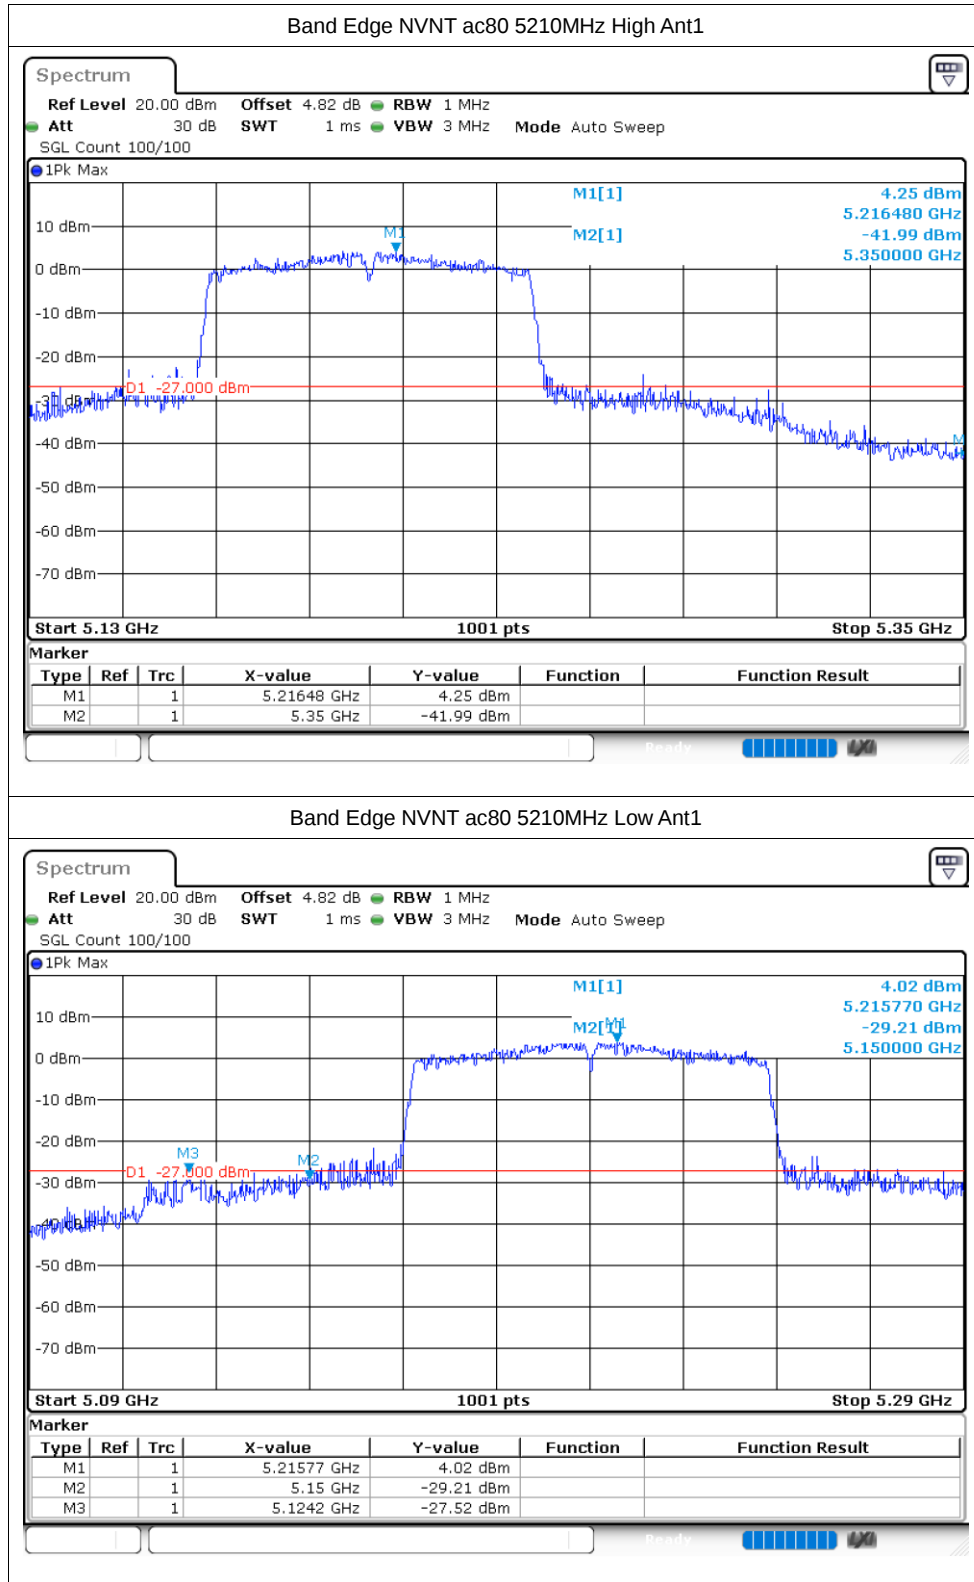


## Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | -34.03          | -27         | Pass    |
| NVNT      | a    | 5200            | Ant1    | -33.63          | -27         | Pass    |
| NVNT      | a    | 5240            | Ant1    | -32.73          | -27         | Pass    |
| NVNT      | n20  | 5180            | Ant1    | -33.75          | -27         | Pass    |
| NVNT      | n20  | 5200            | Ant1    | -33.84          | -27         | Pass    |
| NVNT      | n20  | 5240            | Ant1    | -33.48          | -27         | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -33.81          | -27         | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -34.13          | -27         | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | -34.15          | -27         | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | -32.33          | -27         | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | -33.68          | -27         | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -34.07          | -27         | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -33.48          | -27         | Pass    |
| NVNT      | ac80 | 5210            | Ant1    | -34.36          | -27         | Pass    |

### Test Graphs

#### Tx. Spurious NVNT a 5180MHz Ant1 Emission

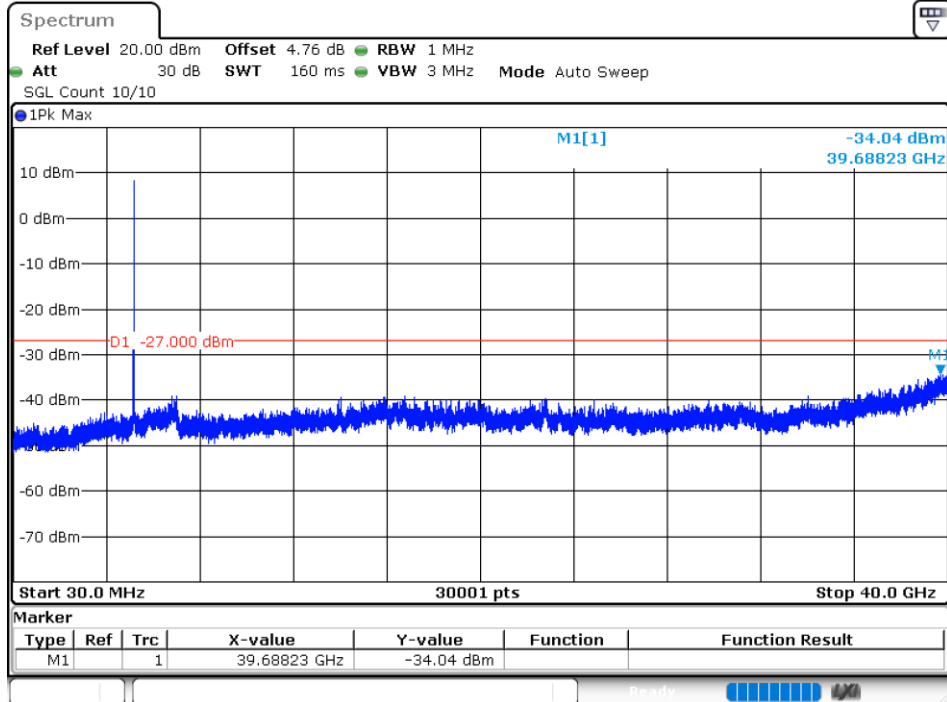

#### Tx. Spurious NVNT a 5200MHz Ant1 Emission

