




Westinghouse

SOLAR LED COLOR CHANGING w/COLOR LOCK
SPOT LIGHT (FACTORY LINKED)
ITEM: SR32SL02H-02

INSTRUCTIONS


FOR FIRST TIME USE: THE SOLAR LIGHT NEEDS TO CHARGE 8-12 HOURS IN FULL SUNLIGHT TO FULLY CHARGE THE BATTERIES.

INSTALLATION




Hardware Included	(AA) Wall Anchor X 2	(BB) Screw X 2	Choose your installation method: -To place in soft ground, please use method A. -To install on wall, please use method B.
Parts	(CC) Light Fixture	(DD) Ground Stake	

A. Insert into the ground with ground stake



- Slide the ground stake into the keyholes of the mounting bracket.
- If the ground is hard and packed, moisten the ground with water before inserting the stake to avoid breakage. Apply pressure to light not to solar panel to insert.

B. Mounted on the wall with screws

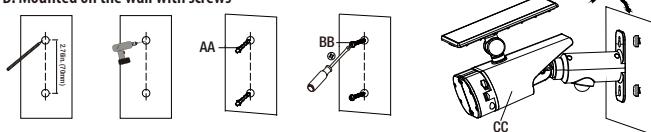

1 Marking the location

- Mark the location where you want to mount the light fixture (CC).
- Measure the width of two holes on the mounting bracket of the light to align holes for the 2 screws (BB) on the surface. The distance between the two holes is 2.76in. (70mm).
- Drill two holes.

2 Mounting the light fixture

- Insert the wall anchors (AA) so they are flush with the surface.
- Insert the screws (BB) and leave at least 1/4in. (6.3mm) of the screws (BB) outside of the surface for holding the light.
- Mount the light (CC) on the screws (BB) by placing the keyholes on the mounting bracket of the light over the screw heads.

OPERATION

- Slide the power switch (FF) to "ON" position.
- Turn selector switch (EE) to WHITE, for white color mode, then this spot light has two performance levels: Light fixture will stay on for 30 seconds when triggered by motion delivering up to 1000 Lumens and revert back to standby mode delivering up to 50 lumens until motion is detected.
- Turn selector switch (EE) to CYCLE, for color changing mode.
- Turn selector switch (EE) to LOCK, for color select mode. You can select the color you want.

5. Adjust the solar panel to be in direct sunlight for 8-12 hours to fully charge the light.
6. Loosen the wing nut to adjust the light base up and down (The maximum adjustable angle is 90°), or rotate the light base (The maximum adjustable angle is less than 360°), and adjust two light panels (The maximum adjustable angle is 90°) to desired positions for optimal lighting coverage.
NOTE: Slide the power switch (FF) to "ON" position before charging the battery. The spot light will not charge when power switch (FF) is in the "OFF" position.


NOTE: Motion detection range is up to 20 feet (6 m), motion detection angle is up to 120°. Light fixtures use radio frequency technology to link, and light fixtures should not be greater than 65 feet (20 m) apart for linked function to work properly. When one light is triggered by motion, both lights will activate and deliver up to 1000 lumens. The package includes 2 lights. These 2 lights are factory linked, and can not be linked with more of the same type light or any other lights. NOTE: If there are performance or quality issues, both units need to be replaced with another set.

TROUBLE SHOOTING

If the light does not turn on, remove the battery, wipe both ends with a clean, dry cloth and reinstall the battery. Check the battery to ensure that it is making secure contact with the terminals. If this does not work, replace with a new battery.

- Slide the power switch (FF) to "OFF" position.
- Open the light panels, remove 6 screws from the light base using a Phillips head screwdriver.
- Pull out and remove 2 screws holding the battery compartment.
- Remove 2 old batteries and replace with 2 new 3.7V, 2000 mAh lithium (18650) rechargeable batteries.
- Secure the battery compartment and the light base with the 8 screws removed earlier.
- Slide the power switch (FF) to "ON" position. For optimal performance, place solar spot light in direct sunlight for 8-12 hours to fully charge the batteries.

REPLACING THE BATTERY

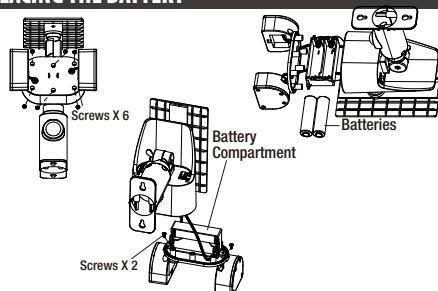


FCC WARNING

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

Notes: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

RF EXPOSURE: This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

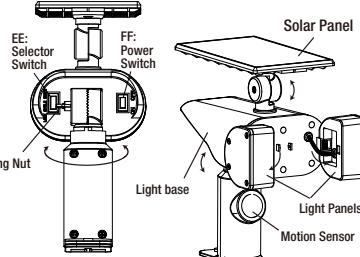

For additional help and information regarding installation, contact customer service at 1-844-551-0680, 8am-5pm, CST Monday – Friday
customerservice@idctexas.com

and Westinghouse are trademarks of Westinghouse Electric Corporation. Used under license by Sky Rich Star Limited. All Rights Reserved.