



# FCC PART 15C TEST REPORT

## BLUETOOTH LOW ENERGY (BLE) PART

No. 24T04Z100874-008

for

**COOSEA GROUP (HK) COMPANY LIMITED**

**Smart Phone**

**Model Name: SL219A/SL219C**

**FCC ID:2A28USL219**

**with**

**Hardware Version:1.0**

**Software Version:SL219AA10013(for SL219A)**

**SL219CC10013(for SL219C)**

**Issued Date: 2024-6-12**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No.52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.chinattl.com](http://www.chinattl.com)

## REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z100874-008	Rev.0	1st edition	2024-5-27
24T04Z100874-008	Rev.1	Add test plot for duty cycle in B.10	2024-6-12

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATA .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION.....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT .....	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. NORMAL ACCESSORY SETTING .....	8
3.5. GENERAL DESCRIPTION.....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING .....	9
<b>5. TEST RESULTS .....</b>	<b>10</b>
5.1. SUMMARY OF EUT MODE .....	10
5.2. SUMMARY OF TEST RESULTS.....	10
5.3. STATEMENTS.....	10
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
7.1. PEAK OUTPUT POWER - CONDUCTED.....	12
7.2. FREQUENCY BAND EDGES- CONDUCTED .....	12
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	12
7.4. RADIATED UNWANTED EMISSION .....	12
7.5. 6dB BANDWIDTH .....	12
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	12
7.7. AC POWERLINE CONDUCTED EMISSION .....	13
<b>ANNEX A: EUT PARAMETERS.....</b>	<b>14</b>
<b>ANNEX B: DETAILED TEST RESULTS.....</b>	<b>15</b>
B.1. MEASUREMENT METHOD .....	15
B.2. PEAK OUTPUT POWER.....	16
B.3. FREQUENCY BAND EDGES - CONDUCTED .....	17

B.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....	19
B.5. RADIATED UNWANTED EMISSION .....	28
B.6. 6dB BANDWIDTH.....	34
B.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL .....	37
B.8. AC POWERLINE CONDUCTED EMISSION .....	40
B.9. ANTENNA REQUIREMENT.....	44
<b>ANNEX C: ACCREDITATION CERTIFICATE .....</b>	<b>46</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### **1.2. Testing Location**

Conducted testing Location:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191


### 1.3. Testing Environment

Normal Temperature: 20-27°C  
Relative Humidity: 20-50%

### 1.4. Project data

Testing Start Date: 2024-4-29  
Testing End Date: 2024-5-27

### 1.5. Signature



---

Wu Le


(Prepared this test report)



---

Sun Zhenyu

(Reviewed this test report)



---

Hu Xiaoyu

(Approved this test report)

## **2. ClientInformation**

### **2.1. Applicant Information**

Company Name: COOSEA GROUP (HK) COMPANY LIMITED  
Address/Post: UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE  
TSIMSHATSUI KL  
City: /  
Postal Code: /  
Country: China  
Telephone: 137-5984-9661  
Fax: /

### **2.2. Manufacturer Information**

Company Name: COOSEA GROUP (HK) COMPANY LIMITED  
Address/Post: UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE  
TSIMSHATSUI KL  
City: /  
Postal Code: /  
Country: China  
Telephone: 137-5984-9661  
Fax: /

### **3. Equipment UnderTest (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart Phone
Model Name	SL219A/SL219C
FCC ID	2A28USL219
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.8V DC by Battery
Antenna gain	-0.27dBi

#### **3.2. Internal Identification of EUT**

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
EUT1(SL219A)	352357990007013	1.0	SL219AA10013	2024-4-30
EUT2(SL219A)	352357990004473	1.0	SL219AA10013	2024-4-29

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

AE ID*	Description	Model	Manufacturer
AE1	Battery1	BL-A67CT	Huizhou Highpower Technology Co., Ltd.
AE2	Charger1	HJ-0502000-US	SHENZHEN HUAJIN ELECTRON CO.,LTD.
AE3	USB Cable1	FKY-24-049	ShenZhen FKY-QY Hardware&Electronics.,Ltd.

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. Normal Accessory setting**

Fully charged battery is used during the test.

#### **3.5. General Description**

The Equipment Under Test (EUT) is a model of Smart Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	2023
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

## 5. Test Results

### 5.1. Summary of EUT Mode

Two modes are provided:

Mode	Conditions
Mode A	1Mbps
Mode B	2Mbps

\*For the test results, the EUT had been tested all conditions. But only the worst case (Mode B) was shown in test report except the "Peak Output Power" test was shown all conditions.

### 5.2. Summary of Test Results

Abbreviations used in this clause:

**P** Pass, The EUT complies with the essential requirements in the standard.  
**F** Fail, The EUT does not comply with the essential requirements in the standard  
**NA** Not Applicable, The test was not applicable  
**NP** Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	<b>P</b>
Frequency Band Edges- Conducted	15.247 (d)	<b>P</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>P</b>
Radiated Unwanted Emission	15.247, 15.205, 15.209	<b>P</b>
6dB Bandwidth	15.247 (a)(2)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>
Antenna Requirement	15.203	<b>P</b>
Duty cycle	/	<b>NA</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.3. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

The SL219A is a new product for this testing. The SL219C is a variant product of SL219A and shares the SL219A results. For detail differences between two models please refer the Declaration of Changes document.

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	R&S	1 year	2025-03-09
2	Test Receiver	ESCI	100344	R&S	1 year	2025-01-21
3	LISN	ENV216	101200	R&S	1 year	2024-05-05
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103015	R&S	1 year	2025-01-19
2	EMI Antenna	VULB 9163	01223	SCHWARZBECK	1 year	2024-07-19
3	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2024-06-07
4	Loop Antenna	HFH2-Z2	829324/00 7	R&S	2 years	2026-01-05

### Test Software

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V11.50.00	R&S
Conducted Emission	EMC32 V8.53.0	R&S

## **7. Measurement Uncertainty**

### **7.1. Peak Output Power - Conducted**

**Measurement Uncertainty:**

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

### **7.2. Frequency Band Edges- Conducted**

**Measurement Uncertainty:**

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

### **7.3. Transmitter Spurious Emission - Conducted**

**Measurement Uncertainty:**

FrequencyRange	Uncertainty(k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### **7.4. Radiated Unwanted Emission**

**Measurement Uncertainty:**

FrequencyRange	Uncertainty(dBm) (k=2)
9kHz-30MHz	/
30MHz ≤ f ≤ 1GHz	4.72
1GHz ≤ f ≤ 18GHz	4.84
18GHz ≤ f ≤ 40GHz	5.12

### **7.5. 6dB Bandwidth**

**Measurement Uncertainty:**

Measurement Uncertainty(k=2)	61.936Hz
------------------------------	----------

### **7.6. Maximum Power Spectral Density Level**

**Measurement Uncertainty:**

Measurement Uncertainty(k=2)	0.66dB
------------------------------	--------

## 7.7. AC Powerline Conducted Emission

### Measurement Uncertainty:

Measurement Uncertainty(k=2)	3.08dB
------------------------------	--------

## **ANNEX A: EUTparameters**

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.


## **ANNEX B: Detailed Test Results**

### **B.1. Measurement Method**

#### **B.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### **B.1.2. Radiated Emission Measurements**

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

## B.2. Peak Output Power

### B.2.1. Peak Output Power – Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.9.1.1

- a) Set the RBW = 3MHz.
- b) Set VBW = 10MHz.
- c) Set span = 10MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### Measurement Limit:

Standard	Limit (dBm)
FCC Part 15.247(b)(3)	< 30

#### Measurement Results:

##### For GFSK

Sample Rate	Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
1Mbps	0	2402	-3.23	P
	19	2440	-2.60	P
	39	2480	-2.41	P
2Mbps	1	2404	-2.92	P
	19	2440	-2.49	P
	38	2478	-2.23	P

**Conclusion:** PASS

### B.2.2. E.I.R.P.

**The radiated E.I.R.P. is listed below:**

Antenna gain =-0.27dBi

##### For GFSK

Sample Rate	Channel No.	Frequency (MHz)	E.I.R.P. (dBm)	Conclusion
1Mbps	0	2402	-3.50	P
	19	2440	-2.87	P
	39	2480	-2.68	P
2Mbps	1	2404	-3.19	P
	19	2440	-2.76	P
	38	2478	-2.50	P

Note: E.I.R.P. are calculated with the antenna gain.

**Conclusion:** PASS

### B.3. Frequency Band Edges - Conducted

**Method of Measurement: See ANSI C63.10-clause6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW=100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	<-20


**Measurement Result:**

**For GFSK**


Channel No.	Frequency (MHz)	Hopping	Band Edge Power (dBc)		Conclusion
1	2404	Hopping OFF	Fig.1	-51.51	P
38	2478	Hopping OFF	Fig.2	-38.22	P

**Conclusion: PASS**

Test graphs as below

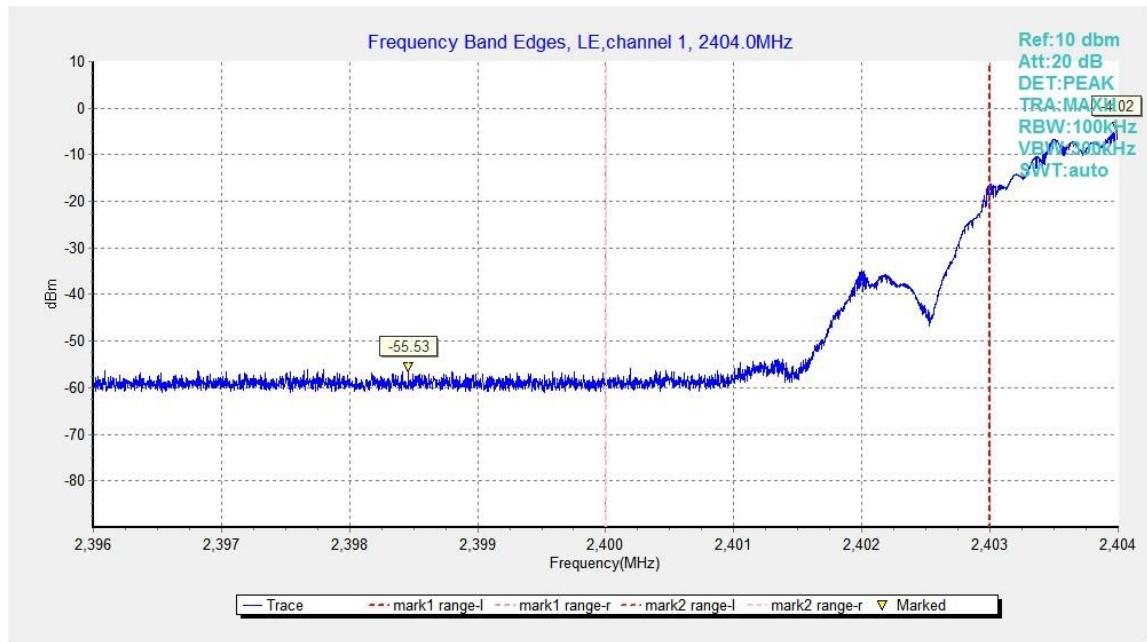

**Fig.1.** Frequency Band Edges: GFSK, 2404 MHz, Hopping Off

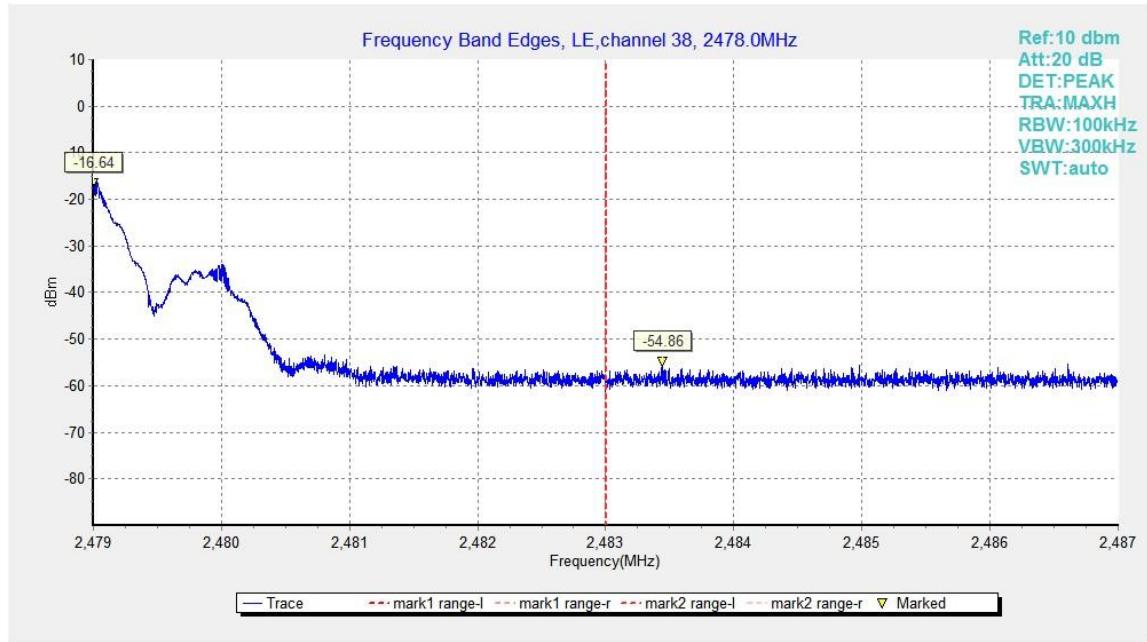

**Fig.2.** Frequency Band Edges: GFSK, 2478 MHz, Hopping Off

## B.4. Transmitter Spurious Emission-Conducted

**Method of Measurement: See ANSI C63.10-clause 11.11.2 and clause 11.11.3**

**Measurement Procedure – Reference Level**

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to  $\geq 1.5$  times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

**Measurement Procedure - Unwanted Emissions**

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.


**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth


**Measurement Results:**
**For GFSK**

Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
1	2404	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
38	2478	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

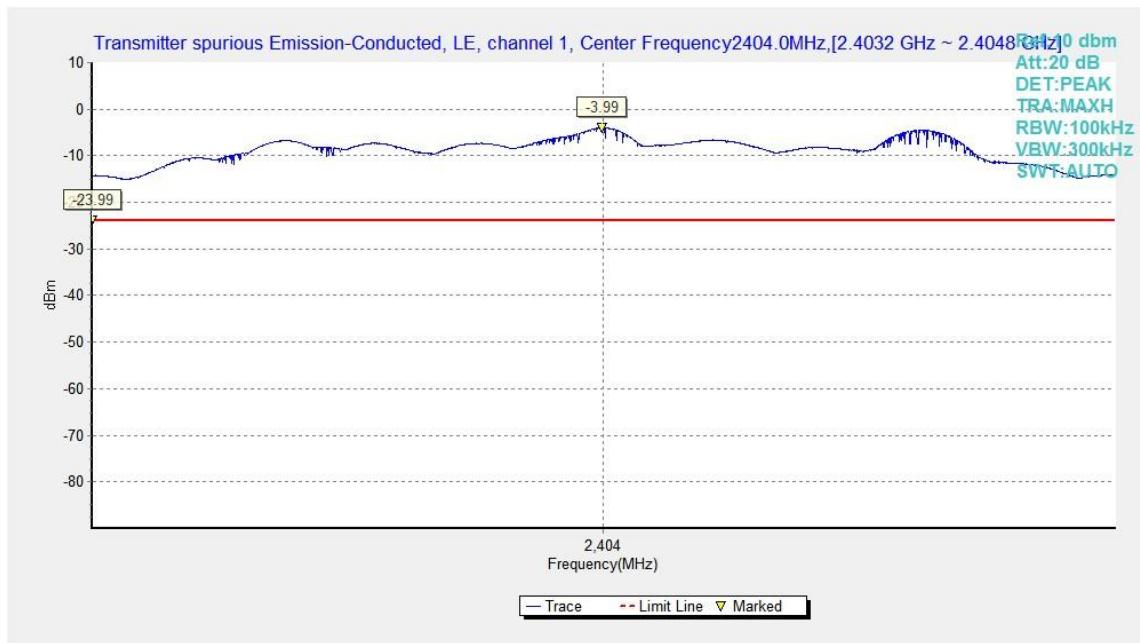
**Conclusion: PASS**
**Test graphs as below**

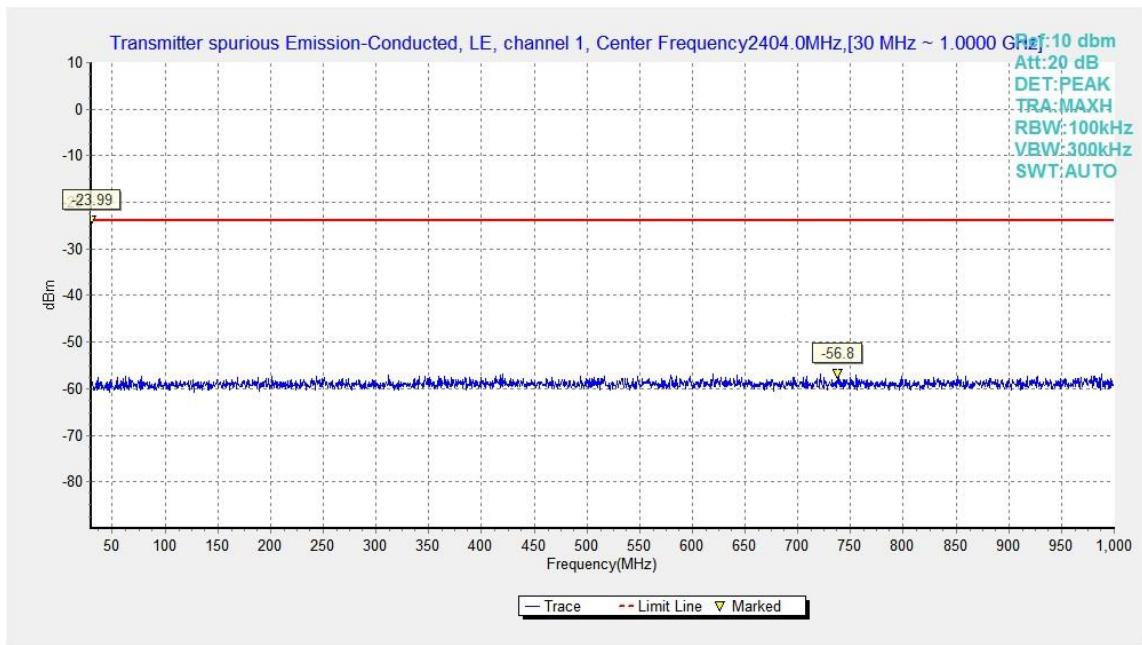**Fig.3.** Transmitter Spurious Emission -Conducted: GFSK,2404MHz

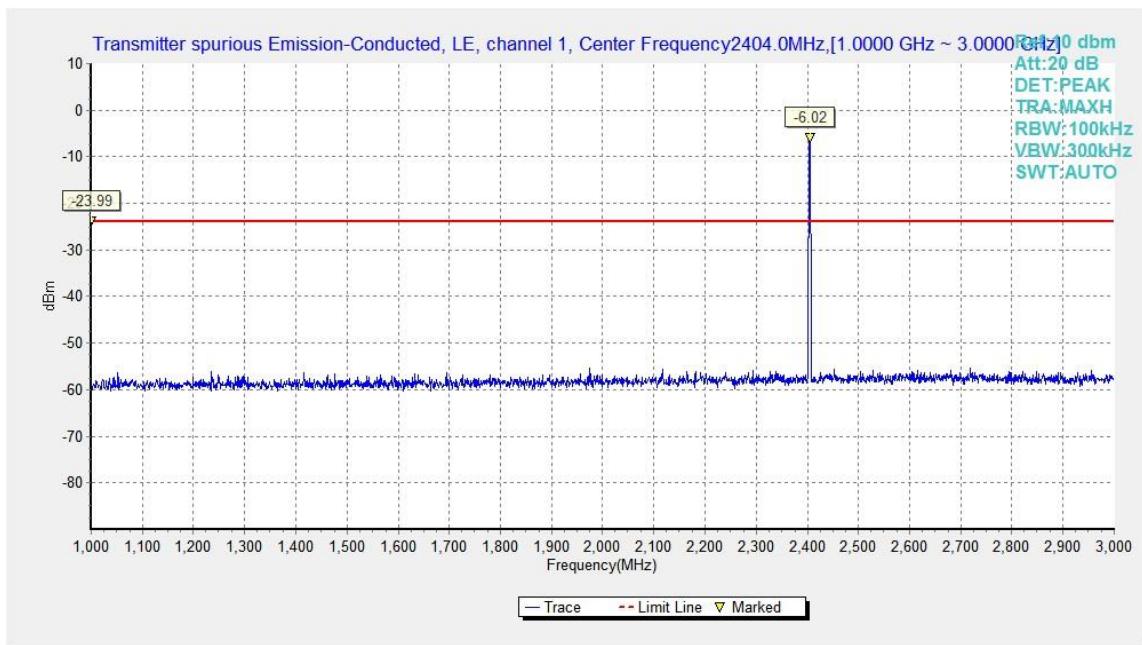


**Fig.4.** Transmitter Spurious Emission -Conducted: GFSK, 2404 MHz, 30MHz - 1GHz

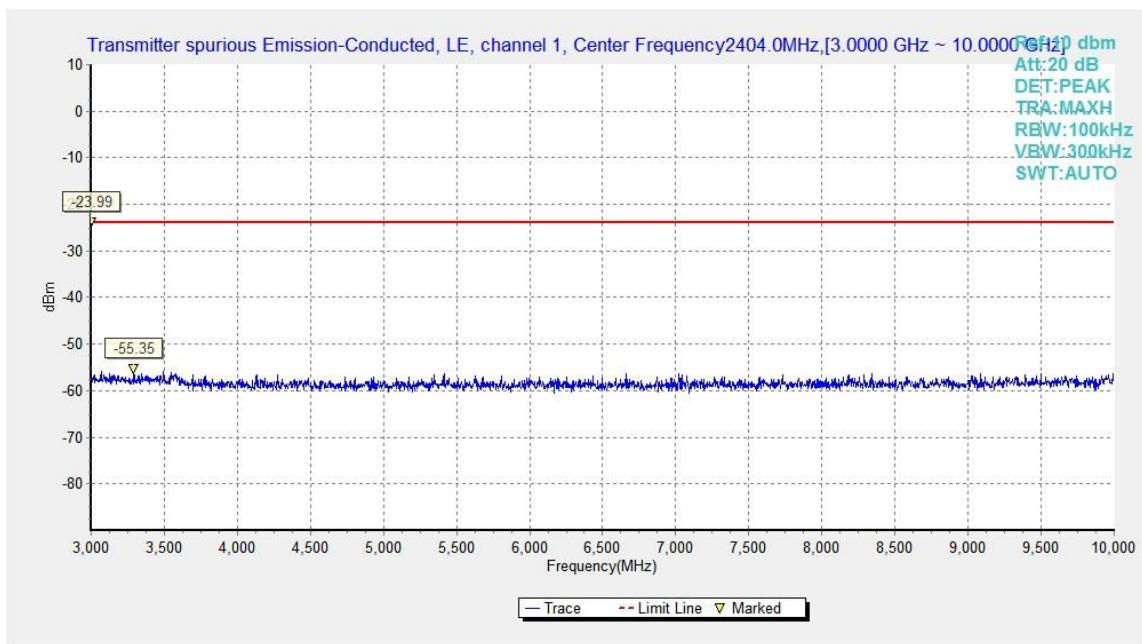


**Fig.5.** Transmitter Spurious Emission -Conducted: GFSK, 2404 MHz, 1GHz - 3GHz




**Fig.6.** Transmitter Spurious Emission -Conducted: GFSK, 2404 MHz, 3GHz - 10GHz

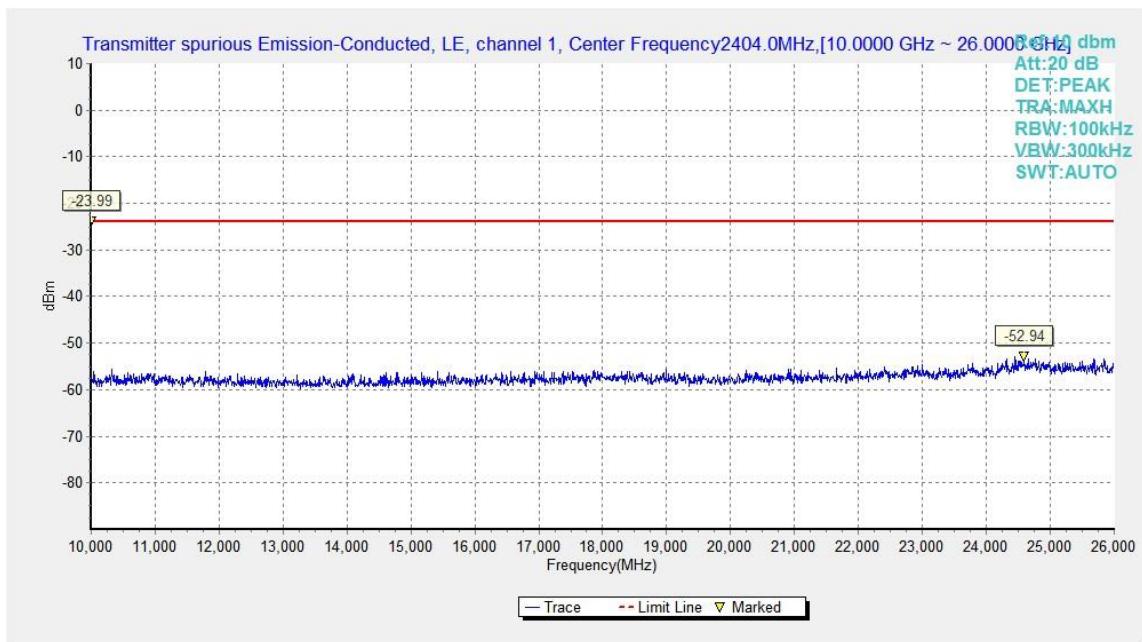


**Fig.7.** Transmitter Spurious Emission -Conducted: GFSK, 2404 MHz, 10GHz - 26GHz

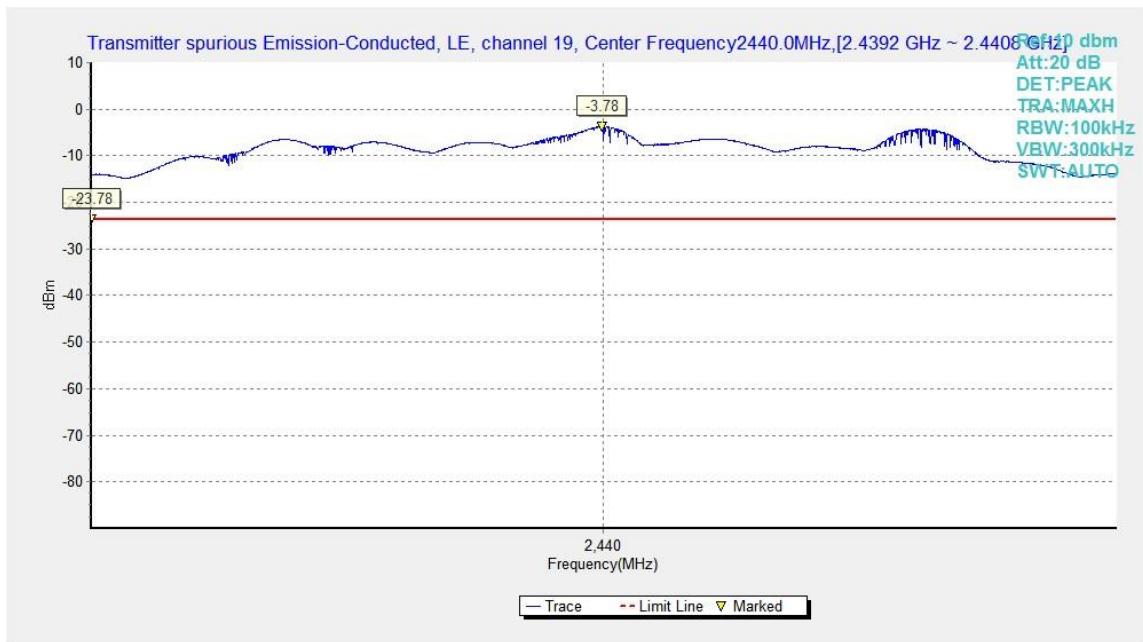


**Fig.8.** Transmitter Spurious Emission -Conducted: GFSK, 2440MHz

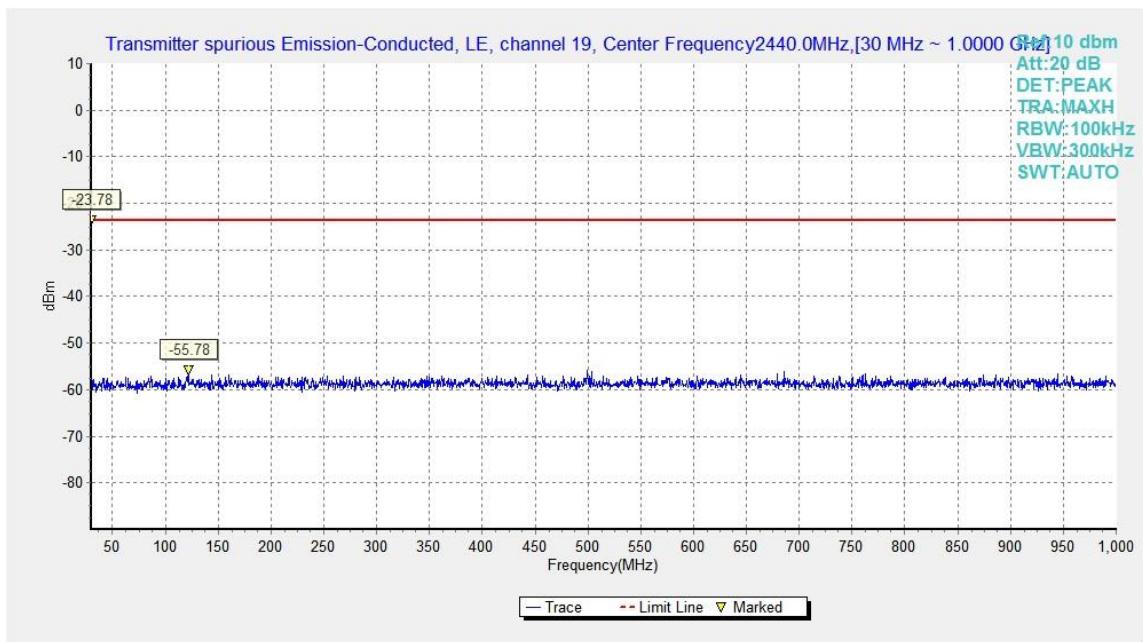


**Fig.9.** Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

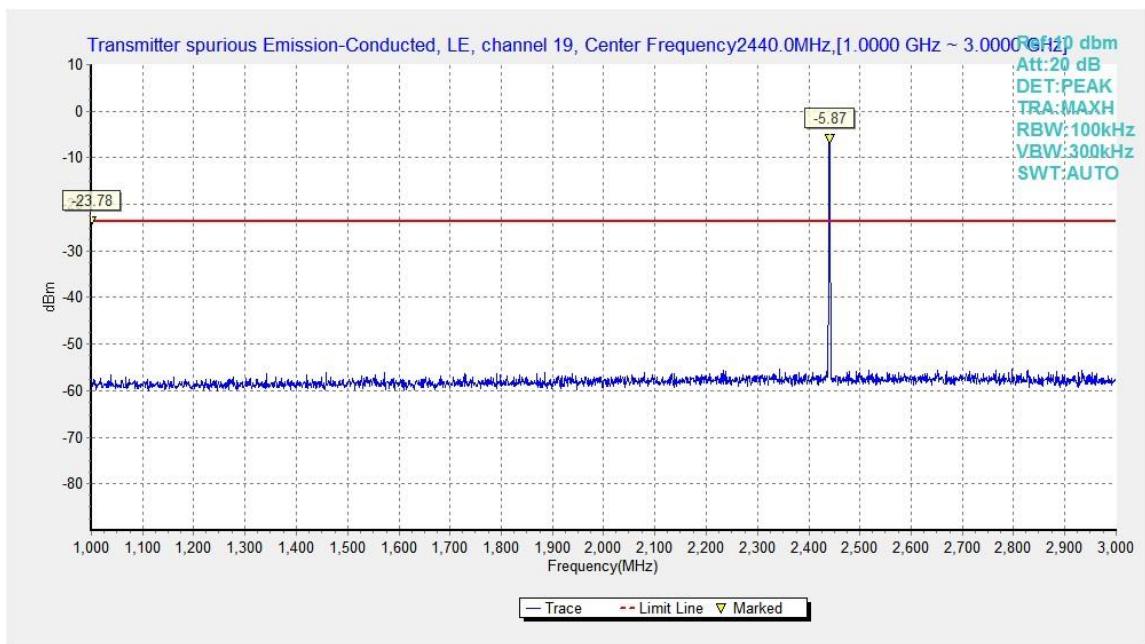


**Fig.10.** Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

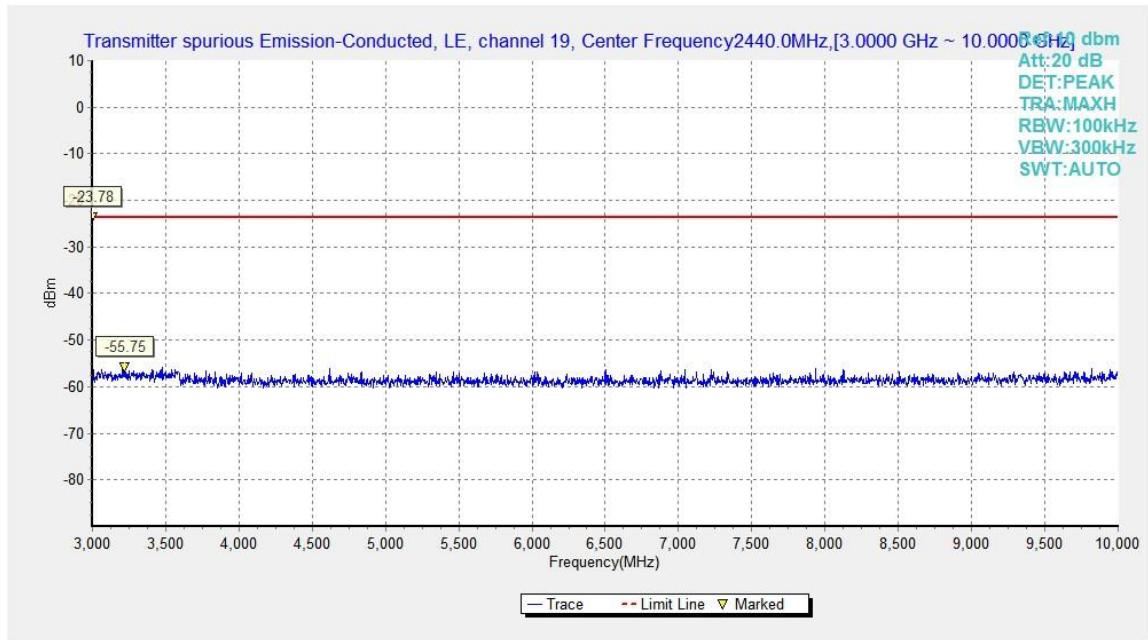


**Fig.11.** Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 3GHz – 10GHz

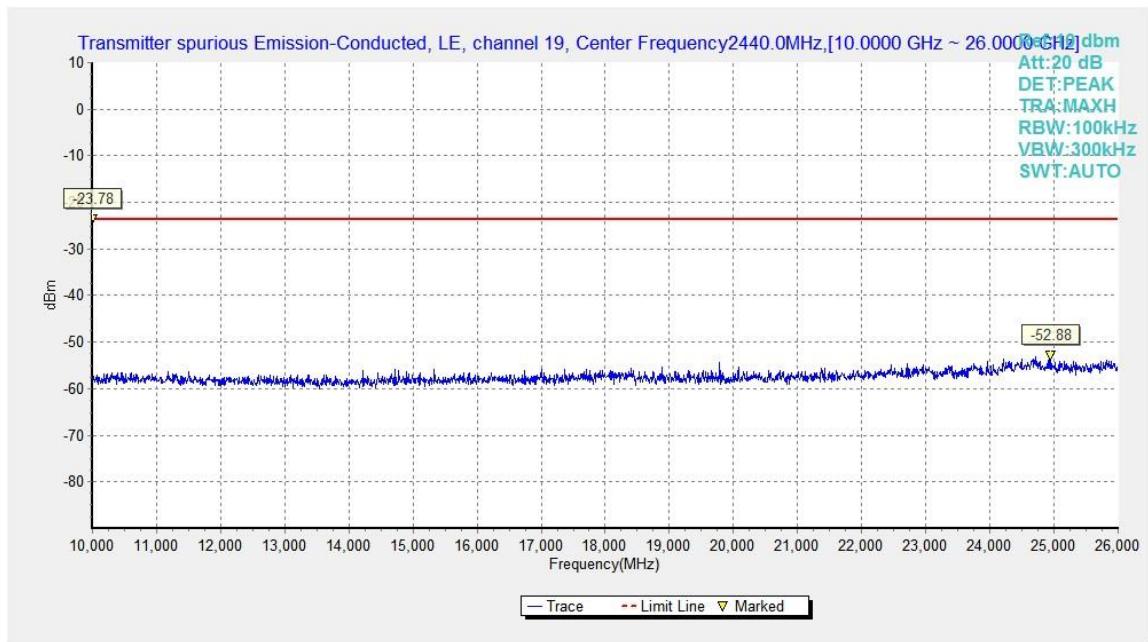


**Fig.12.** Transmitter Spurious Emission -Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

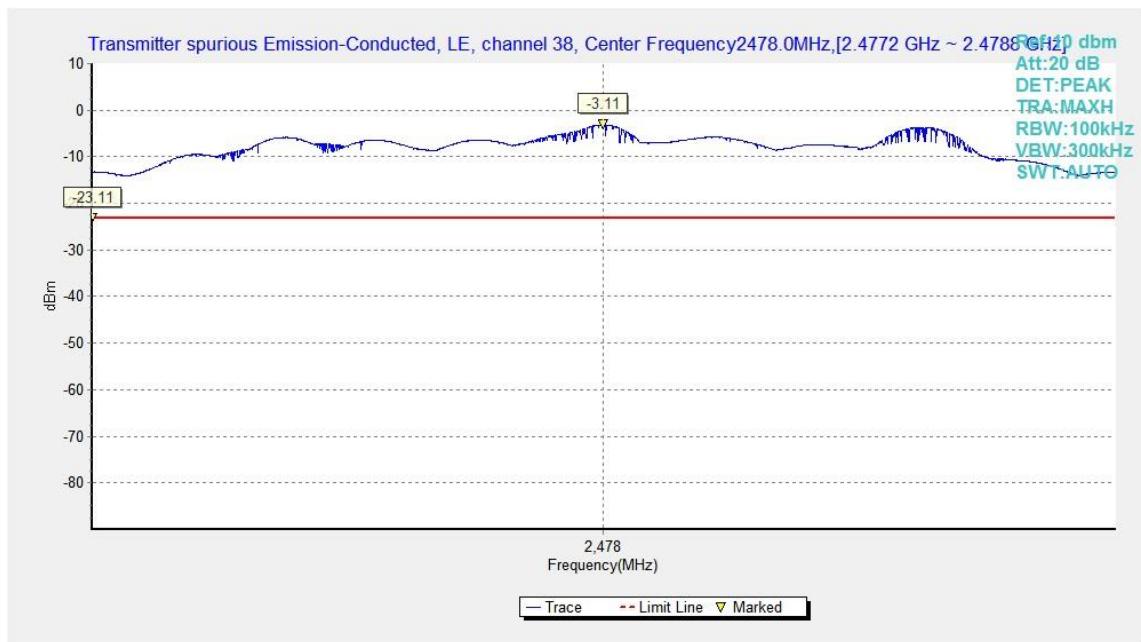


**Fig.13.** Transmitter Spurious Emission -Conducted: GFSK, 2478 MHz

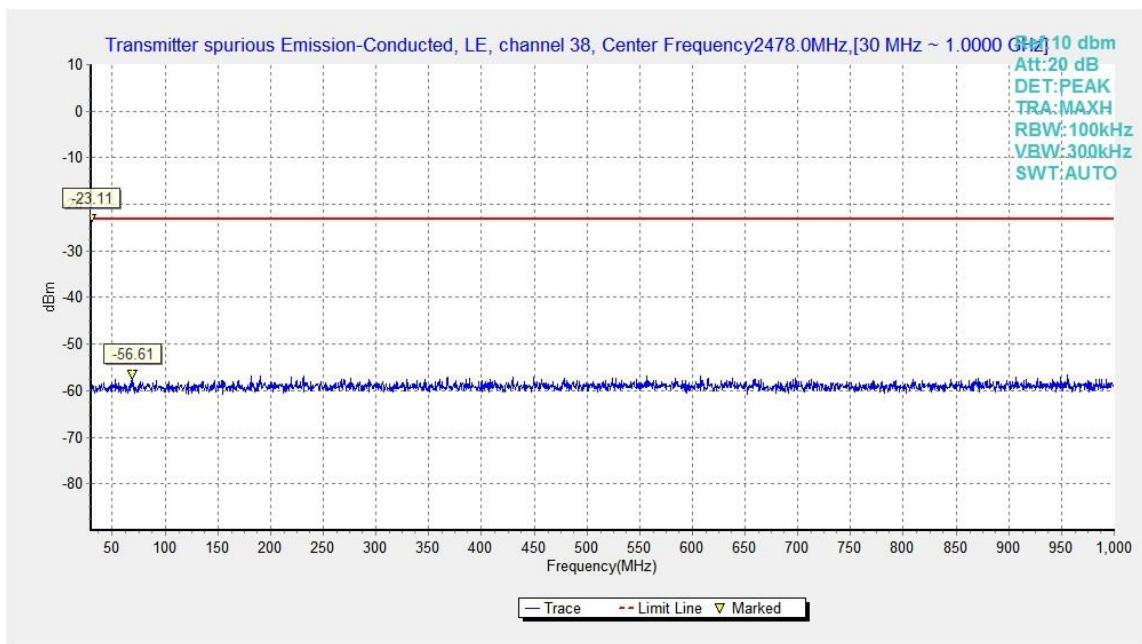


**Fig.14.** Transmitter Spurious Emission -Conducted: GFSK, 2478MHz, 30MHz - 1GHz

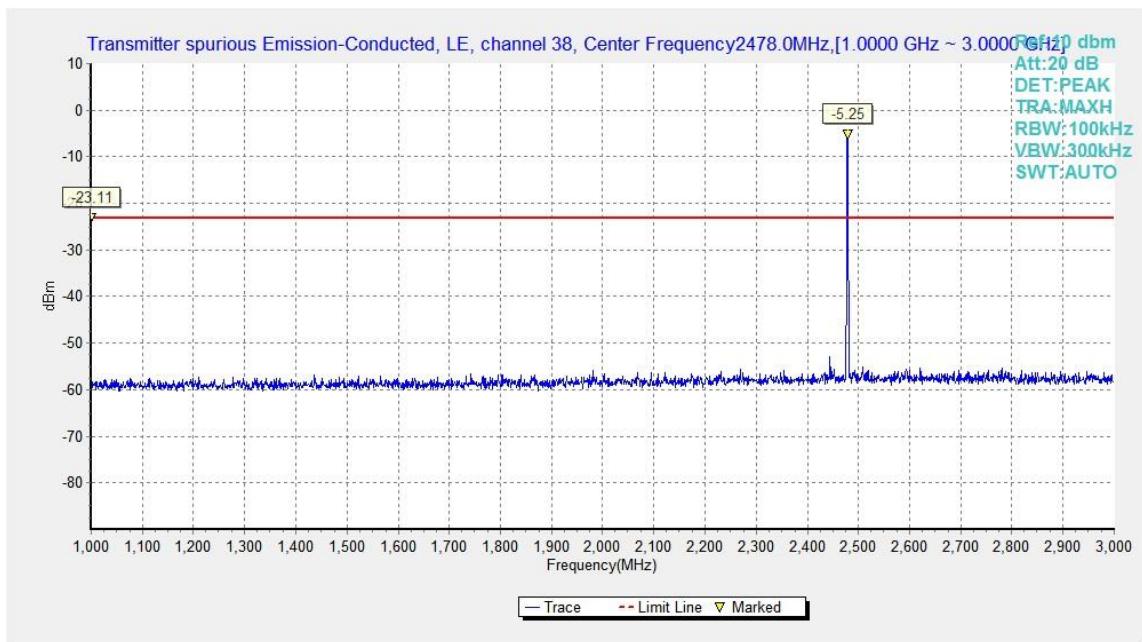

**Fig.15.** Transmitter Spurious Emission -Conducted: GFSK, 2478MHz, 1GHz - 3GHz

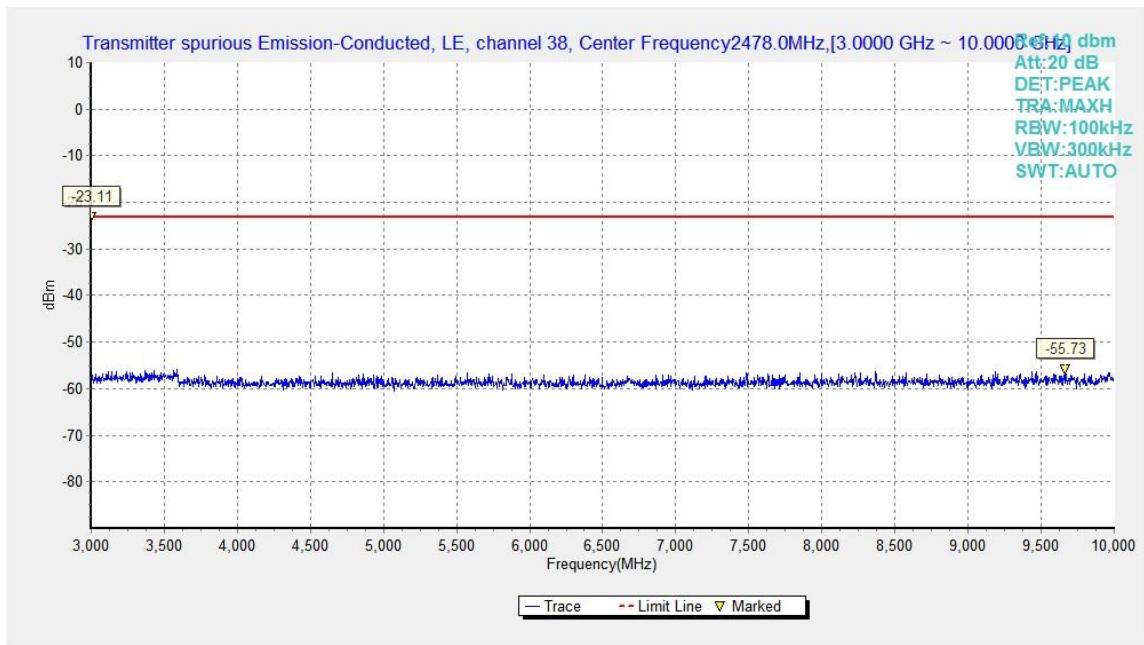

**Fig.16.** Transmitter Spurious Emission -Conducted:GFSK, 2478MHz,3GHz - 10GHz

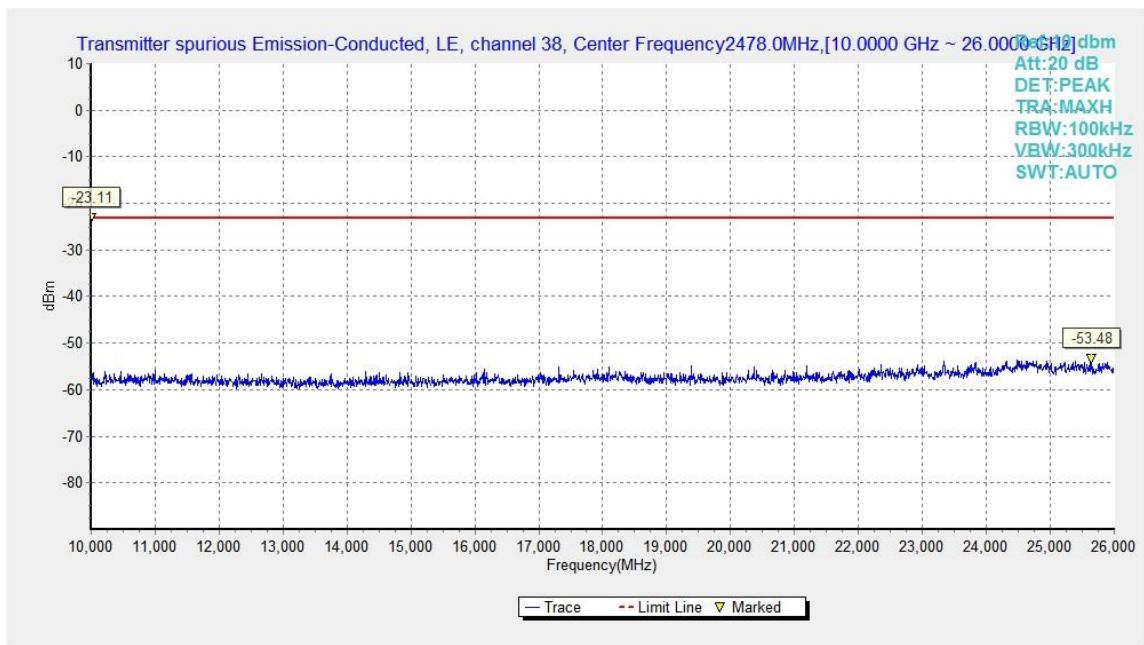

**Fig.17.** Transmitter Spurious Emission -Conducted: GFSK, 2478MHz, 10GHz - 26GHz

## B.5. Radiated Unwanted Emission

### Limits

#### Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


#### Limit in restricted band

Frequency (MHz)	Field strength( $\mu$ V/m)	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30


Frequency of emission (MHz)	Field strength ( $\mu$ V/m)	Field strength (dB $\mu$ V/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.


### Test setup

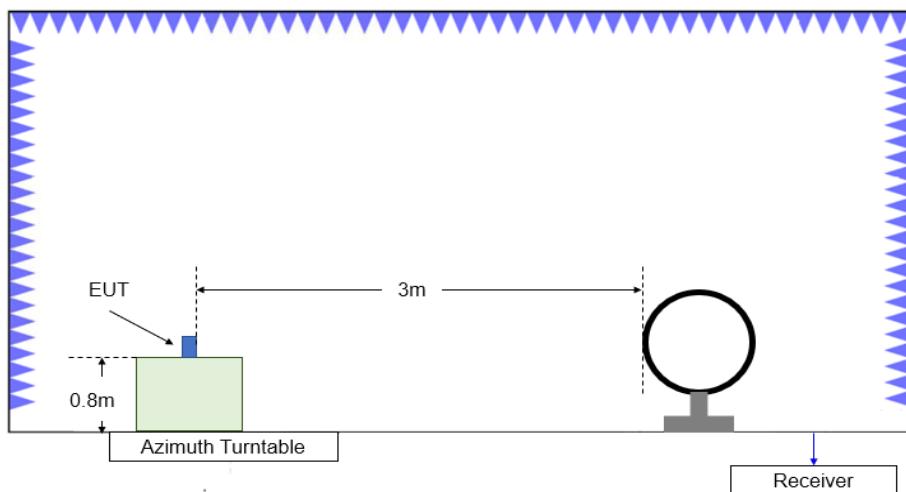

**Figure B.5.1. Test Site Diagram (9kHz-30MHz)**

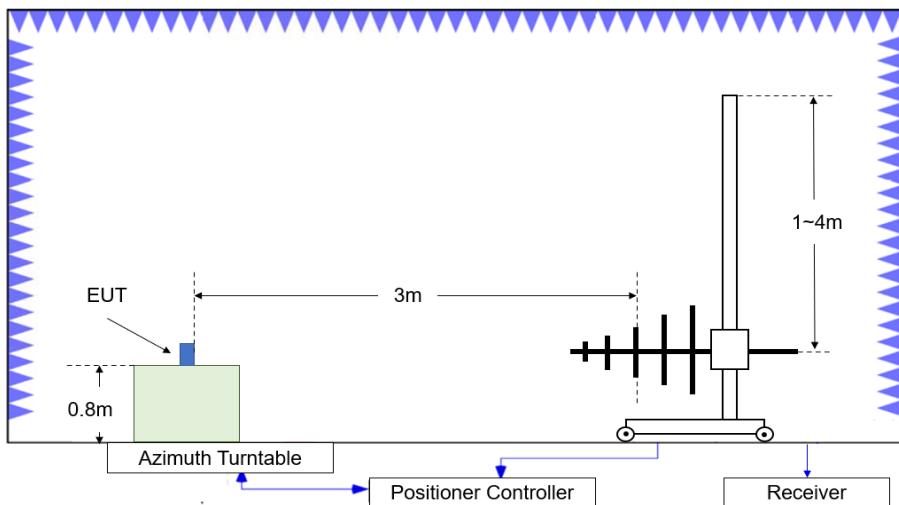

**Figure B.5.2. Test Site Diagram (30MHz-1GHz)**

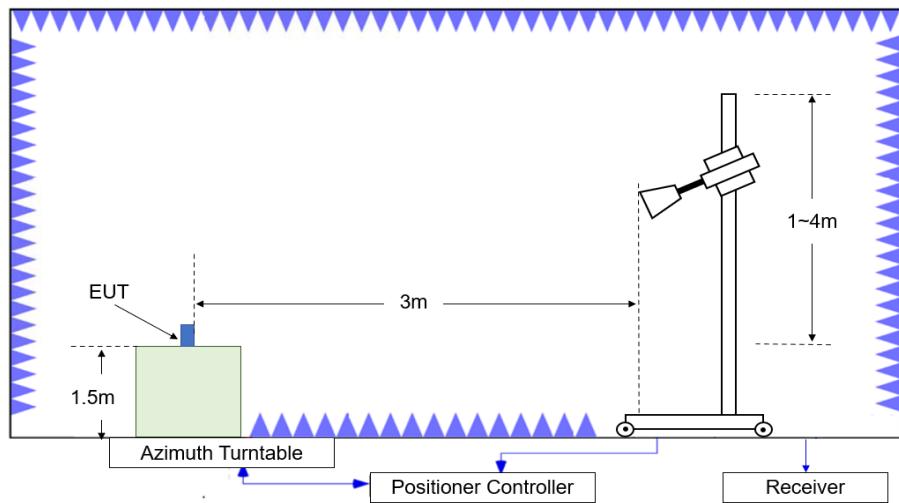

**Figure B.5.3. Test Site Diagram (1GHz-40GHz)**

### Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10-2013 (ANSI C63.10-2020).

#### Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### Sample Calculation

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result=P<sub>Mea</sub>+A<sub>Rpl</sub>=P<sub>Mea</sub>+CableLoss+Antenna Factor

**Test note**

1. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
2. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
3. Measurement frequencies were performed from 9 kHz to the 10<sup>th</sup> harmonic of highest fundamental frequency or 40GHz, whichever is lower.

### Test Result

EUT ID:EUT1

#### Average Measurement results

##### GFSK 2402MHz

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17993.500	41.06	-29.40	46.00	24.46	54.00	12.94	H
13695.000	37.55	-31.00	41.00	27.55	54.00	16.45	V
12651.000	33.83	-31.80	39.40	26.23	54.00	20.17	V
8977.000	32.13	-34.70	37.70	29.13	54.00	21.87	V
6742.000	31.57	-36.00	35.20	32.37	54.00	22.43	V
2351.400	42.35	-19.60	28.20	33.75	54.00	11.65	H

##### GFSK 2440MHz

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17958.500	41.26	-29.40	46.00	24.66	54.00	12.74	V
13722.000	37.54	-31.00	41.10	27.44	54.00	16.46	V
12780.000	34.18	-31.50	39.80	25.88	54.00	19.82	H
9505.500	32.54	-33.80	37.60	28.74	54.00	21.46	V
7310.500	31.81	-35.40	36.60	30.61	54.00	22.19	H
4086.500	27.59	-38.00	32.20	33.39	54.00	26.41	V

##### GFSK 2480MHz

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17574.000	40.98	-29.20	44.90	25.28	54.00	13.02	V
13579.000	37.29	-31.30	40.80	27.79	54.00	16.71	V
12649.500	34.01	-31.80	39.40	26.41	54.00	19.99	H
9485.000	32.47	-34.60	37.70	29.37	54.00	21.53	V
7520.000	31.29	-35.10	36.40	29.99	54.00	22.71	V
2488.000	42.38	-19.70	28.20	33.88	54.00	11.62	H

**Peak Measurement results**
**GFSK 2402MHz**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17495.000	50.25	-29.20	44.50	34.85	74.00	23.75	H
13743.500	46.78	-31.00	41.10	36.68	74.00	27.22	H
12654.000	43.31	-31.80	39.40	35.71	74.00	30.69	V
9479.000	41.99	-34.60	37.70	38.89	74.00	32.01	V
7607.000	40.56	-35.60	36.30	39.86	74.00	33.44	H
2337.600	53.97	-19.60	28.20	45.37	74.00	20.03	V

**GFSK 2440MHz**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17499.000	50.56	-29.20	44.50	35.16	74.00	23.44	V
13770.500	47.12	-30.90	41.20	36.82	74.00	26.88	V
12252.000	44.25	-32.50	39.00	37.75	74.00	29.75	H
9463.500	41.81	-34.60	37.70	38.71	74.00	32.19	V
7320.000	41.12	-35.40	36.60	39.92	74.00	32.88	V
4712.500	36.87	-37.80	33.00	41.67	74.00	37.13	H

**GFSK 2480MHz**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17613.000	51.18	-29.60	45.10	35.58	74.00	22.82	H
13727.500	47.33	-31.00	41.10	37.23	74.00	26.67	V
12640.500	43.20	-31.80	39.40	35.60	74.00	30.80	V
9187.500	42.48	-34.70	37.70	39.48	74.00	31.52	V
7128.000	40.93	-35.10	35.70	40.33	74.00	33.07	H
2494.300	54.54	-19.70	28.20	46.04	74.00	19.46	H


**Conclusion: PASS**

Note: the spurious emission above 18G is noise only and did not show on the report.


**Band edge compliance**

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.31GHz ~2.43GHz	Fig.18	P
	39	2.45GHz ~2.5GHz	Fig.19	P

**Conclusion: PASS**  
**Test graphs as below**

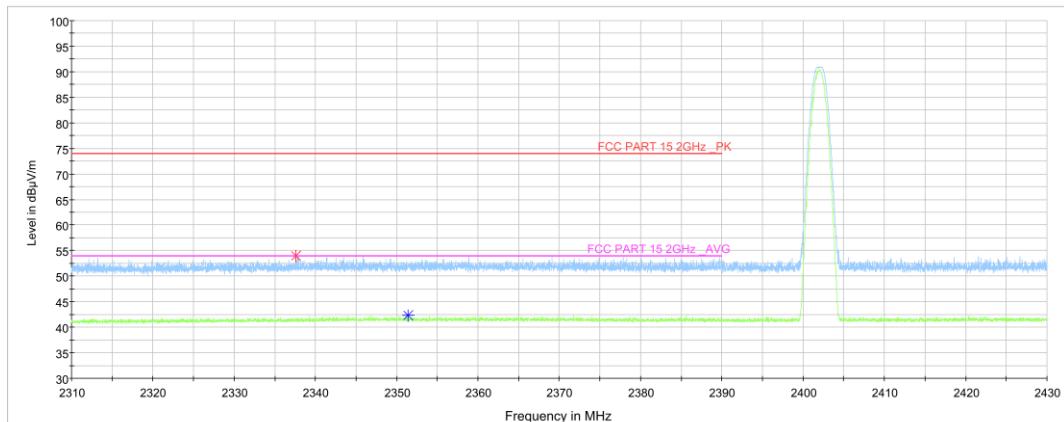

**Fig.18. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off, 2.31 GHz – 2.43GHz**

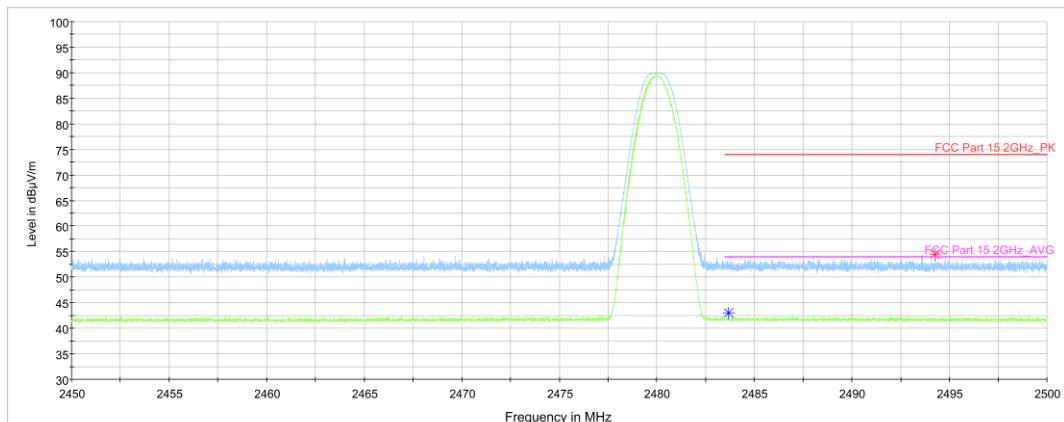

**Fig.19. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off, 2.45 GHz - 2.50GHz**

## B.6. 6dB Bandwidth

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	>= 500KHz


### Measurement Results:

#### For GFSK


Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)	Conclusion
1	2404	Fig.20	P
19	2440	Fig.21	P
38	2478	Fig.22	P

**Conclusion: PASS**


**Test graphs as below:**

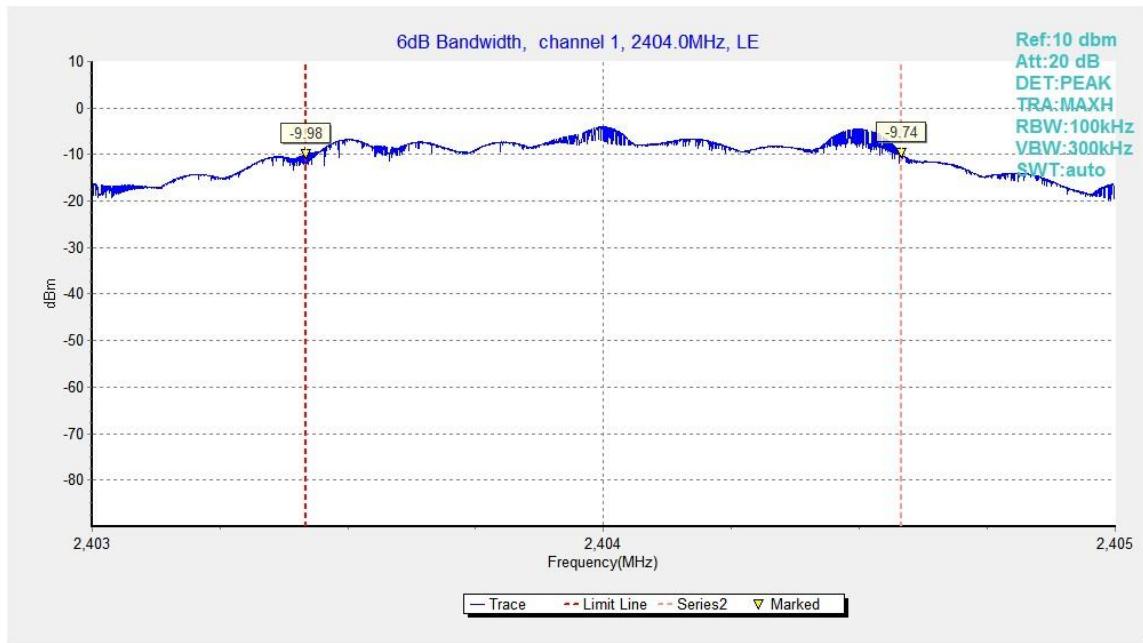

**Fig.20.** 6dB Bandwidth: GFSK, 2404 MHz

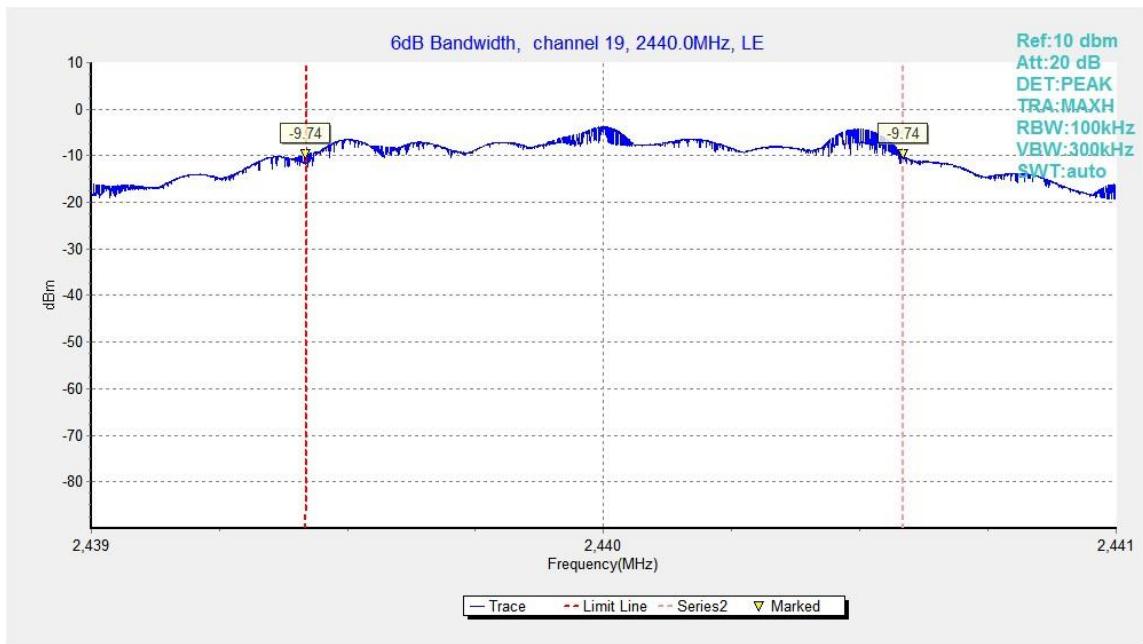

**Fig.21.** 6dB Bandwidth: GFSK, 2440 MHz

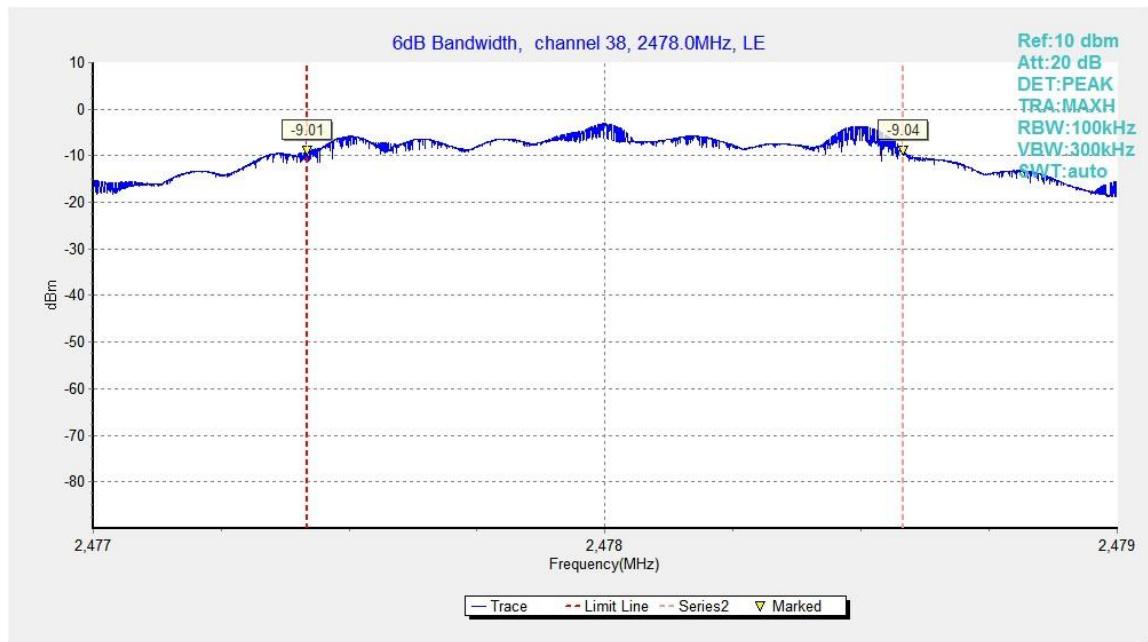

**Fig.22.** 6dB Bandwidth: GFSK, 2478 MHz

## B.7. Maximum Power Spectral Density Level

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW =10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247(e)	<=8.0dBm/3kHz

### Measurement Results:


#### For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)	Conclusion
1	2404	Fig.23	-22.05
19	2440	Fig.24	-21.89
38	2478	Fig.25	-21.21


Test graphs as below:

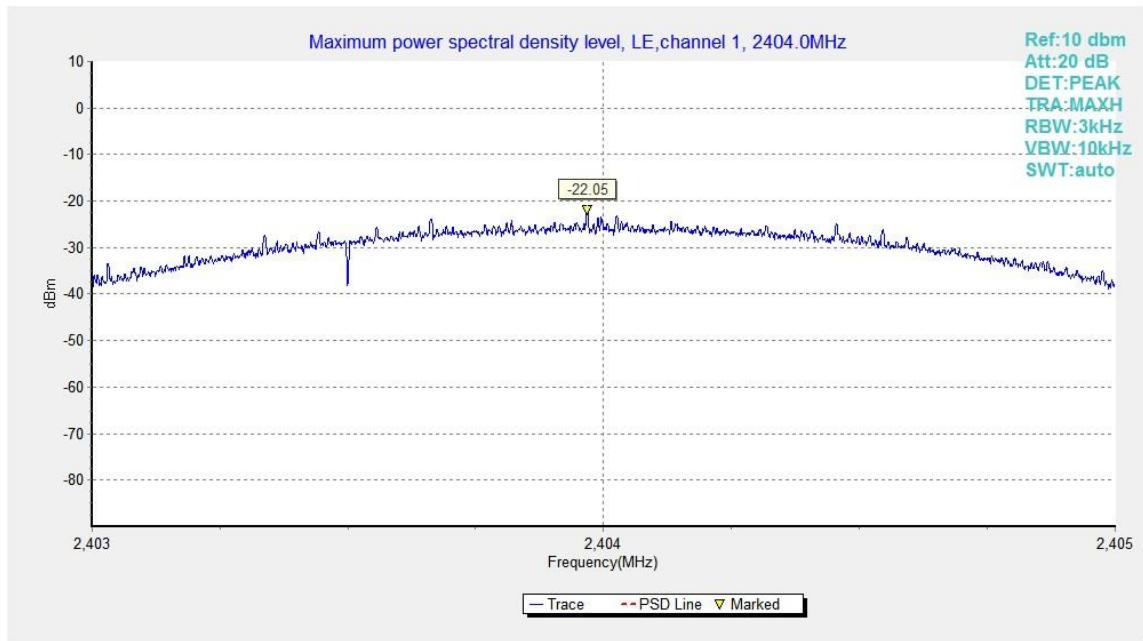

**Fig.23.** Maximum Power Spectral Density Level Function: GFSK, 2404 MHz

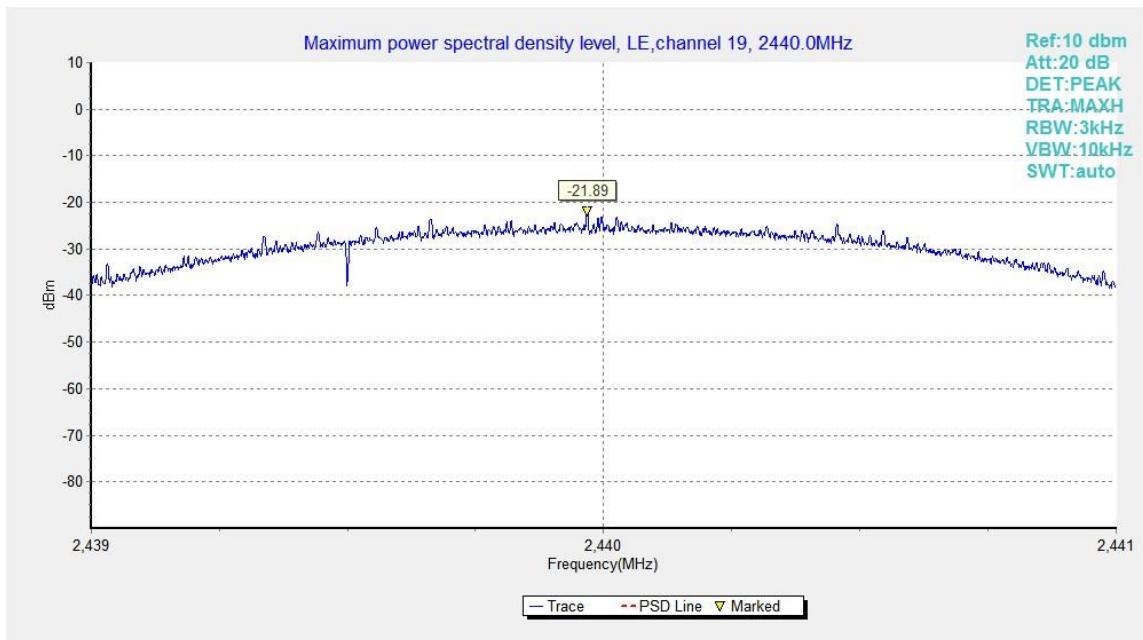

**Fig.24.** Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

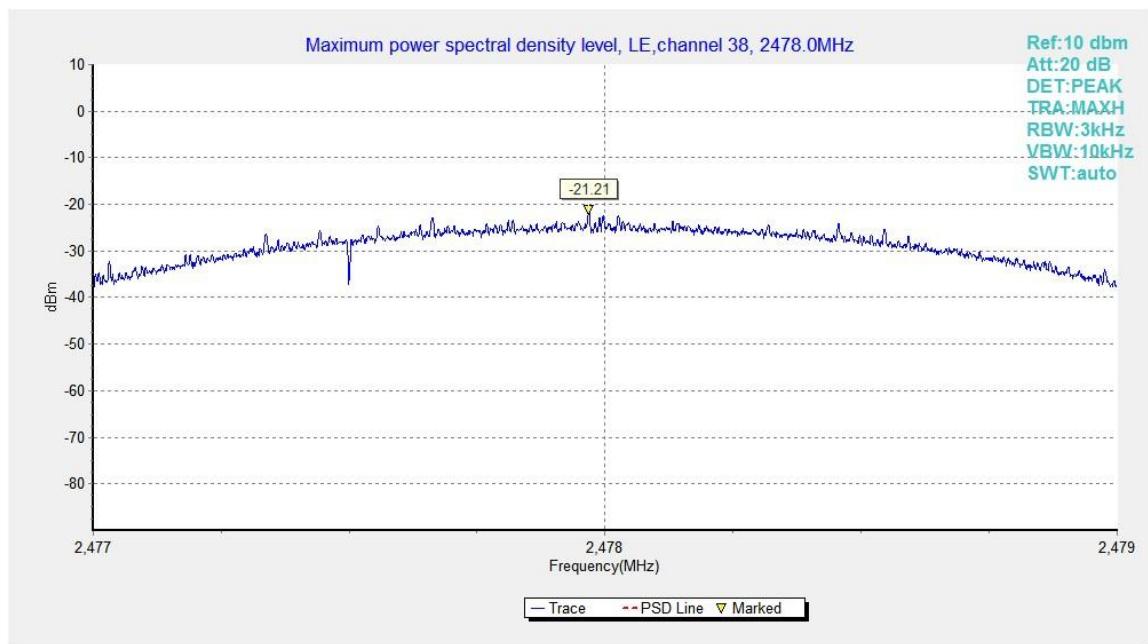

**Fig.25.** Maximum Power Spectral Density Level Function: GFSK, 2478 MHz

## B.8. AC Powerline Conducted Emission

### Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

### Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Test setup

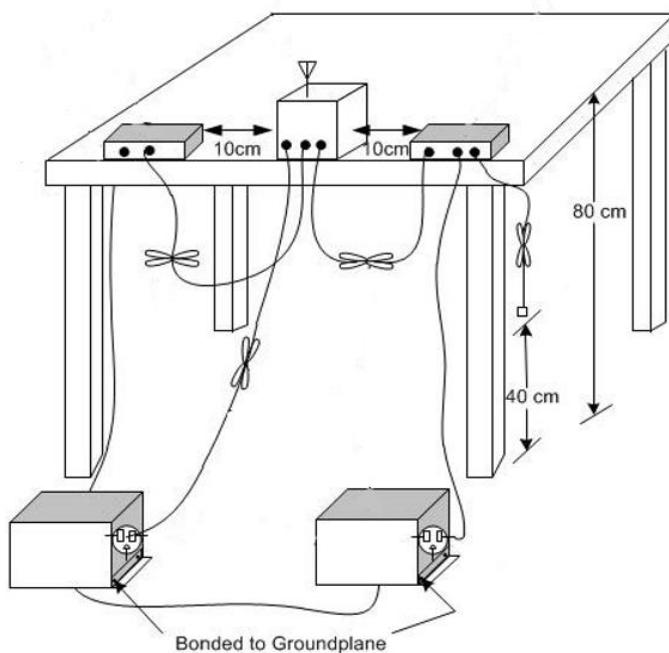

**Measurement Result and limit:**

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	66 to 56	Fig.B.8.1	Fig.B.8.2	P	
0.5 to 5	56				
5 to 30	60				


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion	
		With charger			
		bluetooth	Idle		
0.15 to 0.5	56 to 46	Fig.B.8.1	Fig.B.8.2	P	
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**
**Test graphs as below:**

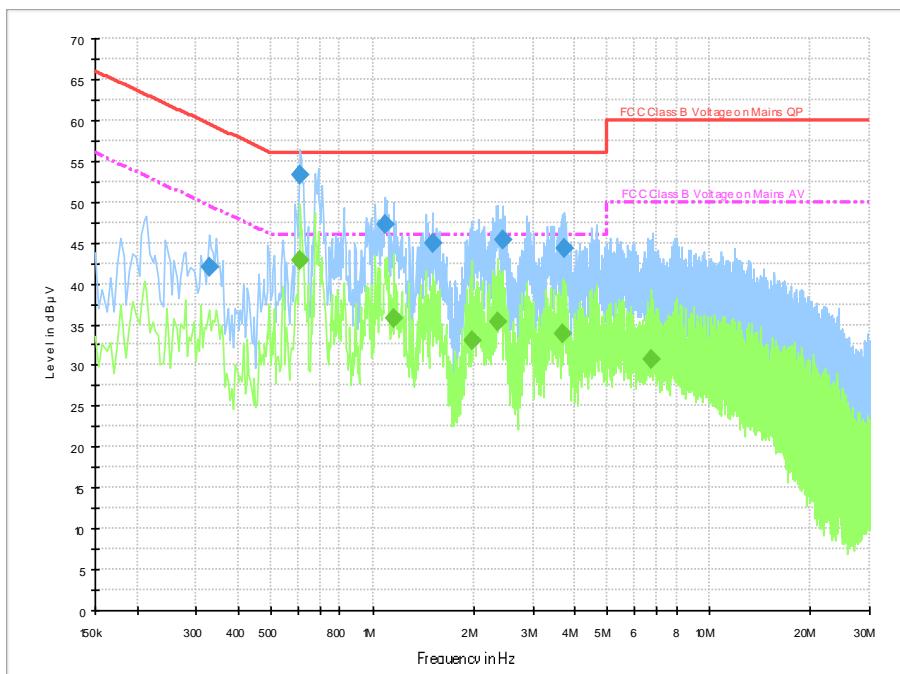

**Fig.B.8.1 AC Powerline Conducted Emission-bluetooth**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

#### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.326000	42.0	2000.0	9.000	On	L1	19.8	17.5	59.6	
0.610000	53.4	2000.0	9.000	On	L1	19.8	2.6	56.0	
1.090000	47.3	2000.0	9.000	On	L1	19.6	8.7	56.0	
1.506000	44.8	2000.0	9.000	On	L1	19.6	11.2	56.0	
2.430000	45.3	2000.0	9.000	On	L1	19.6	10.7	56.0	
3.718000	44.3	2000.0	9.000	On	L1	19.6	11.7	56.0	

#### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.610000	42.8	2000.0	9.000	On	L1	19.8	3.2	46.0	
1.154000	35.7	2000.0	9.000	On	L1	19.6	10.3	46.0	
1.978000	33.0	2000.0	9.000	On	L1	19.6	13.0	46.0	
2.358000	35.3	2000.0	9.000	On	L1	19.6	10.7	46.0	
3.662000	33.8	2000.0	9.000	On	L1	19.6	12.2	46.0	
6.710000	30.8	2000.0	9.000	On	L1	19.6	19.2	50.0	

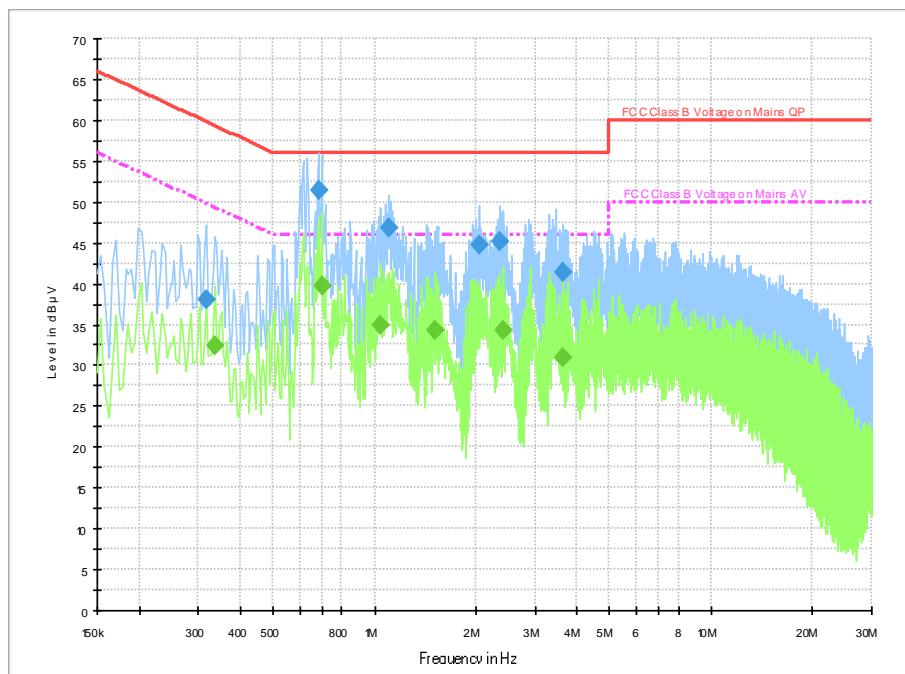
**Fig.B.8.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.318000	38.1	2000.0	9.000	On	N	19.7	21.7	59.8	
0.682000	51.5	2000.0	9.000	On	L1	19.7	4.5	56.0	
1.102000	46.8	2000.0	9.000	On	L1	19.6	9.2	56.0	
2.054000	44.8	2000.0	9.000	On	L1	19.6	11.2	56.0	
2.346000	45.1	2000.0	9.000	On	L1	19.6	10.9	56.0	
3.610000	41.4	2000.0	9.000	On	L1	19.6	14.6	56.0	

### Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.334000	32.4	2000.0	9.000	On	L1	19.8	16.9	49.4	
0.698000	39.6	2000.0	9.000	On	L1	19.7	6.4	46.0	
1.046000	34.8	2000.0	9.000	On	L1	19.6	11.2	46.0	
1.510000	34.3	2000.0	9.000	On	L1	19.6	11.7	46.0	
2.406000	34.2	2000.0	9.000	On	L1	19.6	11.8	46.0	
3.610000	31.0	2000.0	9.000	On	L1	19.6	15.0	46.0	

## B.9.Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

## B.10. Duty cycle

### Method of Measurement:


Use the following spectrum analyzer settings:

- Span = zero span
- RBW = 100kHz
- VBW  $\geq$  RBW
- Sweep =single sweep
- Detector function = peak

### Measurement Results:

Channel No.	Frequency (MHz)	Duty cycle	
19	2440	Fig.26	0.86

See test graphs as following.

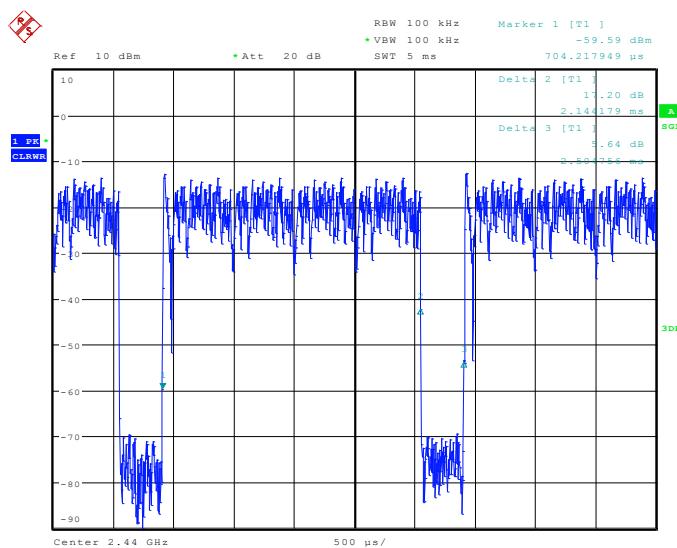

**Fig. 26 Duty cycle: BLE 2440 MHz**

## ANNEX C: Accreditation Certificate



### **Accredited Laboratory**

A2LA has accredited

**TELECOMMUNICATION TECHNOLOGY LABS, CAICT**  
Beijing, People's Republic of China

for technical competence in the field of

### **Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 26<sup>th</sup> day of June 2023.



Mr. Trace McInturff, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 7049.01  
Valid to July 31, 2024

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*



**\*\*\*END OF REPORT\*\*\***