




**18000156\_IS**  
Designer: DF  
Docket: 12-037-22  
Factory: ZNT

PRINTING SPECIFICATIONS FOR SKU:  
印刷品颜色要求

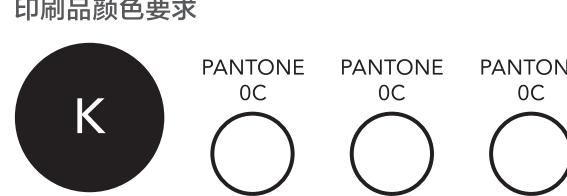

CARD DIMENSION  
卡片尺寸  
w (width): 297 mm  
h (height): 210 mm  
w

正面

FRONT

**globe** Wired  
**SMART DOORBELL KIT**

**WARNING:** This doorbell requires a low voltage electrical connection. Do not connect directly to 120V AC.

**WARNING:** Turn off power at fuse or circuit breaker before installing transformer.

**PACKAGE CONTENTS**  
Illustrations may vary from actual unit.

**SAFETY INFORMATION**  
Please read this entire manual before attempting to assemble, install, or operate this doorbell kit.

- All electrical work must be in accordance with national and local electrical codes. If in doubt, consult a qualified electrician.
- This doorbell requires a 16 volt AC, 10 watt or a 16 volt AC, 15 watt transformer (included).

**TOOLS REQUIRED**

**1** **INSTALLATION**

- Turn off power**  
Turn off power at fuse or circuit breaker before installation.
- Verify the transformer power rating**  
16V AC transformer with a 10W or greater rating. **WARNING:** This doorbell requires a low voltage electrical connection. Do not connect directly to 120V AC.
- Mounting the chime base**
  - Feed wires through the wire entrance hole.
  - Using the "UP" arrow indicator, place the chime base against the wall and mark the two screw hole locations.
  - Drill two 7/32" pilot holes and insert wall anchors.
  - Attach the chime base to the mounting surface using the two screws (large) and tighten securely.

**2** **CONNECTING INSTRUCTIONS**

- Wiring the chime**
  - Connect the wires to the chime base (B):
  - Wire "F" to screw terminal "FRONT"
  - Wire "T" to screw terminal "TRANS"
  - Wire "R" to screw terminal "REAR"
  - Press the doorbell cover onto the doorbell base (B).
- CONNECTING INSTRUCTIONS**
  - Fasten the mounted plate to the mounting surface with two screws (small).
  - Pull the cables through the holes in the mounting plate and connect to the binding post. Lock with two screws (M3X4).
- Download the Globe Suite™ app from the iOS or Android store**  
Create an account and log in. Ensure your mobile device is running iOS 9.0/watchOS 2.0/Android™ 4.4 or higher.
- Connect**  
Ensure the doorbell kit is powered and all requested permissions are enabled on your mobile device: Wi-Fi, Bluetooth, Location Services.
- On the app's home screen, select the in the top-right corner and select "Add a device". The app will detect it within a few seconds. When discovered, select "Add" beside the push-button icon.**
- Setup**  
Name your push-button and choose which room to place it in. You can now control it directly from the app.

**3** **CONNECTING TO A WIRELESS CHIME**

**4** **Voice assistance**  
On the app's home screen, select "Profile," and select "Integration." Choose your voice assistant and follow the instructions within the app.

**5** **Installing the smart push-button**  
Place push buttons fixed plate on the mounting surface where the bell wires exit and verify it is level. Mark the mounting surface through the two mounting holes and drill two 1/16 in. pilot holes.

反面

BACK

**CONTROLLING THROUGH THE APP**

**ROUTINES**

**Timer**  
The doorbell will be muted until the timer runs out.

**Add a new schedule**  
The doorbell can be scheduled to mute at specific times throughout the day or week.

**DEVICE SETTINGS**

**History**  
Access full ring history.

**Indicator light**  
Customize how the smart push-button's indicator light behaves.

**Notifications**  
Customize how you would like to be alerted when the doorbell is rung.

**GENERAL SETTINGS**

**Control**

**Mute options**  
Delete or restore device

**CONTROL**

**Mute options**  
Mute / Unmute

**ROUTINES**

**Light**  
State  
Description

RED (solid)	Booting up or Wi-Fi error	May display until connected to Wi-Fi
RED (flashing)	Pairing mode	Will display until paired to the app
BLUE (flashing)	Connecting	Displays when attempting to connect to the app
BLUE (solid)	Successfully connected	Displays as long as the chime is connected to the app
OFF	Not connected	Cannot connect to the Wi-Fi or app after 20 minutes
PINK (solid)	Someone's ringing	Lights up for 10 seconds after a push-button is pressed

**TROUBLESHOOTING**

**A = cause** **B = solution**

**The chime doesn't ring when the smart push-button is pressed**

- The transformer is not working properly.
- Test transformer voltage output with a voltage tester. Set the voltmeter to read AC/Volt. Voltage should read between 18 - 22 volts AC on the low voltage side of the transformer when the chime is NOT ringing. If the voltmeter reads below 18 volts, replace the transformer.

**A HeathZenith® wireless chime doesn't ring when the smart push-button is pressed**

- The push-button is not working properly.
- Sync by following these steps:
  - Press and hold the "Sync" button on the chime until it sounds a "Beep-Beep" (about 3 seconds).
  - Press the push-button within 10 seconds. The chime will sound a "Beep-beep" tone to indicate it is synced.
  - Press the push-button to ensure operation.

**A) The chime is not working properly.**

**B) Disconnect the wire from the chime terminal marked "TRANS". While someone presses the push-button at the front door, quickly touch the "TRANS" wire to the terminal marked "REAR". You will see a tone. If the push-button, wiring, and transformer are operating properly, repeat the steps for the "REAR" terminal and the rear push-button. If the wiring between the transformer and the push-button(s) checks out properly, replace the chime.**

正面

FRONT

**globe** Câble  
**KIT SONNETTE INTELLIGENTE**

**AVERTISSEMENT :** Cette sonnette nécessite une connexion électrique à basse tension. Ne pas la brancher directement sur un courant alternatif de 120 V AC.

**AVERTISSEMENT :** Couper le courant au niveau du fusible ou du disjoncteur avant d'installer le transformateur.

**CONTENUS DE L'EMBALLAGE**  
Les illustrations peuvent différer de l'unité réelle. Avant de retourner au magasin, veuillez contacter notre équipe de service à la clientèle pour obtenir de l'aide au 1-888-53-1388

**CONSIGNES DE SÉCURITÉ**  
- Veuillez lire et comprendre ce manuel entièrement avant d'essayer d'assembler, d'installer ou de faire fonctionner ce kit de sonnette.

- Tous les fils et câbles doivent être conformes aux codes électriques nationaux et locaux. Si vous avez des doutes, consultez un électricien qualifié.

- Cette sonnette nécessite un transformateur de 16 volts AC, 10 watts ou de 16 volts AC, 15 watts (inclus).

**4** **Câblage du carillon**  
Connectez les fils à la base du carillon (B):  
- Fil "F" à la borne à vis "FRONT" (AVANT)  
- Fil "T" à la borne à vis "TRANS" (TRANS)  
- Fil "R" à la borne à vis "REAR" (ARRIÈRE)  
- Poussez le couvercle du carillon sur la base du carillon (B).

**5** **Installation du bouton-poussoir intelligent**  
Placer la plaque fixe du bouton-poussoir sur la surface où sort le fil de la sonnette et vérifiez qu'elle est de niveau. Marquez la surface de montage à travers les deux trous de montage et percez deux trous pilotes de 1/16 po.

**2** **INSTRUCTIONS DE CONNEXION**

- Téléchargez l'application Globe Suite™ à partir de la boutique iOS ou Android**  
Créez un compte et connectez-vous. Assurez-vous que votre appareil mobile fonctionne sous iOS 9.0/watchOS 2.0/Android™ 4.4 ou une version plus récente.
- Connectez**  
Assurez-vous que le kit sonnette est alimenté et que toutes les autorisations requises sont activées sur votre appareil mobile: WiFi, Bluetooth, services de localisation.
- Sur l'écran d'accueil de l'application, sélectionnez le bouton "Ajouter un appareil". L'application le détectera en quelques secondes. Lorsque l'appareil est détecté, sélectionnez "Ajouter" à côté de l'icône du bouton-poussoir.**
- Configuration**  
Nommez votre bouton-poussoir et choisissez la pièce dans laquelle le placer. Vous pouvez maintenant le contrôler directement à partir de l'application.

**3** **CONNEXION À UN CARILLON SANS FIL**

**4** **Assistance vocale**  
Sur l'écran d'accueil de l'application, sélectionnez "Profil", puis sélectionnez "Intégration". Choisissez votre assistant vocal et suivez les instructions de l'application.

**5** **Besoin d'aide ?**  
Sélectionnez le lien "Comment mettre l'appareil en mode d'appairage" sur la page "Scan" et suivez les instructions in-app.

**6** **Pas de WiFi, pas de problème.** Continue à fonctionner comme une sonnette normale connexion internet est perdue.

反面

BACK

**CONTROLE PAR L'APPLICATION**

**ROUTINES**

**Minuterie**  
Le carillon est mis en sourdine jusqu'à ce que la minuterie soit terminée.

**Ajouter un nouvel horaire**  
Le carillon peut être programmé pour être mis en sourdine à des heures précises de la journée ou de la semaine.

**PARAMETRES DE L'APPAREIL**

**Historique**  
Accéder à l'historique complet des sonneries.

**Voyant lumineux**  
Personnalisez le comportement du voyant du bouton-poussoir.

**Notifications**  
Personnalisez la façon dont vous souhaitez être alerté lorsque la sonnette est activée.

**PARAMETRES GÉNÉRAUX**

**Supprimer ou restaurer l'appareil**  
Rétablissez les paramètres d'usine de l'appareil ou supprimez-le.

**CONNEXION À UN CARILLON SANS FIL**

**TROUBLESHOOTING**

**A = cause** **B = solution**

**Le carillon ne sonne pas lorsqu'on appuie sur le bouton-poussoir intelligent**

- Le transformateur ne fonctionne pas correctement.
- Testez l'ensemble de la partie de la sonnette à l'aide d'un voltmètre et vérifiez si le voltmètre indique une tension d'alimentation. La tension doit être comprise entre 18 et 22 volts AC sur le côté basse tension du transformateur lorsque le carillon ne sonne PAS. Si le voltmètre indique une tension inférieure à 18 volts, remplacez le transformateur.

**Le bouton-poussoir ne fonctionne pas correctement.**

- Retirez le bouton-poussoir qui ne fonctionne pas du cadre de la porte. Débranchez les fils des bornes et touchez les fils dénudés ensemble. Si la sonnette retentit, le bouton-poussoir est défectueux. Remplacez le bouton-poussoir.

**Un carillon sans fil de HeathZenith® ne sonne pas lorsque vous appuyez sur le bouton-poussoir intelligent.**

- Le bouton-poussoir et le carillon sans fil ne sont pas synchronisés.
- Appuyez sur le bouton "Sync" du carillon et maintenez-le enfoncé jusqu'à ce qu'il émette un "Bip-Bip" (environ 3 secondes).
- Appuyez sur le bouton-poussoir dans les 10 secondes qui suivent. Le carillon émet un "Bip-Bip" pour indiquer qu'il est synchronisé.
- Appuyez sur le bouton-poussoir pour vérifier qu'il fonctionne.

18000156 12-037-22

18000156 12-037-22