


**Mono Bluetooth headphone PHILIPS
TAL3000**

User Manual

Catalog

1. Product Overview-----	1
2. Basic Operation-----	2
3. Bluetooth Pairing and Connection-----	3
4. Connection with Two devices-----	4
5. LED Indicator-----	5
6. Charging-----	6
7. Product Specification-----	7
8. Attentions and Q & A-----	8

1. Product Overview

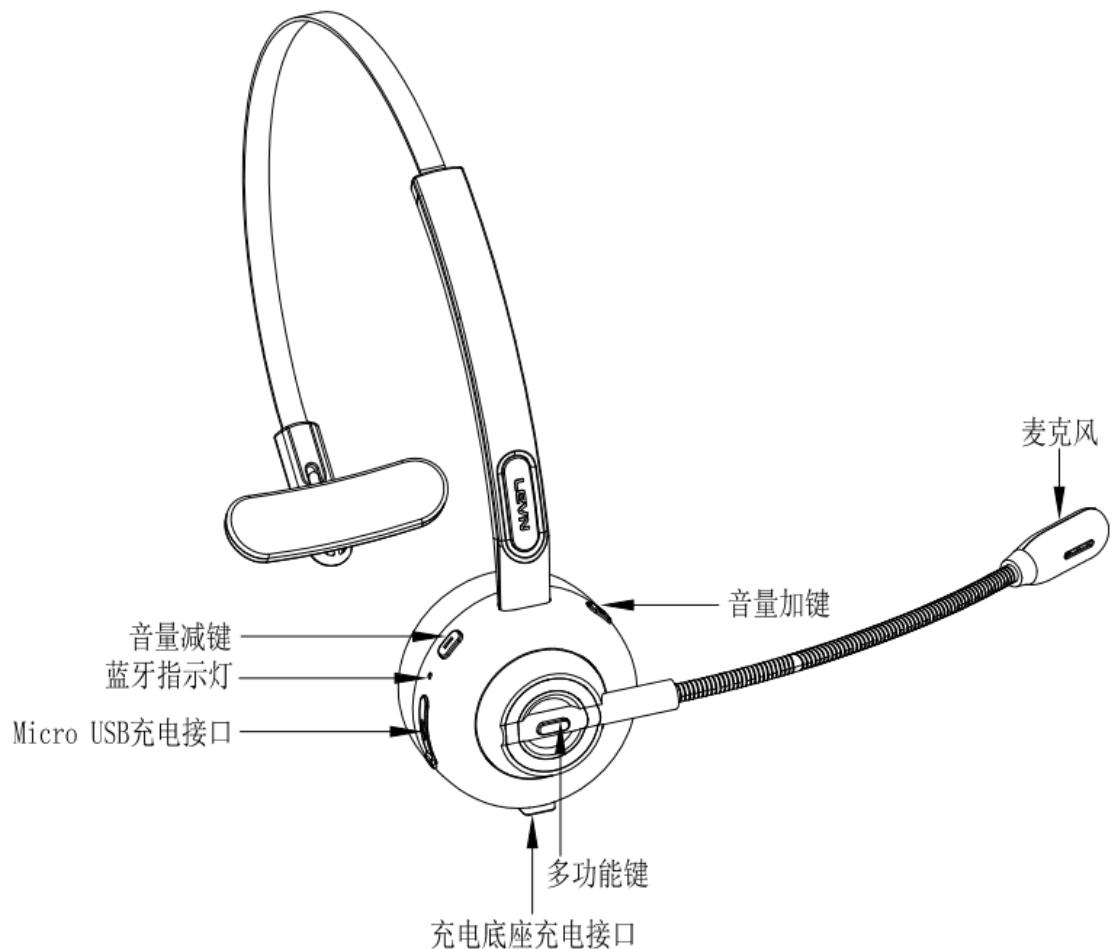

Volume - / LED Indicator / Micro USB Charging pin / Volume + / Multi-Function Button (MFB) / Charging contact plate / Microphone

Packing list:

- A. Bluetooth Headset PHILIPS TAL3000 x 1
- B. Micro USB charge cable x 1
- C. User manual x 1

2. Basic Operation


Button	Function	Operation Instruction
MFB	Power On	In off-state, long press MFB for 1-3 seconds to power on (if have paired records, PHILIPS TAL3000 will enter reconnect mode; if not, PHILIPS TAL3000 will enter pairing mode automatically)
	Power Off	In on-state, long press MFB for 5 seconds to power off
	Enter Pairing Mode	1. In off-state, long press MFB for 5-8 seconds 2. In unconnected sandy mode, double click MFB
	Play / Pause	Short press MFB when play music.
	Redial A Call	In connected standby/playing music mode, double press
	Reconnect	1. if have paired records, PHILIPS TAL3000 will enter reconnect mode when power on 2. In pairing mode, short press MFB
	Voice Assistant	Long press MFB for 1 second then release
	Audio Switch	When during a call, long press MFB for 1 second to switch
	Answer	When a call incoming, short press MFB to answer
	Hang up	During a call, short press MFB to hang up
	Reject a call	When a call incoming, long press MFB for 1 second to reject
Volume +	Volume Up	Short press
	Next Song	Long press for 1 second
Volume -	Volume Down	Short press.
	Previous Song	Long press for 1 second

3. Bluetooth Pairing and Connection

A. Long press MFB for 5-8 seconds to enter pairing mode, with Blue & Red LED flash alternately.

B. Search and click to connect "PHILIPS TAL3000" on your phone Bluetooth lists, LED change to Blue and flashes slowly after connected. Now you can play music from phone to headphone.

C. You can press MFB / Volume+ / Volume- to control the answer/hang up a call and play/pause a music, next and previous song, volume up and down, etc.

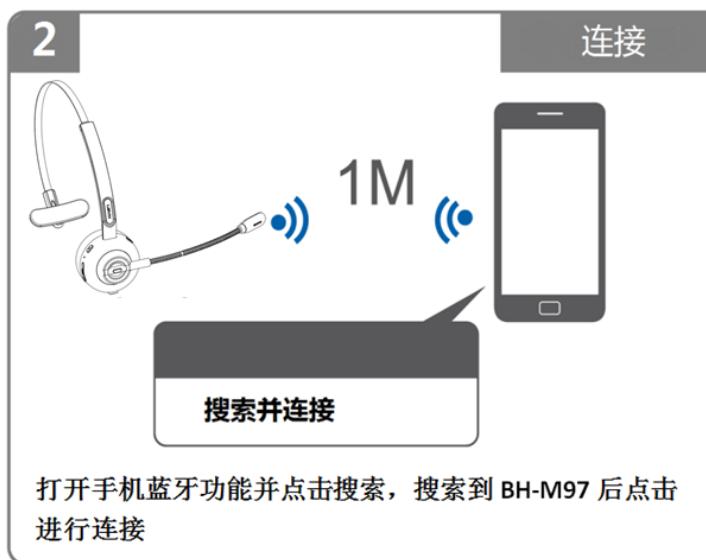

1. Long press MFB for 5-8 seconds to enter pairing mode, with Blue & Red LED flash alternately.


2. Search and click to connect “PHILIPS TAL3000” on your phone Bluetooth lists,

4. Connection with Two devices

A. Connect the first mobile phone according to the above methods, and turn off the Bluetooth of the first machine.

B. Let PHILIPS TAL3000 be pairing mode again—double MFB to enter the pairing state in unconnected standy mode, with Blue & Red LED flash alternately.

C. Turn on the Bluetooth of the first machine and click "PHILIPS TAL3000" to connect, now music can be played with two devices.

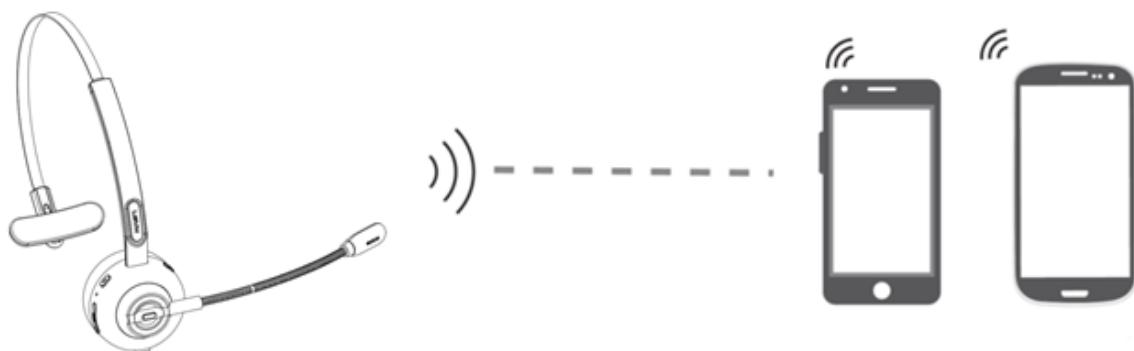

Note:

*Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or close the music of the previous phone.

5. LED Indicator


Mode	LED Indicator
Power on	Blue LED lights up for 1 second
Power off	Red LED lights up for 1 second
Pairing mode	Red & Blue LED flash alternately
Unconnected standby mode	Blue LED flashes once every 2 seconds
Connected standby mode	Blue LED flashes once every 5 seconds
Playing Music	Blue LED flashes once every 5 seconds
Talking	Blue LED flashes once every 5 seconds
Delete pairing record	Red & Blue LED flash once at the same time
Charging	Solid Red LED
Full charged	Solid Blue LED
Low battery	Red LED flashes

6. Charging

Please charge PHILIPS TAL3000 at once when the Red LED flashes.

Charging time is about 2 hours. Solid Red LED change to Solid Blue LED when full charged.


Please connect to PHILIPS TAL3000 charging port through the Micro end of Micro USB charging cable, USB end to the charger(can be used as car charger, travel charger, computer USB, etc).

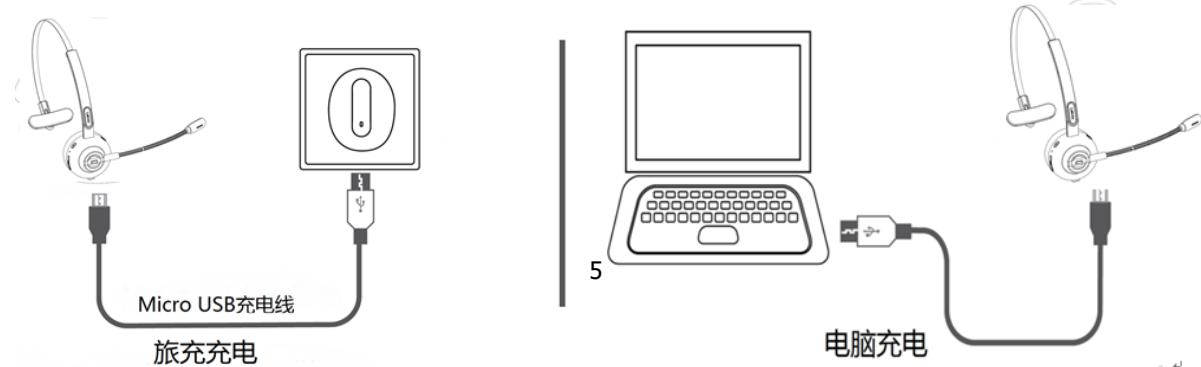

Charge with a Travel Charger / Charge with a Computer USB

Charge with a Recharge Base

Please place the PHILIPS TAL3000 on the charging base, then connect it to the charging port of the charging base through the Micro USB head of the Micro USB charging cable, and connect the USB head to the USB charger (car charger, travel charger, computer USB, etc.)

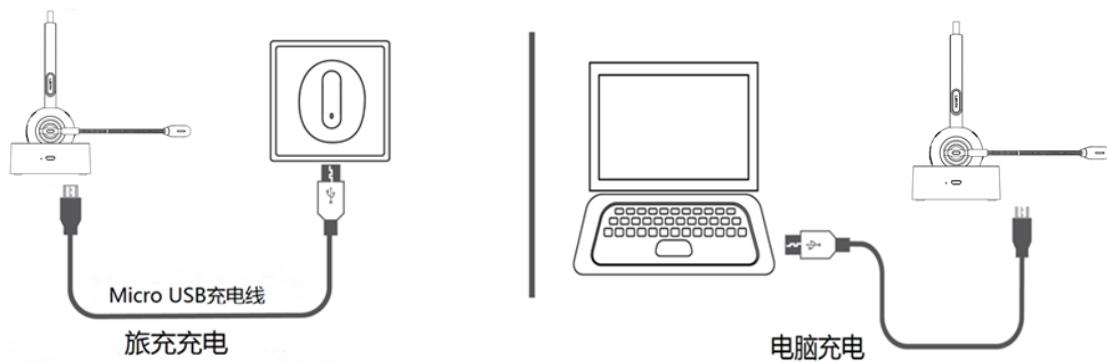

Charge with a Travel Charger / Charge with a Computer USB

* Note: When the PHILIPS TAL3000 is not in use, please charge it at least once every 2 months.

7. Product Specification

Bluetooth specification	Bluetooth V5.3
Chip solution	BT8926B
Operation range	UP to 10 meters
Supported profile	HSP,HFP,AVRCP,A2DP
Code	SBC、AAC
Battery	180mAh/3.7V

Charge time	About 2 hours
Standby Time	About 200 hours
Working time	about 17 hours (50% Volume)
Headset Net weight	About 51g
Charge case Net weight	About 242g
Headset Overall dimensions	163.21*142.27*48.5mm
Charge case Overall dimensions	79*73*31mm

8. Attentions and Q & A

A. How to reconnect and operation when failed to reconnect?

When PHILIPS TAL3000 are connected with your mobile phone successfully at the first time, it will search and reconnect the paired device automatically when power on. If failed, please pair and connect again.

B. How to delete paired records?

In on-state, long press the Volume + and Volume - Button for 5 seconds at the same time to clear the pairing record, with Red & Blue LED flashes once at the same time. When the pairing records have been cleared, PHILIPS TAL3000 will not reconnect the previous devices. When various connection exceptions occur, you can try to clear the pairing records.

C. What' s the password for pairing?

Some connection devices require password for pairing, please try 0000 or 8888 or 1111 or 1234.

D. What devices could charge for the headphone?

Any car charger, power bank, PC etc. which meet DC 5V, charging current more than 500mA could be charge for PHILIPS TAL3000.

E. Microphone mute

During a call, press the volume+ and volume- at the same time to mute the microphone, and press them again to cancel the mute.

F. Three-way calling function operation?

- 1.Call coming during call, short press the MFB to answer the new call and hang up the current call ;
- 2.Call coming during the call, double press the MFB to answer the new call and keep the current call ;
- 3.Call coming during the call, long press the MFB for 2 seconds to reject the new call and keep the current call;
- 4.When you are on a three-party call, double press the MFB to switch audio between the current call and the keep call;

FCC and IC Statement

FCC Information

The device complies with the FCC rules, Part 15. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and.
- This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the

user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit.different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

RF Warning Statement

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable conditions without restriction.

IC-Canada: CAN ICES-3(B)/NMB-3(B)

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt

RSS(s) Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation. of the device.

Avis d'Industrie Canada: CAN ICES-(B)/NMB-(B)

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada. applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radiation Exposure Statement: The product comply with the Canada portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. Déclaration d'exposition aux radiations: Le produit est conforme aux limites d'exposition pour les appareils portables RF pour les Etats-Unis et le Canada établies pour un environnement non contrôlé.