

# HAC (Volume Control) Test Report

<b>Application No.:</b>	SUES2504000630AT
<b>FCC ID:</b>	2A28USN333
<b>Applicant:</b>	COOSEA GROUP (HK) COMPANY LIMITED
<b>Applicant Address:</b>	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL
<b>Manufacturer:</b>	COOSEA GROUP (HK) COMPANY LIMITED
<b>Manufacturer Address:</b>	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL
<b>Product Name:</b>	Smart Phone
<b>Model No.(EUT):</b>	SN333A, SN333C -----•
<b>Standards:</b>	<p>• The two models named SN333A, SN333C are the same product except that their model names are different for different market segments</p> <p>ANSI C63.19-2019 ANSI/TIA-5050-2018 47CFR Part 20.19 KDB 285076 D01 v06r04 KDB 285076 D04 v02 KDB 285076 D05 v01</p>
<b>Date of Receipt:</b>	2025/04/15
<b>Date of Test:</b>	2025/04/16 to 2025/05/15
<b>Date of Issue:</b>	2025/05/29
<b>Test conclusion:</b>	<b>PASS *</b>

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<b>Revision Record</b>			
<b>Version</b>	<b>Description</b>	<b>Date</b>	<b>Remark</b>
00	Original	2025/05/29	/

<b>Authorized for issue by:</b>				
<b>Tested By</b>		<i>Hainan Sun</i>		
		<b>Hainan Sun/Project Engineer</b>		
<b>Approved By</b>		<i>Nada Cao</i>		
		<b>Nada Cao/Reviewer</b>		

## 2 Test Summary of Minimum Conversational Gain

Mode	Band	Conv. Gain (dB)		Limit (dB)	Result
		2N	8N		
WCDMA	B2	8.34	12.96	≥6	Pass
	B4	8.40	12.99		Pass
	B5	8.28	12.87		Pass
LTE	B2	7.65	12.28	≥6	Pass
	B5	7.83	12.70		Pass
	B7	7.85	12.67		Pass
	B12(17)	7.60	12.42		Pass
	B14	7.70	12.67		Pass
	B30	7.79	12.56		Pass
	B66(4)	7.65	12.47		Pass
NR	N2	8.09	13.81	≥6	Pass
	N5	7.95	13.68		Pass
	N30	8.08	13.77		Pass
	N66	8.07	13.70		Pass
	N77	7.86	13.85		Pass
WLAN-2.4G	802.11b	8.07	12.58	≥6	Pass
	802.11g	7.52	12.35		Pass
	802.11n	7.70	12.41		Pass
WLAN-5G	802.11a	7.67	12.63	≥6	Pass
	802.11n	7.82	12.35		Pass
	802.11ac	7.90	12.41		Pass
<b>Minimum Conversational Gain</b>		7.52	12.28	≥6	Pass

### 3 Contents

	Page
1 Cover Page .....	1
2 Test Summary of Minimum Conversational Gain.....	3
3 Contents.....	4
4 General Information.....	5
4.1 General Description of EUT .....	5
4.2 Air interfaces and Operation Mode. ....	6
4.3 Test Environment .....	7
4.4 Measurement Uncertainty .....	8
4.5 Test Location.....	8
4.6 Test Facility .....	8
5 Equipment list .....	9
6 Volume Control Requirement .....	10
7 Measurement Procedure .....	12
8 System Description .....	14
9 Test Result.....	15
10 Test Setup Photo .....	15
11 EUT Constructional Details (EUT Photos).....	15

## 4 General Information

### 4.1 General Description of EUT

IMEI:	355006370000182		
Hardware Version:	1.0		
Software Version:	SN333A10008		
Antenna Type:	Integrated Antenna		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	WCDMA band 2	1850 - 1910 MHz	1930 - 1990 MHz
	WCDMA band 4	1710 - 1755MHz	2110 - 2155MHz
	WCDMA band 5	824 - 849MHz	869 - 894MHz
	LTE band 2	1850 - 1910 MHz	1930 - 1990 MHz
	LTE band 4	1710 - 1755 MHz	2110 - 2155 MHz
	LTE band 5	824 - 849 MHz	869 - 894 MHz
	LTE band 7	2500 - 2570 MHz	2620 - 2690 MHz
	LTE band 12	699 - 716 MHz	729 - 746 MHz
	LTE band 14	788 - 798 MHz	758 - 768 MHz
	LTE band 17	704 - 716 MHz	734 - 746 MHz
	LTE band 30	2305 - 2315 MHz	2350 - 2360 MHz
	LTE band 66	1710 - 1780 MHz	2110 - 2200 MHz
	FR1 n2	1850 - 1910 MHz	1930 - 1990 MHz
	FR1 n5	824 - 849 MHz	869 - 894 MHz
	FR1 n30	2305 - 2315 MHz	2350 - 2360 MHz
	FR1 n66	1710 - 1780 MHz	2110 - 2200 MHz
	FR1 n77	3450 - 3550 MHz	3450 - 3550 MHz
		3700 - 3980 MHz	3700 - 3980 MHz
	WLAN2.4GHz	2412-2462 MHz	2412-2462 MHz
	WLAN5GHz	5180~5240MHz	5180~5240MHz
		5260~5320MHz	5260~5320MHz
		5500~5720MHz	5500~5720MHz
		5745~5825MHz	5745~5825MHz
	Bluetooth	2400~2483.5MHz	2400~2483.5MHz

## 4.2 Air interfaces and Operation Mode.

Air Interface	Band (MHz)	Type	ANSI C63.19	Simultaneous Transmitter	Name of Voice Service	Power Reduction
			Tested			
WCDMA	Band II	VO	Yes	BT, Wi-Fi	CMRS Voice	NO
	Band IV					
	Band V					
	HSPA	VD	Yes		Google Meet*	
LTE FDD	LTE band 2	VD	Yes	BT, Wi-Fi	VoLTE Google Meet*	NO
	LTE band 4					
	LTE band 5					
	LTE band 7					
	LTE band 12					
	LTE band 14					
	LTE band 17					
	LTE band 30					
	LTE band 66					
FR1 FDD	FR1 n2	VD	Yes	BT, Wi-Fi	Google Meet*	NO
	FR1 n5					
	FR1 n30					
	FR1 n66					
FR1 TDD	FR1 n77	VD	Yes	BT, Wi-Fi	Google Meet*	NO
Wi-Fi	2450	VD	Yes	WWAN	Google Meet*	NO
	5200					
	5300					
	5500					
	5800					
BT	2450	DT	No(1)	WWAN	NO	NO

VO: Legacy Cellular Voice Service  
DT: Digital Transport (no voice)

\*ANSI C63.19-2019 use table 6.1 to establish the Normal speech input level and NOTE 2 of table 6.1 identifies the group of VoIP voice services that use -16 dBm0 as the normal speech input level.

Remark:

1. Because features of Google Meet allow the option of voice-only communications, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience.
2. The Google Meet and google Fi the audio path, parameter and audio codec are all the same, therefore, the Google Meet is evaluation for this device to show compliance.

### EUT support Codec for Volume control test

Air interface	Audio Codec Evaluated
WCDMA	AMR-NB,AMR-WB
LTE	AMR-NB,AMR-WB,EVS-NB,EVS-WB
NR	AMR-NB,AMR-WB,EVS-NB,EVS-WB
WLAN	AMR-NB,AMR-WB,EVS-NB,EVS-WB

Codec /Birate			
NB AMR	WB AMR	EVS NB	EVS WB
4.75 Kbps	6.60Kbps	5.9Kbps	5.9 Kbps
5.15Kbps	8.85Kbps	7.2Kbps	7.2Kbps
5.90Kbps	12.65Kbps	8.0Kbps	8.0Kbps
6.60Kbps		9.6Kbps	9.6Kbps
7.40 Kbps		13.2Kbps	13.2Kbps
7.95Kbps			
10.20Kbps			
12.20Kbps			

### 4.3 Test Environment

Temperature	Relative humidity
Relative humidity	54%
Atmospheric pressure	101.7kPa
Background Noise	15dB

#### 4.4 Measurement Uncertainty

For ANSI/TIA-5050 testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by coaxial connection. The EUT was set from the emulator to radiate maximum output power during testing. Also EUT was set to backlight off during testing.

Test Item	Uncertainty
Receiving volume control	1.7dB
Receiving distortion and noise	1.7dB
Receiving frequency response	1.7dB

Note:

- a) All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor  $k=2$ .
- b) Depends on the microphone calibration. The value is valid if calibration is carried out with recommended pistonphone/calibrator in the HMS II.3 manual.
- c) Time and frequency accuracies of labCORE determined by the internal clock accuracy. The time and frequency resolution and accuracy may change due to analysis of the digital signals in ACQUA or if an external clock is applied.

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch  
No. 10, Weiye Road, Kunshan Development Zone, Suzhou, Jiangsu, China

No tests were sub-contracted.

Note:

- a) SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- b) SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
- c) Sample(s) provided by customer.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA**

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 6706.01.

• **FCC**

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch has been recognized by FCC as an accredited testing laboratory. Designation Number: CN1387.

• **ISED**

SGS-CSTC Standards Technical Services Co., Ltd. Suzhou Branch has been recognized by ISED as an accredited testing laboratory. Company Number: 32368

## 5 Equipment list

Equipment	Model	Equipment No.	Cal Data	Cal Due Data
Microphone	46AE	KSES307108	2024-06-13	2025-06-14
Sound calibrator	GRAS 42AG	KSES304302a	2024-06-13	2025-06-14
HEAD Measurement System	HMS II.3-LN	KSES330101	/	/
Multi-channel audio Analyzer	Labcore	KSES304303	2024-06-13	2025-06-14
Radio communication tester	CMW 500	SUWI-01-16-05	2025-01-20	2026-01-19
Radio communication tester	CMX 500	SUWI-01-56-02	2025-01-16	2026-01-15
Acoustic Chamber	/	KSES330801	2025-02-06	2027-02-05

## 6 Volume Control Requirement

### Conversational Gain

- a) Per KDB 285076 D05, with a mounting force of 8N, the DUT shall have at least one volume control setting that will produce a conversational gain of  $\geq 6$ dB.
- b) Per KDB 285076 D05, with a mounting force of 2N, the DUT shall have at least one volume control setting that will produce a conversational gain of  $\geq 6$ dB.
- c) Calculate the Conversational Gain by subtracting 70 from the measures SPL.  
[Conversational Gain = (Measured SPL Level-70dsSPL)]

### Receive Distortion and Noise Performance:

With a mounting force of 8N and 2N, the ratio of the stimulus signal power to the 100Hz to 8000Hz total A-weighted distortion and noise power shall  $\geq 20$ dB when tested over the range of 1/3 octave band center frequencies:

- a) Narrowband transmission mode: Each 1/3 octave band center frequency from 400Hz to 3150Hz.
- b) Wideband transmission mode: Each 1/3 octave band center frequency from 250Hz to 5000Hz.
- c) Per K 285076 D05, choose one narrowband and one wideband for all voice services, bands of operation and air interfaces over which it operates using one codec bit rate of the applicant's choosing to meet Receive Distortion and Noise Performance requirement.

### Receive Acoustic Frequency Response Performance:

- a) For the volume control settings determined in ANSI/TIA-5050 section 5.1.1 with a mounting force of 8N and 2N, the receive frequency response shall be measured at the DRP in 1/12 octave bands. After translation to the FF, it shall fall between the applicable upper and lower limits. The exact limit values at any 1/12 octave band center frequency falling between two consecutive points specified in the table may be calculated using the formula given in Eq 2 below:

$$X_f = X_1 + (X_2 - X_1) * \left( \frac{\log_{10} f - \log_{10} f_1}{\log_{10} f_2 - \log_{10} f_1} \right) \quad \text{Eq 2}$$

Where

- $X_f$  = limit value at frequency  $f$
- $X_1$  = limit value at frequency  $f_1$  as given in table
- $X_2$  = limit value at frequency  $f_2$  as given in table

- b) For Narrowband: The 1/12 octave band frequency response after translation to the FF shall fall between the upper and lower limits (Arbitrary level) given the Table 1.
- c) For wideband: The 1/12 octave band frequency response after translation to the FF shall fall between the upper and lower limits (Arbitrary level) given the Table 2.

Table 1 – Narrowband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
300	-6	100	+6
3400	-6	4000	+6

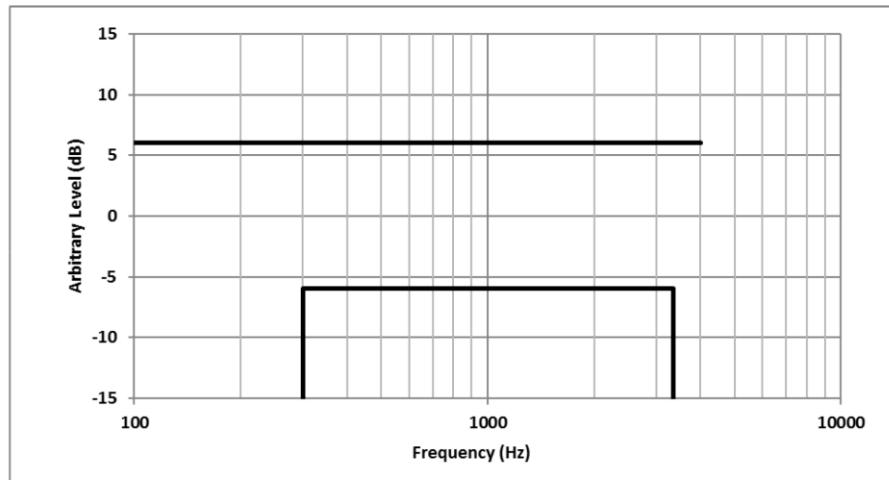


Figure 2 – Narrowband Receive Frequency Response Limits

Table 2 – Wideband Receive Frequency Response Limits

Lower Limit Frequency (Hz)	Lower Limit (dB)	Upper Limit Frequency (Hz)	Upper Limit (dB)
200	-10	100	+6
300	-6	1000	+6
5000	-6	2000	+8
6300	-12	8000	+8

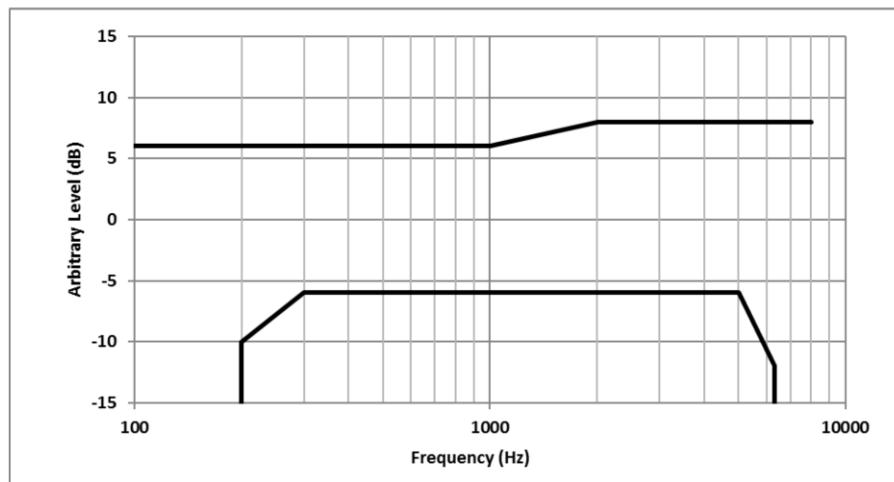


Figure 3 – Wideband Receive Frequency Response Limits

## 7 Measurement Procedure

According to ANSI /TIA-5050, the test procedure for wireless communications device is as below.

### Conversational Gain

- a) Configure the DUT with a mounting force of 8N and test equipment as shown in section 4 in an active call state with the applicable codec for the transmission mode under test.
- b) Set the DUT volume control to the maximum setting.
- c) If the DUT has an adjustable tone control feature, a tone control setting that meets the frequency response requirements in ANSI/TIA-5050 section 5.3.1 shall be used.
- d) The ACQUA system is apply the real speech test signal at a level of -20dBm0 at the RETP and measure the acoustic output at the Drum Reference Point (DRP) over one complete sequence of the test signal.
- e) Translate the measurement made at DRP to Free Filed (FF) using the translation data in ANSI/TIA-5050 AnnexB.
- f) Over the applicable frequency band, determine the ASL in SPL for the resulting sound pressure level in accordance with Method B of ITU-T Recommendation P.56,  
Narrowband 100Hz through 4000 Hz  
Wideband 100Hz through 7720 Hz

Calculate the Conversational Gain by subtracting 70 from the measured dB SPL.

[Conversational Gain = (Measured dB SPL Level – 70dB SPL) dB]

- g) Measure output distortion per ANSI/TIA-5050 clause 5.2. If a distortion failure occurs at the maximum volume control setting, reduce the volume control setting and repeat the measurement to determine if a setting can be found for which the conversational gain requirement is met without a distortion failure.
- h) Repeat steps 2-8 with a mounting force of 2N.

### Receive Distortion and Noise Performance:

- a) Configure the DUT with a mounting force of 8N and test equipment as shown in section in an active call state with the applicable codec for the transmission mode under test.
- b) Receive distortion and noise is measured using the PN-SDNR procedure.
- c) To ensure DUT activation, apply the real speech test signal at a level of -20 dBm0 followed immediately by the initial 1/3 octave center frequency PN test signal based on the narrowband or wideband operating mode. Measure the acoustic output at the DRP over the complete sequence of the PN test signal.
- d) Translate the measurement made at DRP to the FF.
- e) Calculate the acoustic out unweighted test signal power of the stimulus measurement band.
- f) Calculate the notched A-weighting distortion and noise components.
- g) Calculate the ratio of signal power to the total A-weighted distortion and noise power ad follow:  
$$\text{PN-SDNR (dB)} = 20 * \log \left[ \frac{\text{measured stimulus amplitude}}{\text{measured distortion amplitude}} \right]$$


- h) Repeat for each of the remaining 1/3 octave center frequencies based on the narrowband or wideband operating mode.
- i) Repeat steps 2-8 with a mounting force of 2N.
- j) The measured value that the system equipment will automatically calculate or converts to define whether it meets the requirements of ANSI/TIA-5050.

### Receive Acoustic Frequency Response Performance:

- a) Configure the DUT with a mounting force of 8N and test equipment as shown in Figure 1 in an active call state with the applicable codec for the transmission mode under test.
- b) If the DUT has an adjustable tone control feature the initial measurement is to be performed with the default tone control setting.

- c) Apply the real speech test signal with a level of -20 dBm0 at the RETP.
- d) Capture the frequency spectrum at the DRP of the HATS using real-time analysis with 1/12 octave bands over the frequency range from 100 Hz to 4000 Hz for narrowband measurements, or over the frequency range from 100 Hz to 8000 Hz for wideband measurements, averaged over the entire duration of the test signal.
- e) Transform the DRP frequency spectrum measurement to the FF.
- f) Divide the 1/12 octave measurement data by the 1/12 octave frequency spectrum of the test signal at the RETP and present the measurement in terms of (Pa/V).
- g) Apply the applicable frequency response limits to determine compliance.
- h) If the default tone control setting does not meet the requirement, repeat the above steps for other tone control settings to determine a tone control setting that meets the requirements.
- i) Repeat with a mounting force of 2N.
- j) The receive acoustic frequency response performance was performed at max tone control setting.

## 8 System Description

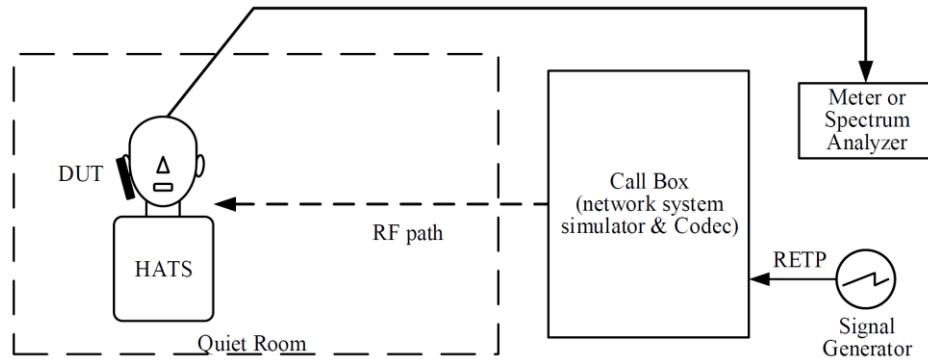

Above is the measurement set-up diagram, and the sequence of the measurement is Volume Control testing procedure over a wireless communication device:

- a) In order to satisfy the quiet room condition below 40 dBA background noise according to TIA-5050 standard, HATS and DUT were placed in Acoustic Chamber and the noise level was checked using Sound Level Meter 46AE.
- b) labCORE equipment is used for signal generator and meter. This equipment directly provided operating voltage for HATS's microphone and -20 dBm0 sound source to Call Box RETP Point.
- c) CMW500 Call box was used for GSM, WCDMA, LTE and WIFI call tests, where the audio input level was set to 1.572 V so that the signal source level supplied from labCORE to RETP matched -20 dBm0. When testing NR calls using CMX500 Call box.
- d) Handset Position, in all tests, handset was placed at the standard test position of IEEE std 269.

## 9 Test Result

Refer to Appendix A - Volume Control Test Data and Plots.

## 10 Test Setup Photo

Refer to Appendix - Test Setup Photo

## 11 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details

--- End of the Report ---