

# User Manual for Emergency Telephone

Model: KNZD-45A LTE



## Features

1. Support 3 G or 4 G, (optional).
2. Power supply: DC12V 1A power and built-in rechargeable battery(8.4V 6AH) .
3. Without keypad, hands-free Mode. Support 1 key speed dial.  
(Built-in 16-bit keypad that allows local programming of speed dial numbers)
4. On board amplifier: Built-in 3W / 8Ω speaker.
5. Built-in Noise canceling microphone.
6. Waterproof grade about IP55.
7. Support indicator lights for call.
8. Support for automatic hanging up.
9. Send message: send alarm message(optional)
10. 2-way input or output control, (options).
11. 2-way dry contact output (options).  
Dry contact Load parameter  
Rated load:0.3 A at 125 VAC; 1 A at 30 VDC  
Rated carry current:1A  
Max.switching voltage:125 VAC,30VDC  
Max.switching current:1A
12. Supported Local and remote storage numbers.
13. Support remote control (optional).
14. Optional 7 minute time-limited call.(optional).

## OPERATIONS & USE

### 1.1 Answer the calling

It will auto-answer the call after seconds or press button when the phone rings.

### 1.2 Dial

Press the button, it will dial out after a dialing tone.

### 1.3 Store number

Open the KNZD-45A emergency telephone enclosure, you can find a white silicon gel keypad inside.

Then press the red on/ off button on the board, you will see the led will on.

press the white silicon gel keypad, \*8888#, you can hear beep beep beep sound.

then press #1, you can hear beep beep sound, input the number you want to store, press the red on/off button, finished.

### 1.4 Clear number


1. Then press the red on/ off button on the board, you will see the led will on.
2. Press the white silicon gel keypad, \*8888#, you can hear beep beep sound.
3. Then press #1, you can hear beep beep sound, finished.

Press the red on/off button, finished.

### 1.5 Factory default settings

1. Then press the red on/ off button on the board, you will see the led will on.
2. Press the white silicon gel keypad, \*\*\*\*\*#, you can hear beep beep beep sound.

Telephone automatic hang-up, finished.

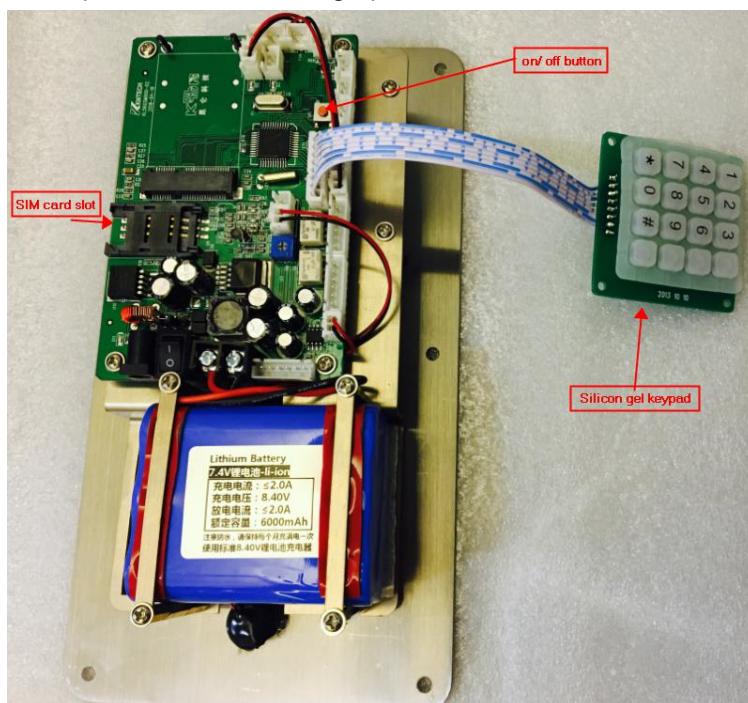

## FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.