RF TEST REPORT



Report No.: 16050024-FCC-R1
Supersede Report No.: N/A

Applicant	Quectel Wireless Solutions Co., Ltd.				
Product Name	GSM/GPRS/GNSS Module				
Model No.	MC60				
Serial No.	N/A	N/A			
Test Standard	FCC Part 22(H):2015 ;FCC Part 24(E):2015; ANSI/TIA-603-D: 2010				
Test Date	August 24 to September 22, 2016				
Issue Date	September 23, 2016				
Test Result	Pass Fail				
Equipment complied with the specification					
Equipment did not comply with the specification					
Loven	Luo	Dewiol	Huang		
Loren Luo Test Engineer			l Huang ked By		

This test report may be reproduced in full only

Test result presented in this test report is applicable to the tested sample only

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn



Test Report	16050024-FCC-R1
Page	2 of 46

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety



Test Report	16050024-FCC-R1
Page	3 of 46

This page has been left blank intentionally.



Test Report	16050024-FCC-R1
Page	4 of 46

CONTENTS

1.	REPORT REVISION HISTORY	5
2.	CUSTOMER INFORMATION	5
3.	TEST SITE INFORMATION	5
4.	EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5.	TEST SUMMARY	8
6.	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1	RF EXPOSURE (SAR)	9
6.2	RF OUTPUT POWER	10
6.3	PEAK - AVERAGE RATIO	13
6.4	OCCUPIED BANDWIDTH	16
6.5	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	20
6.6	SPURIOUS RADIATED EMISSIONS	25
6.7	BAND EDGE	29
6.8	FREQUENCY STABILITY	33
ANN	NEX A. TEST INSTRUMENT	37
ANN	NEX B. EUT AND TEST SETUP PHOTOGRAPHS	39
ANN	NEX C. TEST SETUP AND SUPPORTING EQUIPMENT	42
ANI	NEX C.II. EUT OPERATING CONKITIONS	44
ANI	NEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	45
INA	NEX E. DECLARATION OF SIMILARITY	46



Test Report	16050024-FCC-R1
Page	5 of 46

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16050024-FCC-R1	NONE	Original	September 23, 2016

2. Customer information

Applicant Name	Quectel Wireless Solutions Co., Ltd.
Applicant Add	RM501,Building 13,No.99 TianZhou Road,Xuhui District,Shanghai,China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer Add	RM501,Building 13,No.99 TianZhou Road,Xuhui District,Shanghai,China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park
Lab Address	South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China
	518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0



Test Report	16050024-FCC-R1
Page	6 of 46

4. Equipment under Test (EUT) Information

Description of EUT:	GSM/GPRS/GNSS Module

Main Model: MC60

Serial Model: N/A

Date EUT received: August 23, 2016

Test Date(s): August 24 to September 22, 2016

Equipment Category: PCB

GSM850: 1dBi

PCS1900: 1dBi

Antenna Gain: Bluetooth:1dBi

(Note: The radio module will be sold without antenna, this antenna

only used limited to ERP/EIRP or radiated spurious emission test.)

GSM / GPRS: GMSK Type of Modulation:

Bluetooth: GFSK, π /4DQPSK, 8DPSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

RF Operating Frequency (ies): PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

Bluetooth: 2402-2480 MHz

GSM Vioce:GSM850: 31.38dBm

Maximum Conducted PCS1900: 28.69dBm

AV Power to Antenna: GPRS:GSM850: 31.37dBm

PCS1900: 28.67dBm

GSM 850: 124CH

Number of Channels: PCS1900: 299CH

Bluetooth: 79CH

Port: N/A

Input Power: Spec: DC 4.0V



Test Report	16050024-FCC-R1
Page	7 of 46

Trade Name : Quectel

GPRS Multi-slot class 8/10/12

FCC ID: XMR201609MC60

Note: Antenna gain including cable loss must not exceed 5.95dBi of 824.2 \sim 848.8 MHz, 3.50dBi of 1850.2 \sim 1909.8 MHz and 19.5dBi of 2402-2480MHz.



Test Report	16050024-FCC-R1
Page	8 of 46

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result	
§ 1.1307; § 2.1093	RF Exposure (SAR)	Compliance	
§2.1046; § 22.913(a); § 24.232(c);	RF Output Power	Compliance	
§ 24.232 (d) ;	Peak-Average Ratio	Compliance	
§ 2.1049; § 22.905; § 22.917;	000/ 8, 26 dD Occurried Daviduidth	Compliance	
§ 24.238;	99% & -26 dB Occupied Bandwidth		
§ 2.1051; § 22.917(a);	Courieus Emissions et Antonno Torreinal	Compliance	
§ 24.238(a);	Spurious Emissions at Antenna Terminal		
§ 2.1053; § 22.917(a);	Field Observable of Occurious Dediction	Compliance	
§ 24.238(a);	Field Strength of Spurious Radiation		
§ 22.917(a); § 24.238(a);	Out of band emission, Band Edge	Compliance	
\$ 0.4055, \$ 00.055, \$ 04.005,	Frequency stability vs. temperature	Compliance	
§ 2.1055; § 22.355; § 24.235;	Frequency stability vs. voltage		

Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

Measurement Uncertainty

Emissions				
Test Item	Uncertainty			
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB		
-	-	-		



Test Report	16050024-FCC-R1
Page	9 of 46

6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

6.1 RF Exposure (SAR)

Test Result: Pass

The EUT is a Mobile device, thus requires MPE evaluation;

Please refer to RF Exposure Evaluation Report: 16050024-FCC-H.



Test Report	16050024-FCC-R1
Page	10 of 46

6.2 RF Output Power

Temperature	24°C		
Relative Humidity	52%		
Atmospheric Pressure	1019mbar		
Test date :	September 19, 2016		
Tested By:	Loren Luo		

Requirement(s):

Requirement(s):									
Spec	Item	Requirement Applicable							
§22.913 (a)	a)	RP:38.45dBm							
§24.232 (c)	b)	EIRP:33dBm							
Test Setup									
	Fo	or Conducted Power:							
	-	The transmitter output port was connected to base stat	ion.						
	-	- Set EUT at maximum power through base station.							
	- Select lowest, middle, and highest channels for each band and								
	different test mode.								
	For ERP/EIRP:								
	According with KDB 971168 v02r02								
	- The transmitter was placed on a wooden turntable, and it was								
Test Procedure	transmitting into a non-radiating load which was also placed on the								
	turntable.								
	- The measurement antenna was placed at a distance of 3 meters								
		from the EUT. During the tests, the antenna height and							
	polarization as well as EUT azimuth were varied in order to ident								
	the maximum level of emissions from the EUT. The test was								
	performed by placing the EUT on 3-orthogonal axis.								
	- The frequency range up to tenth harmonic of the fundamental								
	frequency was investigated.								



Test Report	16050024-FCC-R1
Page	11 of 46

	- Remove the EUT and replace it with substitution antenna. A signal		
	generator was connected to the substitution antenna by a non-		
	radiating cable. The absolute levels of the spurious emissions		
	were measured by the substitution.		
	- Spurious emissions in dB = 10 log (TX power in Watts/0.001) –		
the absolute level			
	- Spurious attenuation limit in dB = 43 + 10 Log10 (power out in		
	Watts.		
Remark			
Result	Pass		
Test Data Yes	N/A		
Test Plot Yes	(See below) N/A		



Test Report	16050024-FCC-R1
Page	12 of 46

Conducted Power

GSM Mode:

Burst Average Power (dBm);									
Band		GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant	
Frequency (MHz)	824.2	836.6	848.8	1	1850.2	1880	1909.8	1	
GSM Voice (1 uplink),GMSK	31.22	31.38	31.25	31.75±0.75	28.66	28.69	28.64	28.75±0.75	
GPRS Multi-Slot Class 8 (1 uplink),GMSK	31.22	31.37	31.23	31.75±0.75	28.66	28.67	28.64	28.75±0.75	
GPRS Multi-Slot Class 10 (2 uplink) GMSK	30.51	31.31	31.19	30.5±1	28.6	28.6	28.53	28.75±0.75	
GPRS Multi-Slot Class 12 (4 uplink) GMSK	30.2	30.01	29.90	29.5±1	28.51	28.52	28.45	28.75±0.75	

Remark:

GPRS, CS1 coding scheme.

Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link

Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link

Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link



Test Report	16050024-FCC-R1	
Page	13 of 46	

6.3 Peak - Average Ratio

Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	September 19, 2016
Tested By:	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§24.232(d)	a)	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	V
Test Setup			

According with KDB 971168 v02r02

5.7.2 Alternate procedure for PAPR

5.1.2 Peak power measurements with a peak power meter

The total peak output power may be measured using a broadband peak RF power meter. The power meter must have a video bandwidth that is greater than or equal to the emission bandwidth and utilize a fast-responding diode detector.

Test Procedure

5.2.3 Average power measurement with average power meter

As an alternative to the use of a spectrum/signal analyzer or EMI receiver to perform a measurement of the total in-band average output power, a wideband RF average power meter with a thermocouple detector or equivalent can be used under certain conditions

If the EUT can be configured to transmit continuously (i.e., the burst duty cycle ≥ 98%) and at all times the EUT is transmitting at is maximum output power level, then a conventional wide-band RF power meter can be used.



Test Report	16050024-FCC-R1	
Page	14 of 46	

	If the EUT cannot be configured to transmit continuously (i.e., the burst duty
	cycle < 98%), then there are two options for the use of an average power
	meter. First, a gated average power meter can be used to perform the
	measurement if the gating parameters can be adjusted such that the power is
	measured only over active transmission bursts at maximum output power
	levels. A conventional average power meter can also be used if the
	measured burst duty cycle is constant (i.e., duty cycle variations are less than
	± 2 percent) by performing the measurement over the on/off burst cycles and
	then correcting (increasing) the measured level by a factor equal to
	10log(1/duty cycle)
Remark	
Result	Pass Fail

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	✓ _{N/A}



Test Report	16050024-FCC-R1	
Page	15 of 46	

GSM: GSM 1900 PK-AV POWER (PART 24E)

Frequency	Conducted power(dBm)		Peak-Average
(MHz)	Peak	Average	Ratio(PAR)
1850.2	30.78	28.66	2.12
1880	30.96	28.69	2.27
1909.8	30.57	28.64	1.93

GPRS 1900 PK-AV POWER (PART 24E)

Frequency	Conducted power(dBm)		Peak-Average
(MHz)	Peak	Average	Ratio(PAR)
1850.2	29.85	28.66	1.19
1880	30.33	28.67	1.66
1909.8	30.12	28.64	1.48



Test Report	16050024-FCC-R1	
Page	16 of 46	

6.4 Occupied Bandwidth

Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	September 19, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item Requirement Appl		Applicable
§2.1049,	a) 99% Occupied Bandwidth(kHz)		S
§22.917,			
§22.905	b)	26 dB Bandwidth(kHz)	
§24.238			_
Test Setup			
	-	The EUT was connected to Spectrum Analyzer and Base	Station via
Test		power divider.	
Procedure	-	The 99% and 26 dB occupied bandwidth (BW) of the mide	dle channel
		for the highest RF powers.	
Remark			
Result	Pa	ass Fail	

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	16050024-FCC-R1
Page	17 of 46

GSM Voice:

Cellular Band (Part 22H) result

Chanal	Frequency	26 dB Bandwidth
Channel	(MHz)	(kHz)
128	824.2	317
190	836.6	318
251	848.8	317

PCS Band (Part 24E) result

Channel	Frequency (MHz)	26 dB Bandwidth (kHz)
512	1850.2	323
661	1880.0	323
810	1909.8	325

GPRS:

Cellular Band (Part 22H) result

Channel	Frequency (MHz)	26 dB Bandwidth (kHz)
128	824.2	318
190	836.6	317
251	848.8	320

PCS Band (Part 24E) result


Channel	Frequency (MHz)	26 dB Bandwidth (kHz)
512	1850.2	318
661	1880.0	323
810	1909.8	323



Test Report	16050024-FCC-R1
Page	18 of 46

Test Plots


GSM Voice:

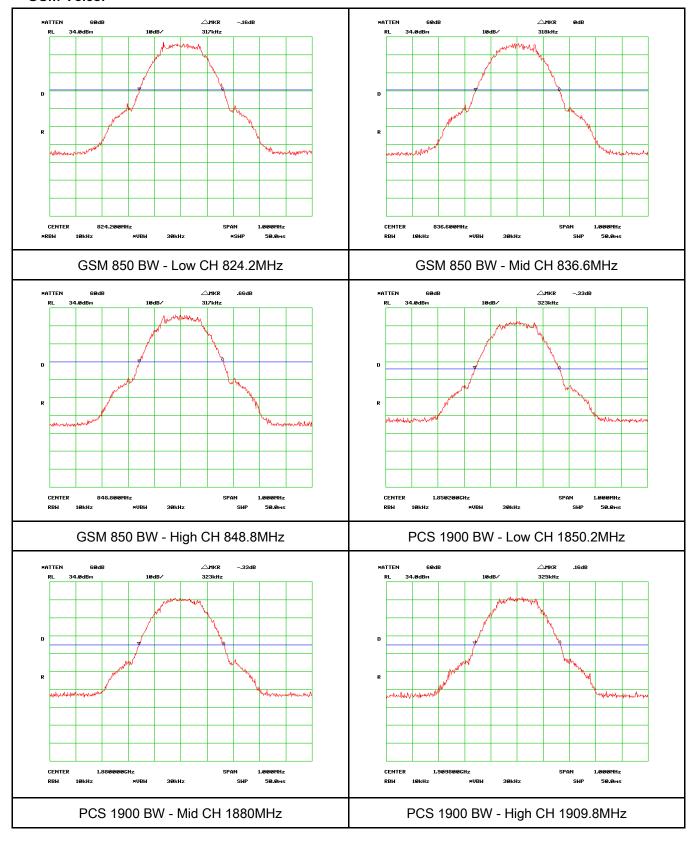



Test Report	16050024-FCC-R1
Page	19 of 46

GPRS:

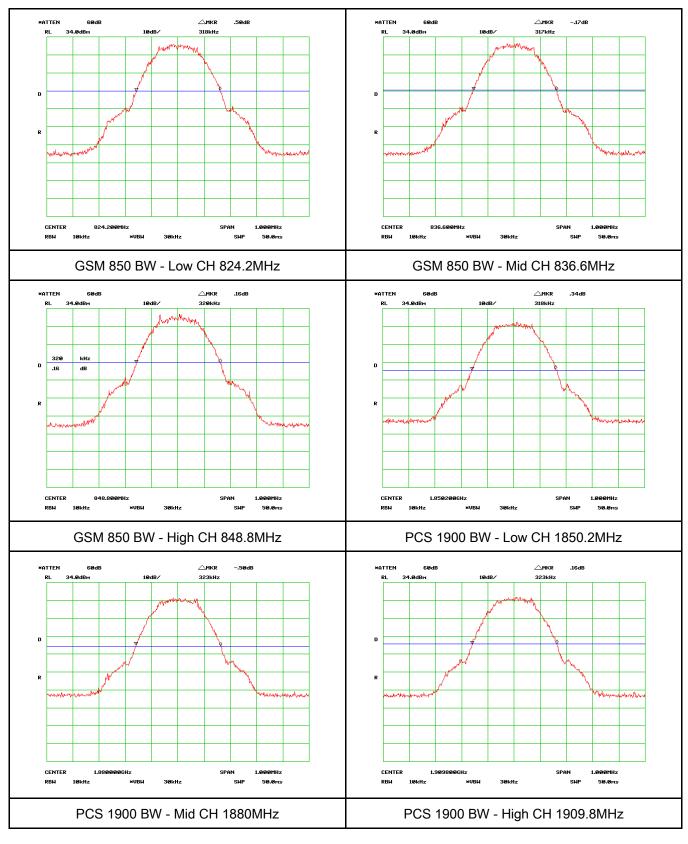



Test Report	16050024-FCC-R1
Page	20 of 46

6.5 Spurious Emissions at Antenna Terminals

Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	September 19, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§2.1051, §22.917(a)& §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB	>
Test Setup			
Test Procedure	-	The EUT was connected to Spectrum Analyzer and Basevia power divider. The Band Edges of low and high channels for the highest powers were measured. Setting RBW as roughly BW/100.	
Remark			
Result	☑ Pa	ss Fail	

Test Data	Yes	☑ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}




Test Report	16050024-FCC-R1			
Page	21 of 46			

Test Plots

GSM Voice:


Cellular Band (Part 22H) result

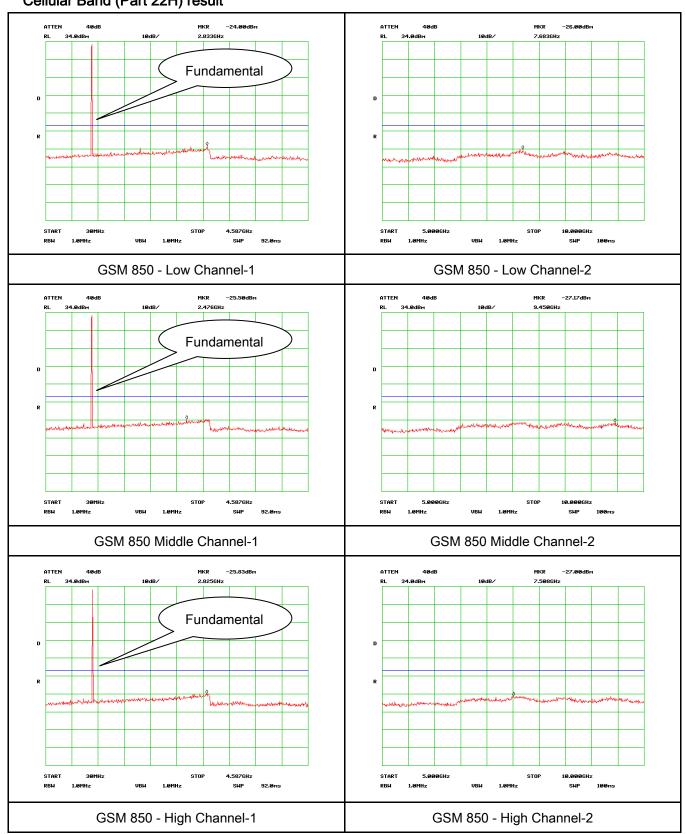



Test Report	16050024-FCC-R1		
Page	22 of 46		

PCS Band (Part24E) result

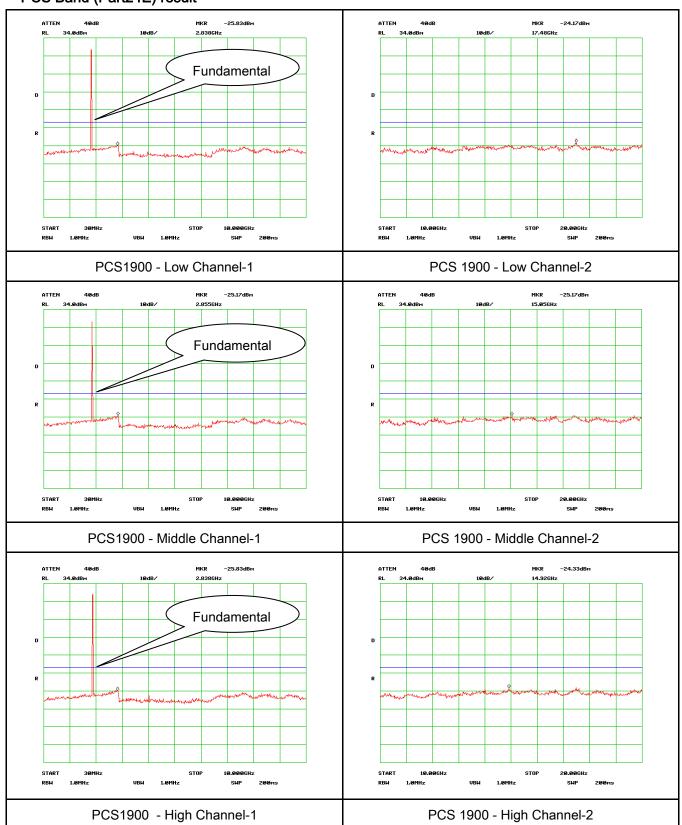




Test Report	16050024-FCC-R1
Page	23 of 46

GPRS:


Cellular Band (Part 22H) result

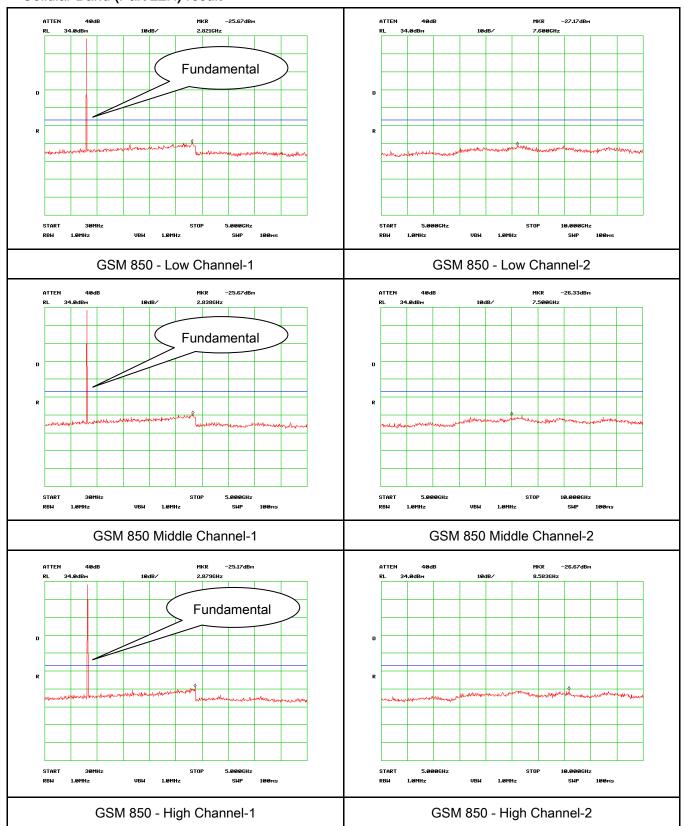



Test Report	16050024-FCC-R1
Page	24 of 46

PCS Band (Part24E) result

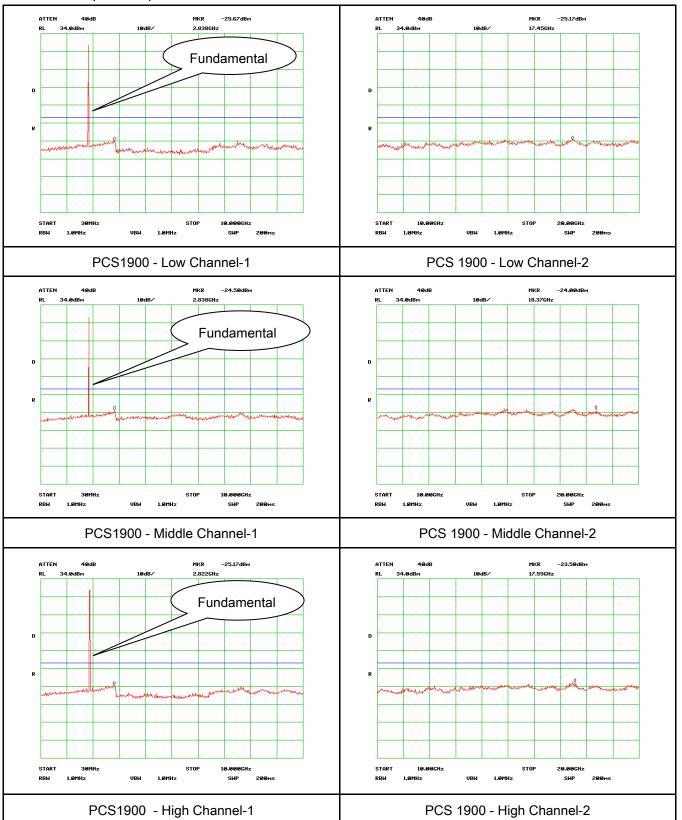



Test Report	16050024-FCC-R1
Page	25 of 46

6.6 Spurious Radiated Emissions

Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1019mbar
Test date :	September 19, 2016
Tested By :	Loren Luo

Requirement(s):									
Spec	Item	Requirement	Applicable						
§2.1053, §22.917 & §24.238	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the							
Test setup	Suppo	Ant. Tower Support Units Turn Table Test Receiver							
Test Procedure	 The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBμV/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used) 								



Test Plot

Test Report	16050024-FCC-R1
Page	26 of 46

Remark				
Result	Pass	Fail		

Yes □_{N/A} Test Data Yes (See below)



Test Report	16050024-FCC-R1		
Page	27 of 46		

Cellular Band (Part 22H) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-43.45	V	7.95	0.78	-36.28	-13	-23.28
1648.4	-44.16	Н	7.95	0.78	-36.99	-13	-23.99
329.4	-52.47	V	6.4	0.26	-46.33	-13	-33.33
604.1	-52.98	Н	6.8	0.37	-46.55	-13	-33.55

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-43.59	V	7.95	0.78	-36.42	-13	-23.42
1673.2	-44.02	Н	7.95	0.78	-36.85	-13	-23.85
329.7	-52.43	V	6.4	0.26	-46.29	-13	-33.29
603.9	-52.94	Н	6.8	0.37	-46.51	-13	-33.51

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-43.22	V	7.95	0.78	-36.05	-13	-23.05
1697.6	-43.85	Н	7.95	0.78	-36.68	-13	-23.68
328.8	-52.45	V	6.4	0.26	-46.31	-13	-33.31
604.3	-53.12	Н	6.8	0.37	-46.69	-13	-33.69

Note:

- 1, The testing has been conformed to 10*848.8MHz=8,488MHz
- 2, All other emissions more than 30 dB below the limit
- $3,GSM\ voice\ ,\ GPRS\ mode\ were\ investigated.$ The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Test Report	16050024-FCC-R1
Page	28 of 46

PCS Band (Part24E) result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-48.51	V	10.25	2.73	-40.99	-13	-27.99
3700.4	-49.32	Н	10.25	2.73	-41.8	-13	-28.80
328.7	-53.16	V	6.4	0.26	-47.02	-13	-34.02
604.5	-53.78	Н	6.8	0.37	-47.35	-13	-34.35

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-48.56	V	10.25	2.73	-41.04	-13	-28.04
3760	-49.74	Н	10.25	2.73	-42.22	-13	-29.22
327.4	-53.24	٧	6.4	0.26	-47.1	-13	-34.10
603.2	-53.49	Н	6.8	0.37	-47.06	-13	-34.06

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-48.57	V	10.36	2.73	-40.94	-13	-27.94
3819.6	-49.68	Η	10.36	2.73	-42.05	-13	-29.05
327.8	-53.51	V	6.4	0.26	-47.37	-13	-34.37
604.6	-54.13	Н	6.8	0.37	-47.70	-13	-34.70

Note:

- 1, The testing has been conformed to 10*1909.8MHz=19,098MHz
- 2, All other emissions more than 30 dB below the limit
- $3,GSM\ voice$, $GPRS\ mode\ were\ investigated.$ The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.



Test Report	16050024-FCC-R1
Page	29 of 46

6.7 Band Edge

Temperature	22°C
Relative Humidity	54%
Atmospheric Pressure	1021mbar
Test date :	September 21, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.	V
Test setup			
Procedure	-	The EUT was connected to Spectrum Analyzer and Base S power divider. The Band Edges of low and high channels for the highest R were measured. Setting RBW as roughly BW/100.	
Remark			
Result	✓ Pa	ss Fail	

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	16050024-FCC-R1
Page	30 of 46

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.997	-16.83	-13
849.015	-17.33	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.998	-14.83	-13
1910.007	-16.00	-13

GPRS:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)	
823.992	-16.67	-13	
849.022	-17.00	-13	

PCS Band (Part24E) result


Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.978	-16.17	-13
1910.012	-13.83	-13




Test Report	16050024-FCC-R1
Page	31 of 46

GSM Voice:

Test Plots






Cellular Band - Low Channel


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log

(3.17/3)=4.0+0.2=4.2dB

Note: Offset=Cable loss (4.0) + 10log (3.17/3)=4.0+0.2=4.2dB





PCS Band - Low Channel

Note: Offset=Cable loss (4.0) + 10log

(3.23/3)=4.5+0.3=4.8dB

PCS Band - High Channel

Note: Offset=Cable loss (4.0) + 10log


(3.25/3)=4.5+0.3=4.8dB



Test Report	16050024-FCC-R1	
Page	32 of 46	

GPRS:

Test Plots

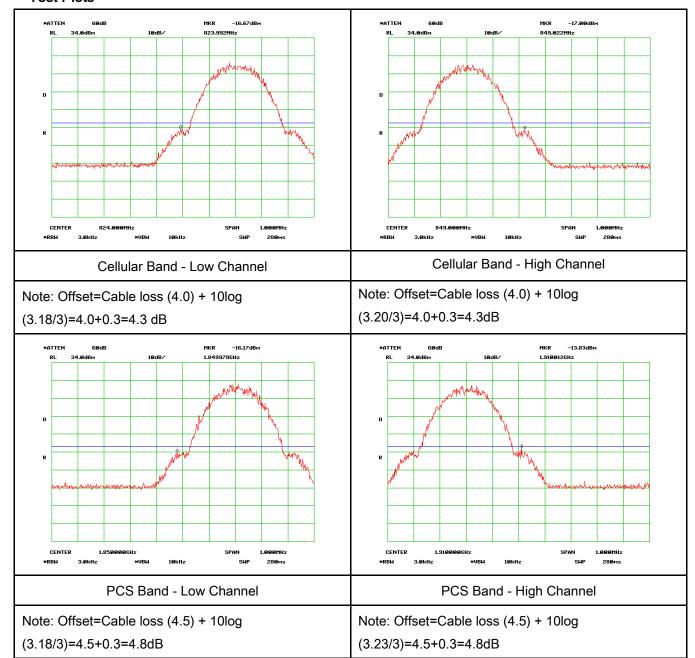



Test Report	16050024-FCC-R1
Page	33 of 46

6.8 Frequency Stability

Temperature	22°C
Relative Humidity	54%
Atmospheric Pressure	1021mbar
Test date :	September 21, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement				Applicable	
		According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services Frequency Base, Mobile ≤ 3 Mobile ≤ 3 Range fixed watts watts					
§2.1055, §22.355 & §24.235	a)	(MHz) 25 to 50 50 to 450 45 to 512 821 to 896 928 to 29. 929 to 960. 2110 to 2220 According to §24.2 ensure that the fun frequency block.	•				
Test setup							



Test Report	16050024-FCC-R1
Page	34 of 46

	A communication link was established between EUT and base station. The		
	frequency error was monitored and measured by base station under variation		
Procedure	of ambient temperature and variation of primary supply voltage.		
	Limit: The frequency stability of the transmitter shall be maintained within		
	±0.00025% (±2.5ppm) of the center frequency.		
Remark			
Result	Pass Fail		

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	V N/A



Test Report	16050024-FCC-R1	
Page	35 of 46	

GSM Voice:

Cellular Band (Part 22H) result

Middle Channel, f₀ = 836.6 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		20	0.0239	2.5
0	3.7	20	0.0239	2.5
10		14	0.0167	2.5
20		15	0.0179	2.5
30		13	0.0155	2.5
40		19	0.0227	2.5
50		20	0.0239	2.5
55		21	0.0251	2.5
25	4.2	19	0.0227	2.5
25	3.5	20	0.0239	2.5

PCS Band (Part 24E) result

	Middle Channel, f₀ = 1880 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-10		10	0.0053	2.5	
0		13	0.0069	2.5	
10	3.7	14	0.0074	2.5	
20		11	0.0059	2.5	
30		15	0.0080	2.5	
40		16	0.0085	2.5	
50		14	0.0074	2.5	
55		15	0.0080	2.5	
25	4.2 3.5	16	0.0085	2.5	
25		20	0.0106	2.5	



Test Report	16050024-FCC-R1
Page	36 of 46

GPRS:

Cellular Band (Part 22H) result

	Middle Channel, f _o = 836.6 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-10		21	0.0251	2.5	
0	3.7	16	0.0191	2.5	
10		13	0.0155	2.5	
20		13	0.0155	2.5	
30		12	0.0143	2.5	
40		14	0.0167	2.5	
50		14	0.0167	2.5	
55		20	0.0239	2.5	
25	4.2	19	0.0227	2.5	
	3.5	21	0.0251	2.5	

PCS Band (Part 24E) result

	Middle Channel, f₀ = 1880 MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	
-10		18	0.0096	2.5	
0		15	0.0080	2.5	
10	3.7	16	0.0085	2.5	
20		11	0.0059	2.5	
30		13	0.0069	2.5	
40		15	0.0080	2.5	
50		16	0.0085	2.5	
55		15	0.0080	2.5	
25	4.2 3.5	21	0.0112	2.5	
25		20	0.0106	2.5	



Test Report	16050024-FCC-R1
Page	37 of 46

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
RF Conducted Test			,		
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/15/2016	09/14/2017	>
Power Splitter	1#	1#	08/31/2016	08/30/2017	V
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	\
Temperature/Humidity Chamber	UHL-270	001	10/09/2015	10/08/2016	V
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	~
RF Power Sensor	Dare RPR3006C/P/W	AY554013	09/16/2016	09/15/2017	V
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	~
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	\
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	V
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	V
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/20/2016	09/19/2017	V
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71259	09/24/2015	09/23/2016	<u><</u>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	V
SYNTHESIZED SIGNAL GENERATOR	8665B	3744A01293	09/16/2016	09/15/2017	V
Power Amplifier	SMC150D	R1553-0313	03/09/2016	03/08/2017	~
Power Amplifier	S41-25D	R1553-0314	05/27/2016	05/26/2017	~
Tunable Notch Filter	3NF-800/1000- S	AA4	08/31/2016	08/30/2017	V



Test Report	16050024-FCC-R1
Page	38 of 46


Tunable Notch Filter	3NF-	AM 4	08/31/2016	08/30/2017	V
	1000/2000-S				



Test Report	16050024-FCC-R1
Page	39 of 46

Annex B. EUT And Test Setup Photographs


Annex B.i. Photograph: EUT External Photo

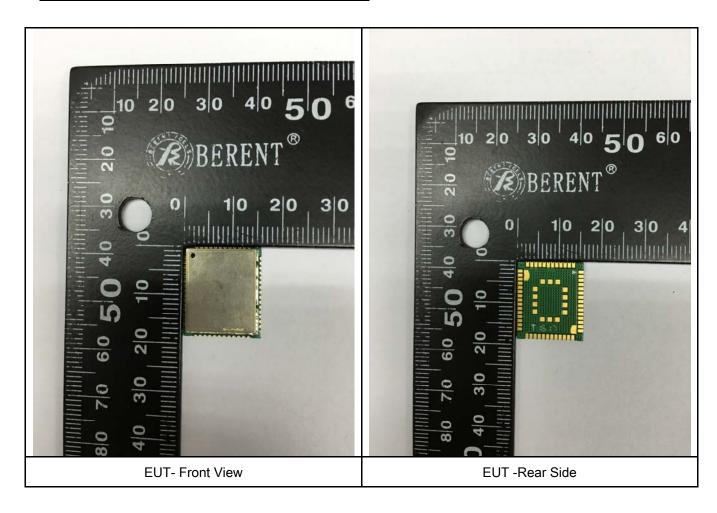



Test Report	16050024-FCC-R1
Page	40 of 46


Annex B.ii. Photograph: EUT Internal Photo

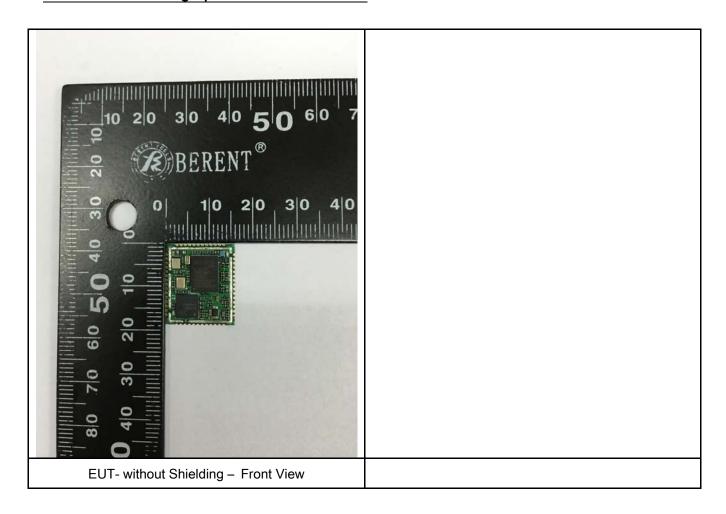





Test Report	16050024-FCC-R1
Page	41 of 46

Annex B.iii. Photograph: Test Setup Photo







Radiated Spurious Emissions Test Setup Above 1GHz




Test Report	16050024-FCC-R1
Page	42 of 46

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

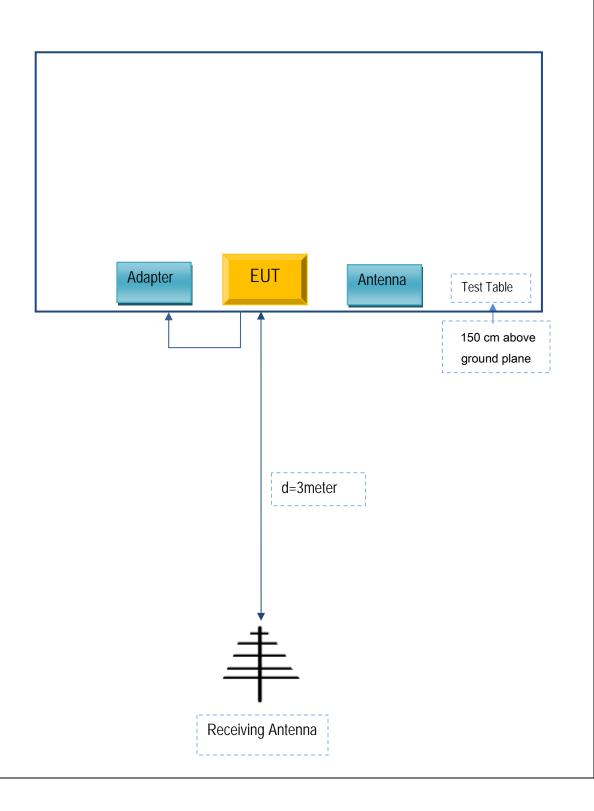



Test Report	16050024-FCC-R1
Page	43 of 46

Annex C. il. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
DCA	Adaptor	E2164A	DCN026423

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	1.5m	DCN026423



Test Report	16050024-FCC-R1
Page	44 of 46

Annex C.ii. EUT OPERATING CONKITIONS

N/A



Test Report	16050024-FCC-R1
Page	45 of 46

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachments



Test Report	16050024-FCC-R1
Page	46 of 46

Annex E. DECLARATION OF SIMILARITY

N/A