

Wireless Self-powered Doorbell User Manual




Product Features:

- No batteries required, no wiring needed
- Built-in 36 selectable ringtones
- Adjustable volume with 8 levels
- Power outage memory function

2

Installation Instructions

- ① Plug the doorbell receiver into the socket (supports wide voltage power input 110-240V). When first plugged in, the doorbell will ring, and the blue indicator light will flash.

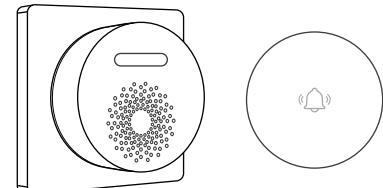

3



Reminder: Install the receiver at a height of 1 meter above the ground to ensure optimal reception; otherwise, it may affect the reception effectiveness.

4

Volume Key: Short press to adjust volume with 8 adjustable levels. The default is the maximum volume, and subsequent presses will mute the volume (-1-2-3-4-5-6-7-8), cycling through each level with each press.

Pairing Key: Long press the volume key for 5 seconds. When the green indicator light is on means waiting to add a wireless transmitter. Up to 10 transmitters can be added.

Music Key: Short press to select through 36 ringtones; the default is the first "Ding Dong."

① Press the transmitter, and the receiver will play the selected ringtone. Simultaneously, the blue indicator light will flash along with the music. If the receiver cannot receive the signal, move the transmitter close it, and use double-side tape or screws to fix transmitter on the wall.

5



Adding/Deleting Transmitter:

The wireless transmitter is already added to the wireless receiver before factory delivery. If you need to add another transmitter for one-to-two or one-to-many use, follow these steps.

6

Adding Transmitter:

Long press the volume key for 5 seconds until the green light stays on. Press the transmitter, after adding success the blue indicator light will flash with the music, the receiver will play the music when press the transmitter.

Deleting Transmitter:

Press and hold down the volume/music key for 8 seconds and release to delete all the transmitters. At the same time, the volume will restore to the 8th level, and the music will restore to the first song.

7

Product Parameters

Transmitter:

Wireless Frequency: 433.92MHz
Wireless Range: 100M (with our receiver, in an open area)
Size: Φ55*20mm

Receiver:

Input Voltage: 110-240V AC
Standby Power Consumption: ≤0.5W
Rated Power: ≤2W
Wireless Frequency: 433.92MHz
Wireless Range: 100M (with our transmitter, in an open area)
Maximum Transmitter Pairing: 10
Plug: Available in US, UK, EU standards
Size: Φ60*23mm

8

FCC Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.