


承认书项目表

Antenna Specifications

NO.	内 容 (Contents)	页数 (Number of	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S 参数测试 (S Parameter)	1	5
6	增益测试 (Gain Test)	1	6
7	增益值 (Gain value)	1	7
8			
9			
10	-	-	-
11	-	-	-
12	-	-	-

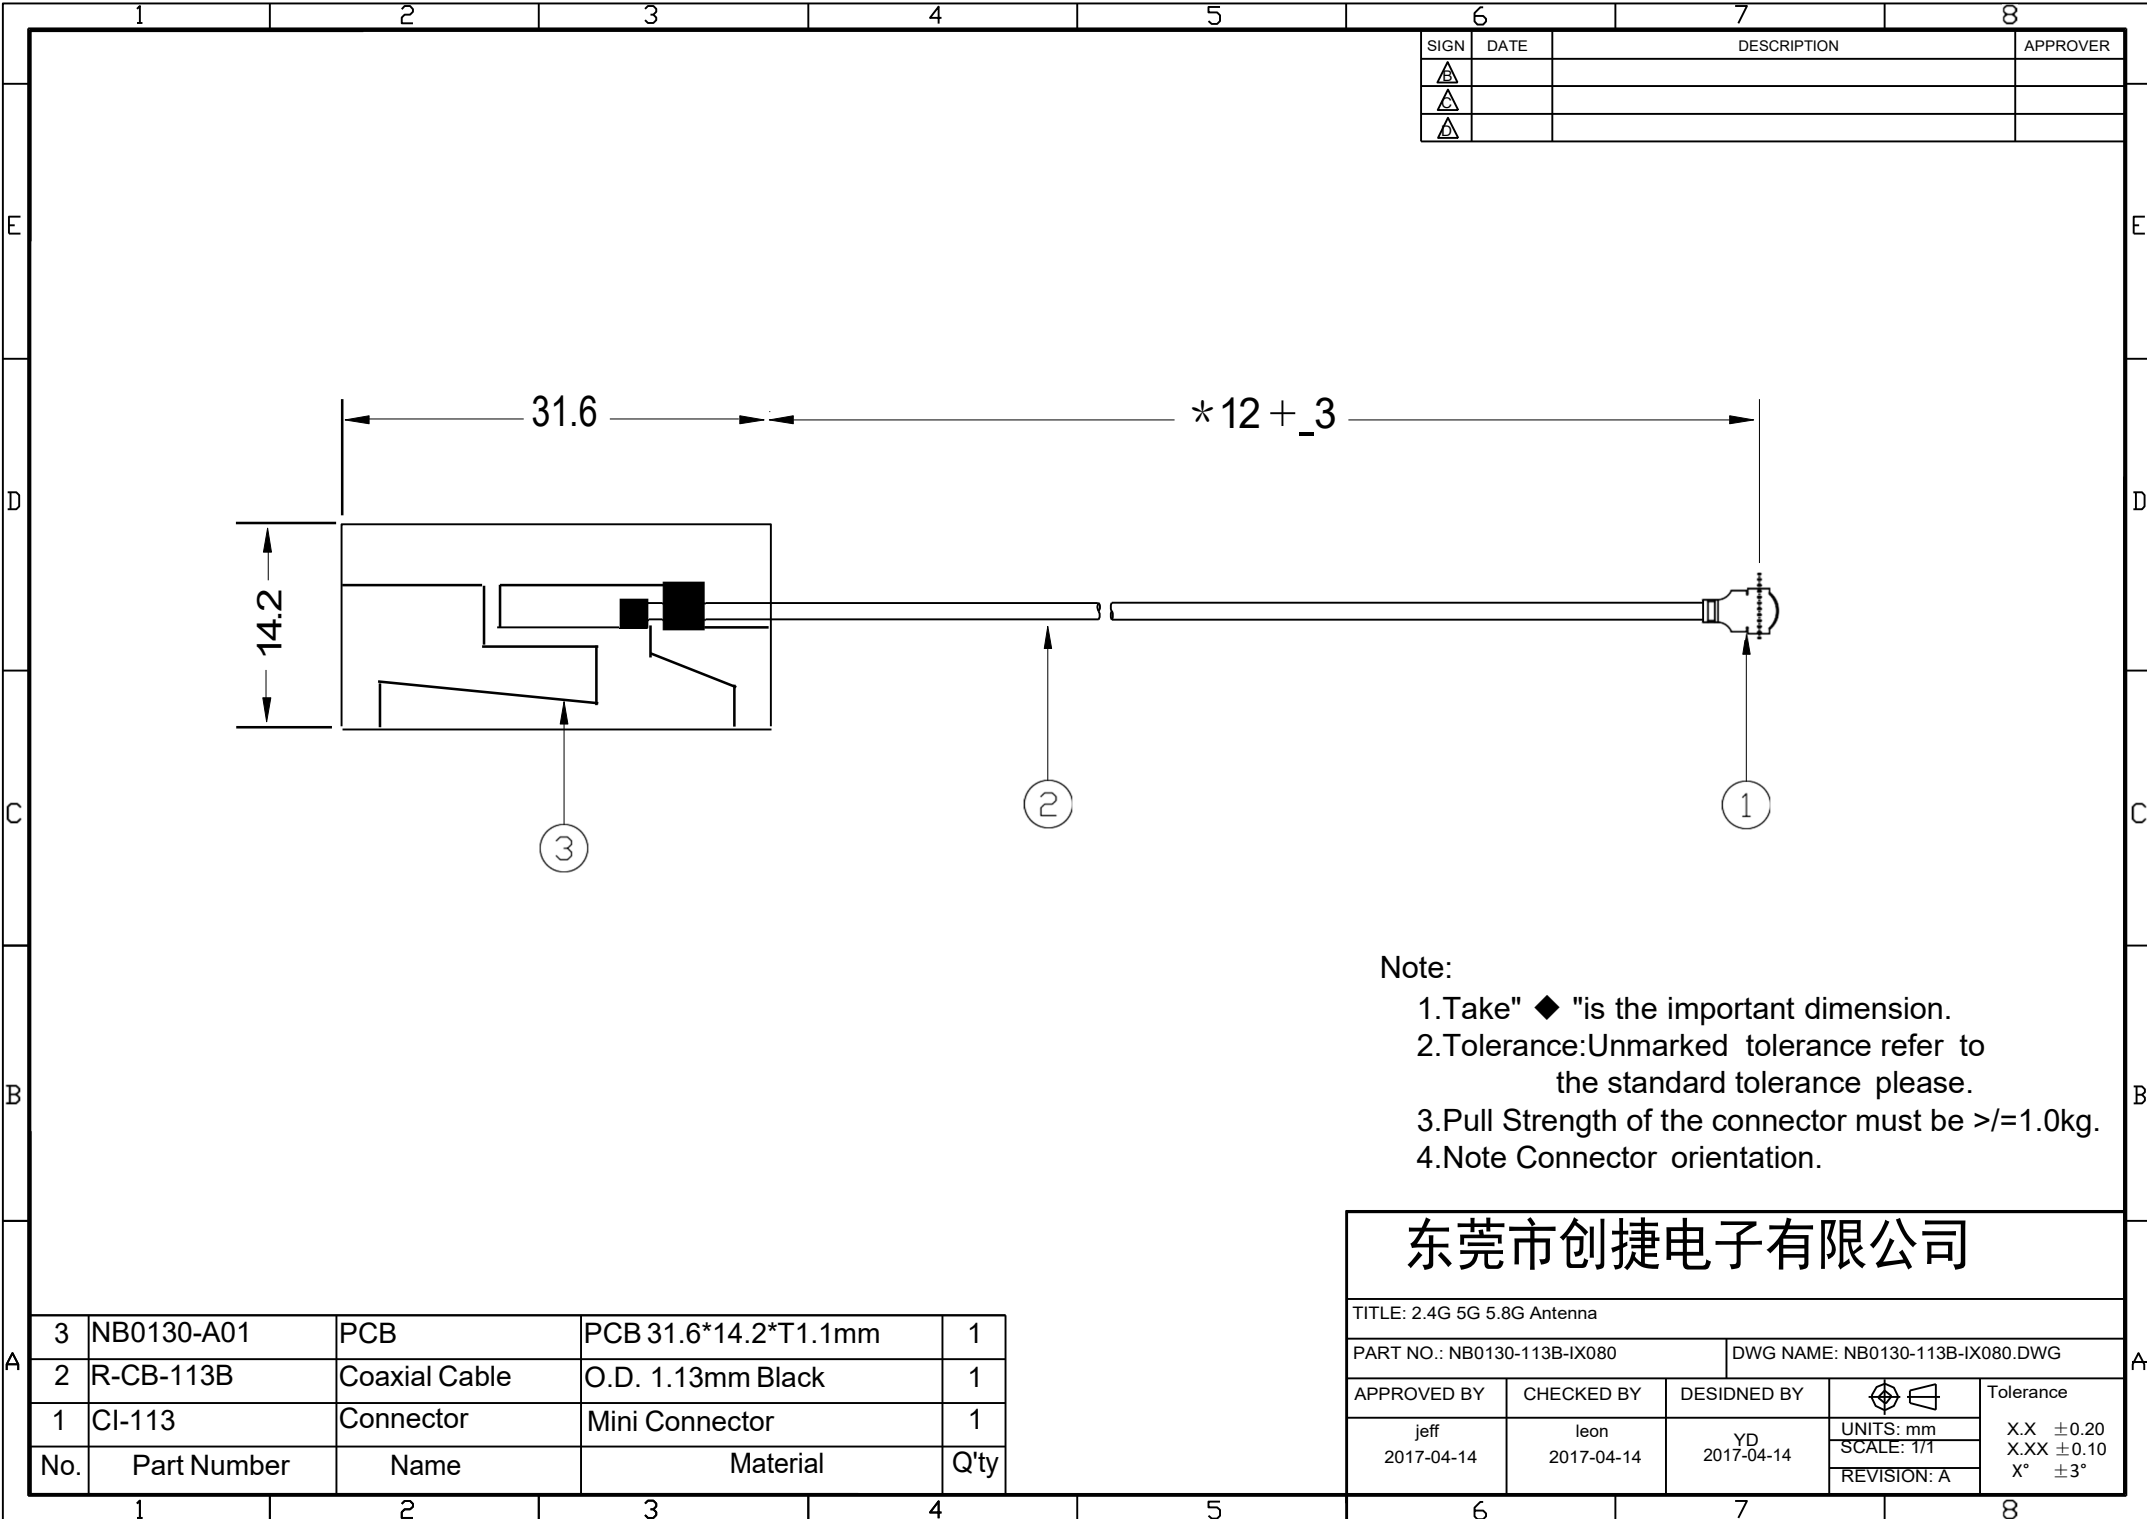

电性测试报告



Test Reports

Electrical Properties	
Frequency	2400-2500MHz
Impedance	50 Ohm Nominal
V.S.W.R	1.92 : 1 Max
Return Loss	-10 dB Max
Radiation	Omni-directional
Cable Loss	3.2 dB / m Max @ 2450 MHz
Polarization	Linear, Vertical
Admitted Power	1 W
Connector	ipex
Physical Properties	
Antenna Material	PCB
Cable Type	O.D. 1.10mm // 80mm
Operating Temp.	-10 ~ +60 °C
Storage Temp.	-10 ~ +70 °C

S 参数测试

S Parameter Test



Agilent E5071C

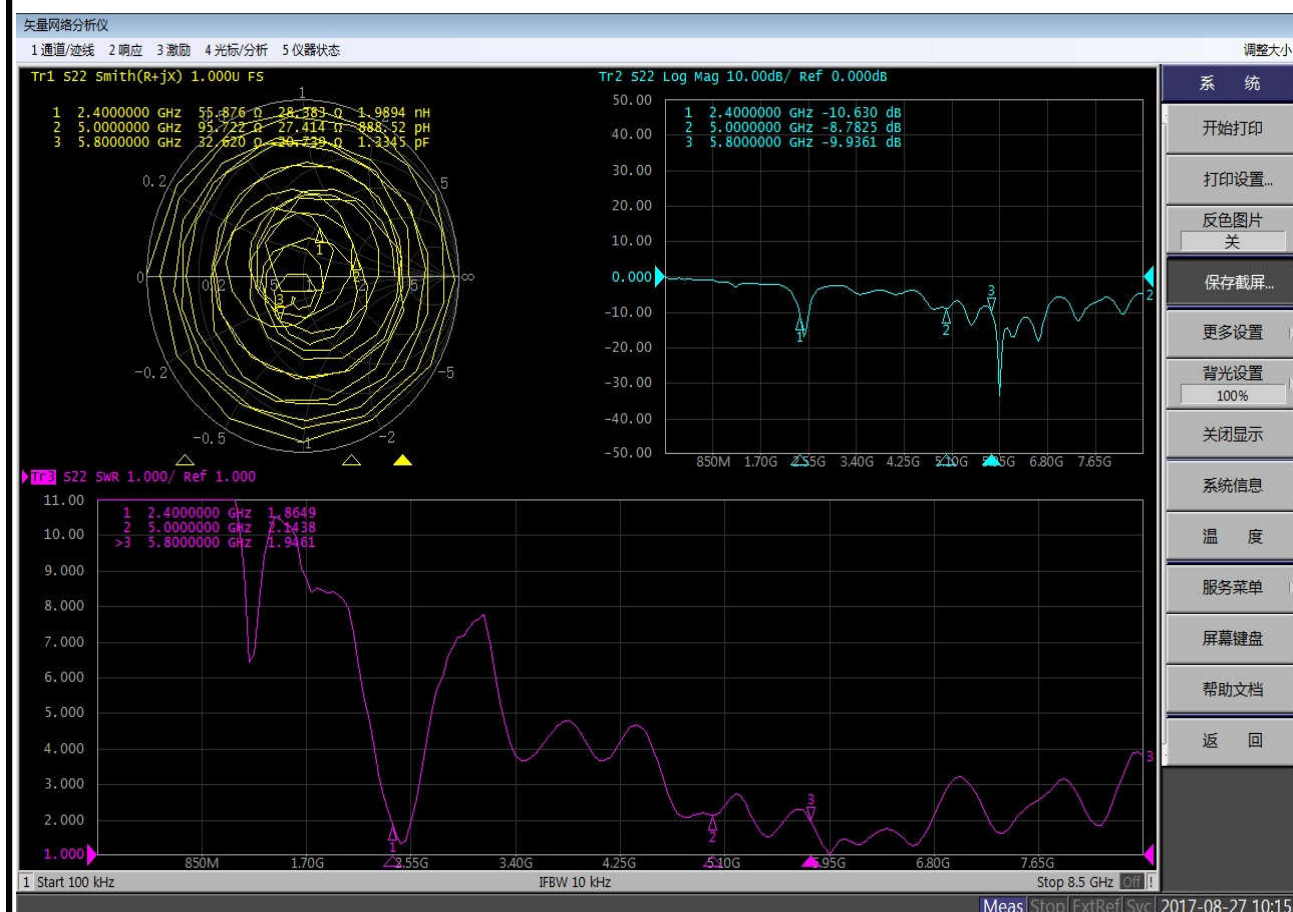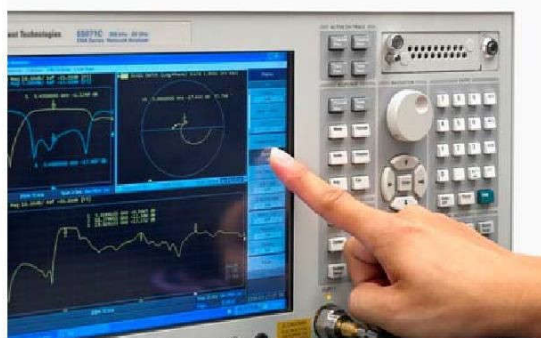

增益测试

Gain Test

*Antenna
Radiation
Pattern
VS
Gain*

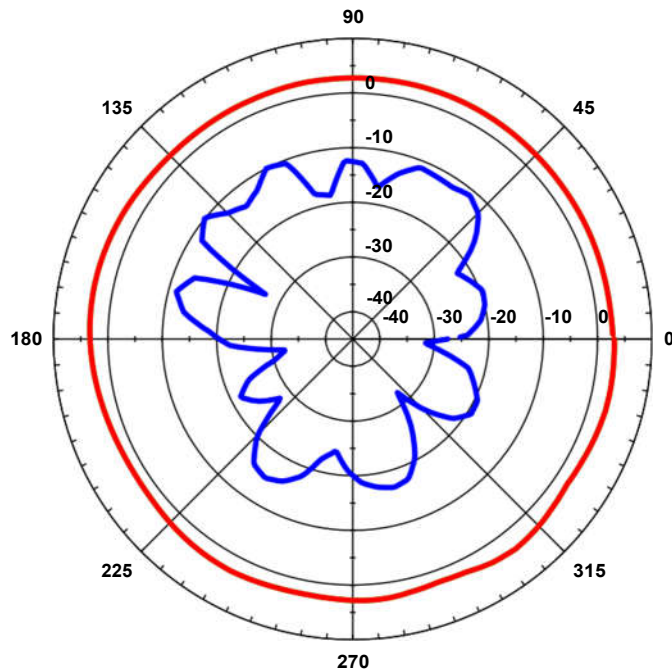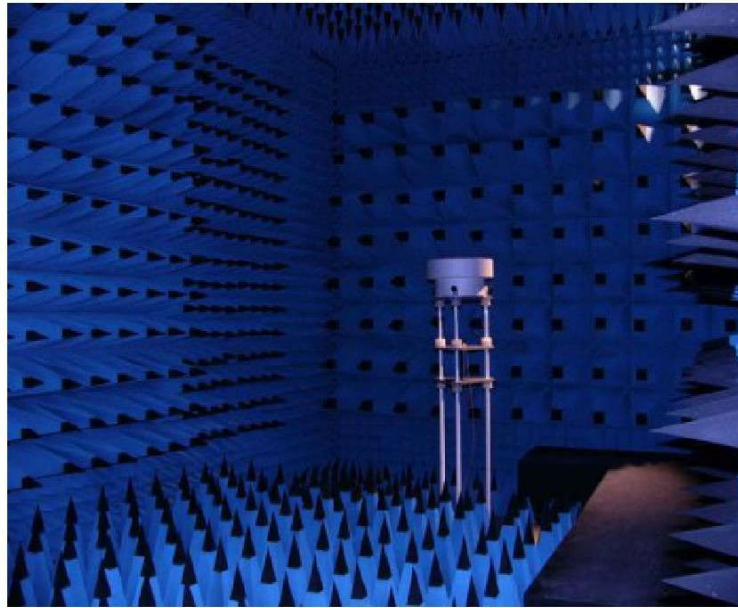

增益值

Gain value

测试 (test frequency)	增益值 (Gain value)	波动 (wave)
2.40G	4.0dBi	±0.20
2.45G	3.85dBi	±0.20
2.50G	3.88dBi	±0.20

