

Instructions for Interaction

Key interaction
touch interaction
speech interaction
IMU

Key interaction

Power key


Press this key to turn ON/OFF the screen
Press and hold this key for 5s to power on
Press and hold this key for 2s to power on

Volume key

Press this key to increase/reduce the volume

Combination key

Power key & volume -: screen shot

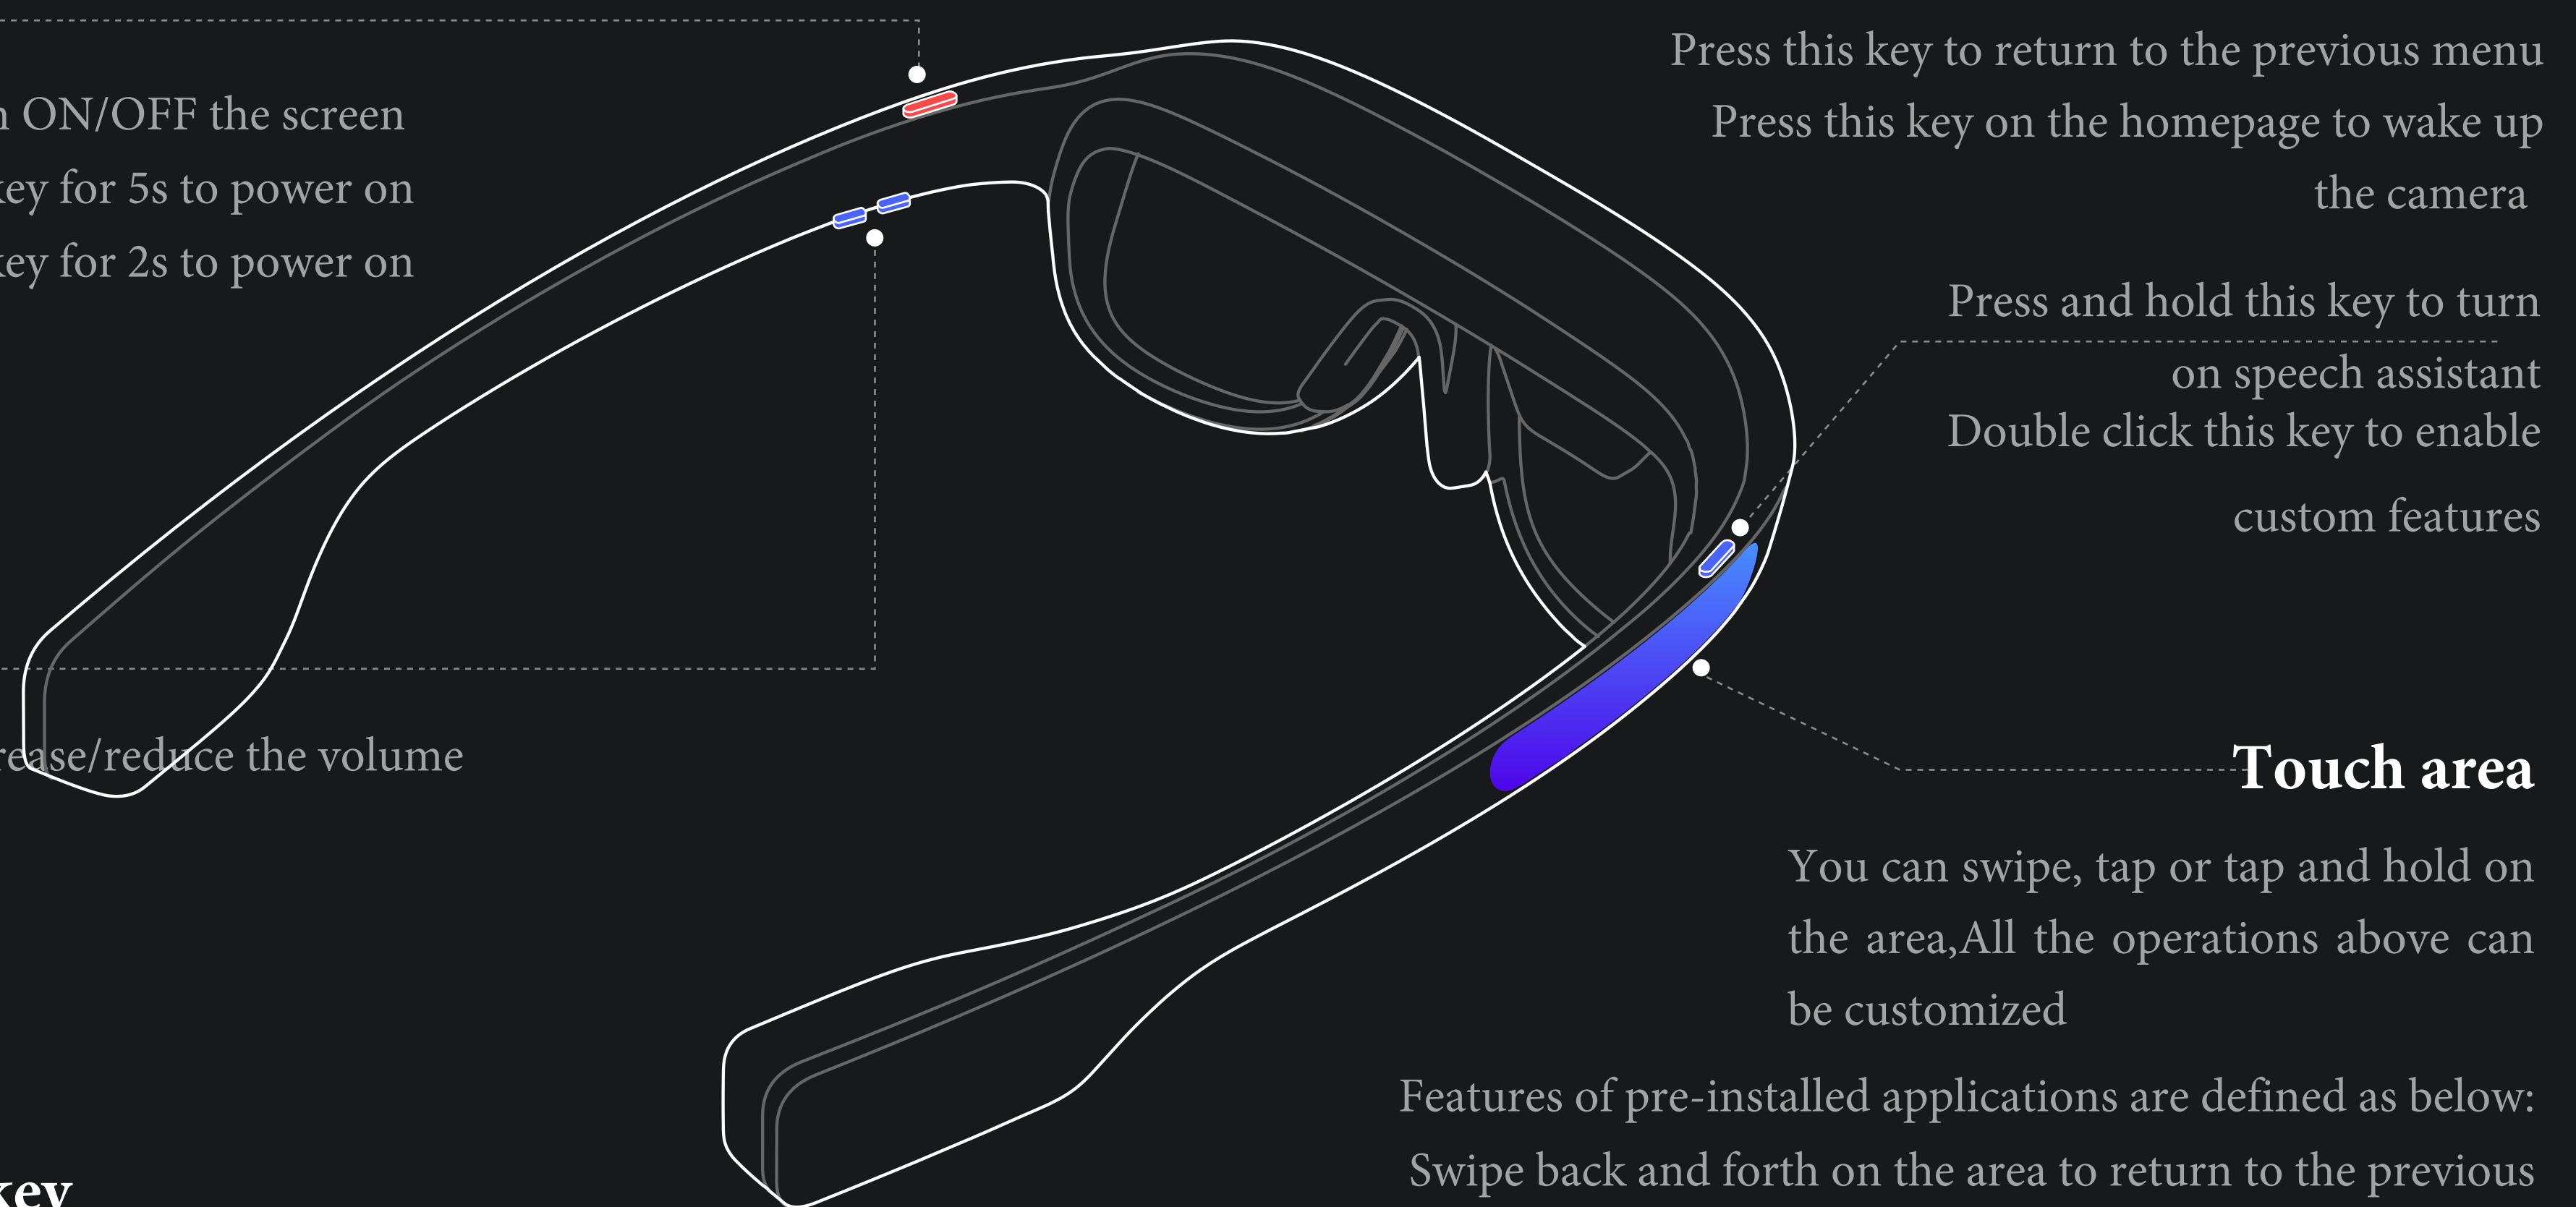

Back key

Press this key to return to the previous menu
Press this key on the homepage to wake up
the camera

Press and hold this key to turn
on speech assistant
Double click this key to enable
custom features


Touch area

You can swipe, tap or tap and hold on
the area, All the operations above can
be customized

Features of pre-installed applications are defined as below:
Swipe back and forth on the area to return to the previous
menu/go to the next menu, Tap the area to confirm your
selection or enter an interface

On the Album detail page, tap and hold the area to wake up
the deletion function

Touch interaction

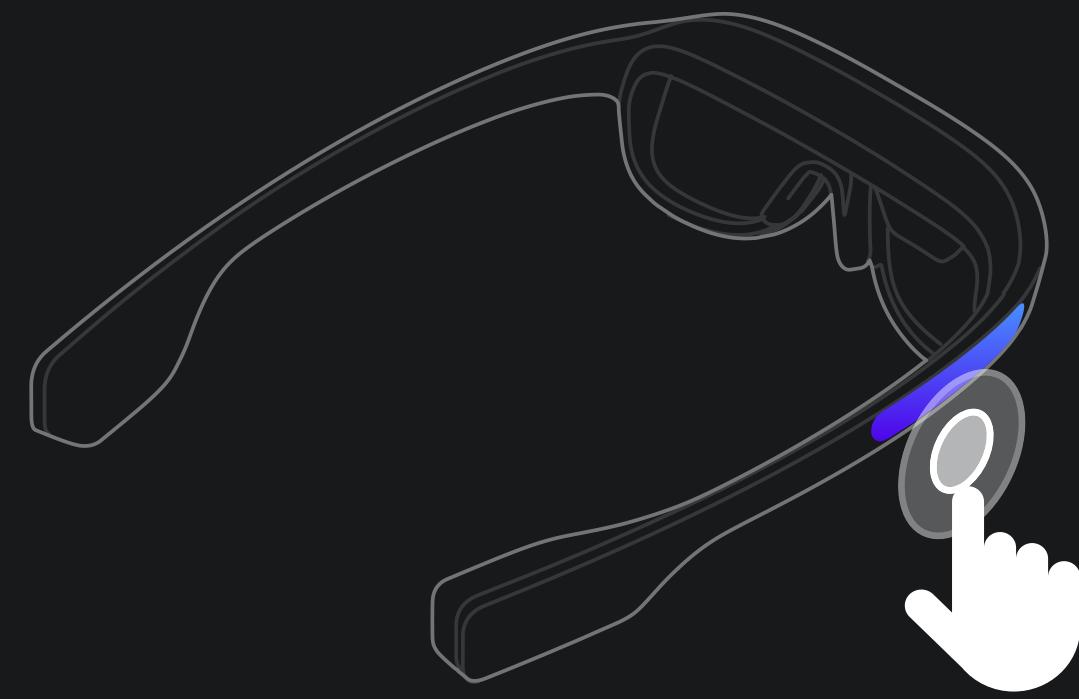

Tap


Confirm and select

Key functions can be customized

Tap and hold (for more than 1 s)

Wake up more operations (for example, delete)

Key functions can be customized

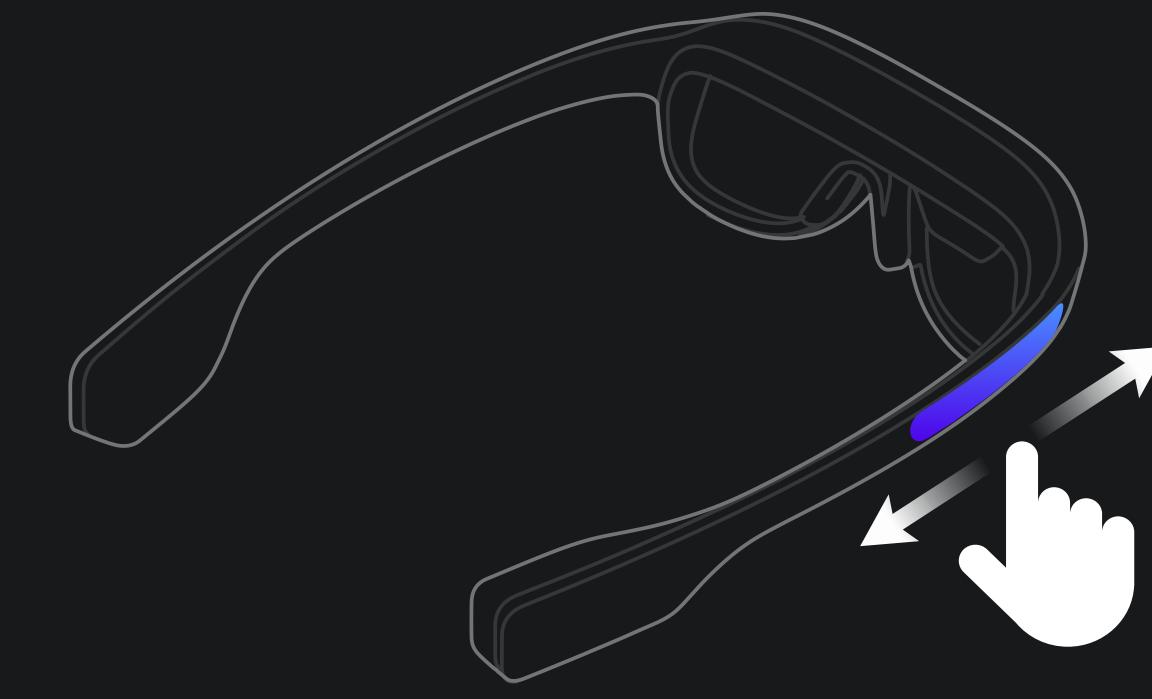


Swipe back and forth

Switch, previous/next

Key functions can be customized

Speech interaction There are two methods to wake up speech



“ROKID”

Press and hold the BACK key for 1 s to quickly wake up the speech assistant

Quickly wake up the speech assistant

Note: Wakeup is impossible if the device is not worn

Wake up the speech assistant with a wakeup word (Rokid)

It is off by default. Please turn on this function from Setup

Wake up with Rokid


Note: Wakeup is impossible if the device is not worn

**Cloud skills (Online)**

The device S/N shall have been registered to an open platform. Cloud skill feedback supports only text&speech for the time being, without GUI visual effect

**Custom instruction words**

For default instruction words, see Speech Instruction Summary. Offline instructions are supported and now only Chinese is supported

**Allow multiple processes to invoke Mic**

For example, wakeup with speech is also possible during recording

Speech interaction Default instruction words list

| Module | Intention | Instruction words (common saying, not all instruction words) |
|---------------------|------------------------|--|
| Global instructions | Turn on an application | Turn on "APP Name" (For example, turn on face recognition, turn on album) |
| | Off | Turn off/exit "APP Name" (for example, turn off translate) turn off, exit, leave |
| | Back | Back/back to/go back to/return/go to/exit to |
| | Ask battery level | How much the battery reserve is? |
| | Control volume | Increase the volume, reduce the volume, adjust the volume to "X", mute, unmute, too high volume, too low volume |
| | Sleep system | Sleep, shutdown, have a break, go to sleep |
| Camera | Camera | Shoot, take a picture, take a photo, I would like to take a picture, I would like to take a photo, I want to take a picture, I want to take a photo, turn on the camera, enable the camera |
| Camera | Recording | Shooting, recording, start shooting, start recording, turn on shooting, turn on recording, I would like to record, I want to shoot, I want to record |
| | Turn off camera | Turn off camera, exit camera, shut down camera, quit camera |
| | Stop recording | Stop recording, exit recording, stop shooting |
| album | Turn on album | Turn on album, view pictures, I want to view pictures, I would like to view pictures, view videos |
| | View recent | I would like to view the picture I just take, view the picture just now, view the recent picture, view the picture I recently take |
| | Delete picture | Delete, delete picture, delete video, delete this, delete this picture, delete this video |


Head motion recognition

This interaction is supported only in Launcher and setup scenarios by default. Developers can customize this interaction in other scenarios. This function is turned off by default and can be turned on from "Setup>Head Motion Recognition"




Turn the head left and right Select/switch

Turn the head left and right in Launcher scenario to slide left and right to select a function

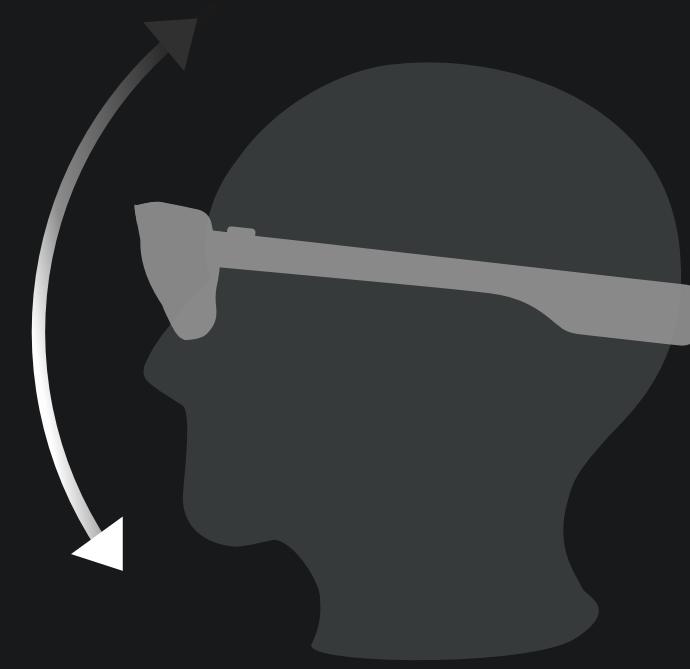


Turn head up and down Select/switch

On the setup list page, raise the head to slide the list up, and lower the head to slide the list down

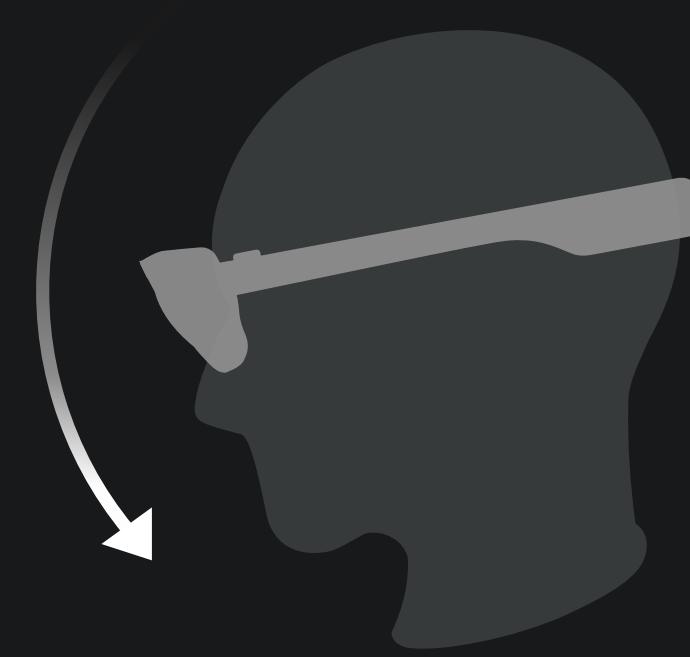

Nod the head to access a function

In Launcher scenario, nod the head to access the highlighted function


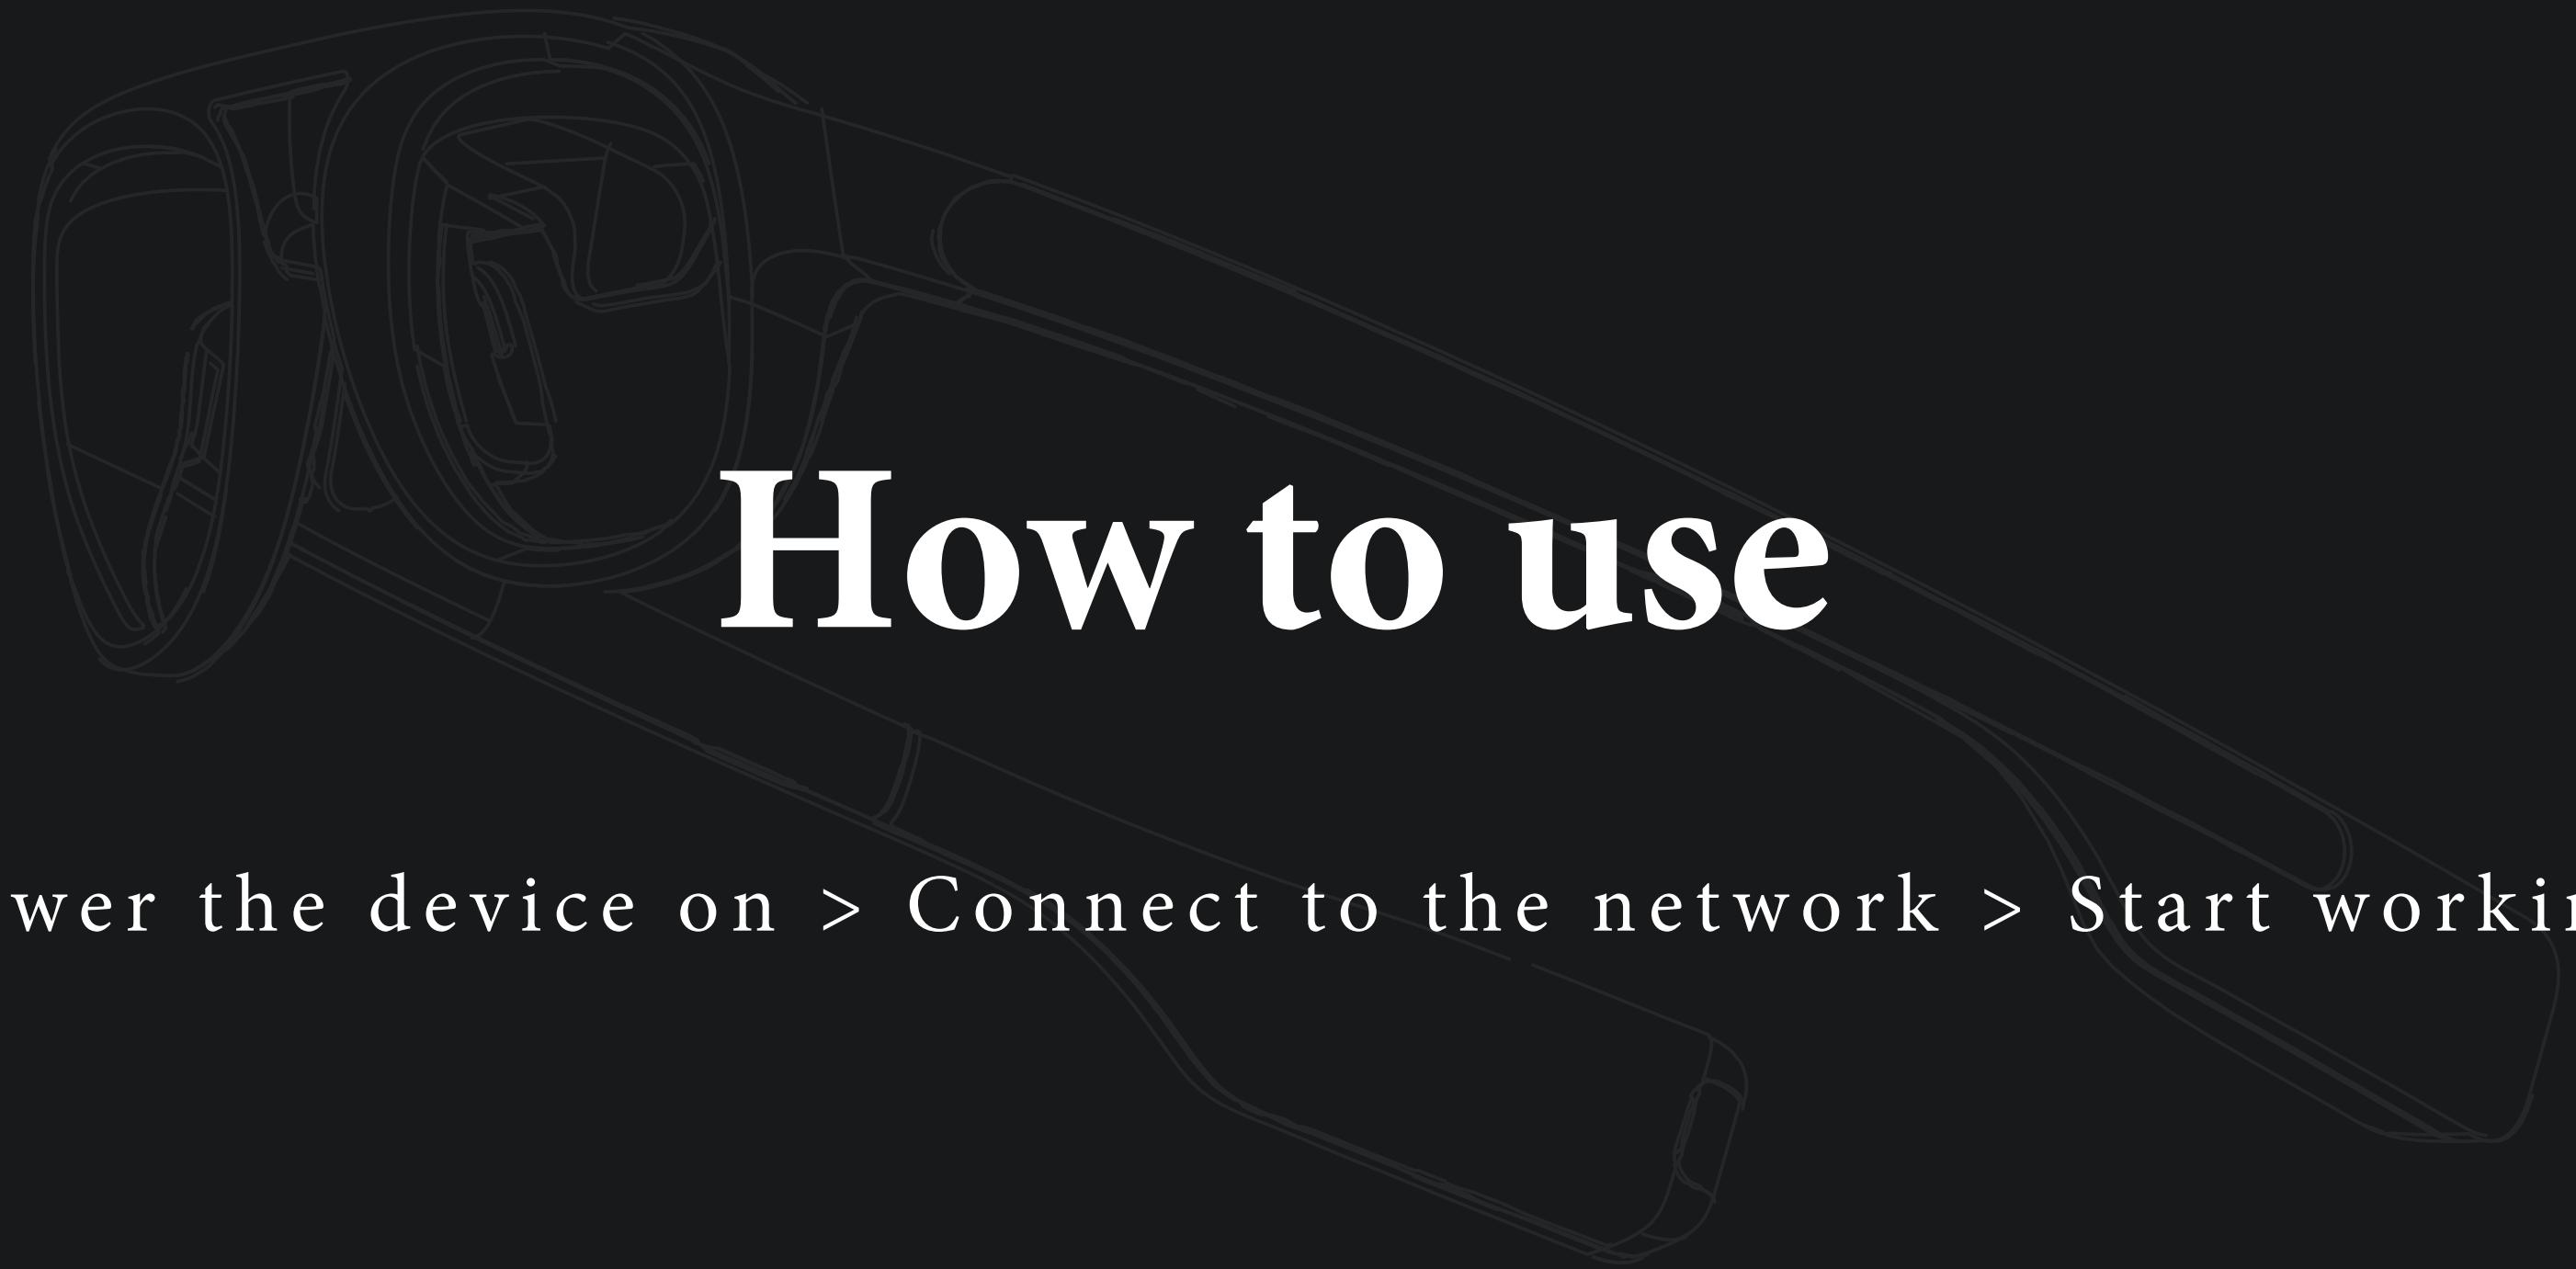


How to use

Power the device on > Connect to the network > Start working

Step 1

Power the device on

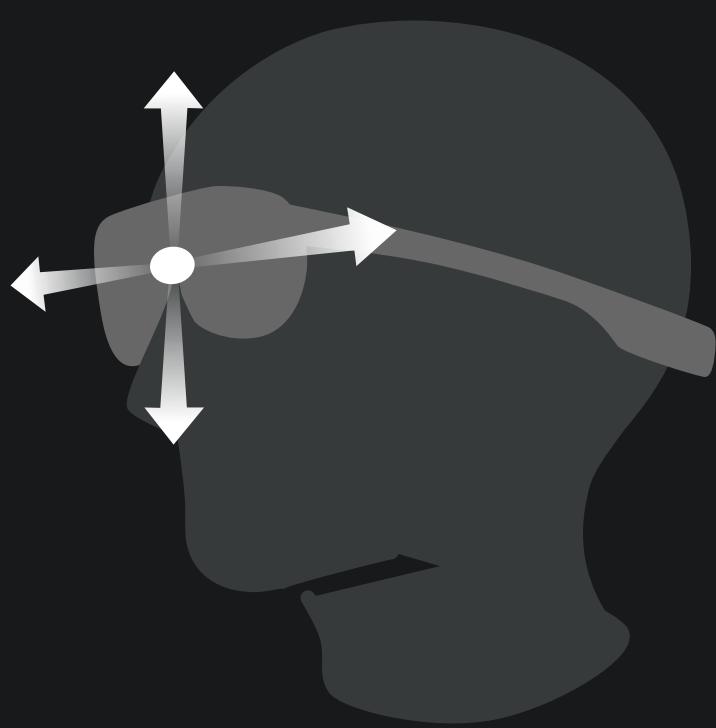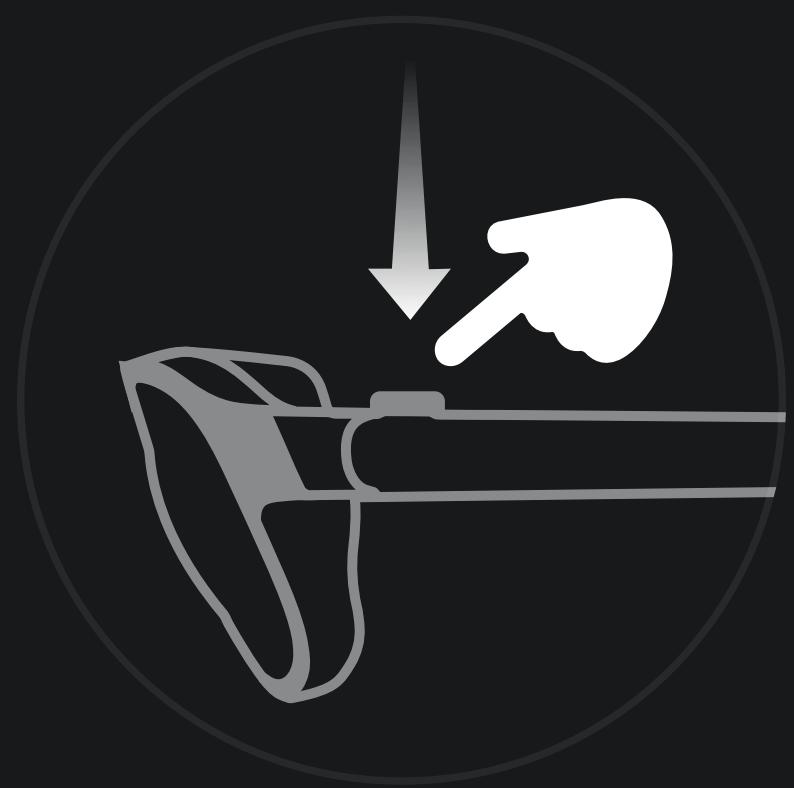

Press and hold the power key for 5 s to power the device on

The power indicator is on to indicate successful power-on

Wear the glasses so that you feel comfortable


Ensure that you feel comfortable and clearly see texts and screen

Wait for the boot screen

The system may take 25 s to load the animation

Step 2

Download mobile APP

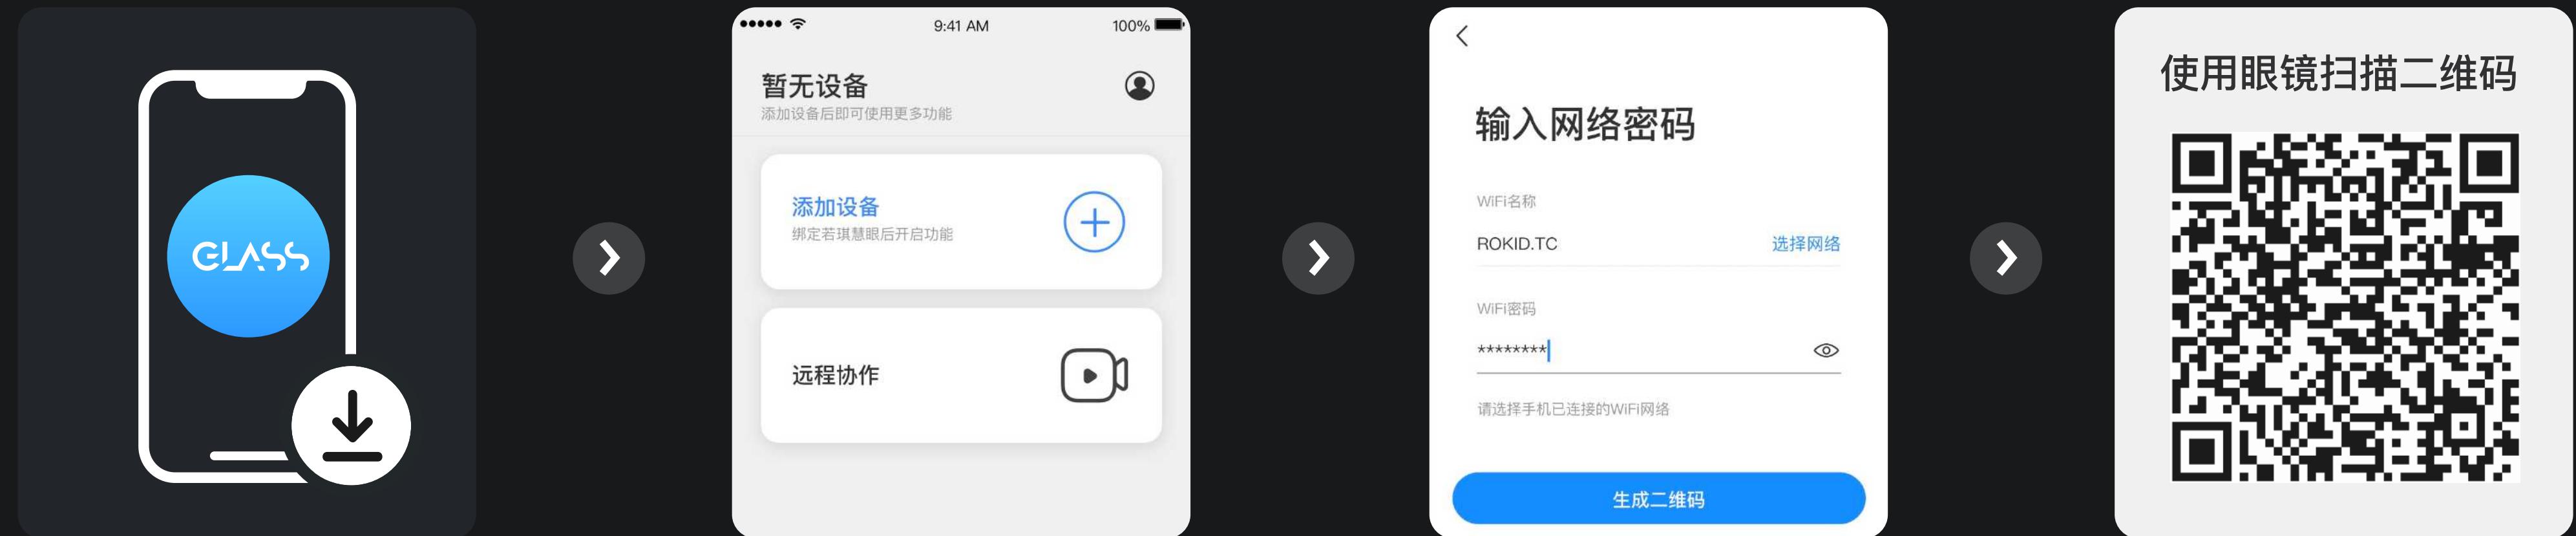

Download Rokid APP

Search Rokid in the app store of your Android mobile and download the mobile app

On the APP homepage

Tap Add Device

Connect to the network

Input a Wi-Fi account and password and then generate a QR code

Generate a QR code

After successful connection, a QR code used for glasses to connect to the network will be generated

Step 3

Connect to Wi-Fi



Open Glasses Setup Wi-Fi

On the setup page, click Wi-Fi



Connect to a new network

On the Wi-Fi page, select Connect to a New Network



Scan the QR code on your phone

Use the glasses to scan the QR code on your mobile app

Step 4

Start working




Wi-Fi connected

You will be prompted with
successful connection



Return to desktop automatically

The system will automatically return to
the desktop after Wi-Fi is connected

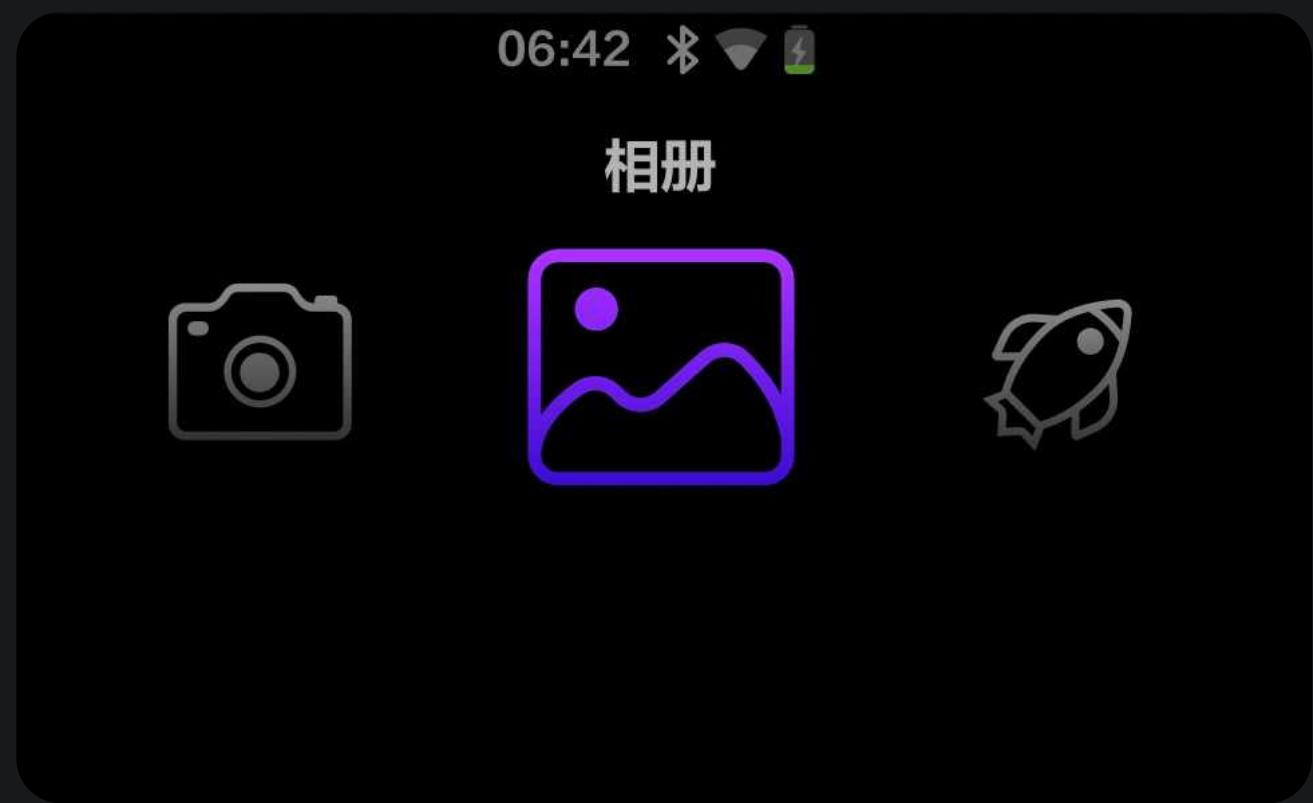

Select your desired function

Select your desired function from the
desktop and start working



Functional Descriptions

Instructions for pre-installed applications and commonly-used functions

Pre-installed applications

Camera



Camera is the first default function of the system

Tap the touch pad to access the camera function



Photo

Tap the touch pad to take a photo

Swipe on the touch pad to switch to video



Video

Tap the touch pad to turn on/off video

Swipe on the touch pad to switch to photo


Pre-installed applications

Album



On the desktop, swipe on the touch pad to go to Album


Tap the touch pad to access the Album function

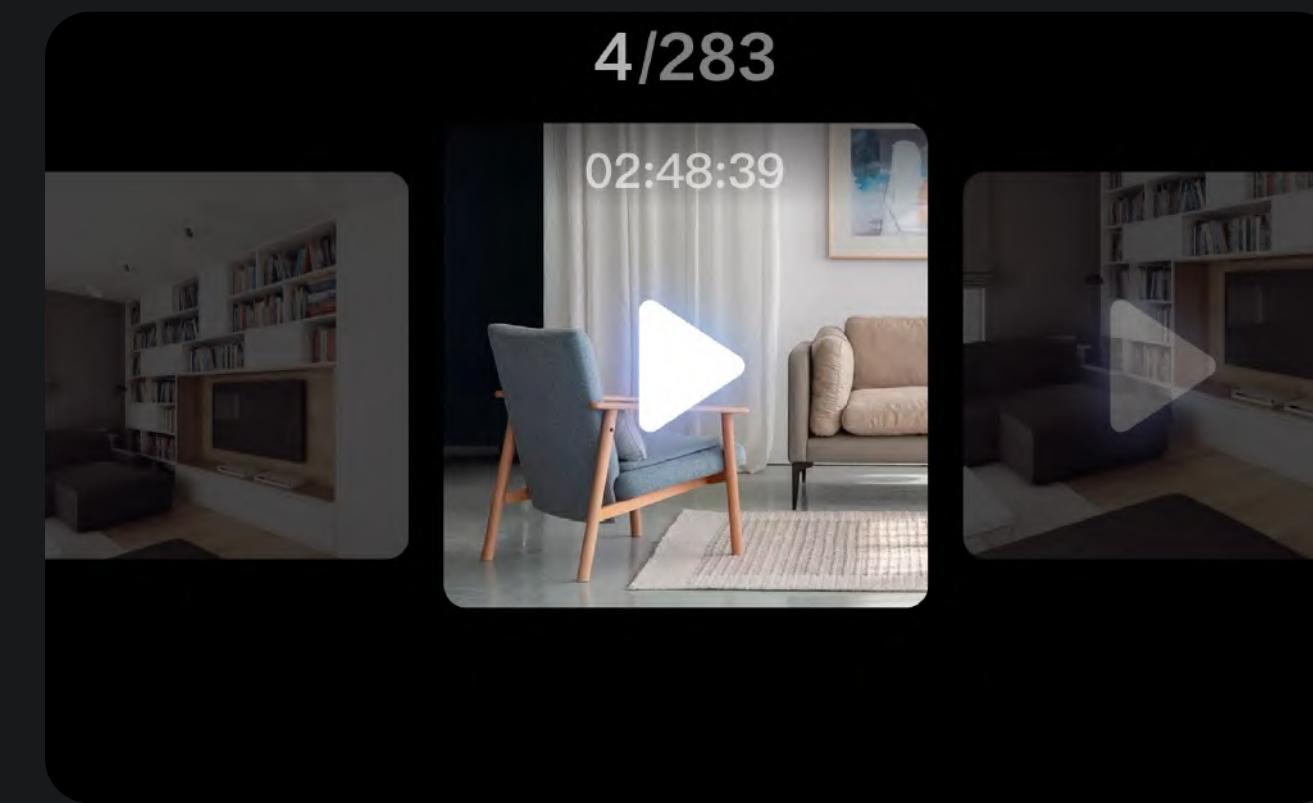

Album list

Swipe on the touch pad to swipe the list

Tap the touch pad to check details

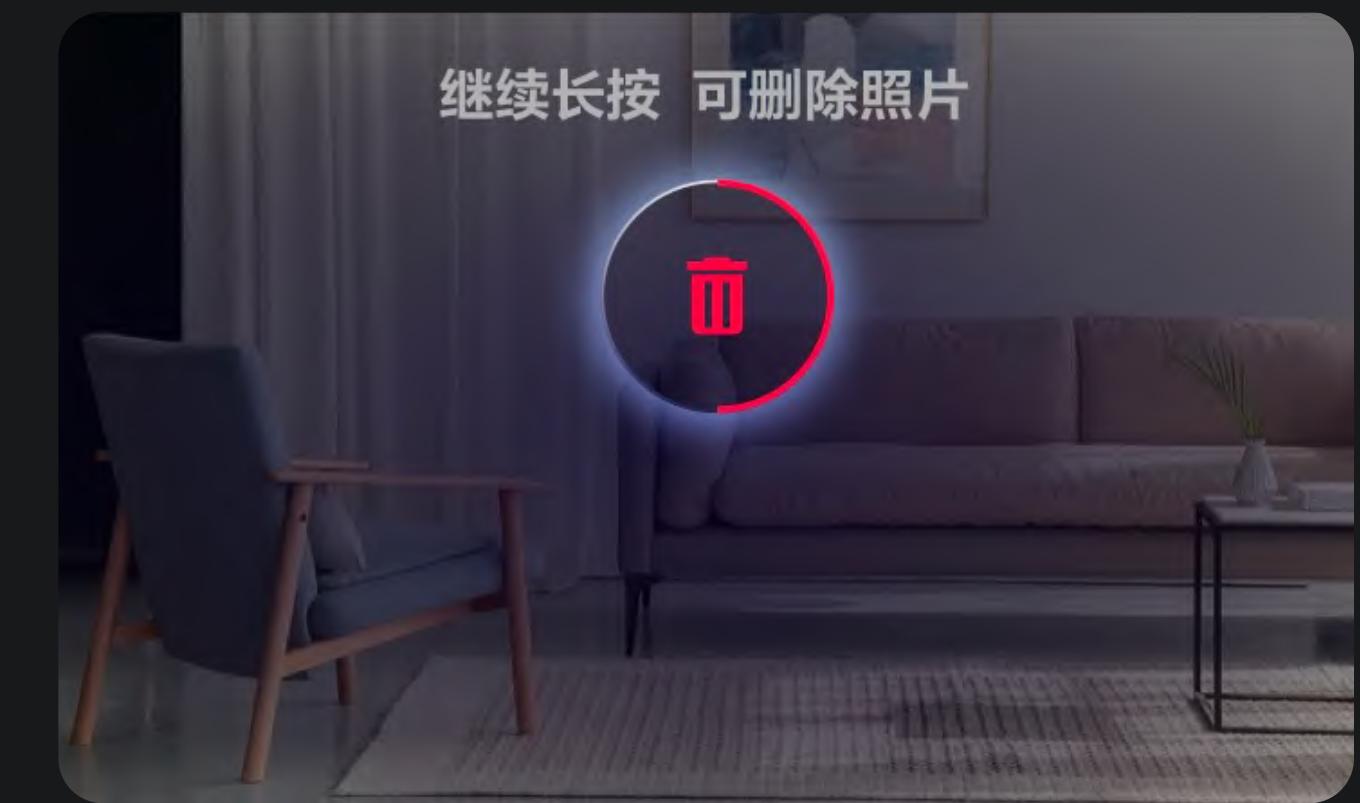


Tap and hold to wake up the delete action

Tap and hold the touch pad for 2s to wake up the delete action

You can release your hand at any time to stop the delete action

Pre-installed applications

Raid

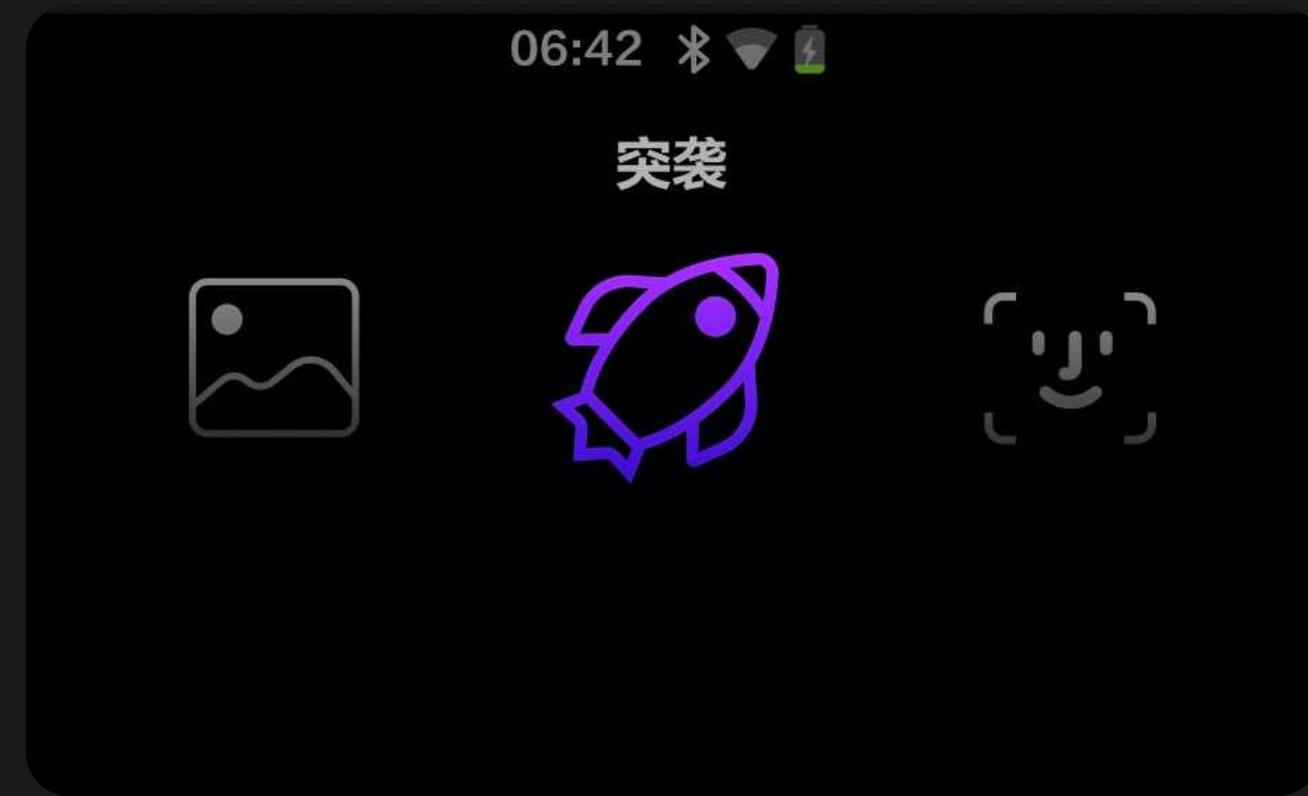

On the desktop, swipe on the touch pad to go to 【Raid】

Tap the touch pad to access the Raid Game



Turn the head to change field of view

Please locate the enemy plane as indicated by the red arrow and bring it down




Locate the enemy plane and bring it down

Target the gunsight box at the red enemy plane and sustain fire to bring it down

Pre-installed applications

Face Recognition

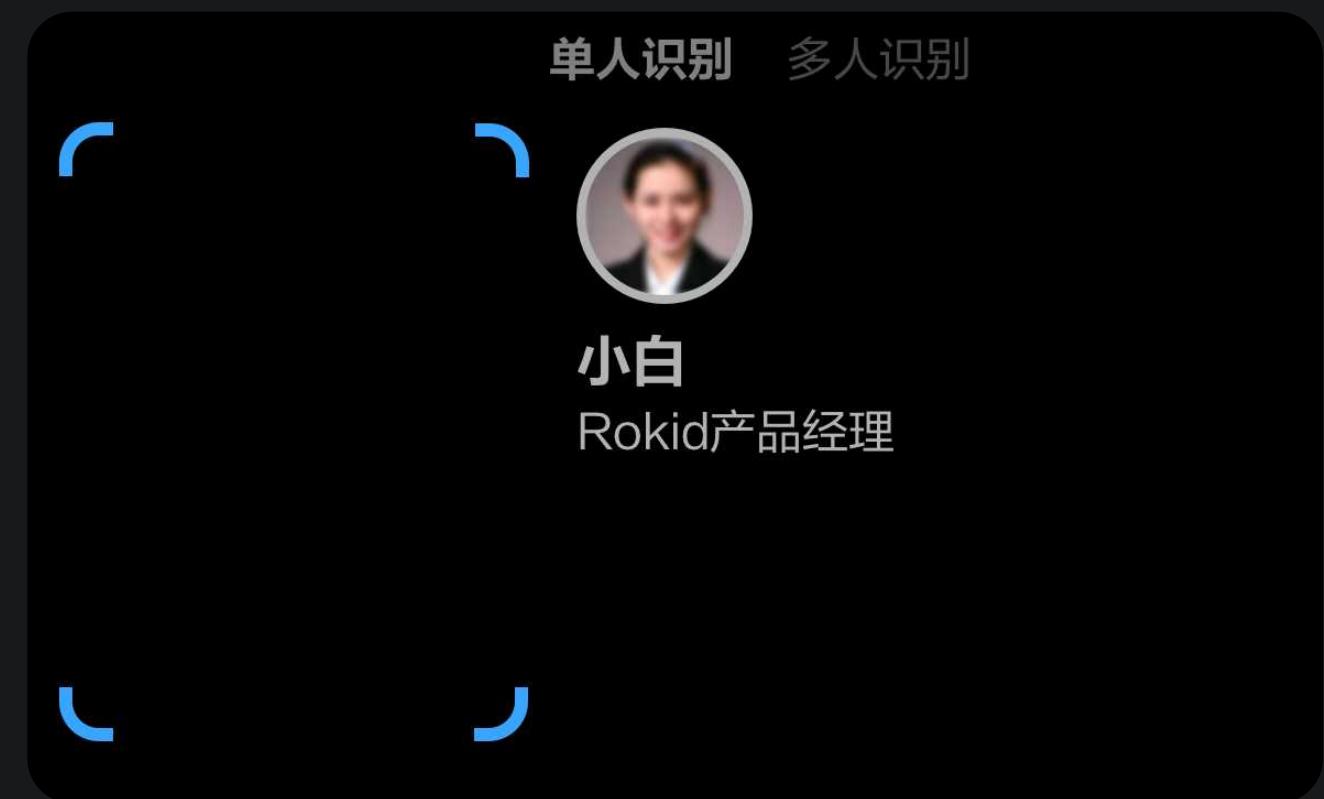

On the desktop, swipe on the touch pad to go to 【Face Recognition】

Tap the touch pad to access the Face Recognition function

Single recognition

Single recognition is enabled by default for face recognition. Swipe on the touch pad to switch to multi-recognition.

Result of recognition

The result is given after recognition. If no result is matched, the "New friend" message appears.

Pre-installed applications

Face Recognition



Multi-recognition

Move the head to target the aiming box at the recognition target

The system will automatically detect face

Face capture

When a face is recognized, a face tracker appears

Try to hold the tracker over the face

Result of recognition

Blue indicates the name of a recognized person

Green indicates a new friend not matched in the face library

Pre-installed applications

Translate



On the desktop, swipe on the touch pad to go to 【Translate】

Tap the touch pad to access the Translate function

Only Chinese-English translation is supported now



Pickup

Pickup starts by default in translate mode. Pickup automatically stops when no valid speech is received for 5 s




Translating

Translate starts automatically after pickup ends

The result will be presented as text and voice broadcast

Functional Descriptions

Remote collaboration - caller

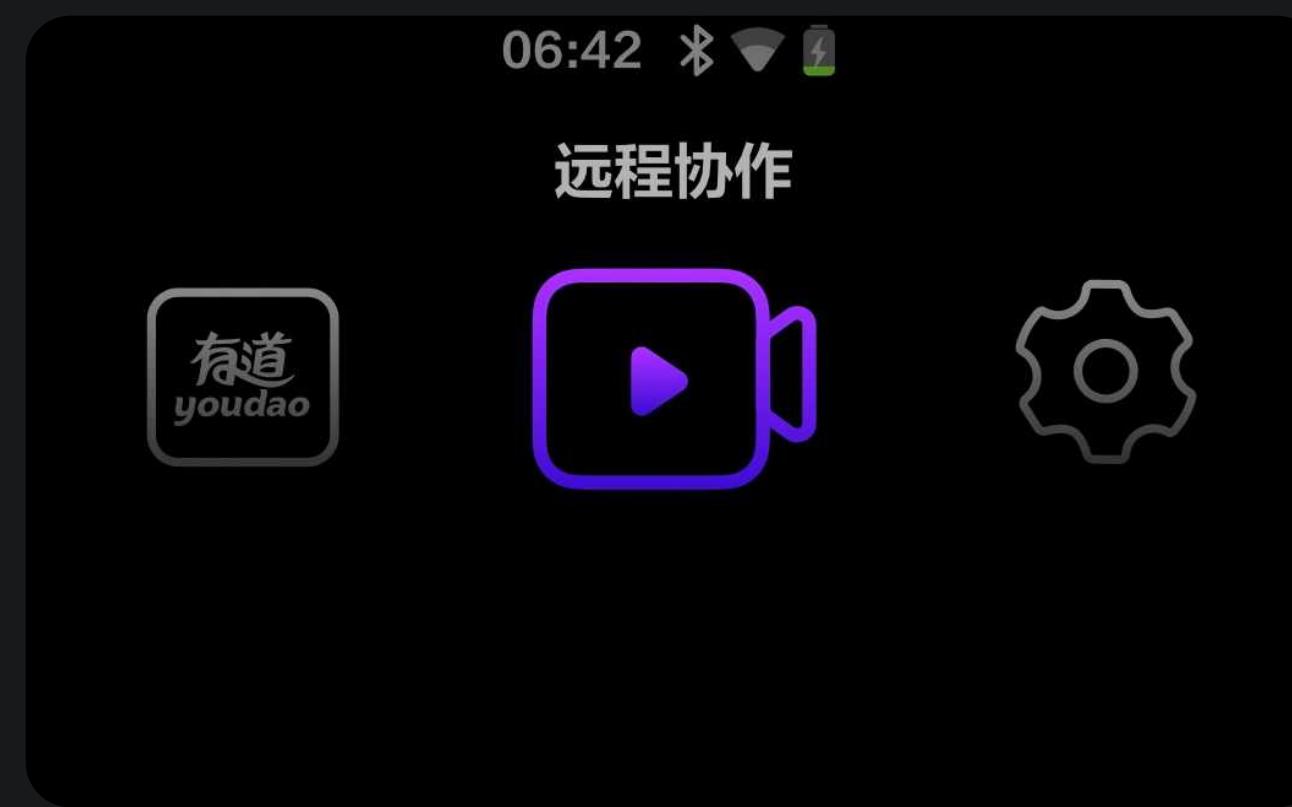

Remote collaboration - caller


Turn on "Desktop Remote Collaboration"

Enter the "Remote Collaboration" page
from the desktop



Initiative dial-up

Select manual dial-up or address book
dial-up (dial-up ID is a Rokid app
account)

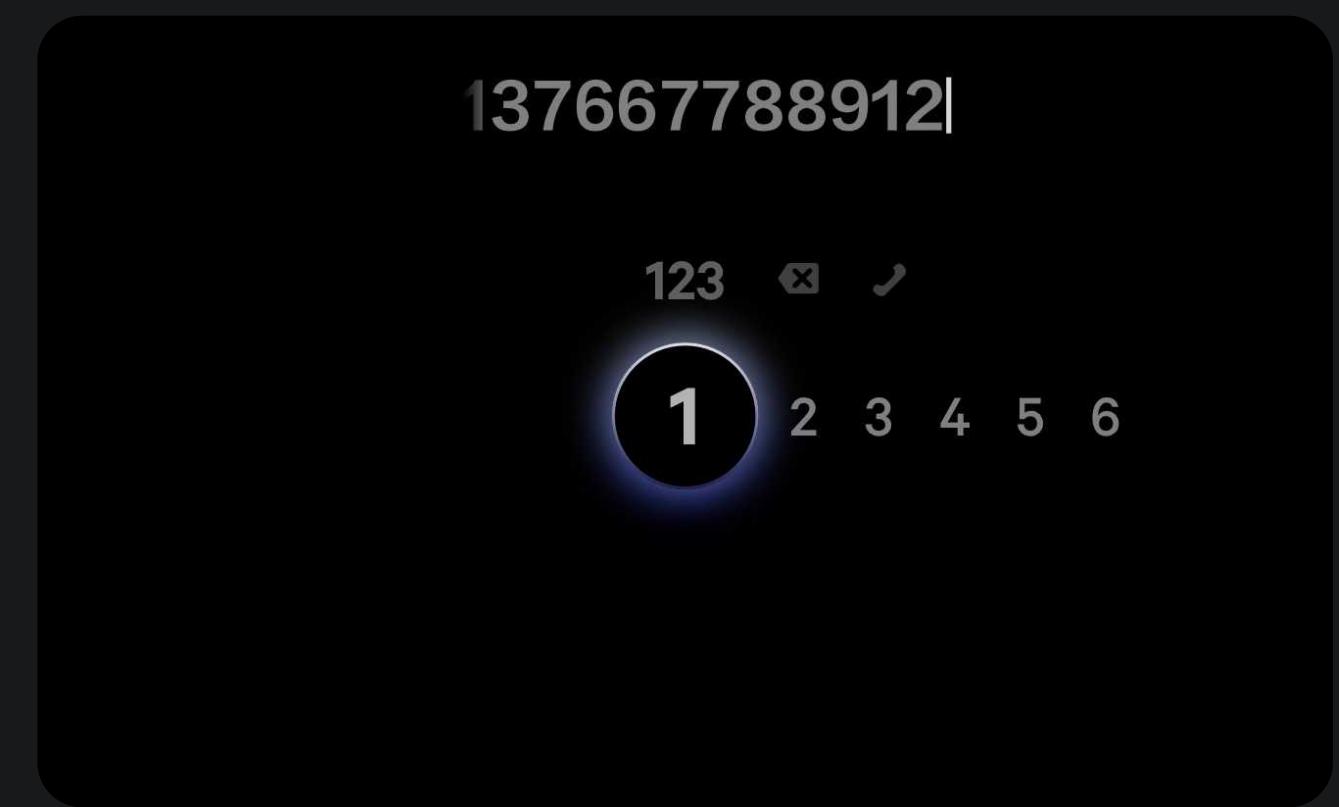

Dial-up pad

Swipe on the touch pad to switch
key values

Tap the touch pad to type, delete
or call out

Pre-installed applications


Remote collaboration - called



Remote collaboration request

Tap the touch pad to accept remote collaboration request

Swipe on the touch pad to switch to reject

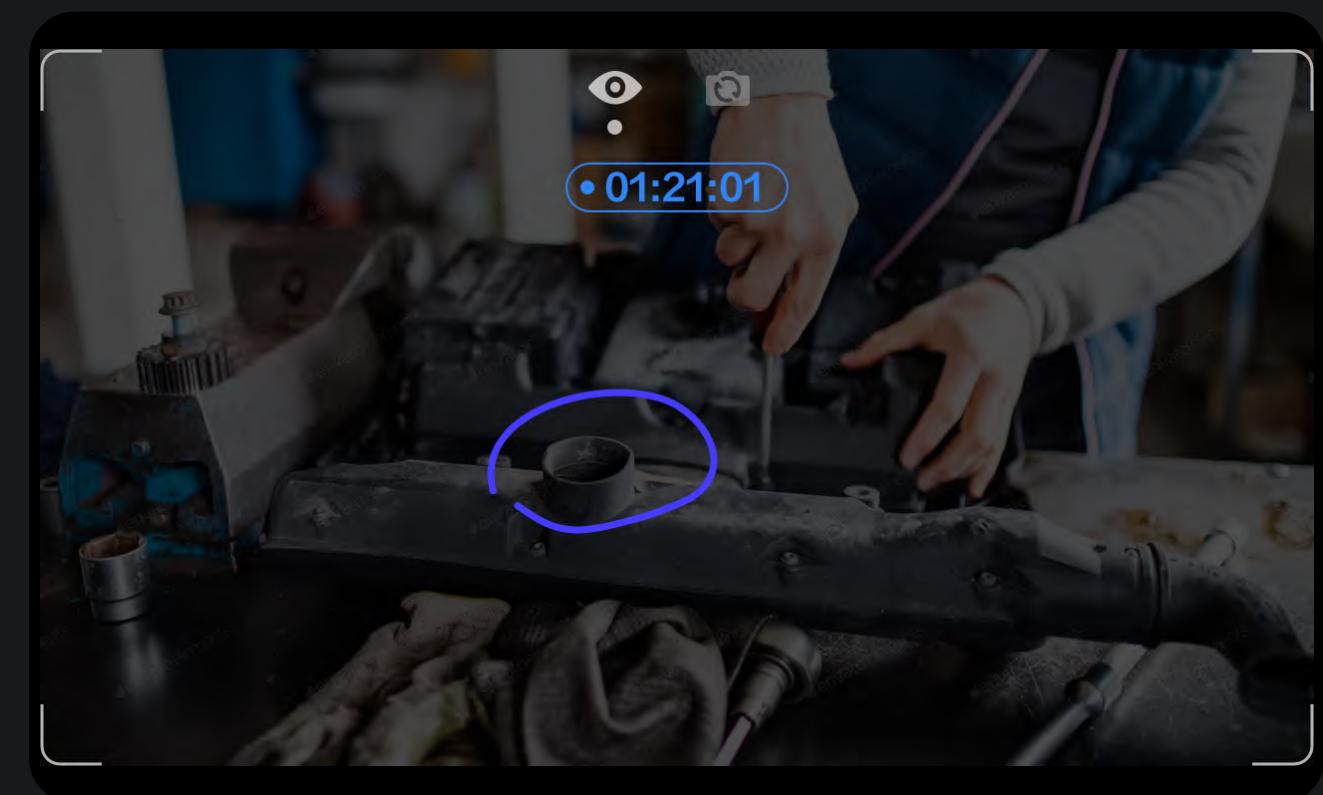

Connected

Talk to the other party in real time after connected

Swipe on the touch pad to switch to the displays of the camera on the other party



Reject

The collaboration request will be cleared after the request from the other party is rejected

Pre-installed applications

Setup



On the desktop, select
【Setup】

The setup portal is the last item
on the desktop.



Setup list page

Swipe on the touch pad to switch list
items

Tap the touch pad to access the
respective function



Setup list page

The setup list page contains: Wi-Fi,
Bluetooth, Clock, Language, Brightness,
Speech Wakeup, Head Control, Operation
Guide, Upgrade, Defaults and Device Info

Pre-installed applications

Setup - Hidden Features



Setup - About

On the About page, you can enable some hidden features

Tap and hold the touch pad, tap the touch pad for 5 consecutive times



Tap and hold the touch pad to enable hidden features

Wake up hidden features: projection function;
Tap "Projection" to carry out projection settings



Tap the touch pad for 5 consecutive times

Tap the touch pad for 5 consecutive times to wake up "Developer Mode>USB Debug" portal

Functional Descriptions

Bluetooth On



Enter "Glasses Setup"

From the desktop, enter the Setup page



Enter the Bluetooth screen

From the setup list, select Bluetooth
(Bluetooth is on by default)



Turn on Bluetooth

Tap the touch pad to turn it on/off


Functional Descriptions

Bluetooth connection



Turn on Bluetooth of the device

On the "Setup Bluetooth" page, remember the name of Bluetooth

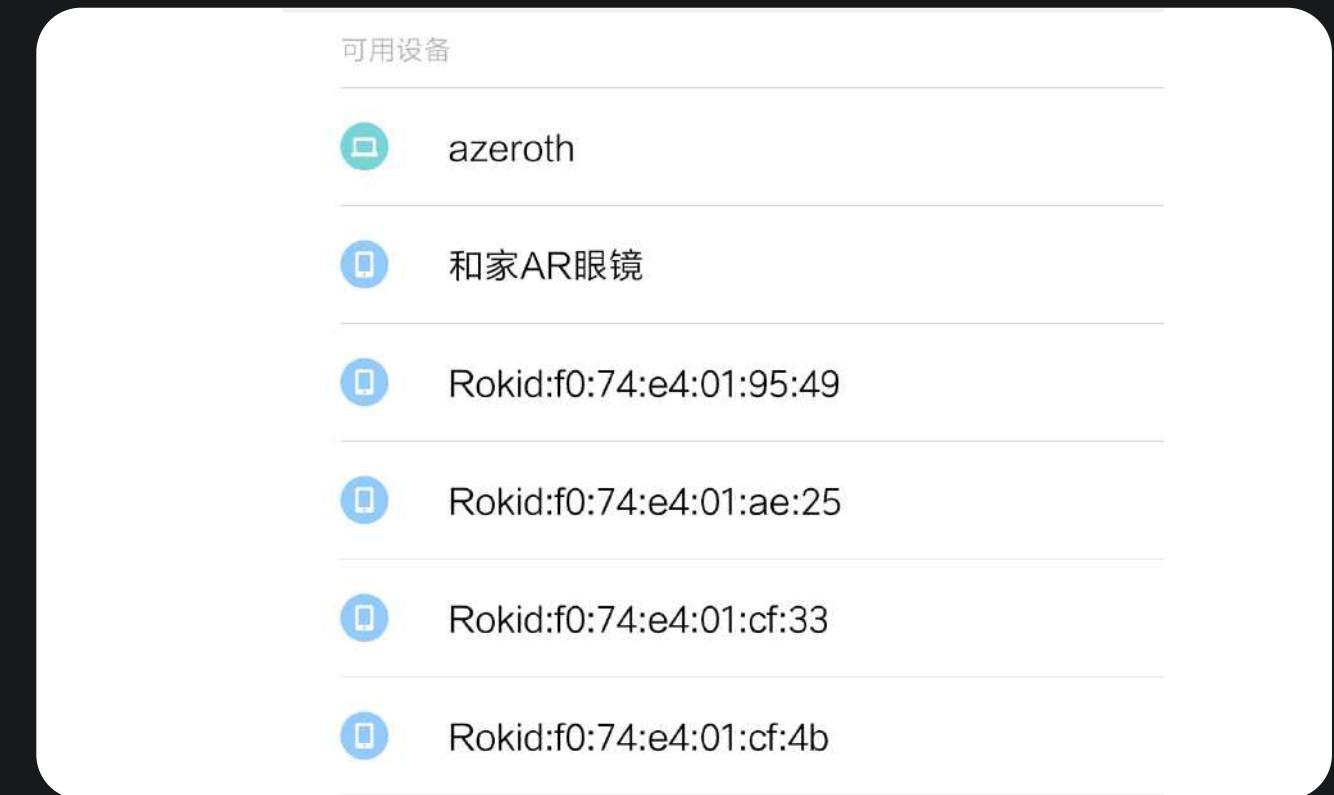

Select the device from your mobile

Turn on Bluetooth on your mobile and enter the Bluetooth list
From the Bluetooth list, select the device to connect



Check pairing on the device

Swipe on the touch pad to select pairing on the device side

Functional Descriptions

Speech wakeup



Enter "Glasses Setup"

From the desktop, enter the Setup page



Select Wake up with "Rokid"

From the setup list, select this option
and tap to access it



Tap to enable functions

Tap the touch pad to display the
function switch

Functional Descriptions

System upgrade



Enter "Glasses Setup"

From the desktop, enter the Setup page



Select "Upgrade"

From the setup list, select this option and tap to access it



Check for updates and then operate as instructed

The system will automatically check for updates

Upgrade as instructed

Mobile APP

Add device



On "APP-Homepage"

The Add Device portal shows by default for a new account

Input Wi-Fi account and password

Select the Wi-Fi to connect to and password

Generate a QR code


Use "SetupWi-Fi New Network" on the device

Start working

After a device is added
The homepage will display more function portals

Mobile APP

File management

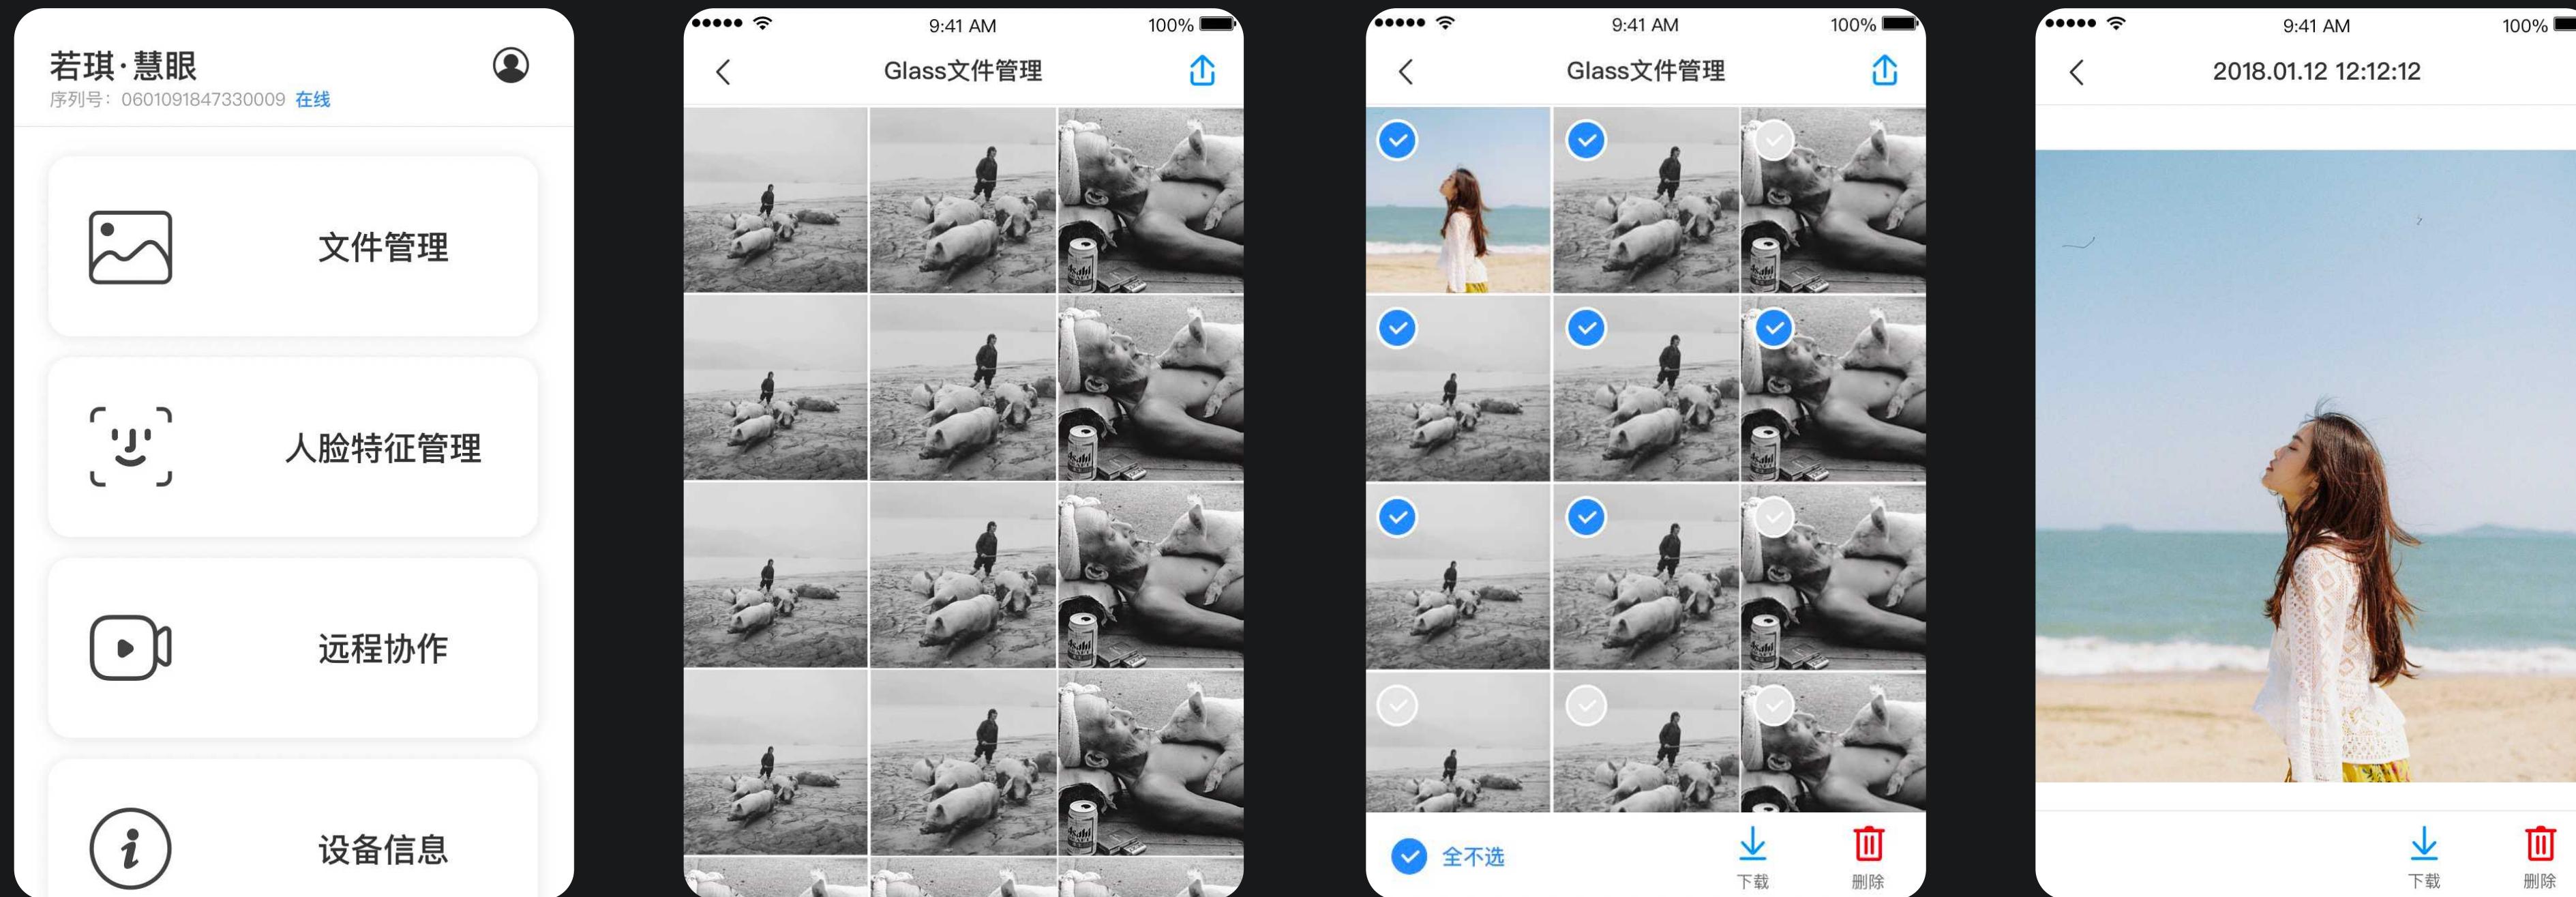

From "APP - File Management"

From APP, tap File Management

Album file list

After the device is connected, your mobile phone will automatically synchronize album files in the device

Tap and hold the list to enter the edit mode

Tap and hold the list image to enter the edit mode


You can select to download or delete a selected image

Album details

You can select to download or delete album details

Mobile APP

Add face features

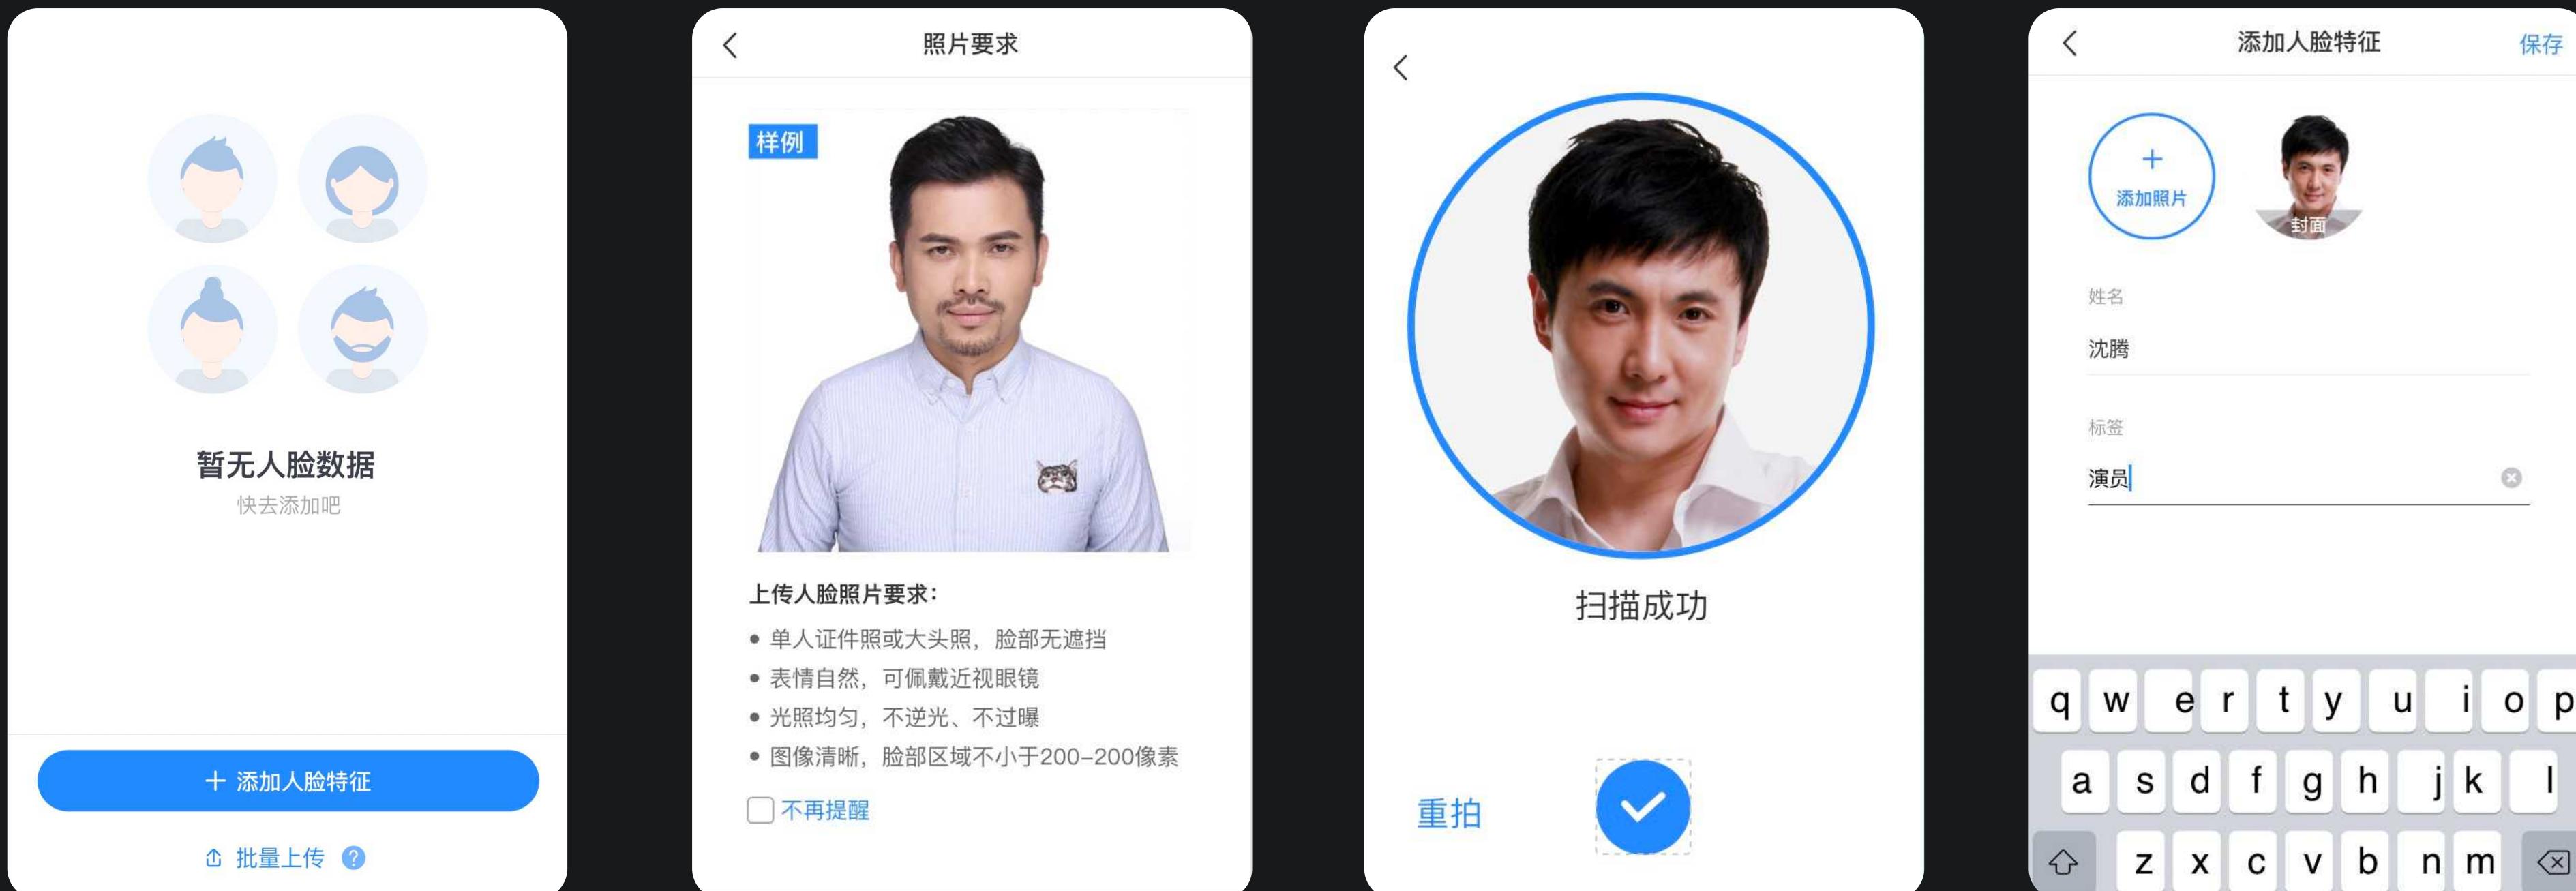

From "Homepage Face Features Management"

There are two ways to add faces: selecting from album or taking a picture

Selecting from album

Select a picture from the album as instructed

Take a picture and upload


Use your mobile phone to take a picture as instructed (The front camera is turned on by default)

Add name and label

Edit name and label after a face is added, save to make it effective

Mobile APP

Delete face features

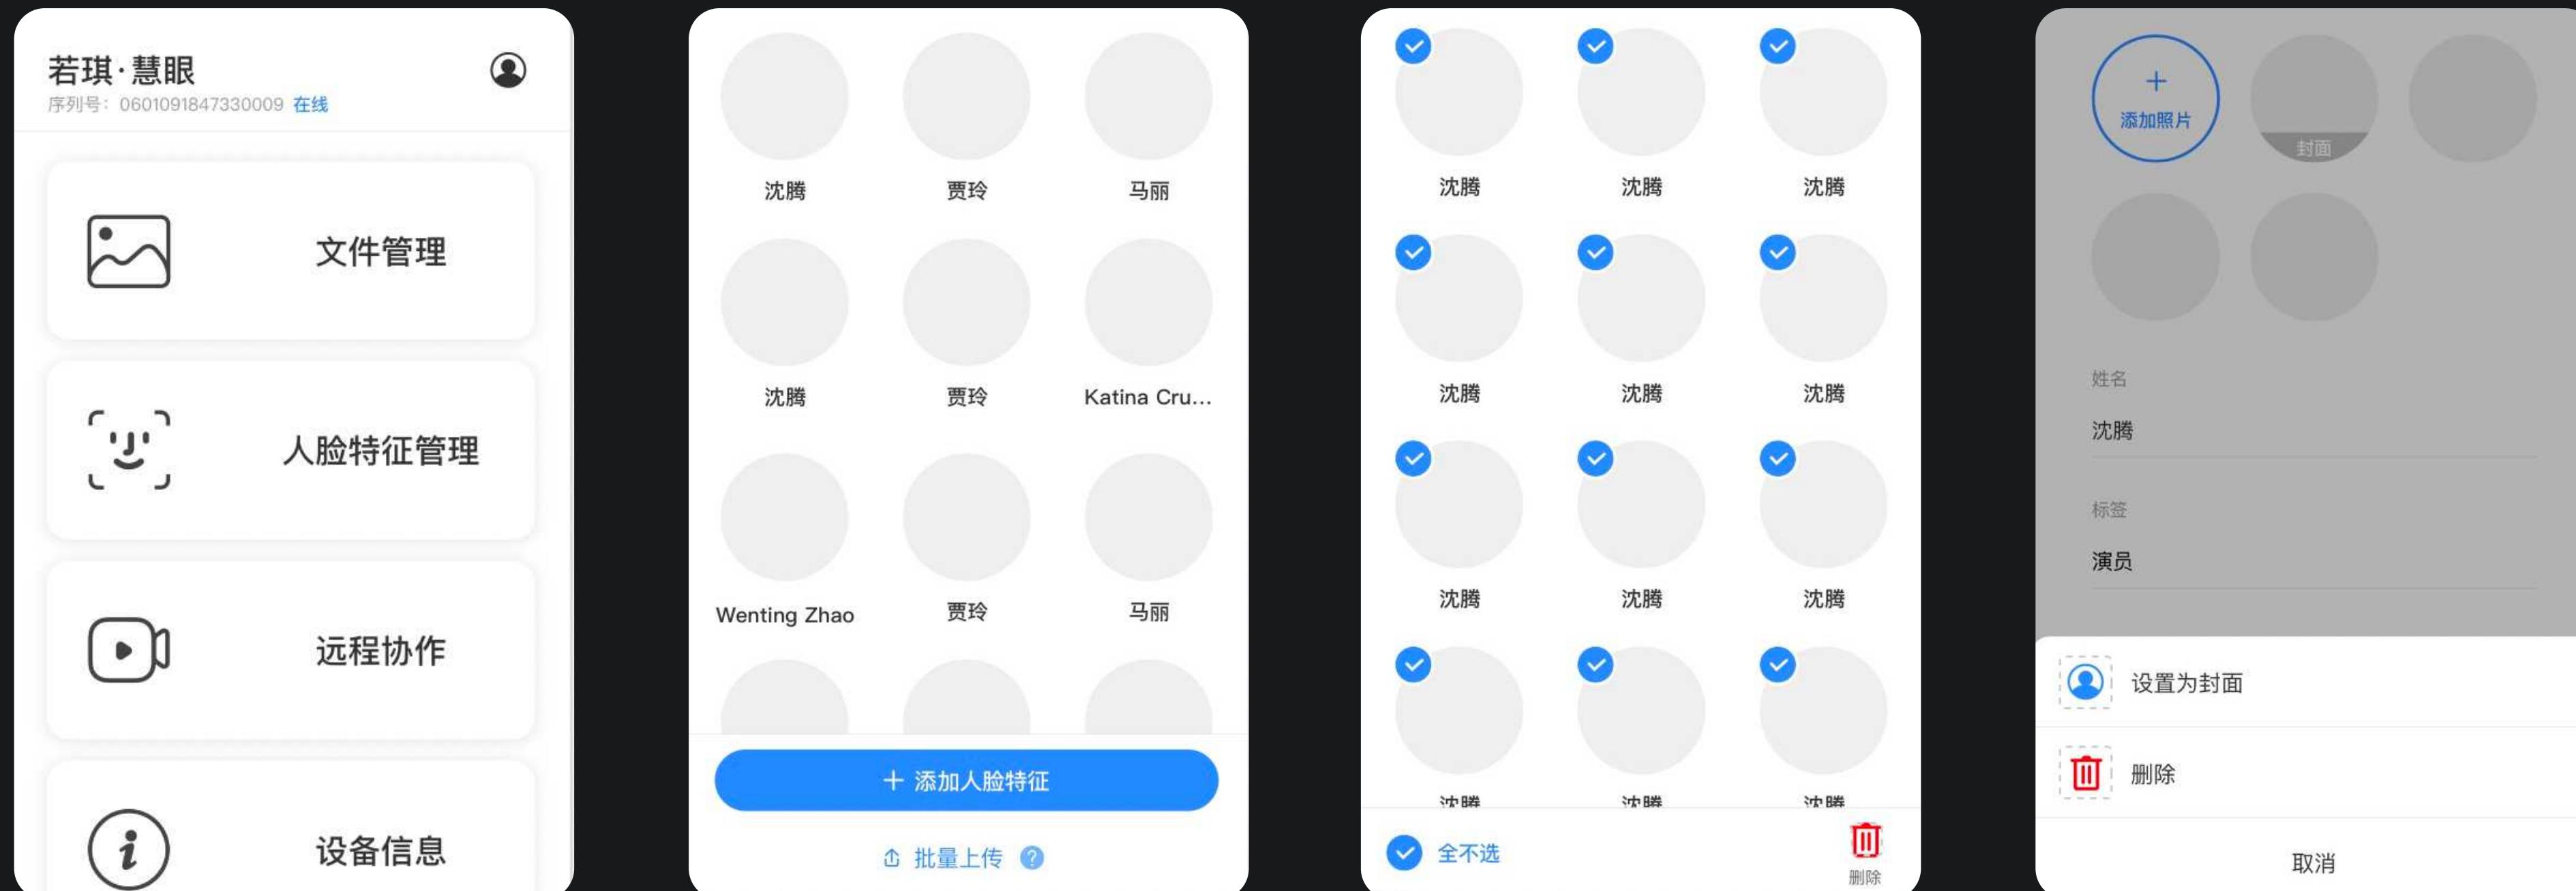

From "Face Features Management"

Accounts stored in the existing face features library access to the features

library list page

Batch delete

On the list page, tap and hold the avatar to enter the batch select page and confirm your selection

Select data to delete

On the list page, check the desired feature and then tap the <872>Delete</872> key on the lower right corner

Delete one item

On the details page of a single face feature, tap the respective avatar and delete it

Mobile APP

Remote collaboration - add contact



From "APP - Remote Collaboration"

On the homepage of remote collaboration, tap the Add icon on the upper right corner

Add contact information


Add contact information and then tap Save

Added

After the contact information is added, the system will automatically return to the contact list page

Mobile APP

Remote collaboration - dial up

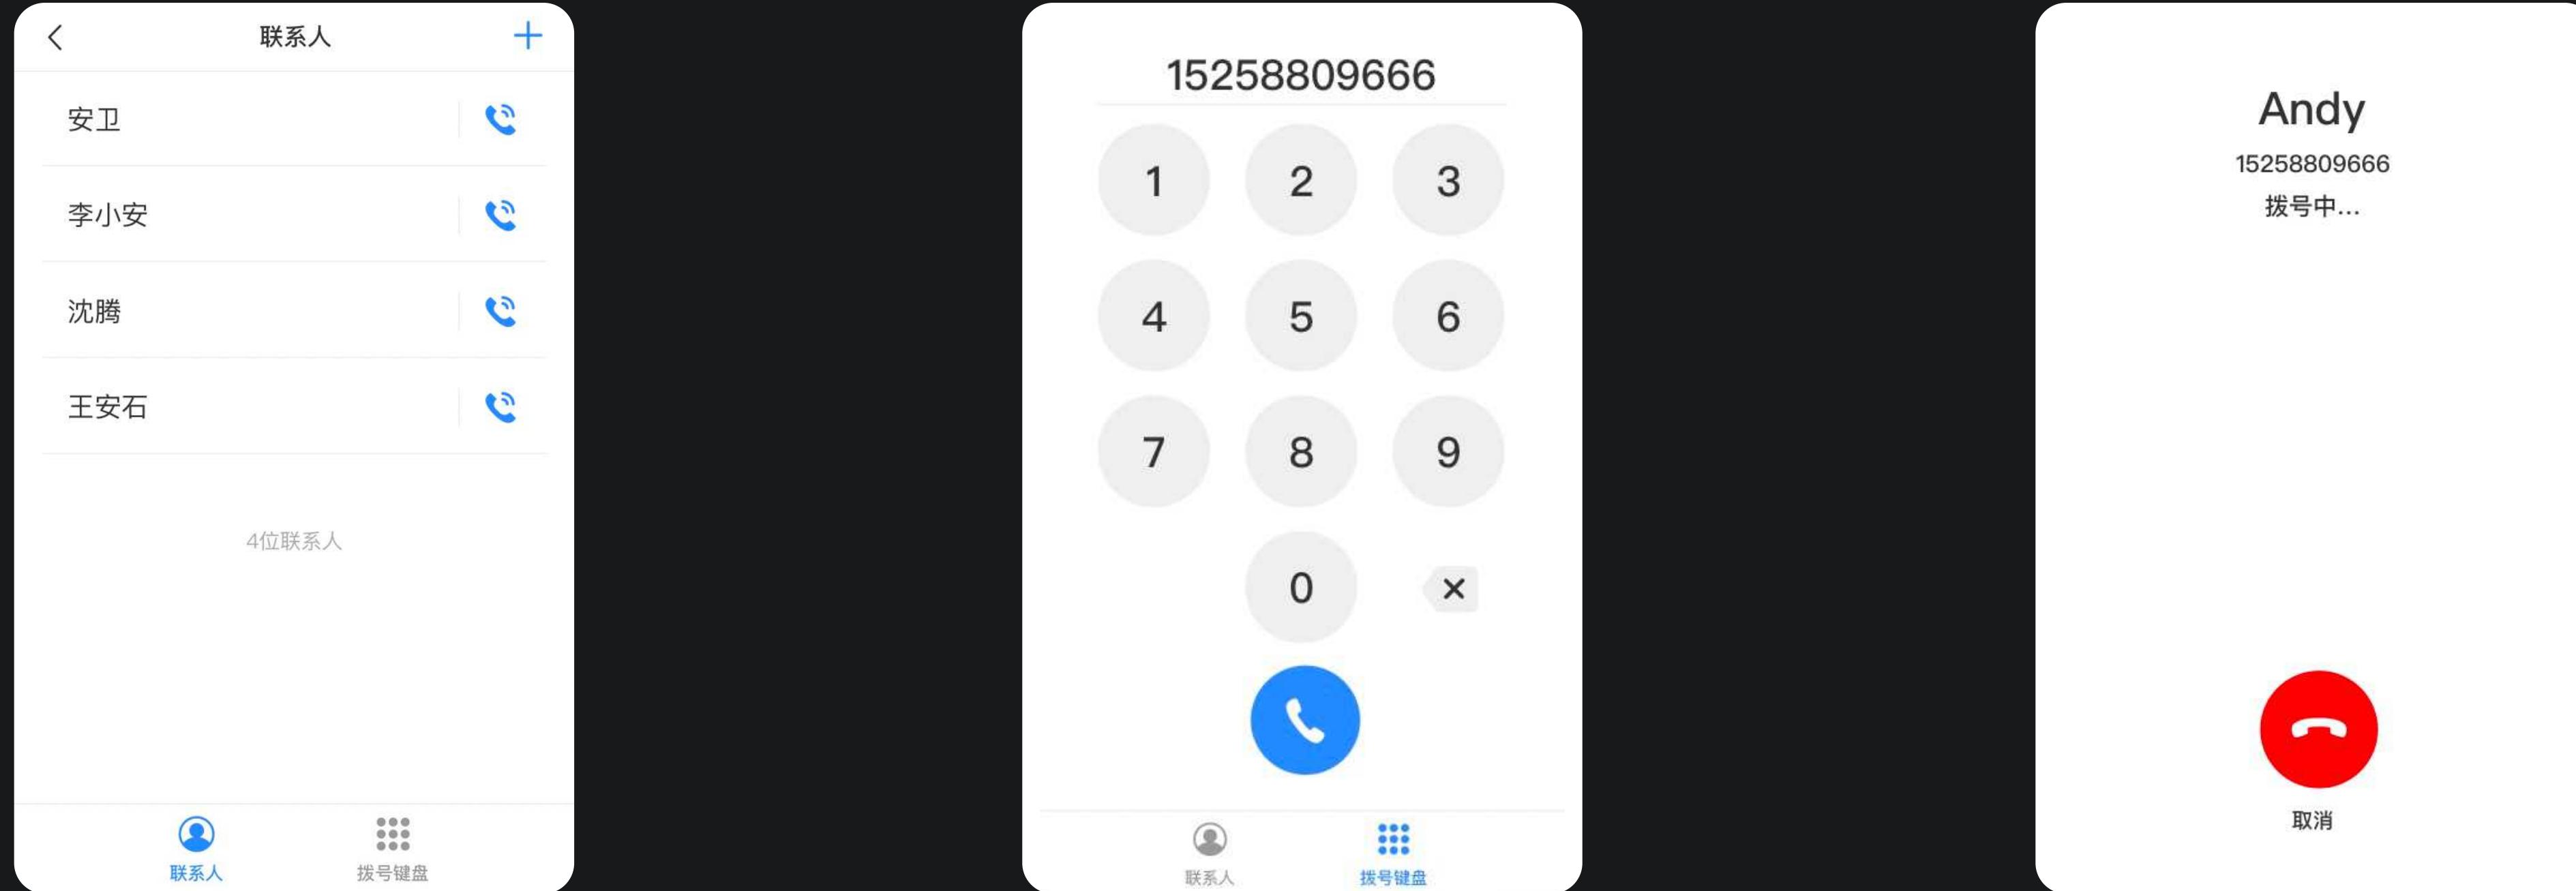

Address book dial-up

From the "Remote Connection Address Book", select the contact to dial up

Manual dial

Tap the TAB on the bottom to switch to manual dial up
Input the dial-up number and dial up

Dialing up

The dial-up page displays the Dialing-up message
The call will be automatically hung up if it is not answered within 1 minute

Mobile APP

Remote collaboration - tagging




Select a tagging tool

After remote collaboration is connected, on the page, tap to select the tagging tool on the lower left corner



Graffiti-Tagging within dotted line

After the tagging tool is selected, you can carry out graffiti-Tagging within the dotted line, and the screen will display a purple tag

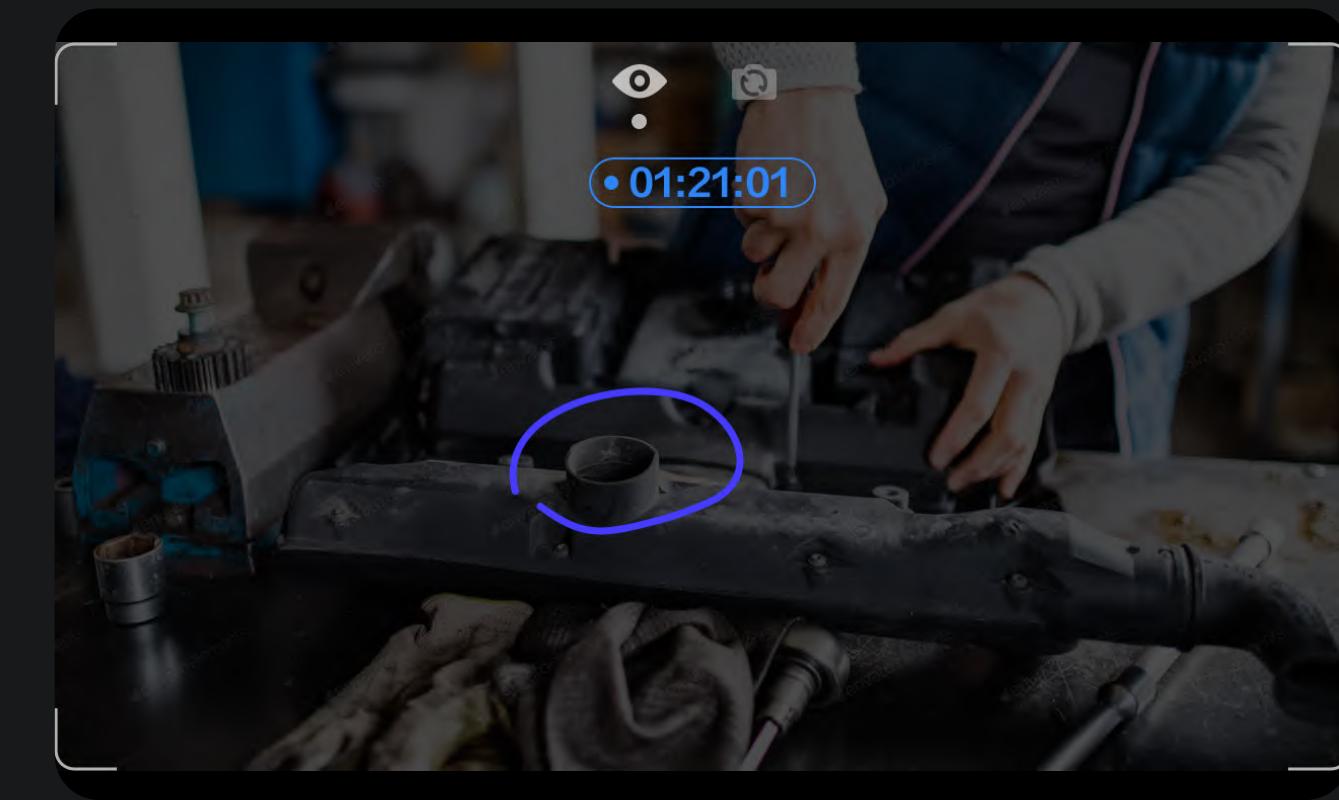

Tagging appears on the glass side in real time

After tagging is complete on your mobile, tagging information will be synchronized to the glasses in real time.



How to power on/off?

- Check whether the battery has sufficient capacity (If the battery level is low, pressing and holding the power key will displays the Battery Low message)
- In off state, press and hold the power key for 5 s to display the boot screen
- In on state, press and hold the power key for 3 s to shut the device down, and then for 15 s to restart the device

No response when pressing and holding the power key?

- Check whether the battery has sufficient capacity (If the battery level is low, pressing and holding the power key will displays the Battery Low message)
- With low battery level or dead battery, please ensure that the power cord is properly connected to the device, and wait for 5 minutes and try again later.
- Properly connect the "type-C" interface of the power supply and check whether an indicator signals when the power supply is connected to the charge interface of the glasses.
- If the problem persists, please contact the service center.

How long will the device take to be fully charged?

- There is not a standard answer for this question. The charging efficiency and time are affected by the type of a power supply and battery level of the device.
- Theoretically, if an official charger is used, it may take about 1 hour to fully charge the glasses. It varies slightly according to the actual situation.

How long will the device take to be upgraded?

- The time (5-30 minutes) required for upgrade is different depending on the size of updates. Please wait patiently.
- Upgrade can be completed in background without affecting normal operation of the device. Updates come into effect after restart
- Please keep the device on and connected and ensure sufficient battery level during upgrade (operate as instructed by the system).

What's the effect from shutdown or restart during upgrade?

- The device operates normally during upgrade. If the device shuts down or restart during upgrade, this upgrade will fail.
- Failure of this upgrade will not lead to damage to the system or device. Simply try it again later (updates come into effect after restart)

Black screen during use

- Press the power key to check this is caused by mis-operation
- Check whether shutdown is resulted from low battery level
- If the problem persists, please contact the service center.

No response when initiating speech wakeup?

- Please check whether "Setup Wake up with "Rokid" option is enabled (disabled by default)
- Use the wakeup word, ensure proper pronunciation and try to avoid noisy environment
- If the device can be woken up but no instruction is executed, please check the instruction for correctness (for details, see the instruction list)

Service Support

- For any non-human damages to the device, please immediately contact the Rokid service center
- For any problem, please immediately contact your local vendor

Warranty Period

- We provide customers with one (1) year warranty for the complete set (excluding battery, consumables and artificial damages)
- For the products with quality defects, we will provide after-sales service of 15-day replacement from the date of purchase

- Please note that any of the following conditions is not covered by the warranty

Beyond the warranty period

Damages due to failure to use, maintain or store the product in accordance with the instructions for use

Damages due to unauthorized disassembly

Invalid warranty certificate and invoice (except when evidences available can prove that the product is within the warranty period)

Alteration of the warranty certificate without authorization

Mismatching of product model or code indicated on the warranty certificate with the claimed product

Damages due to infection with virus during use

Damages due to any force majeure

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
-

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment.

Kindly Reminder

If the problem persists, please forcibly restart the device (by pressing and holding the power key for 15 s), or ask a technician for help.