



RADIO TEST REPORT

(FCC Part 15 Subpart C)

Applicant:	Minda Corporation Ltd.
Address:	D 6-11 Sector 59 Noida Uttar Pradesh India

Manufacturer:	Minda Corporation Ltd.
Address:	D 6-11 Sector 59 Noida Uttar Pradesh India
Product:	Immobilizer
Brand Name:	SPARK
Model Name:	ML-10237A
FCC ID:	2A29L-10237A
Date of tests:	Aug. 30, 2023 ~ Nov 14 ,2023

The tests have been carried out according to the requirements of the following standard:

<input checked="" type="checkbox"/> Part 15 Subpart C §15. 203	<input checked="" type="checkbox"/> Part 15 Subpart C §15. 205
<input checked="" type="checkbox"/> Part 15 Subpart C §15. 207	<input checked="" type="checkbox"/> Part 15 Subpart C §15. 209
<input checked="" type="checkbox"/> Part 15 Subpart C §15. 215	
<input checked="" type="checkbox"/> ANSI C63.10-2013	

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Chao Wu Engineer / Mobile Department	Approved by Peibo Sun Manager / Mobile Department

Date: Nov 14 ,2023 Date: Nov 14 ,2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

1 GENERAL DESCRIPTION.....	5
1.1 GENERAL DESCRIPTION OF EUT.....	5
1.2 MODIFICATION OF EUT	5
1.3 APPLICABLE STANDARDS	5
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	6
2.1 DESCRIPTIONS OF TEST MODE.....	6
2.2 TEST CONFIGURATIONS	7
2.3 SUPPORT EQUIPMENT	8
2.4 TEST SETUP.....	8
2.5 MEASUREMENT RESULTS EXPLANATION EXAMPLE.....	10
3 TEST RESULT	11
3.1 20DB AND 99% BANDWIDTH MEASUREMENT	11
3.1.1 LIMIT OF 20DB AND 99% BANDWIDTH	11
3.1.2 TEST PROCEDURES	11
3.1.3 TEST RESULT OF 20DB AND 99% BANDWIDTH	12
3.2 FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT	14
3.2.1 LIMIT OF FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK	14
3.2.2 TEST PROCEDURES	14
3.2.3 TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK (125kHz)	15
3.3 RADIATED EMISSIONS MEASUREMENT	17
3.3.1 LIMIT	17
3.3.2 MEASURING INSTRUMENT SETTING	17
3.3.3 TEST PROCEDURES	18
3.3.4 TEST RESULTS OF RADIATED EMISSIONS (9 KHZ ~ 30 MHZ).....	19
3.3.5 TEST RESULT OF RADIATED SPURIOUS EMISSION (30MHZ ~ 1GHZ)	21
3.4 AC CONDUCTED EMISSION MEASUREMENT	23
3.4.1 LIMIT OF AC CONDUCTED EMISSION	23
3.4.2 TEST PROCEDURES	23
3.4.3 TEST RESULT OF AC CONDUCTED EMISSION	24
3.5 ANTENNA REQUIREMENTS	26
3.5.1 STANDARD APPLICABLE.....	26
3.5.2 ANTENNA CONNECTED CONSTRUCTION	26
3.5.3 ANTENNA GAIN	26
4 LIST OF MEASURING EQUIPMENT.....	27
5 UNCERTAINTY OF EVALUATION.....	28



Test Report No.: W7L-230830W001RF01

REPORT REVISE RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-230830W001RF01	Original release	Nov 14 ,2023



Test Report No.: W7L-230830W001RF01

SUMMARY OF TEST RESULT

FCC Rule	Description	Limit	Result	Remark
15.203	Antenna Requirement	15.203	Pass	-
15.205	Restricted Bands Of Operation	15.205	Pass	-
15.207	AC Conducted Emission	15.207	Pass	-
15.209	Field strength of Fundamental emissions	15.209	Pass	-
15.209	Radiated Emission	15.209	Pass	-
15.215	20db Spectrum Bandwidth	15.215	Pass	-



1 GENERAL DESCRIPTION

1.1 GENERAL DESCRIPTION OF EUT

Items	Description
Tx/Rx Frequency Range	125 kHz
Channel Number	1
20dBW	2.55 kHz
99%OBW	2.29 kHz
Antenna Type	Loop coil Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.2 MODIFICATION OF EUT

No modifications are made to the EUT during all test items.

1.3 APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.203
- FCC Part 15 Subpart C §15.205
- FCC Part 15 Subpart C §15.207
- FCC Part 15 Subpart C §15.209
- FCC Part 15 Subpart C §15.215
- ANSI C63.10-2013



2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

2.1 DESCRIPTIONS OF TEST MODE

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	
Radiated Emissions 9kHz~30MHz	

Note:

1. The EUT was programmed to be in continuously transmitting mode.
2. The ancillary equipment, RFID card, is used to make the EUT continuously transmit at 125kHz and is placed around 3 cm gap to the EUT.
3. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, work in modes and data rates. Selected for the final test as listed below.


Frequency	Work in Modes	Type	Data Rate (Kbps)
125kHz	<input type="checkbox"/> Card Emulation <input checked="" type="checkbox"/> Reader/Writer <input type="checkbox"/> Peer-to-Peer	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> F <input type="checkbox"/> V	<input type="checkbox"/> 106 <input checked="" type="checkbox"/> 212 <input type="checkbox"/> 424 <input type="checkbox"/> 848

Remark:
The mark "✓" means is chosen for testing;
The mark "□" means is not chosen for testing.



2.2 TEST CONFIGURATIONS

<AC Conducted Emissions>

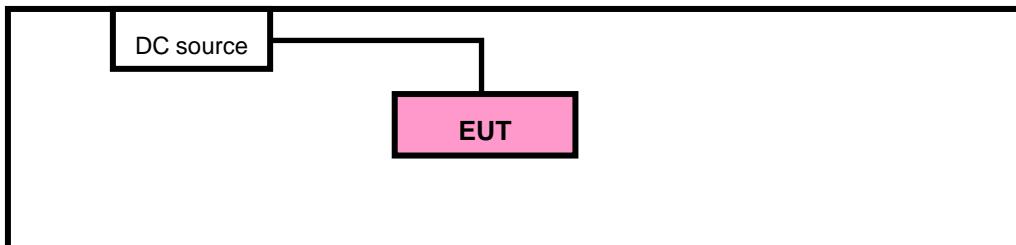


*Test Table



* Kept in a remote area

< For Fundamental Emissions and Mask and Radiated Emissions Measurement >

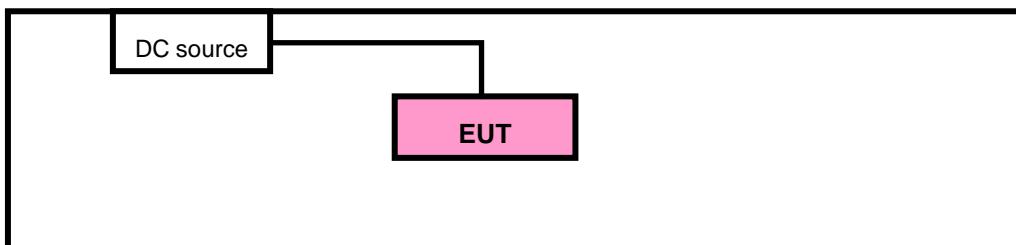

*Test Table



* Kept in a remote area

2.3 SUPPORT EQUIPMENT

FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC Source	HYELEC	HY3010B	551016	N/A


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1m

2.4 TEST SETUP


The EUT is continuously communicating during the tests.

EUT was set in the Hidden menu mode to enable RFID communications.


Setup diagram for Conducted Test

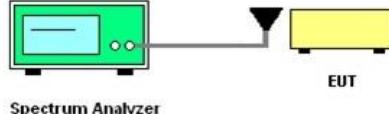


Setup diagram for Radiation(9KHz~30MHz) Test

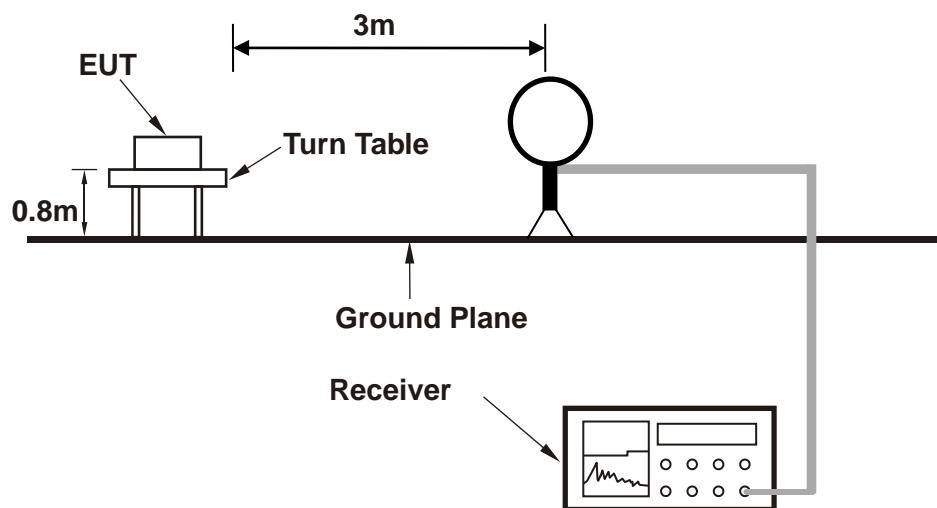

Setup diagram for Radiation(Below 1G) Test

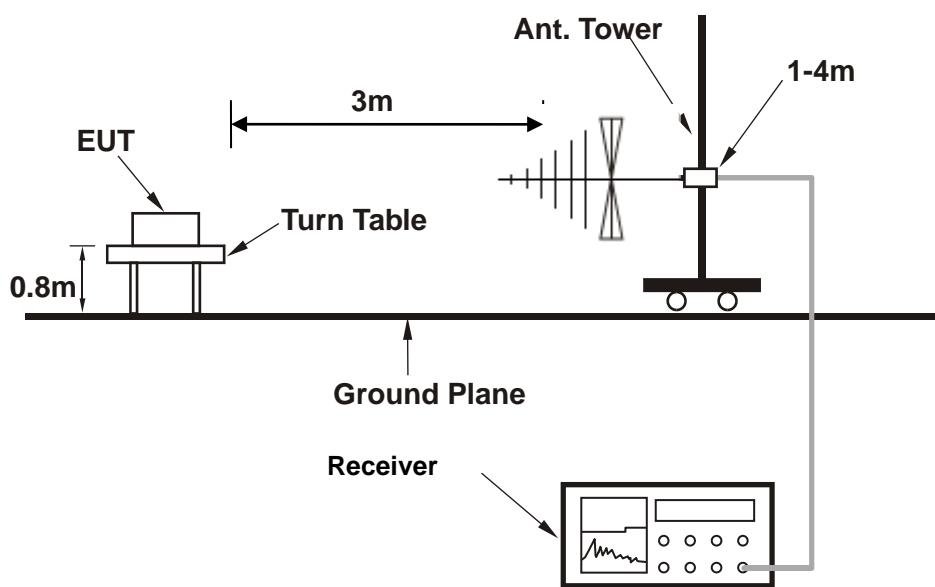

Setup diagram for AC Conducted Emission Test

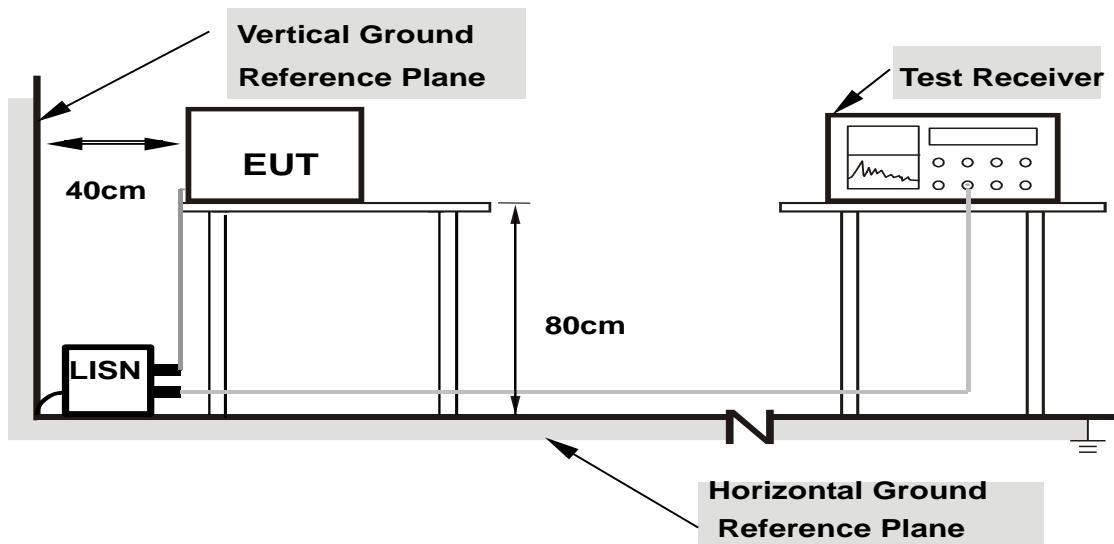

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



2.5 MEASUREMENT RESULTS EXPLANATION EXAMPLE

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5 + 10 = 15 \text{ (dB)} \end{aligned}$$



3 TEST RESULT

3.1 20DB AND 99% BANDWIDTH MEASUREMENT

3.1.1 LIMIT OF 20DB AND 99% BANDWIDTH

No limit defined

3.1.2 TEST PROCEDURES


1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used. (Since the signal being measured is CW or CW-like, it is impractical to adjust RBW according to C63.10 because the bandwidth measured will always follow RBW and the result will be approximately twice as large as RBW.)
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.



3.1.3 TEST RESULT OF 20DB AND 99% BANDWIDTH


Test Mode :	125kHz	Temperature :	23°C
Test Engineer :	Chao Wu	Relative Humidity :	50%
Mode	Frequency	20dB Bandwidth [kHz]	99% OBW [kHz]
RFID Type F_212 Kbps	125kHz	2.55	2.29

20dB Bandwidth

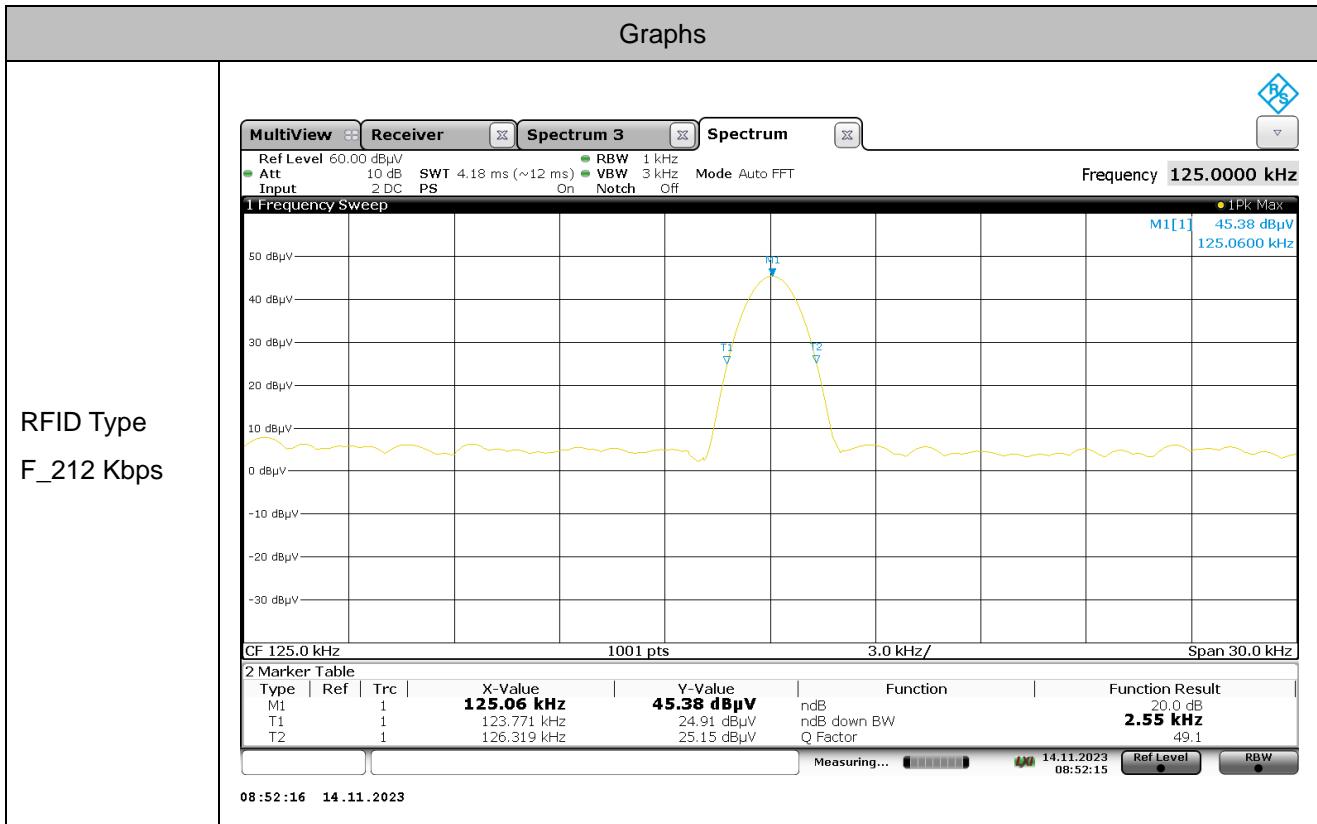



99% Bandwidth Plot

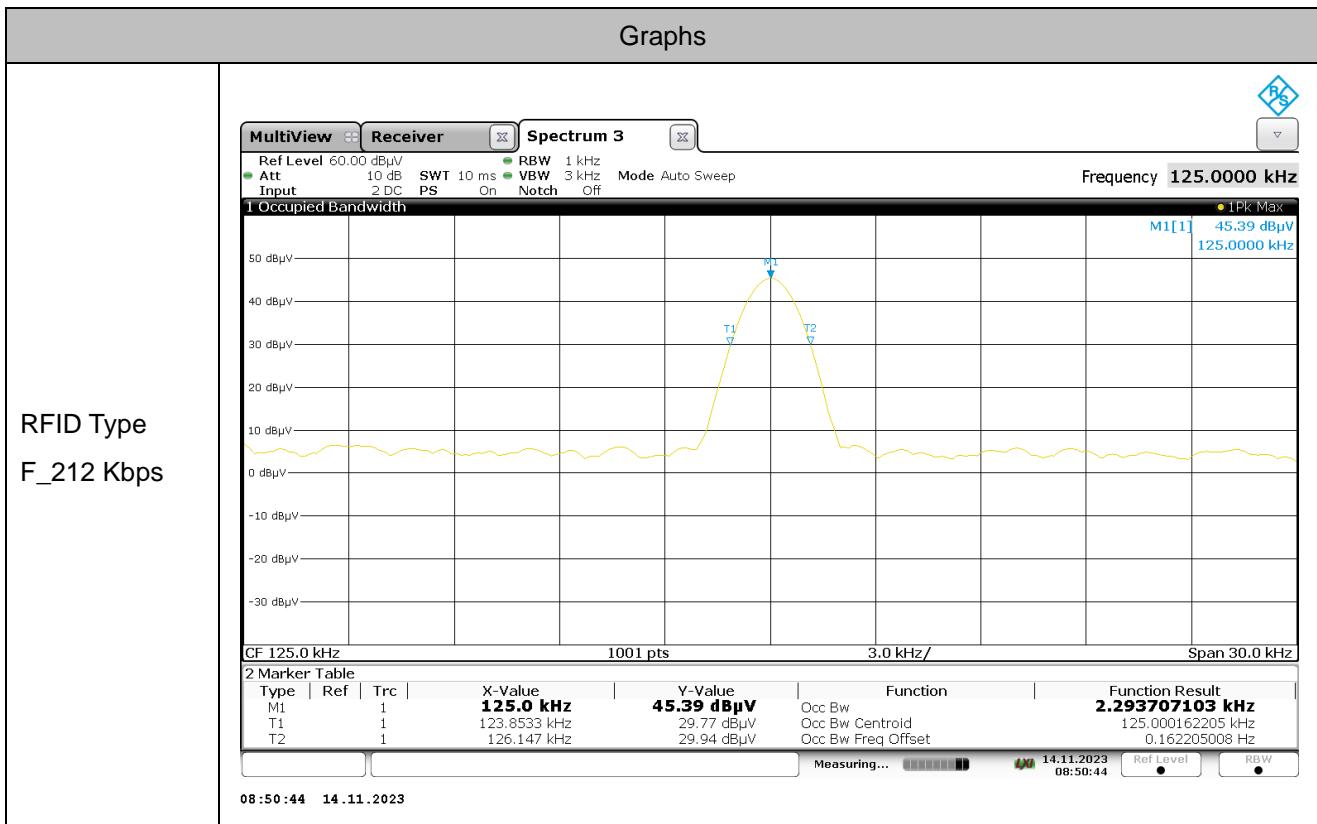



3.2 FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK MEASUREMENT

3.2.1 LIMIT OF FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

3.2.2 TEST PROCEDURES


- 1 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
- 2 Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3 The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
- 4 For Fundamental emissions, use the receiver to measure QP reading.
- 5 When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 6 Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level ($\text{dB}\mu\text{V/m}$) = $20 \log \text{Emission level } (\mu\text{V/m})$.



Test Report No.: W7L-230830W001RF01


3.2.3 TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND MASK (125kHz)

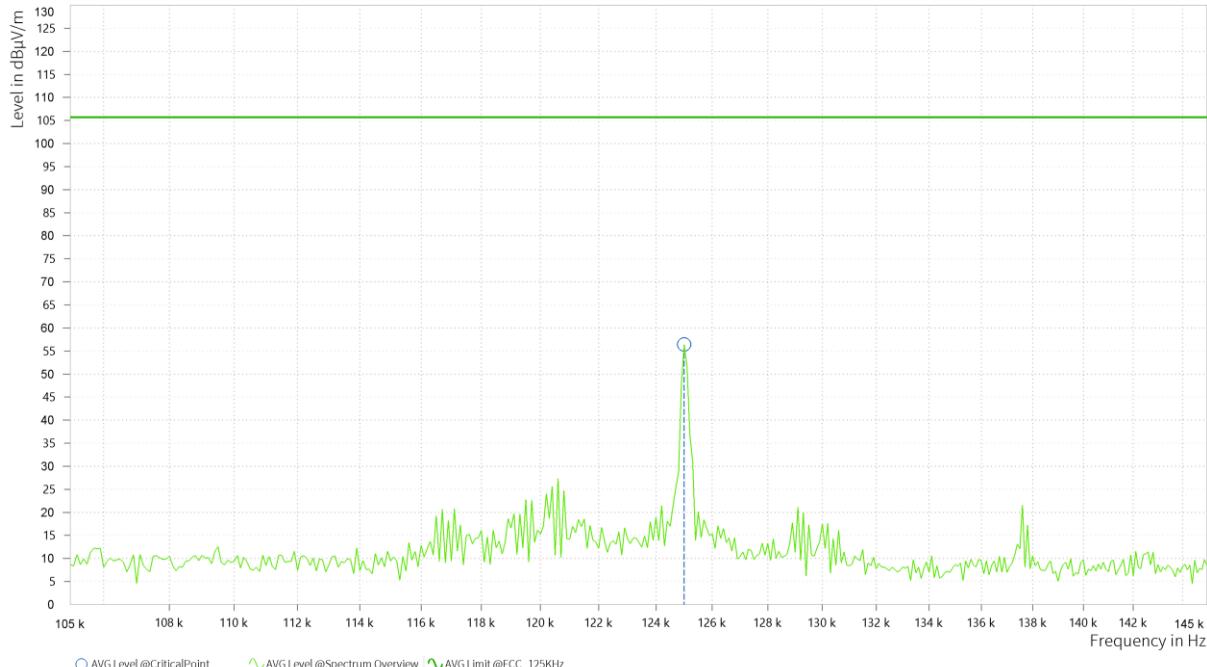Test Mode :	RFID (125kHz)	Temperature :	23°C					
Test Engineer :	Chao Wu	Relative Humidity :	50%					
Frequency Range	125kHz	Polarization :	Horizontal					
								
Rg	Frequency [MHz]	AVG Level [dBµV/m]	AVG Limit [dBµV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	0.125	56.40	105.67	49.27	20.41	H	122.8596	1



Test Report No.: W7L-230830W001RF01

Test Mode :	RFID (125kHz)	Temperature :	23°C
Test Engineer :	Chao Wu	Relative Humidity :	50%
Frequency Range	125kHz	Polarization :	Vertical

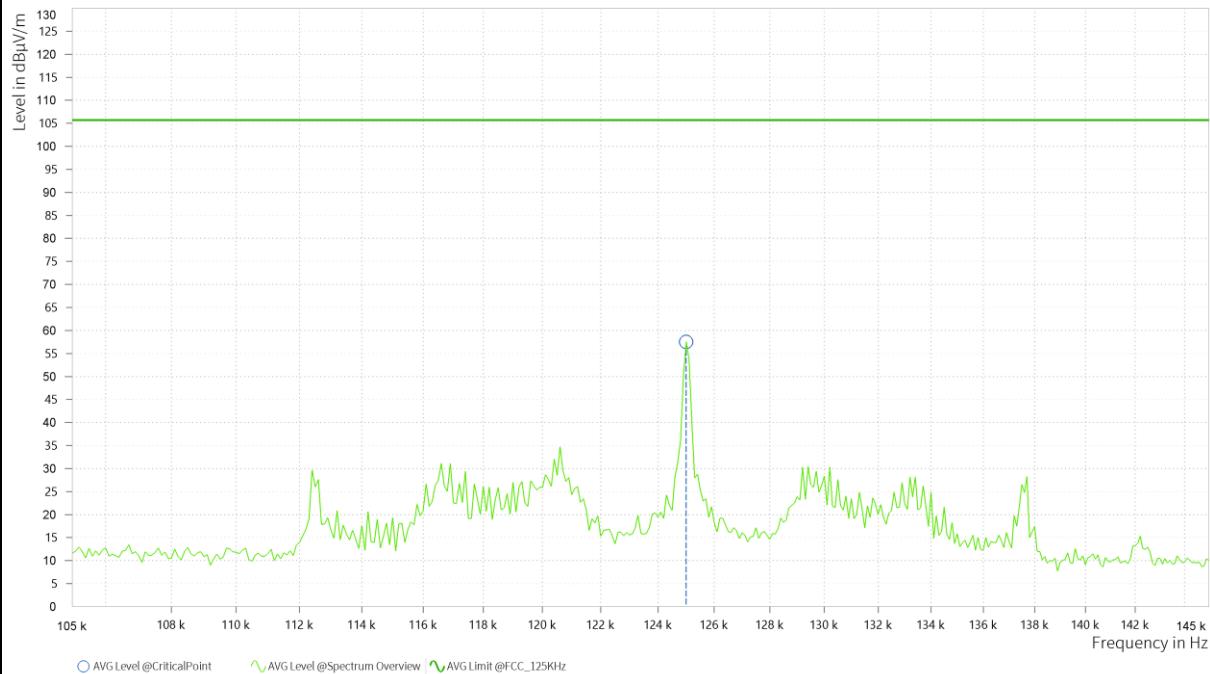

Rg	Frequency [MHz]	AVG Level [dB μ V/m]	AVG Limit [dB μ V/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	0.125	57.55	105.67	48.12	20.41	V	359.1	1



3.3 RADIATED EMISSIONS MEASUREMENT

3.3.1 LIMIT

Frequencies (MHz)	Field Strength (μ V/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.3.2 MEASURING INSTRUMENT SETTING

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak


Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.



3.3.3 TEST PROCEDURES

- 1 Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2 Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3 The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4 For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5 Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6 When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
- 7 In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver.

3.3.4 TEST RESULTS OF RADIATED EMISSIONS (9 KHZ ~ 30 MHZ)

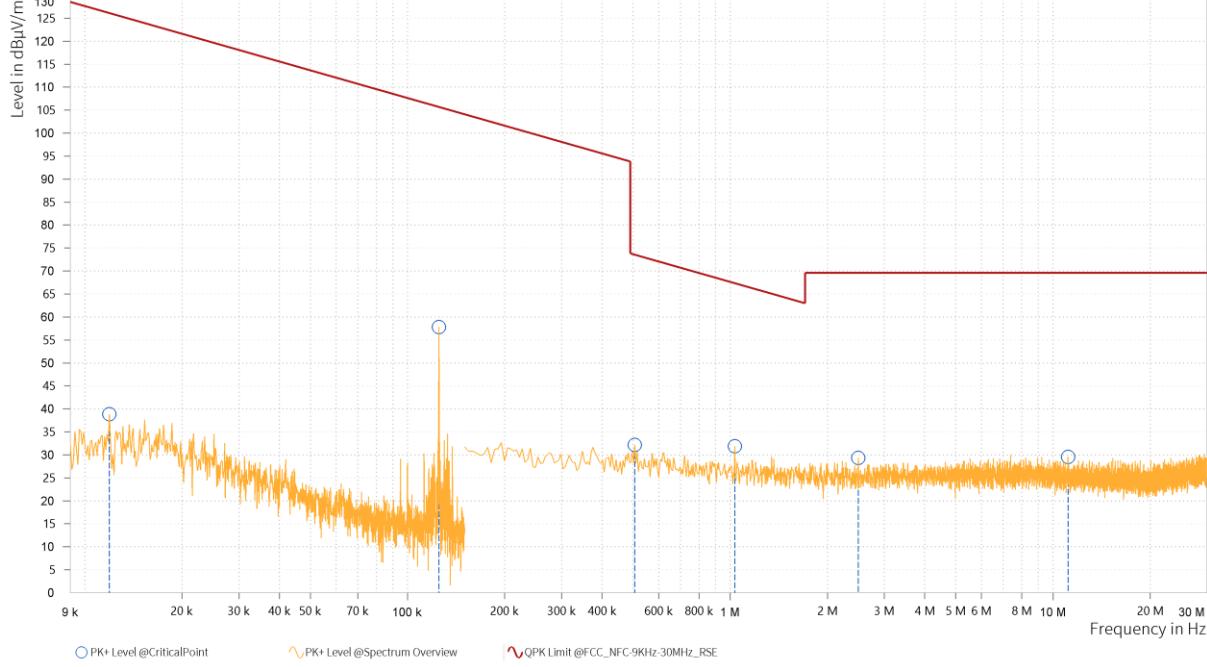Test Mode :	RFID(125kHz)	Temperature :	23°C																																																															
Test Engineer :	Chao Wu	Relative Humidity :	50%																																																															
Frequency Range	9 KHz ~ 30 MHz	Polarization :	Horizontal																																																															
																																																																		
<table border="1"> <thead> <tr> <th>Rg</th> <th>Frequency [MHz]</th> <th>PK+ Level [dBμV/m]</th> <th>PK+: QPK Limit [dBμV/m]</th> <th>PK+ Margin [dB]</th> <th>Correction [dB]</th> <th>Polarization</th> <th>Azimuth [deg]</th> <th>Antenna Height [m]</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.012</td> <td>38.84</td> <td>126.02</td> <td>87.18</td> <td>20.13</td> <td>H</td> <td>1</td> <td>1</td> </tr> <tr> <td>1</td> <td>0.125</td> <td>57.82</td> <td>105.67</td> <td>47.84</td> <td>20.41</td> <td>H</td> <td>1</td> <td>1</td> </tr> <tr> <td>2</td> <td>0.506</td> <td>32.16</td> <td>73.52</td> <td>41.36</td> <td>20.36</td> <td>H</td> <td>358.9</td> <td>1</td> </tr> <tr> <td>2</td> <td>1.032</td> <td>31.89</td> <td>67.33</td> <td>35.44</td> <td>20.44</td> <td>H</td> <td>358.9</td> <td>1</td> </tr> <tr> <td>2</td> <td>2.495</td> <td>29.36</td> <td>69.54</td> <td>40.18</td> <td>20.34</td> <td>H</td> <td>1</td> <td>1</td> </tr> <tr> <td>2</td> <td>11.130</td> <td>29.57</td> <td>69.54</td> <td>39.97</td> <td>20.35</td> <td>H</td> <td>359.1</td> <td>1</td> </tr> </tbody> </table>				Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	1	0.012	38.84	126.02	87.18	20.13	H	1	1	1	0.125	57.82	105.67	47.84	20.41	H	1	1	2	0.506	32.16	73.52	41.36	20.36	H	358.9	1	2	1.032	31.89	67.33	35.44	20.44	H	358.9	1	2	2.495	29.36	69.54	40.18	20.34	H	1	1	2	11.130	29.57	69.54	39.97	20.35	H	359.1	1
Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+: QPK Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]																																																										
1	0.012	38.84	126.02	87.18	20.13	H	1	1																																																										
1	0.125	57.82	105.67	47.84	20.41	H	1	1																																																										
2	0.506	32.16	73.52	41.36	20.36	H	358.9	1																																																										
2	1.032	31.89	67.33	35.44	20.44	H	358.9	1																																																										
2	2.495	29.36	69.54	40.18	20.34	H	1	1																																																										
2	11.130	29.57	69.54	39.97	20.35	H	359.1	1																																																										



Test Report No.: W7L-230830W001RF01

Test Mode :	RFID(125kHz)	Temperature :	23°C																																																															
Test Engineer :	Chao Wu	Relative Humidity :	50%																																																															
Frequency Range	9 KHz ~ 30 MHz	Polarization :	Vertical																																																															
<table border="1"><thead><tr><th>Rg</th><th>Frequency [MHz]</th><th>PK+ Level [dBµV/m]</th><th>PK+: QPK Limit [dBµV/m]</th><th>PK+ Margin [dB]</th><th>Correction [dB]</th><th>Polarization</th><th>Azimuth [deg]</th><th>Antenna Height [m]</th></tr></thead><tbody><tr><td>1</td><td>0.011</td><td>41.64</td><td>126.78</td><td>85.14</td><td>20.10</td><td>V</td><td>5</td><td>1</td></tr><tr><td>1</td><td>0.125</td><td>65.08</td><td>105.67</td><td>40.58</td><td>20.41</td><td>V</td><td>1</td><td>1</td></tr><tr><td>2</td><td>0.375</td><td>34.69</td><td>96.12</td><td>61.44</td><td>20.36</td><td>V</td><td>359</td><td>1</td></tr><tr><td>2</td><td>1.343</td><td>30.83</td><td>65.04</td><td>34.21</td><td>20.46</td><td>V</td><td>359</td><td>1</td></tr><tr><td>2</td><td>2.976</td><td>30.70</td><td>69.54</td><td>38.84</td><td>20.34</td><td>V</td><td>359</td><td>1</td></tr><tr><td>2</td><td>10.149</td><td>30.37</td><td>69.54</td><td>39.18</td><td>20.52</td><td>V</td><td>1</td><td>1</td></tr></tbody></table>				Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+: QPK Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	1	0.011	41.64	126.78	85.14	20.10	V	5	1	1	0.125	65.08	105.67	40.58	20.41	V	1	1	2	0.375	34.69	96.12	61.44	20.36	V	359	1	2	1.343	30.83	65.04	34.21	20.46	V	359	1	2	2.976	30.70	69.54	38.84	20.34	V	359	1	2	10.149	30.37	69.54	39.18	20.52	V	1	1
Rg	Frequency [MHz]	PK+ Level [dBµV/m]	PK+: QPK Limit [dBµV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]																																																										
1	0.011	41.64	126.78	85.14	20.10	V	5	1																																																										
1	0.125	65.08	105.67	40.58	20.41	V	1	1																																																										
2	0.375	34.69	96.12	61.44	20.36	V	359	1																																																										
2	1.343	30.83	65.04	34.21	20.46	V	359	1																																																										
2	2.976	30.70	69.54	38.84	20.34	V	359	1																																																										
2	10.149	30.37	69.54	39.18	20.52	V	1	1																																																										




3.3.5 TEST RESULT OF RADIATED SPURIOUS EMISSION (30MHZ ~ 1GHZ)

Test Mode :	RFID(125kHz)	Temperature :	23°C																																																																						
Test Engineer :	Chao Wu	Relative Humidity :	50%																																																																						
Frequency Range	30MHz~1GHz	Polarization :	Horizontal																																																																						
<table border="1"><thead><tr><th>Rg</th><th>Frequency [MHz]</th><th>QPK Level [dBμV/m]</th><th>QPK Limit [dBμV/m]</th><th>QPK Margin [dB]</th><th>Correction [dB]</th><th>Polarization</th><th>Azimuth [deg]</th><th>Antenna Height [m]</th><th>Meas. BW [kHz]</th></tr></thead><tbody><tr><td>1</td><td>43.007</td><td>23.12</td><td>40.00</td><td>16.88</td><td>-10.40</td><td>H</td><td>84.5</td><td>2</td><td>120.000</td></tr><tr><td>1</td><td>71.534</td><td>21.70</td><td>40.00</td><td>18.30</td><td>-15.31</td><td>H</td><td>135.6</td><td>1</td><td>120.000</td></tr><tr><td>1</td><td>121.709</td><td>28.90</td><td>43.50</td><td>14.60</td><td>-14.29</td><td>H</td><td>84.5</td><td>2</td><td>120.000</td></tr><tr><td>1</td><td>235.949</td><td>36.77</td><td>46.00</td><td>9.23</td><td>-9.50</td><td>H</td><td>1</td><td>1</td><td>120.000</td></tr><tr><td>1</td><td>276.204</td><td>31.72</td><td>46.00</td><td>14.28</td><td>-8.16</td><td>H</td><td>274.3</td><td>1</td><td>120.000</td></tr><tr><td>1</td><td>554.197</td><td>21.23</td><td>46.00</td><td>24.77</td><td>-4.18</td><td>H</td><td>1</td><td>1</td><td>120.000</td></tr></tbody></table>				Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	1	43.007	23.12	40.00	16.88	-10.40	H	84.5	2	120.000	1	71.534	21.70	40.00	18.30	-15.31	H	135.6	1	120.000	1	121.709	28.90	43.50	14.60	-14.29	H	84.5	2	120.000	1	235.949	36.77	46.00	9.23	-9.50	H	1	1	120.000	1	276.204	31.72	46.00	14.28	-8.16	H	274.3	1	120.000	1	554.197	21.23	46.00	24.77	-4.18	H	1	1	120.000
Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]																																																																
1	43.007	23.12	40.00	16.88	-10.40	H	84.5	2	120.000																																																																
1	71.534	21.70	40.00	18.30	-15.31	H	135.6	1	120.000																																																																
1	121.709	28.90	43.50	14.60	-14.29	H	84.5	2	120.000																																																																
1	235.949	36.77	46.00	9.23	-9.50	H	1	1	120.000																																																																
1	276.204	31.72	46.00	14.28	-8.16	H	274.3	1	120.000																																																																
1	554.197	21.23	46.00	24.77	-4.18	H	1	1	120.000																																																																



Test Report No.: W7L-230830W001RF01

Test Mode :	RFID(125kHz)	Temperature :	23°C
Test Engineer :	Chao Wu	Relative Humidity :	50%
Frequency Range	30MHz~1GHz	Polarization :	Vertical

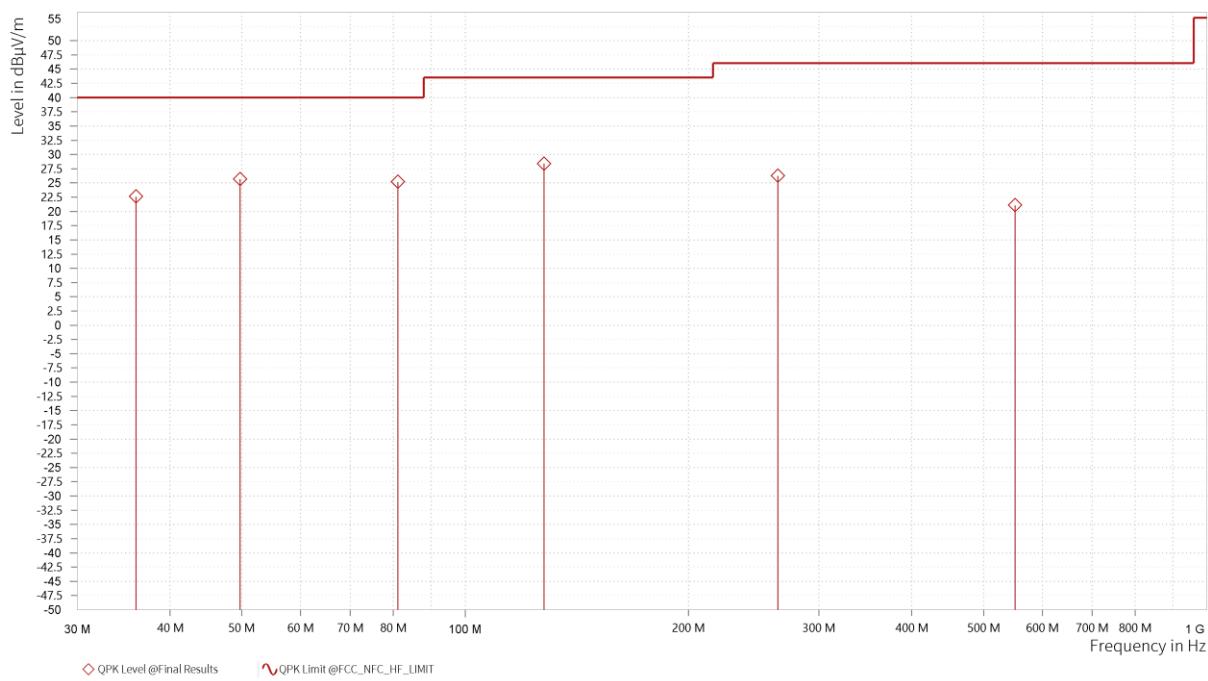

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	35.996	22.60	40.00	17.40	-12.45	V	359.1	1	120.000
1	49.753	25.68	40.00	14.32	-10.32	V	134.4	1	120.000
1	81.145	25.19	40.00	14.81	-16.41	V	85.7	2	120.000
1	127.750	28.38	43.50	15.12	-15.20	V	85.7	2	120.000
1	264.123	26.24	46.00	19.76	-8.55	V	4.3	1	120.000
1	551.110	21.09	46.00	24.91	-4.15	V	359	1	120.000



3.4 AC CONDUCTED EMISSION MEASUREMENT


3.4.1 LIMIT OF AC CONDUCTED EMISSION


Refer to chapter § 15.207.

3.4.2 TEST PROCEDURES

- 1 The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
- 4 Connect EUT to the power mains through a line impedance stabilization network (LISN).
- 5 All the support units are connecting to the other LISN.
- 6 The LISN provides 50 ohm coupling impedance for the measuring instrument.
- 7 The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- 8 Both sides of AC line were checked for maximum conducted interference.
- 9 The frequency 125 kHz was searched.
- 10 Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.4.3 TEST RESULT OF AC CONDUCTED EMISSION

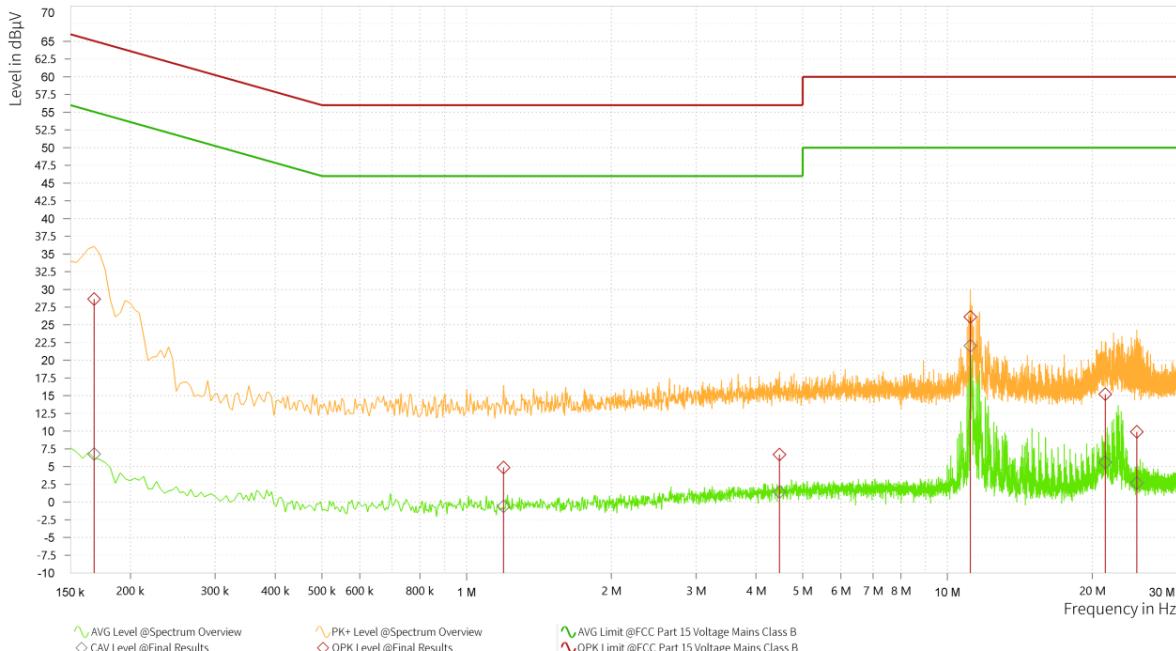Test Mode :	125kHz	Temperature :	26°C																																																																													
Test Engineer :	Chao Wu	Relative Humidity :	51%																																																																													
Test Voltage :	DC 12V	Phase :	Line																																																																													
Function Type :	RFID																																																																															
																																																																																
<table border="1"> <thead> <tr> <th>Rg</th> <th>Frequency [MHz]</th> <th>QPK Level [dBµV]</th> <th>QPK Limit [dBµV]</th> <th>QPK Margin [dB]</th> <th>CAV Level [dBµV]</th> <th>CAV: AVG Limit [dBµV]</th> <th>CAV Margin [dB]</th> <th>Correction [dB]</th> <th>Line</th> <th>Meas. BW [kHz]</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>0.168</td> <td>28.65</td> <td>65.06</td> <td>36.41</td> <td>6.75</td> <td>55.06</td> <td>48.31</td> <td>12.35</td> <td>L1</td> <td>9.000</td> </tr> <tr> <td>1</td> <td>1.194</td> <td>4.86</td> <td>56.00</td> <td>51.14</td> <td>-0.63</td> <td>46.00</td> <td>46.63</td> <td>11.75</td> <td>L1</td> <td>9.000</td> </tr> <tr> <td>1</td> <td>4.475</td> <td>6.69</td> <td>56.00</td> <td>49.31</td> <td>1.43</td> <td>46.00</td> <td>44.57</td> <td>11.79</td> <td>L1</td> <td>9.000</td> </tr> <tr> <td>1</td> <td>11.162</td> <td>26.11</td> <td>60.00</td> <td>33.89</td> <td>22.05</td> <td>50.00</td> <td>27.95</td> <td>11.84</td> <td>L1</td> <td>9.000</td> </tr> <tr> <td>1</td> <td>21.296</td> <td>15.22</td> <td>60.00</td> <td>44.78</td> <td>5.58</td> <td>50.00</td> <td>44.42</td> <td>11.88</td> <td>L1</td> <td>9.000</td> </tr> <tr> <td>1</td> <td>24.747</td> <td>9.89</td> <td>60.00</td> <td>50.11</td> <td>2.65</td> <td>50.00</td> <td>47.35</td> <td>11.89</td> <td>L1</td> <td>9.000</td> </tr> </tbody> </table>				Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]	1	0.168	28.65	65.06	36.41	6.75	55.06	48.31	12.35	L1	9.000	1	1.194	4.86	56.00	51.14	-0.63	46.00	46.63	11.75	L1	9.000	1	4.475	6.69	56.00	49.31	1.43	46.00	44.57	11.79	L1	9.000	1	11.162	26.11	60.00	33.89	22.05	50.00	27.95	11.84	L1	9.000	1	21.296	15.22	60.00	44.78	5.58	50.00	44.42	11.88	L1	9.000	1	24.747	9.89	60.00	50.11	2.65	50.00	47.35	11.89	L1	9.000
Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]																																																																						
1	0.168	28.65	65.06	36.41	6.75	55.06	48.31	12.35	L1	9.000																																																																						
1	1.194	4.86	56.00	51.14	-0.63	46.00	46.63	11.75	L1	9.000																																																																						
1	4.475	6.69	56.00	49.31	1.43	46.00	44.57	11.79	L1	9.000																																																																						
1	11.162	26.11	60.00	33.89	22.05	50.00	27.95	11.84	L1	9.000																																																																						
1	21.296	15.22	60.00	44.78	5.58	50.00	44.42	11.88	L1	9.000																																																																						
1	24.747	9.89	60.00	50.11	2.65	50.00	47.35	11.89	L1	9.000																																																																						

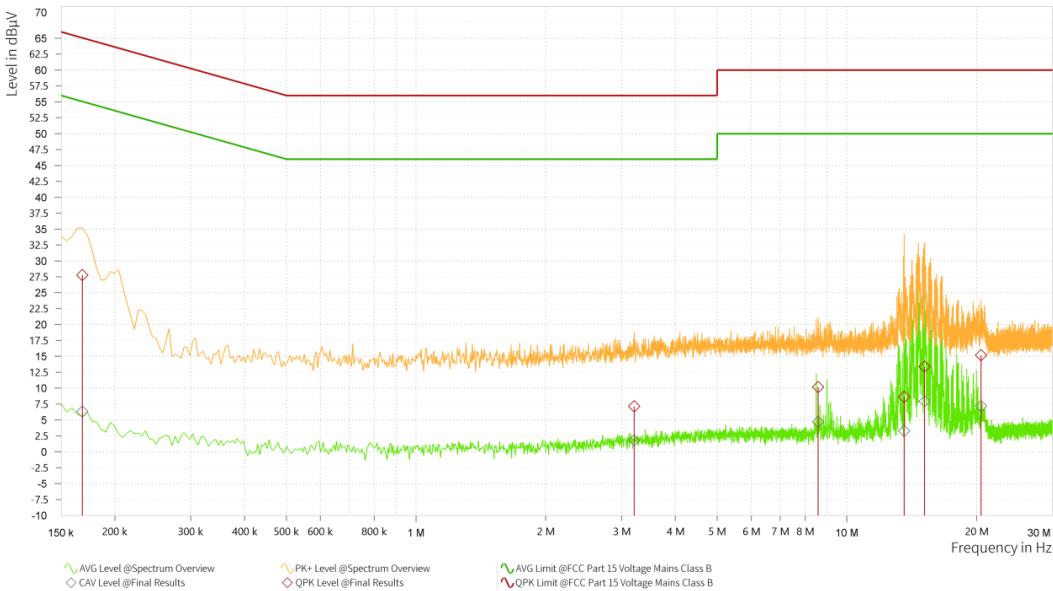Test Mode :	125kHz		Temperature :		26°C					
Test Engineer :	Carl Xie		Relative Humidity :		51%					
Test Voltage :	DC 12V		Phase :		Neutral					
Function Type :	RFID									
 <p>Legend:</p> <ul style="list-style-type: none"> ▲ AVG Level @Spectrum Overview ○ CAV Level @Final Results △ PK+ Level @Spectrum Overview ◇ QPK Level @Final Results ■ AVG Limit @FCC Part 15 Voltage Mains Class B ■ QPK Limit @FCC Part 15 Voltage Mains Class B 										
Rg	Frequency [MHz]	QPK Level [dBµV]	QPK Limit [dBµV]	QPK Margin [dB]	CAV Level [dBµV]	CAV: AVG Limit [dBµV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.168	27.78	65.06	37.28	6.30	55.06	48.76	12.18	N	9.000
1	3.210	7.14	56.00	48.86	1.79	46.00	44.21	12.75	N	9.000
1	8.579	10.16	60.00	49.84	4.68	50.00	45.32	12.79	N	9.000
1	13.578	8.62	60.00	51.38	3.28	50.00	46.72	12.82	N	9.000
1	15.153	13.40	60.00	46.60	7.95	50.00	42.05	12.83	N	9.000
1	20.481	15.19	60.00	44.81	7.18	50.00	42.82	12.86	N	9.000



3.5 ANTENNA REQUIREMENTS

3.5.1 STANDARD APPLICABLE

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

3.5.2 ANTENNA CONNECTED CONSTRUCTION

An Loop coil Antenna design is used.

3.5.3 ANTENNA GAIN

The antenna peak gain of EUT is unknown gain, more details please refer to the Justification for no antenna gain information from Manufacturer.



4 LIST OF MEASURING EQUIPMENT

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.27,22	Jun.26,24
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-0 2Chamber	Nov.24,22	Nov.23,25
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Feb.28,22	Feb.27,24
Loop Antenna	R&S	HFH2-Z2/Z2 E	100976	Feb.23,22	Feb.22,24
Antenna Power Supply	RS	N/A	N/A	N/A	N/A
EMI Test Receiver	R&S	ESW44	101973	Feb.25,22	Feb.24,24
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
Pre-Amplifier	R&S	SCU08F1	101028	Sep.16,22	Sep.15,24
CABLE	R&S	W13.01	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.01	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W13.02	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W13.02	N/A	Oct.27,23	Apr.26,24
CABLE	R&S	W12.14	N/A	Apr.28,23	Oct.27,23
CABLE	R&S	W12.14	N/A	Oct.27,23	Apr.26,24

NOTE: 1. The calibration interval of the above test instruments is 6 months or 24 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 434559; The Designation No. is CN1325.



5 UNCERTAINTY OF EVALUATION

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±3.4dB
Radiated emissions (9KHz~30MHz)	±2.7dB
Radiated emissions (30MHz~1GHz)	±5.0dB
Occupied Channel Bandwidth	±43.58KHz
Temperature	±1°C
Humidity	±5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

-----End of the report-----