



Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

Annex for BT

Test Report No.: CTL2506182071-WF01

TABLE OF CONTENTS

1. Bandwidth	3
1.1 Test Result	3
1.1.1 OBW	3
1.1.2 20dB BW	3
1.2 Test Graph	4
1.2.1 OBW	4
1.2.2 20dB BW	9
2. Maximum Conducted Output Power	14
2.1 Test Result	14
2.1.1 Power	14
3. Carrier Frequency Separation	15
3.1 Test Result	15
3.1.1 Ant1	15
3.2 Test Graph	16
3.2.1 Ant1	16
4. Number of Hopping Frequencies	18
4.1 Test Result	18
4.1.1 HoppNum	18
4.2 Test Graph	19

FCCID: 2AUARTKMU8A

4.2.1 HoppNum	19
5. Time of Occupancy (Dwell Time)	21
5.1 Test Result	21
5.1.1 Ant1	21
5.2 Test Graph	22
5.2.1 Ant1	22
6. Unwanted Emissions In Non-restricted Frequency Bands	31
6.1 Test Result	31
6.1.1 Ref	31
6.1.2 CSE	31
6.2 Test Graph	32
6.2.1 Ref	32
6.2.2 CSE	37

FCCID: 2AUARTKMU8A

1. Bandwidth

1.1 Test Result

1.1.1 OBW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.840	/	Pass
		2441	DH5	1	0.839	/	Pass
		2480	DH5	1	0.840	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.178	/	Pass
		2441	2DH5	1	1.177	/	Pass
		2480	2DH5	1	1.176	/	Pass
8DPSK	SISO	2402	3DH5	1	1.186	/	Pass
		2441	3DH5	1	1.183	/	Pass
		2480	3DH5	1	1.189	/	Pass


1.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.949	/	Pass
		2441	DH5	1	0.954	/	Pass
		2480	DH5	1	0.951	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.326	/	Pass
		2441	2DH5	1	1.321	/	Pass
		2480	2DH5	1	1.322	/	Pass
8DPSK	SISO	2402	3DH5	1	1.313	/	Pass
		2441	3DH5	1	1.312	/	Pass
		2480	3DH5	1	1.315	/	Pass


FCCID: 2AUARTKMU8A

1.2 Test Graph


1.2.1 OBW

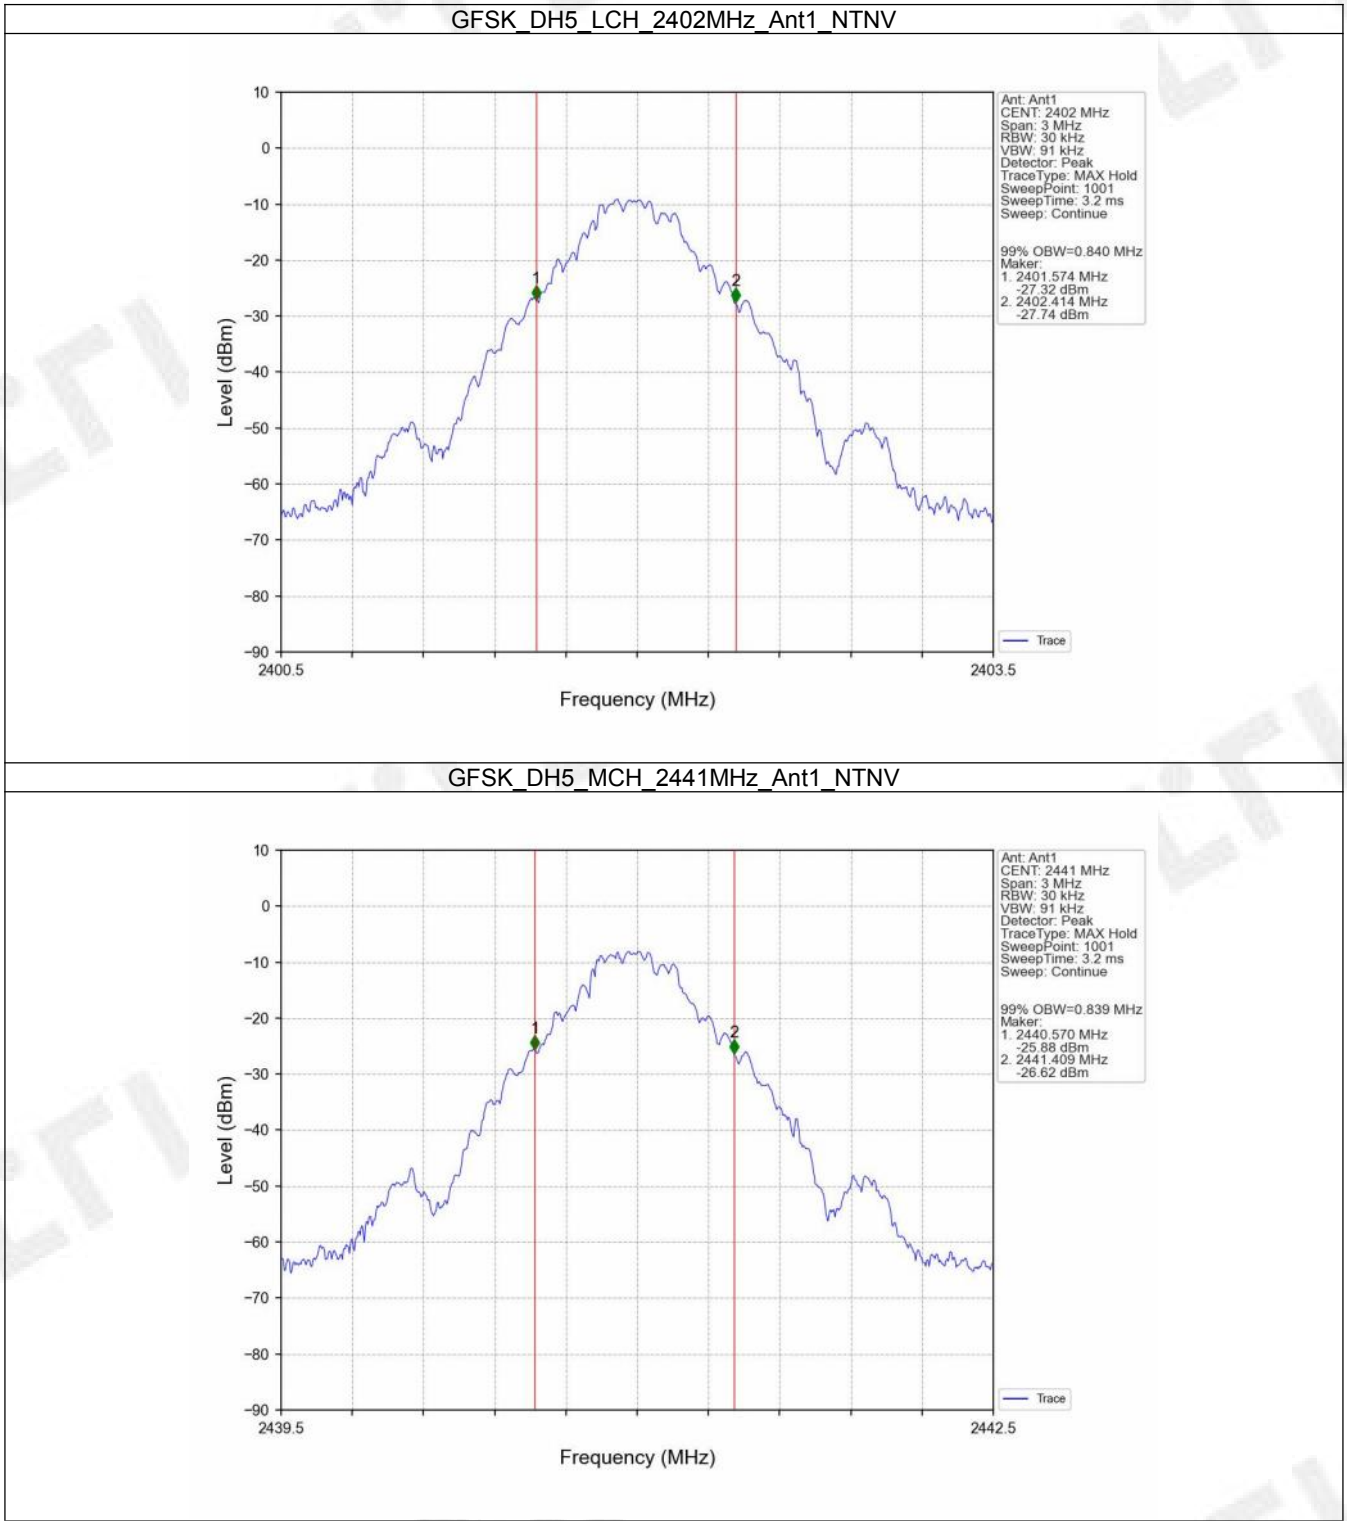


FCCID: 2AUARTKMU8A

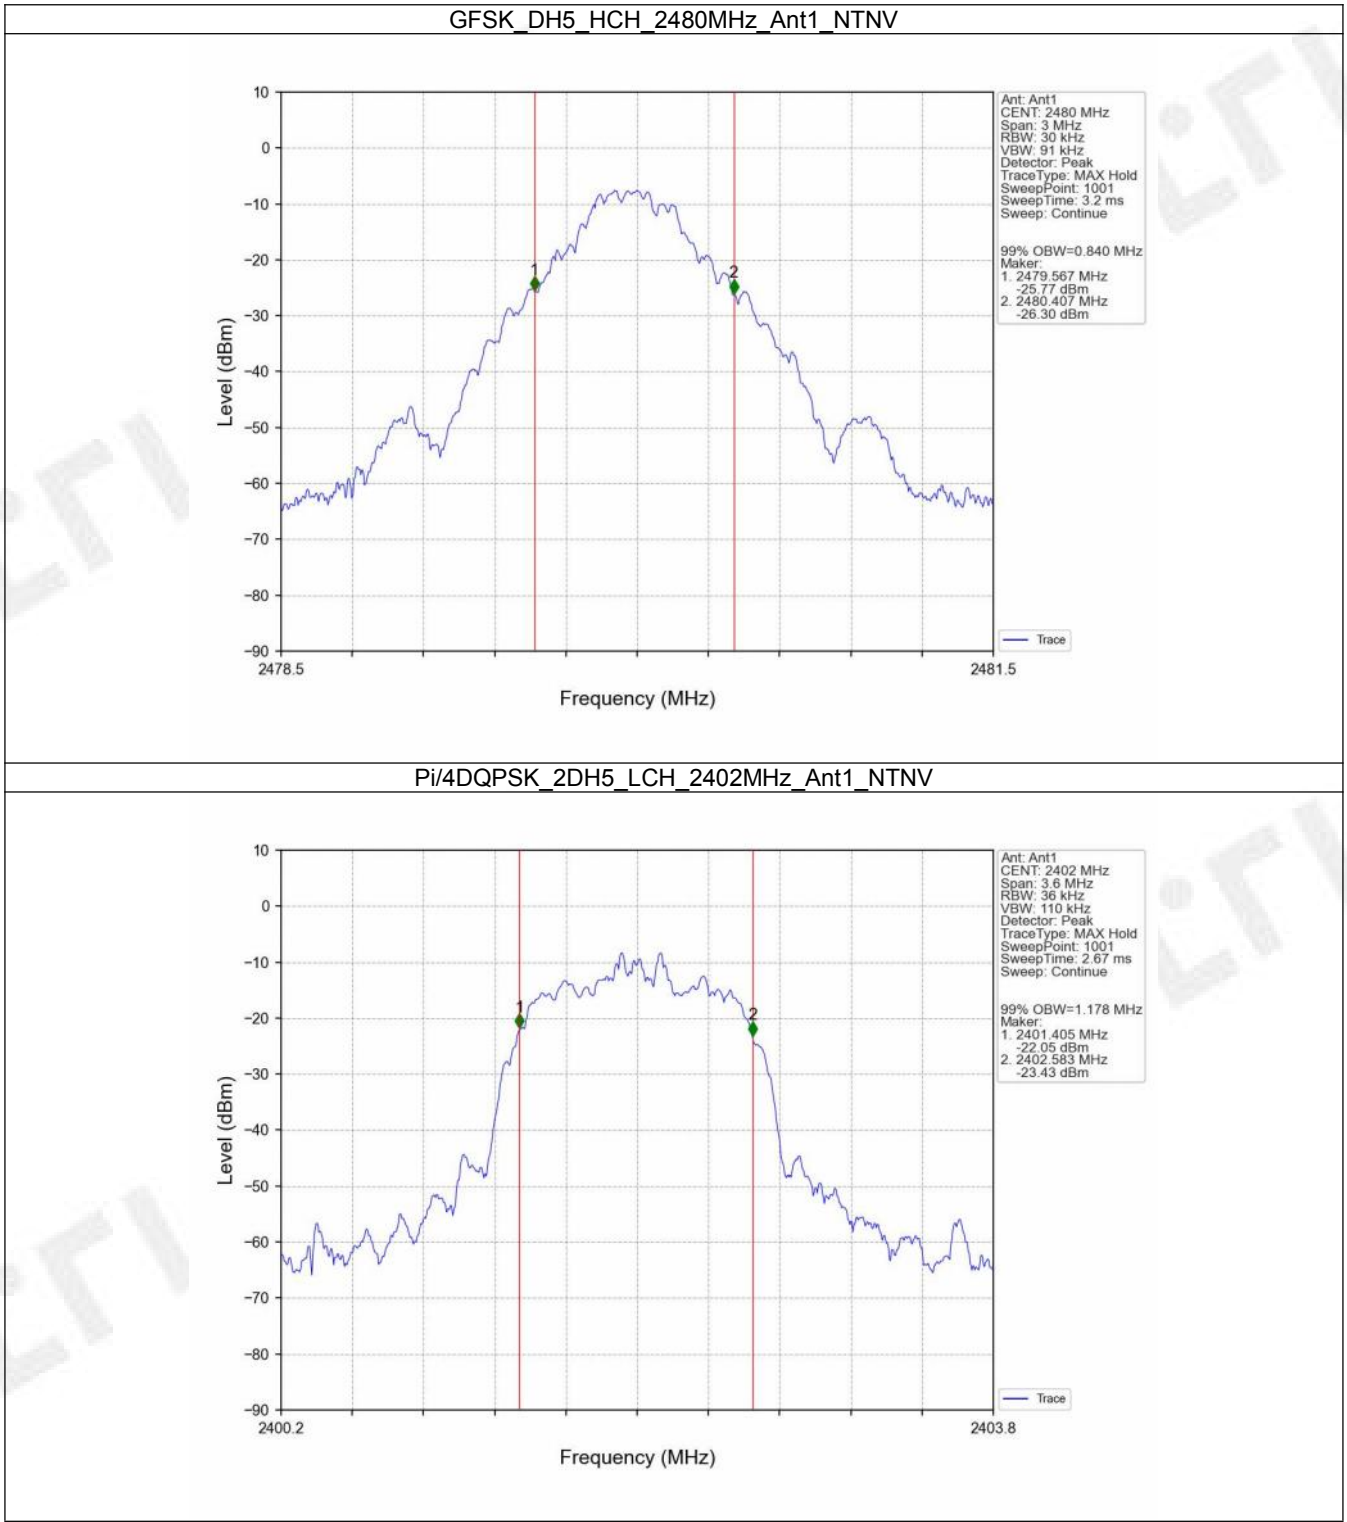


FCCID: 2AUARTKMU8A

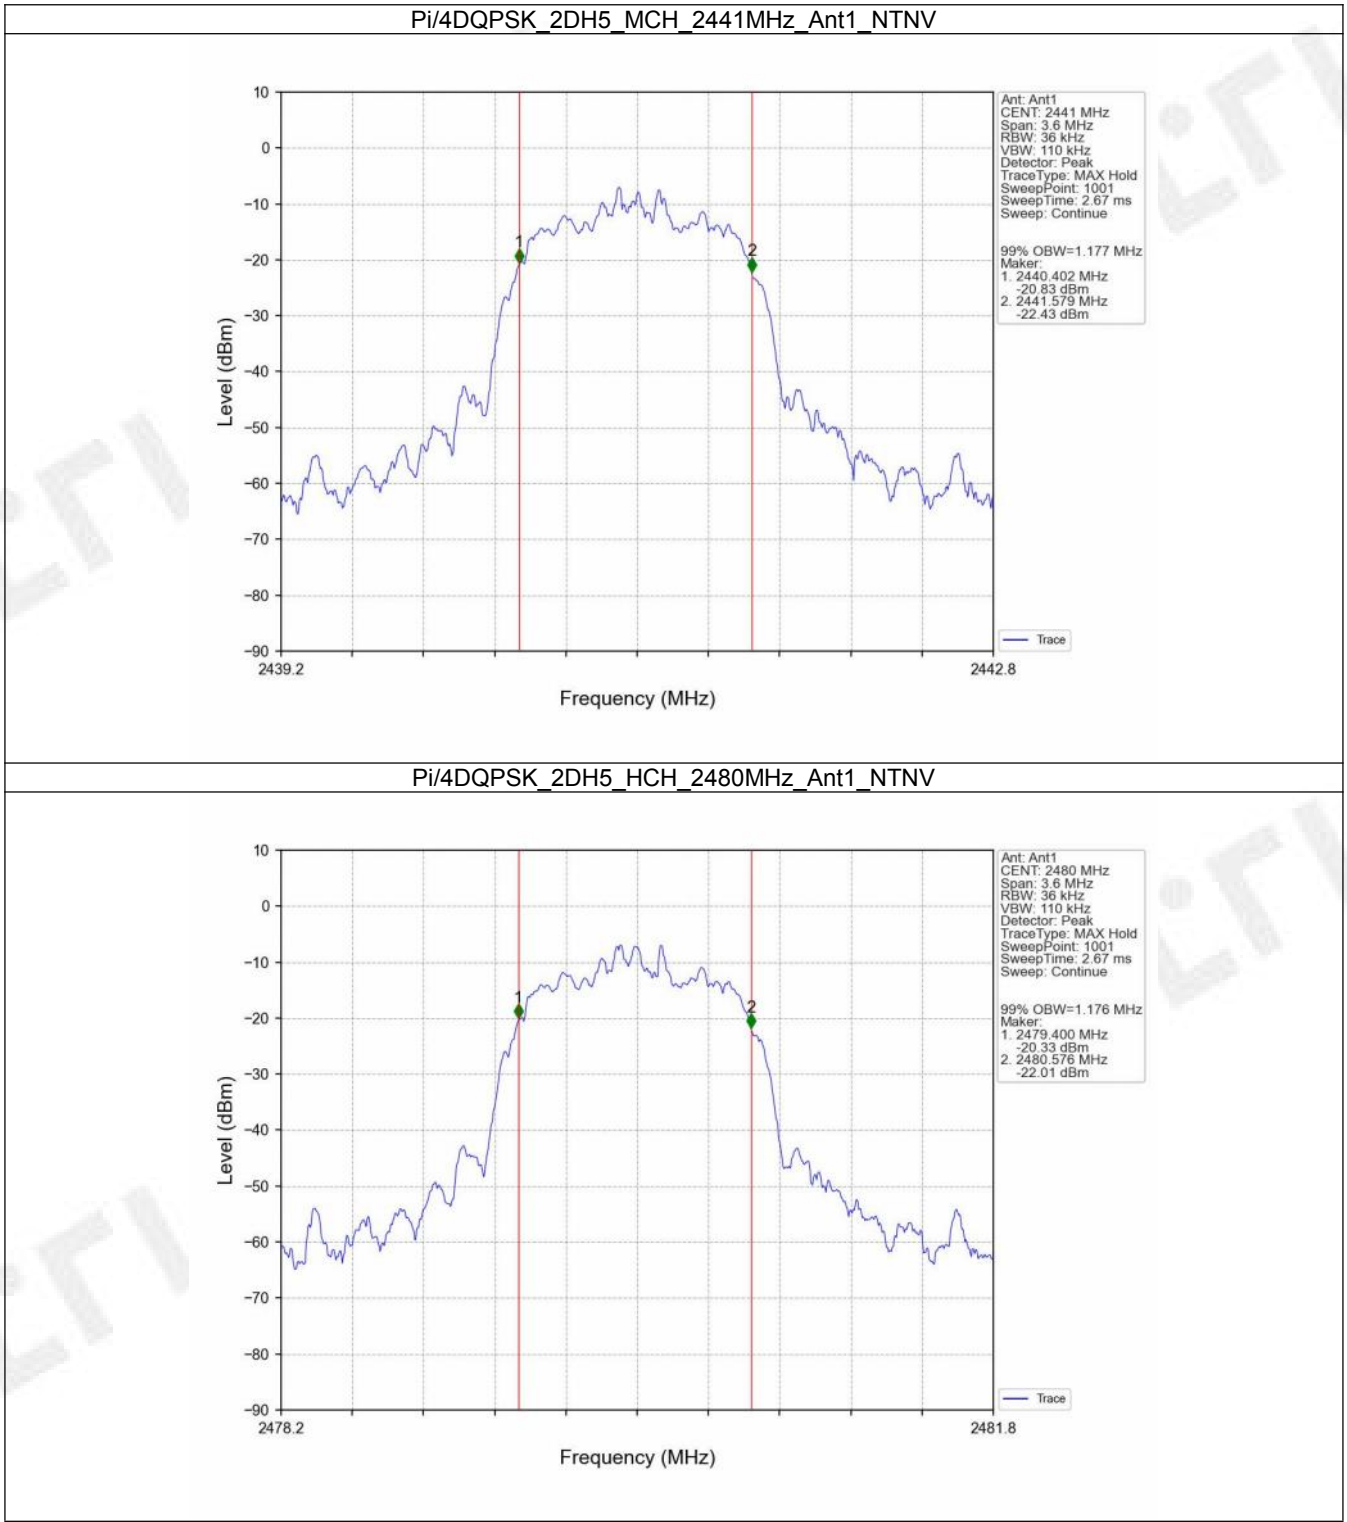

FCCID: 2AUARTKMU8A

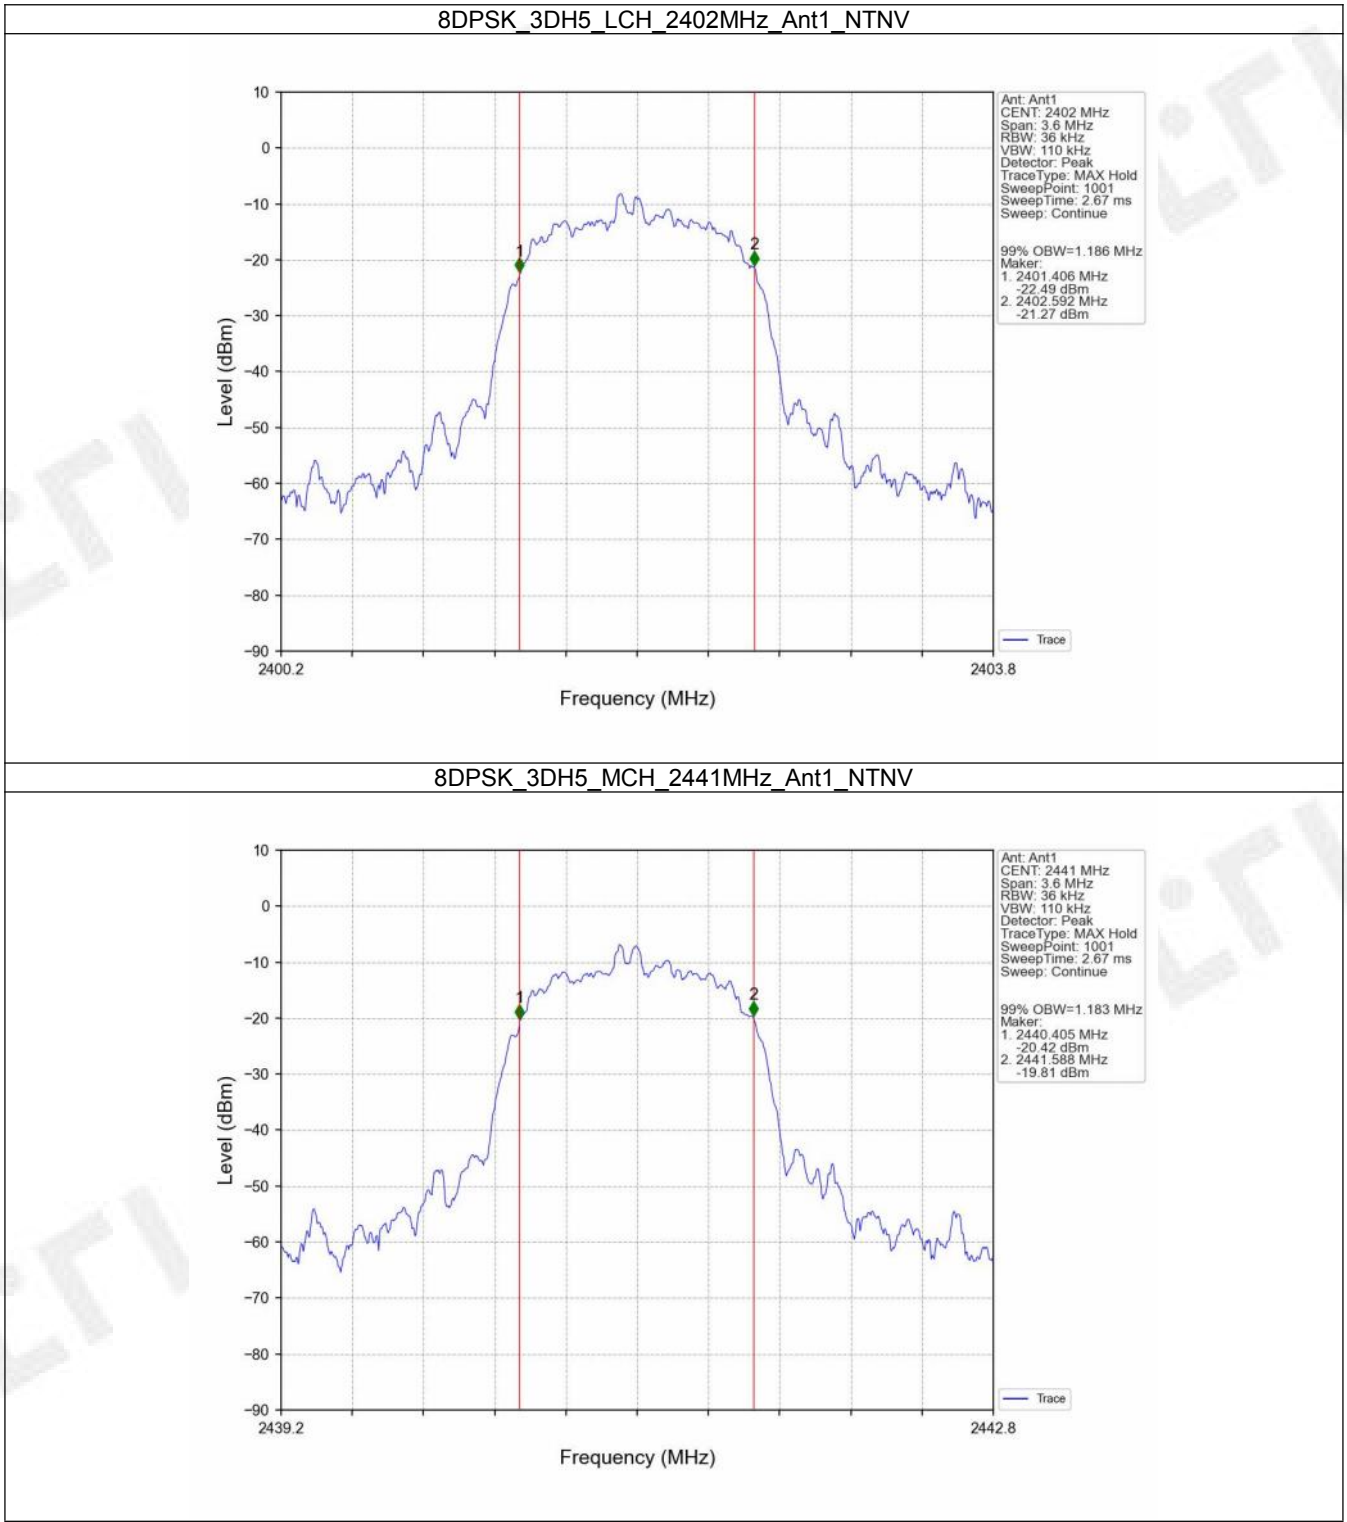


FCCID: 2AUARTKMU8A

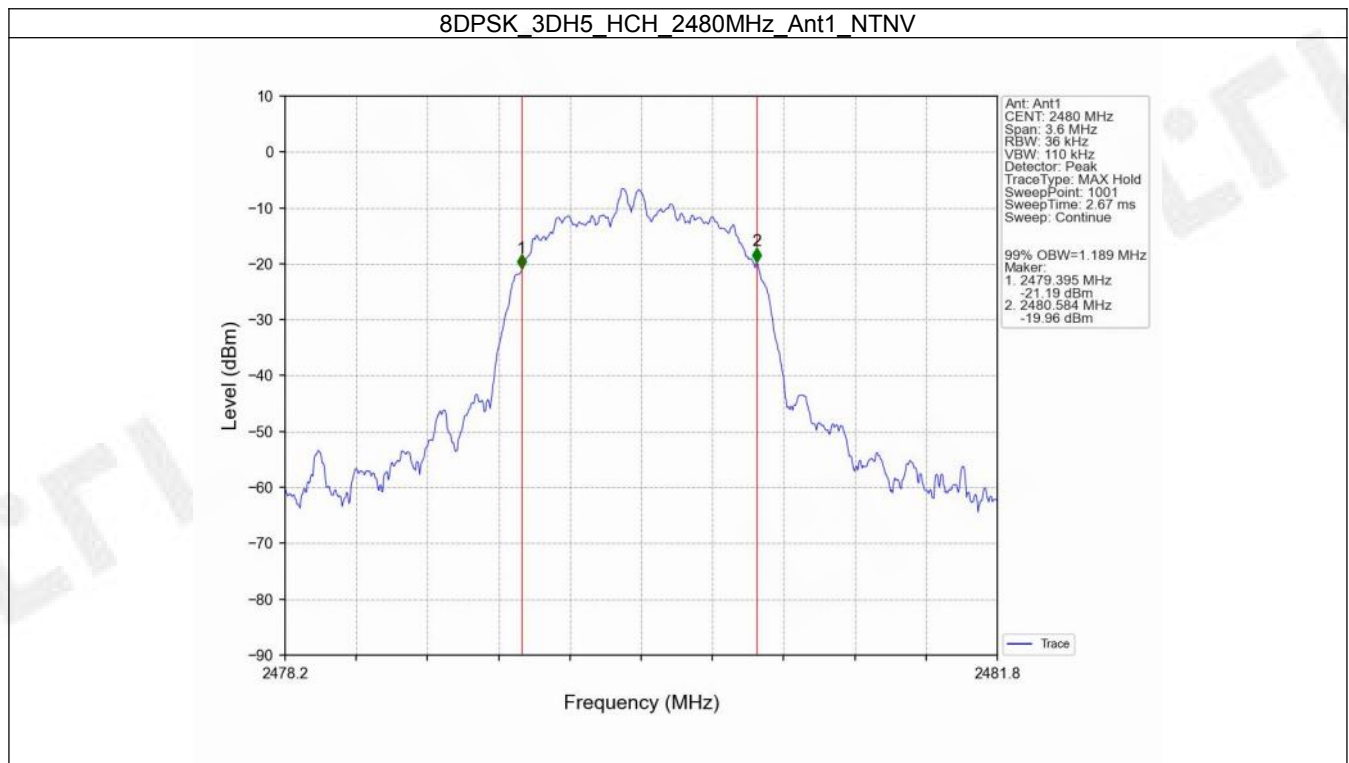


FCCID: 2AUARTKMU8A


1.2.2 20dB BW

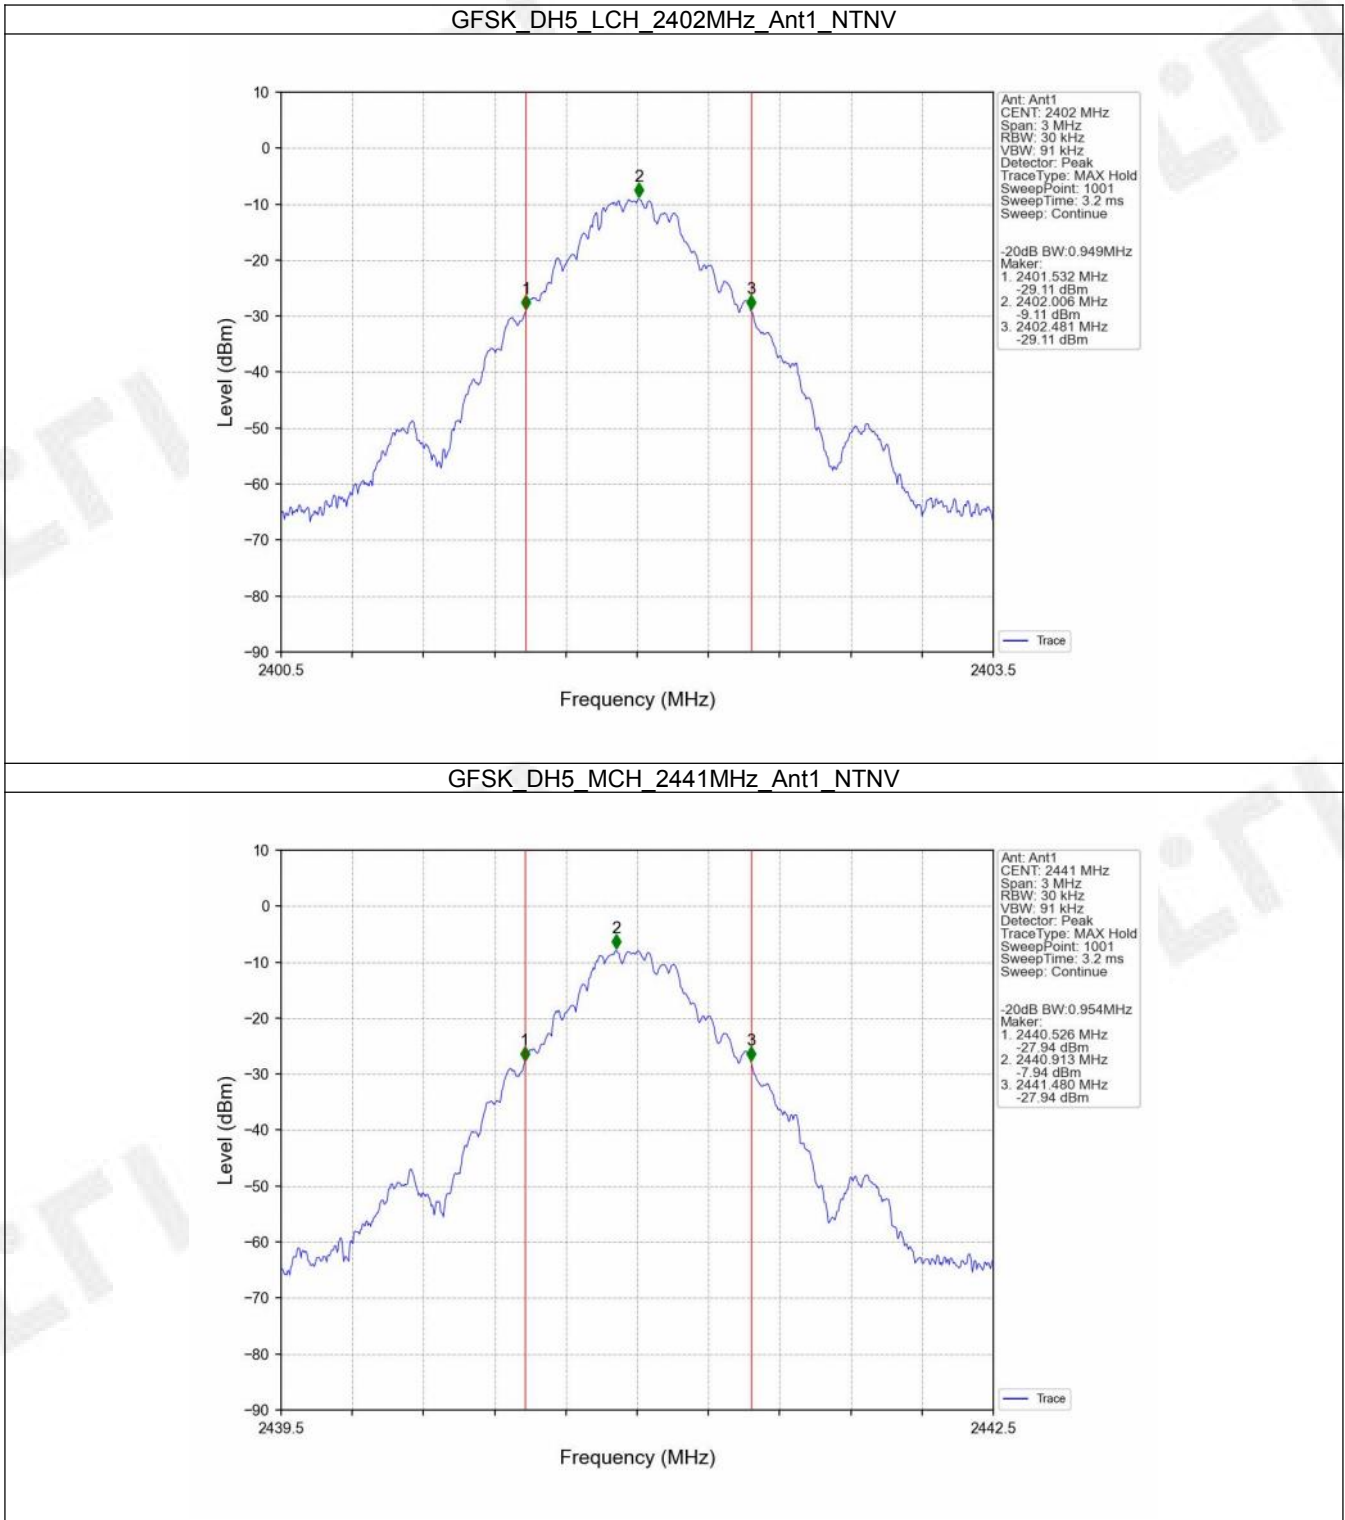


FCCID: 2AUARTKMU8A

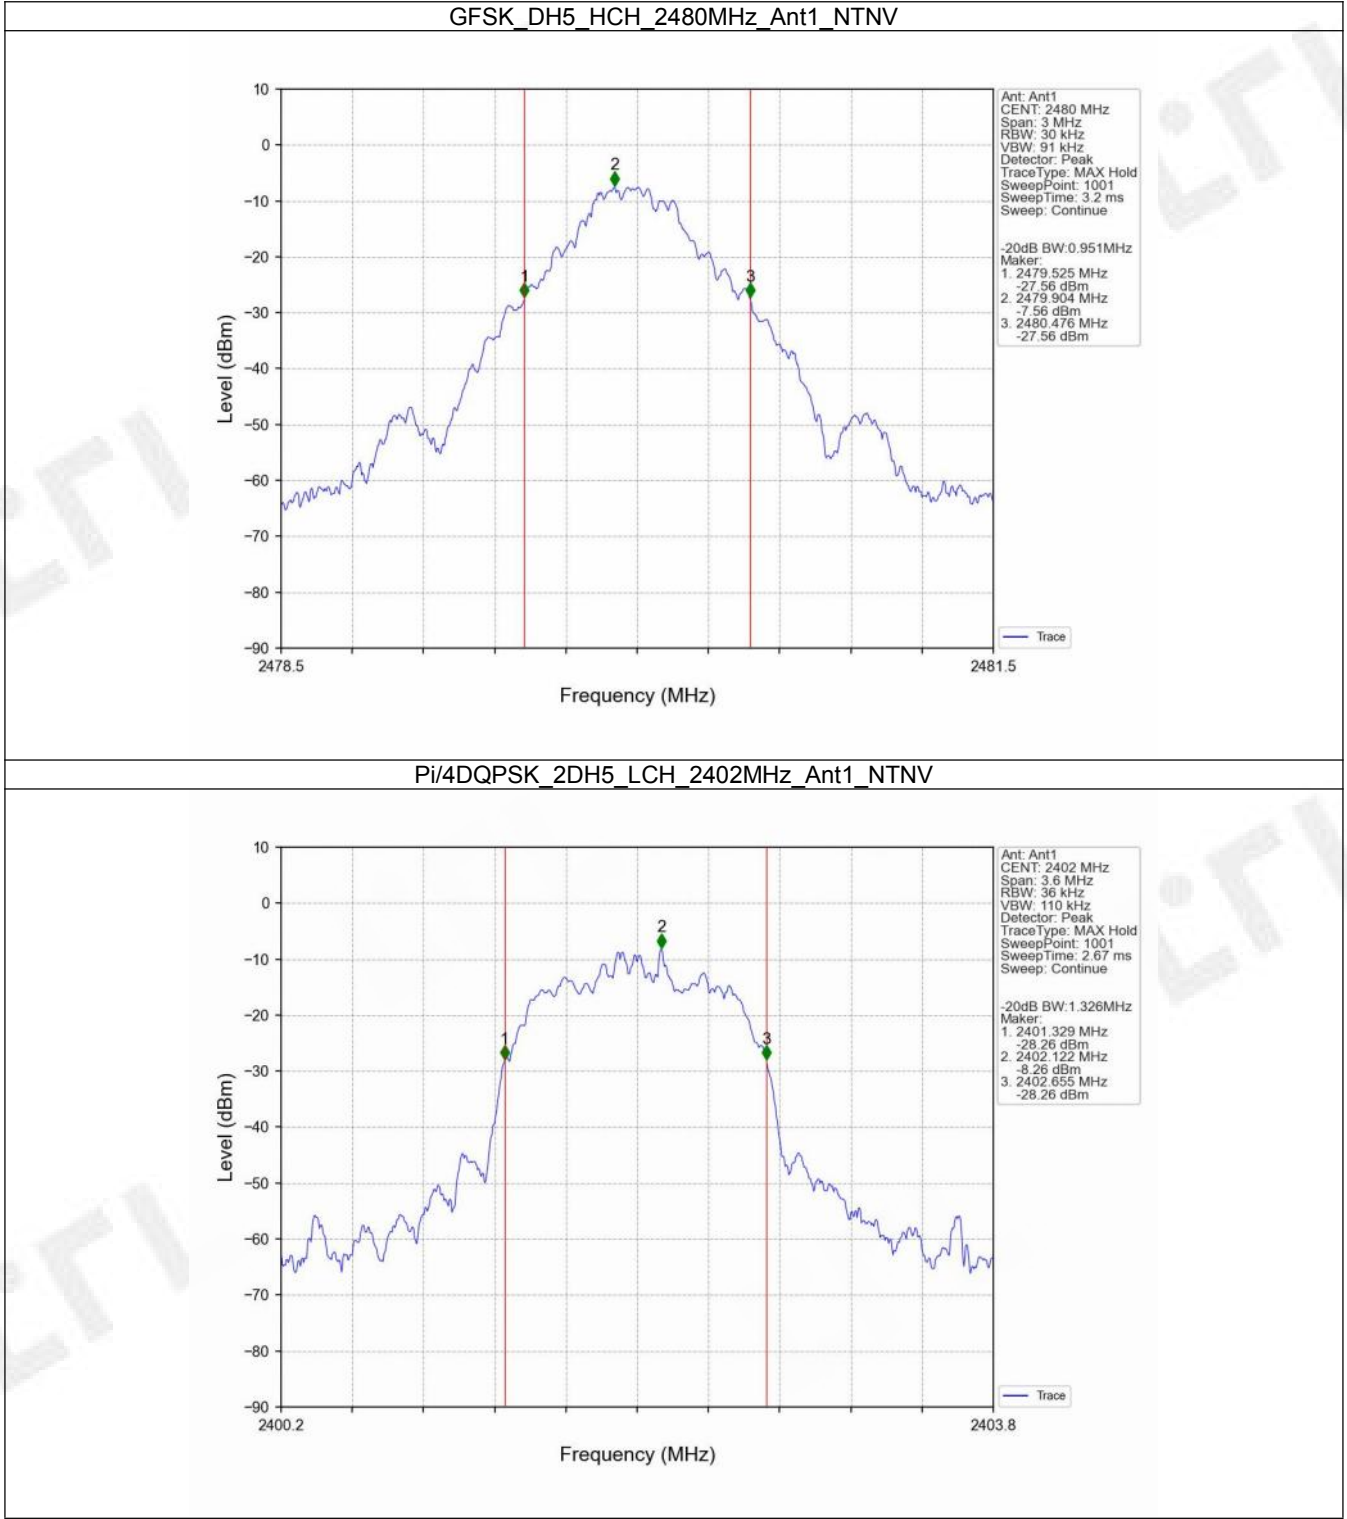


FCCID: 2AUARTKMU8A

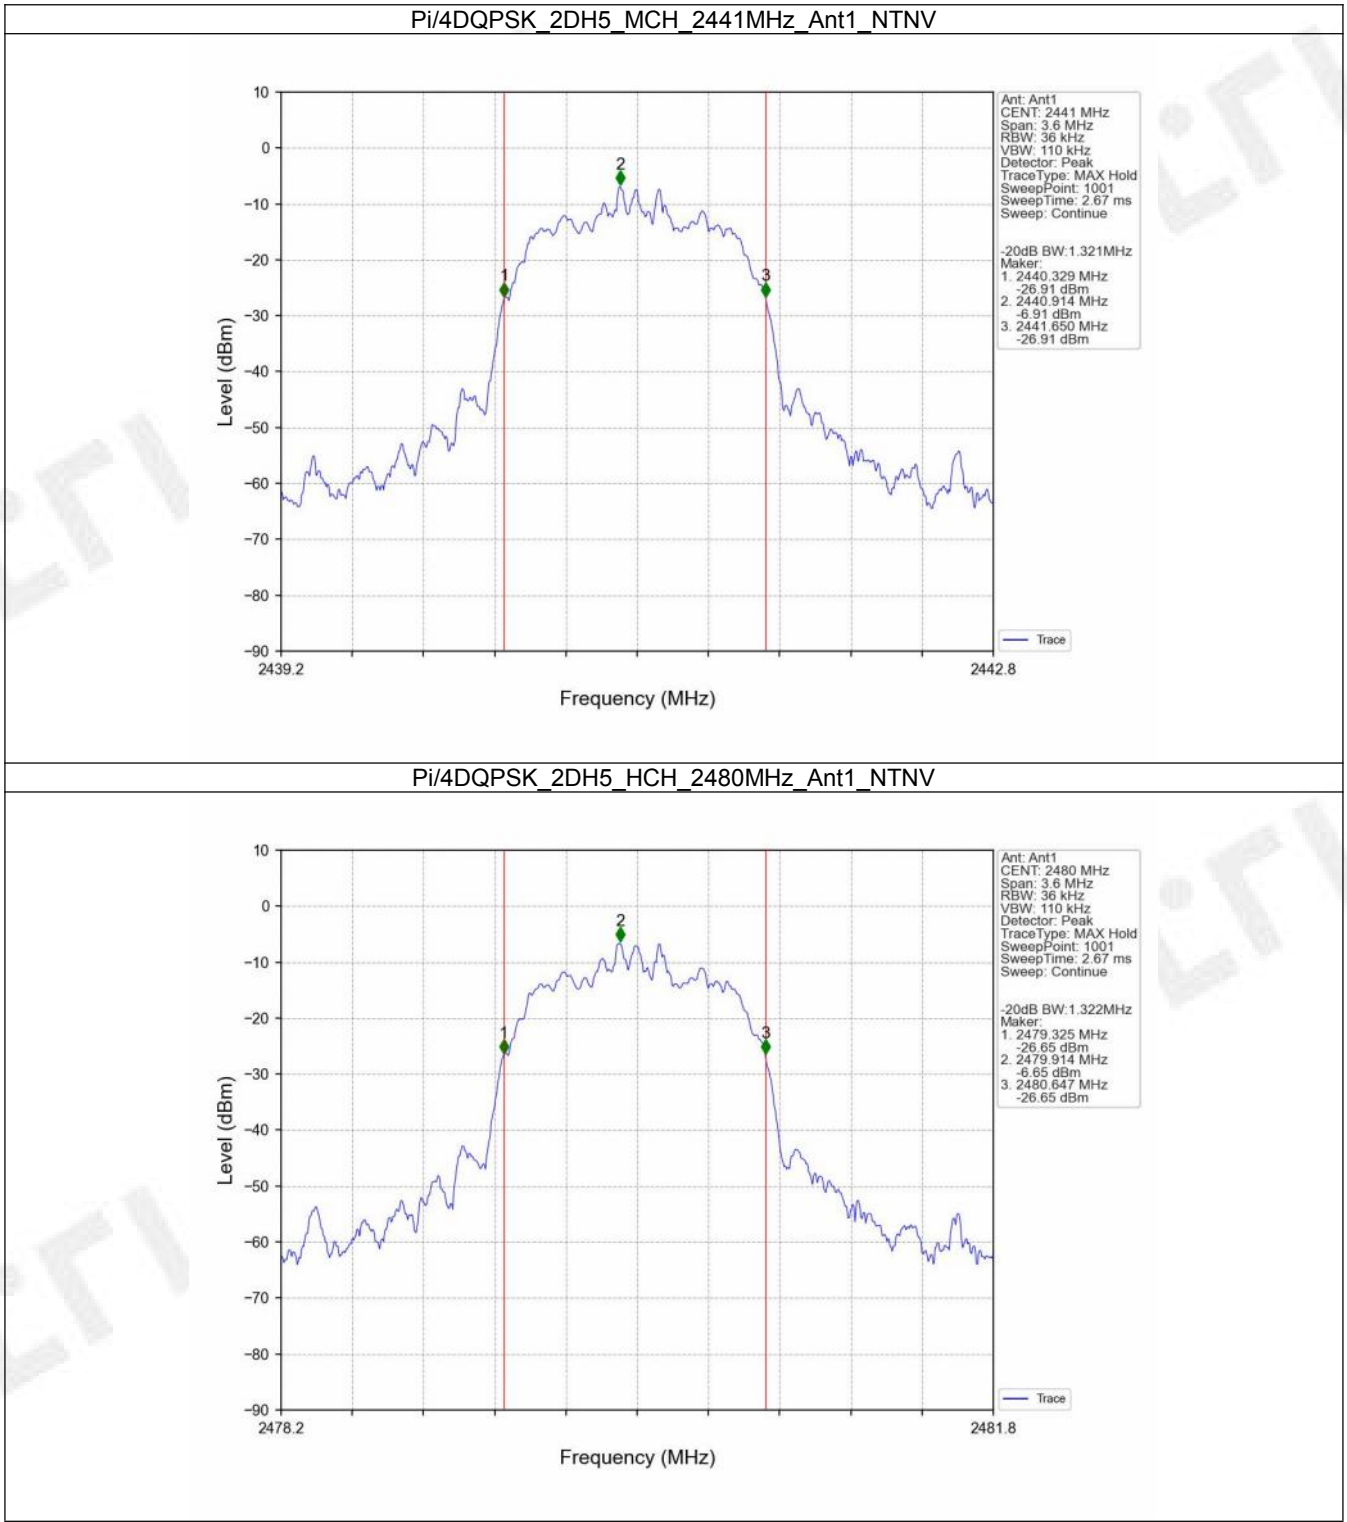

FCCID: 2AUARTKMU8A

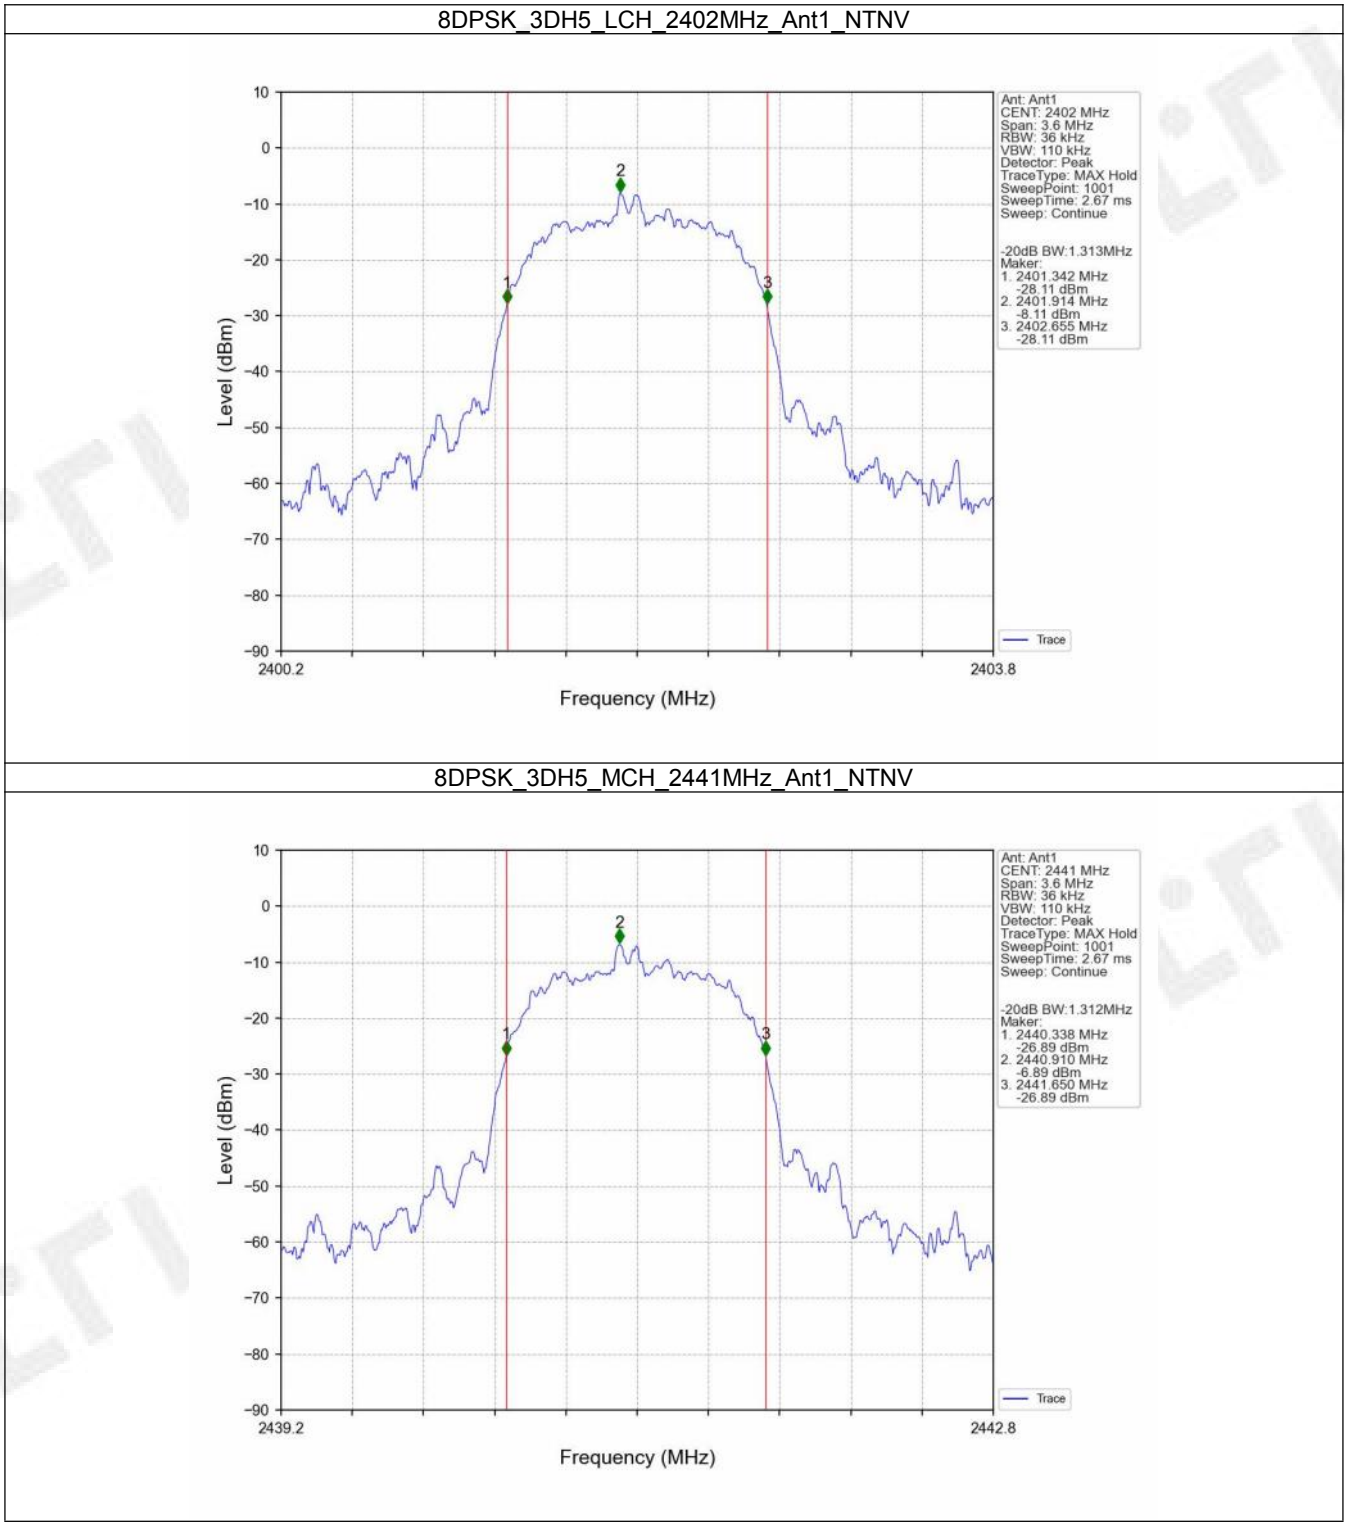

FCCID: 2AUARTKMU8A

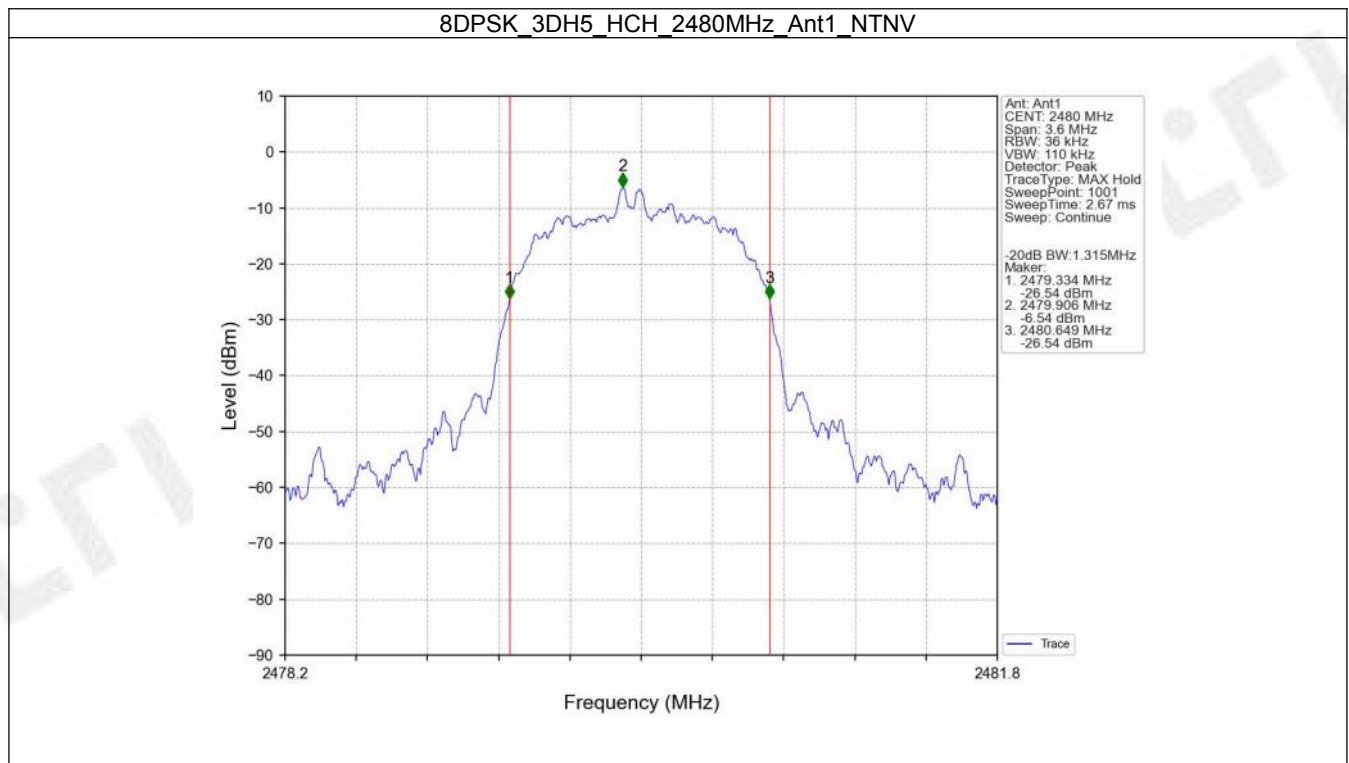

FCCID: 2AUARTKMU8A

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-6.62	<=30	Pass
		2441	DH5	-5.45	<=30	Pass
		2480	DH5	-5.06	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	-4.28	<=20.97	Pass
		2441	2DH5	-3.20	<=20.97	Pass
		2480	2DH5	-2.79	<=20.97	Pass
8DPSK	SISO	2402	3DH5	-3.74	<=20.97	Pass
		2441	3DH5	-2.46	<=20.97	Pass
		2480	3DH5	-2.12	<=20.97	Pass

Note1: Antenna Gain: Ant1: 4.81dBi;

FCCID: 2AUARTKMU8A

3. Carrier Frequency Separation

3.1 Test Result


3.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.990	0.954	≥ 0.954	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	0.991	1.326	≥ 0.884	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.315	≥ 0.877	Pass


FCCID: 2AUARTKMU8A

3.2 Test Graph

3.2.1 Ant1

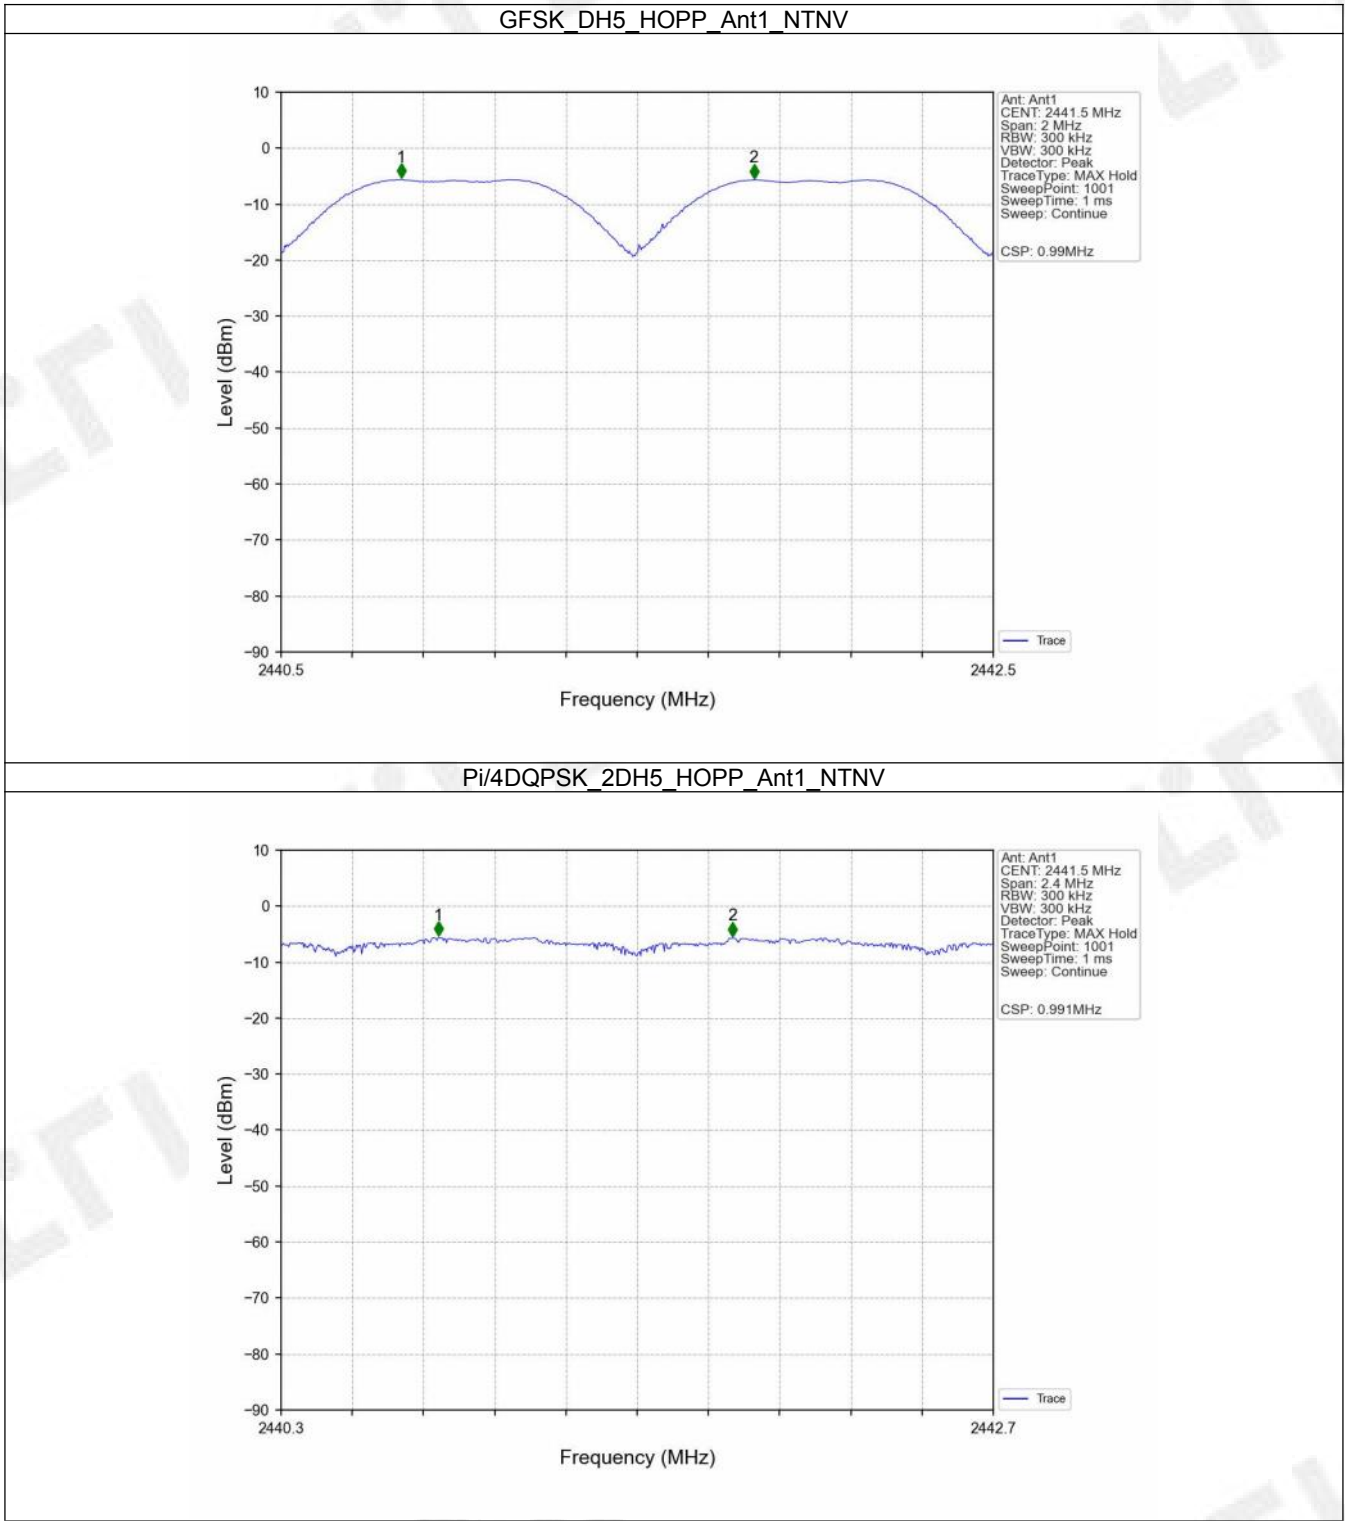

FCCID: 2AUARTKMU8A

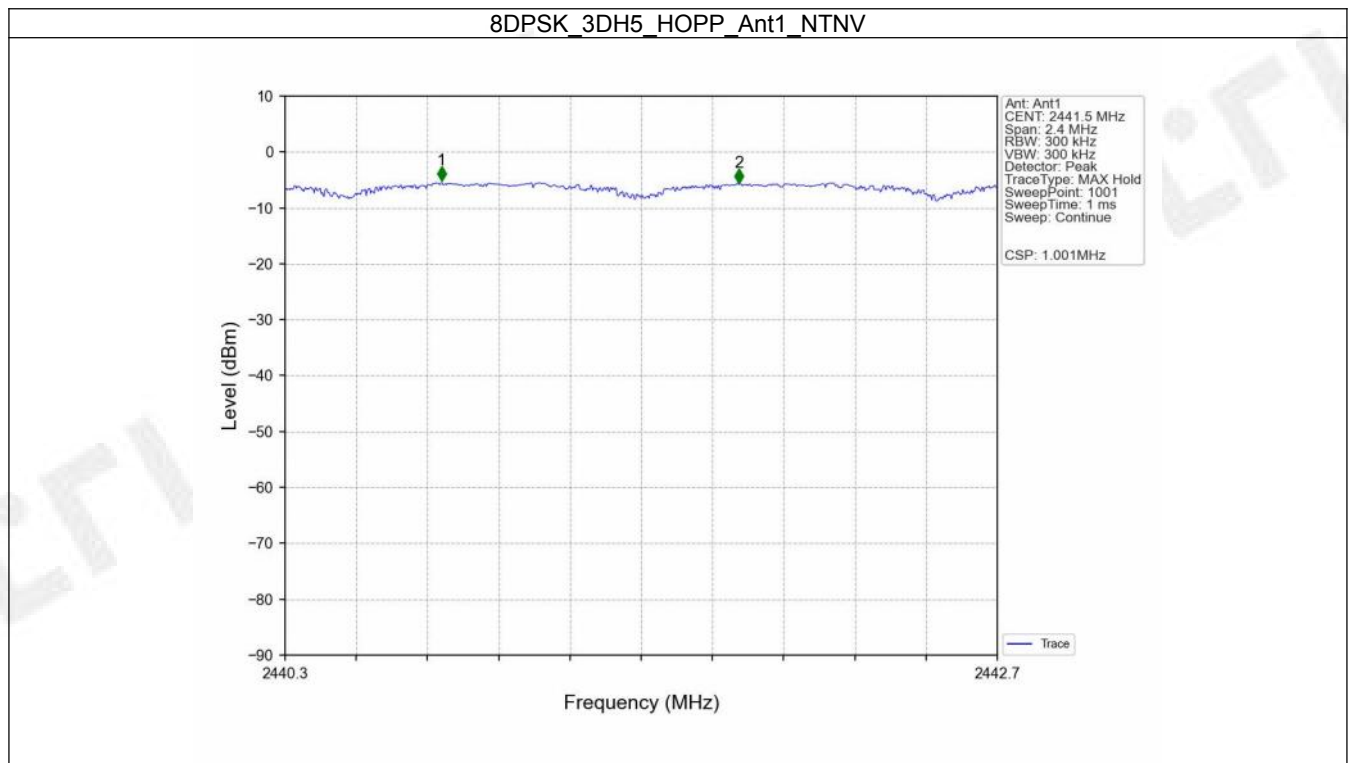

FCCID: 2AUARTKMU8A

4. Number of Hopping Frequencies

4.1 Test Result


4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass


FCCID: 2AUARTKMU8A

4.2 Test Graph

4.2.1 HoppNum

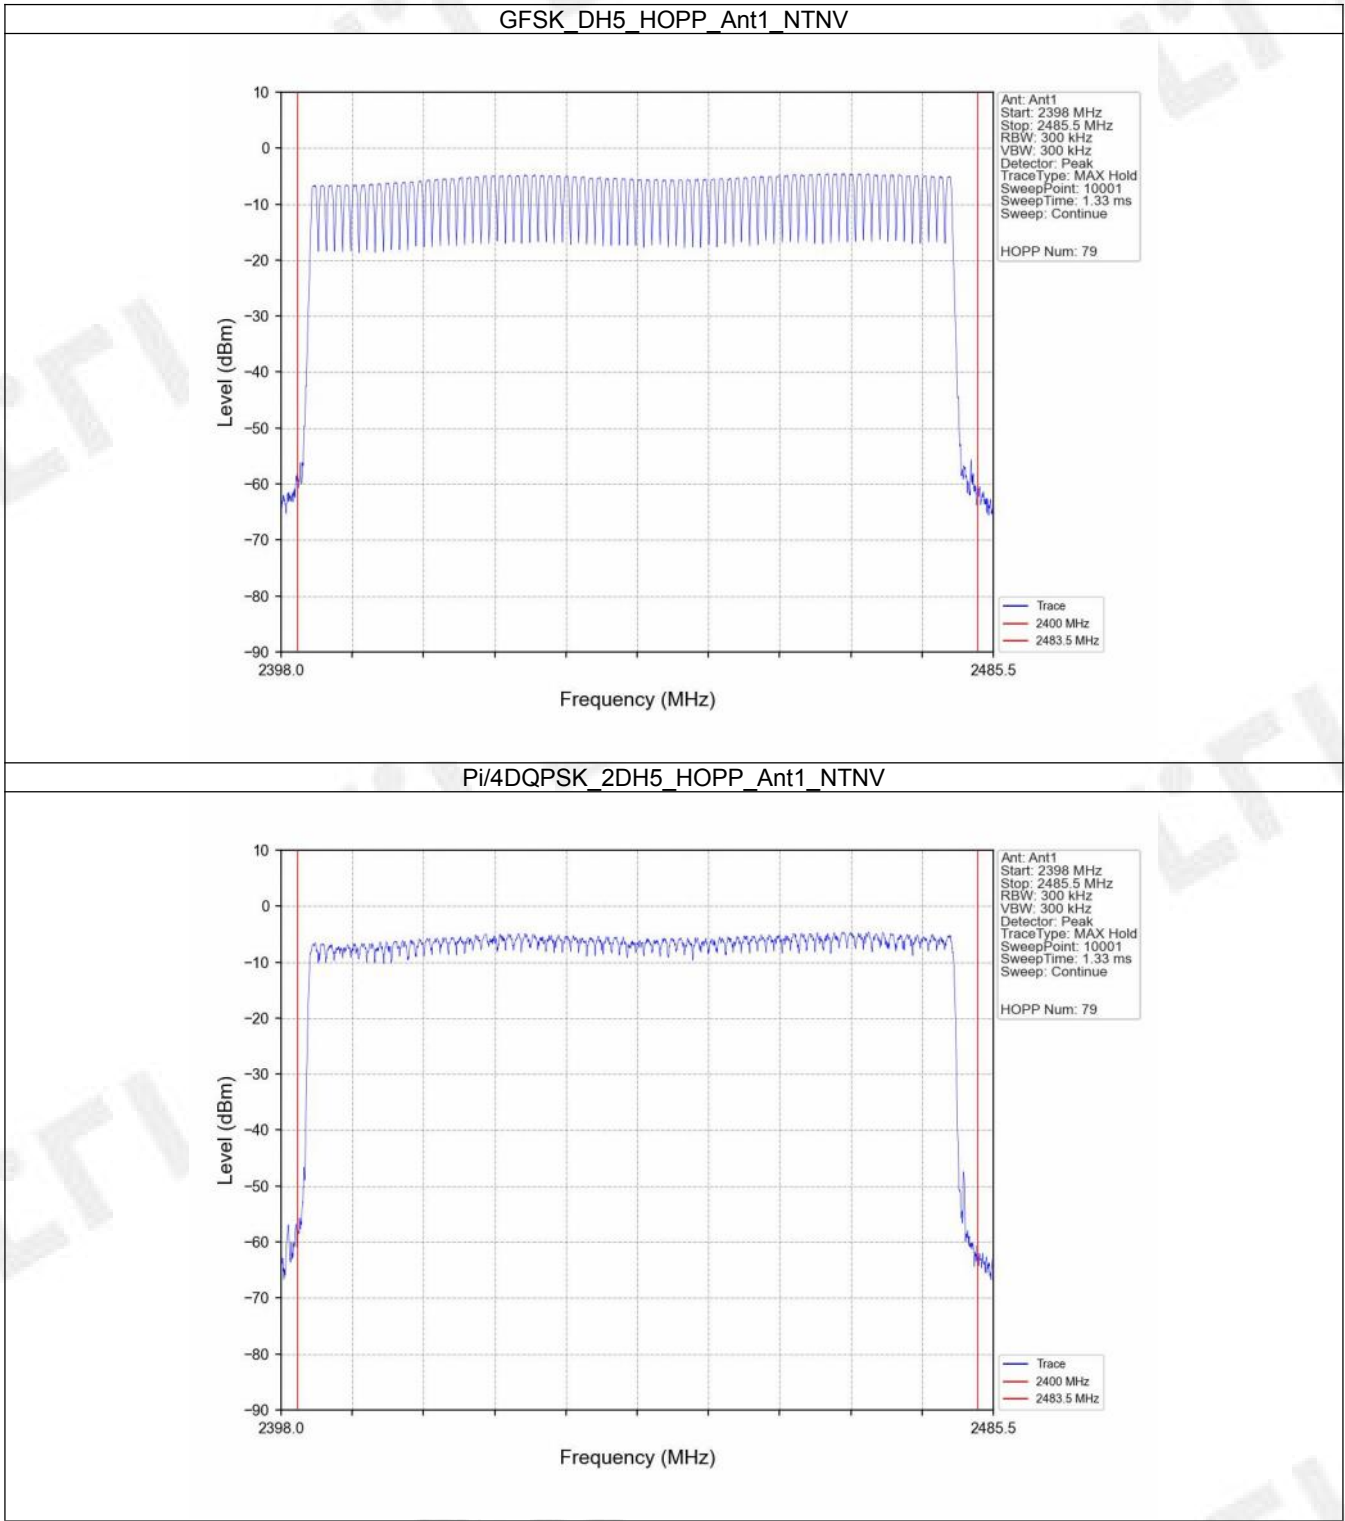

FCCID: 2AUARTKMU8A

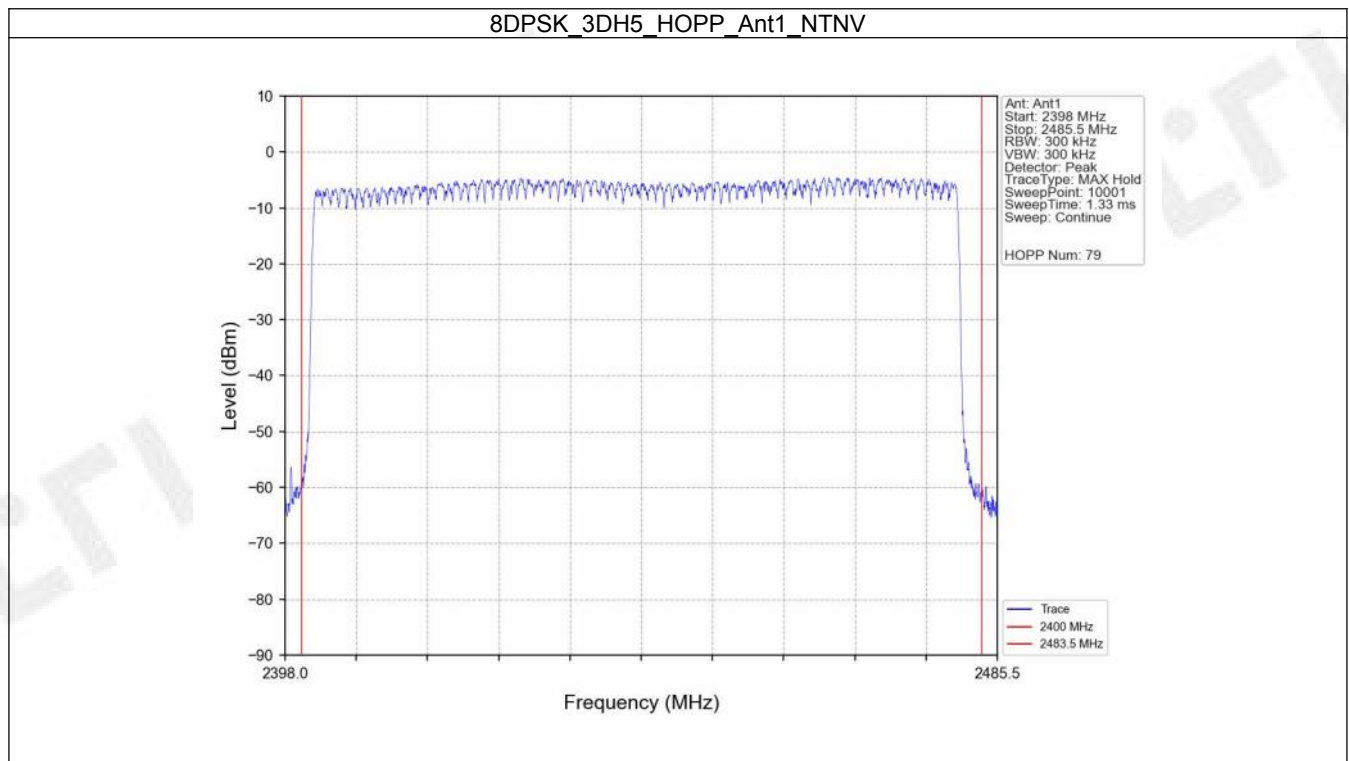

FCCID: 2AUARTKMU8A

5. Time of Occupancy (Dwell Time)

5.1 Test Result


5.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.420	31.600	318	133.560	<=400	Pass
			DH3	1.676	31.600	170	284.920	<=400	Pass
			DH5	2.926	31.600	115	336.490	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.428	31.600	320	136.960	<=400	Pass
			2DH3	1.684	31.600	166	279.544	<=400	Pass
			2DH5	2.932	31.600	109	319.588	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.430	31.600	320	137.600	<=400	Pass
			3DH3	1.682	31.600	157	264.074	<=400	Pass
			3DH5	2.932	31.600	103	301.996	<=400	Pass


FCCID: 2AUARTKMU8A

5.2 Test Graph


5.2.1 Ant1

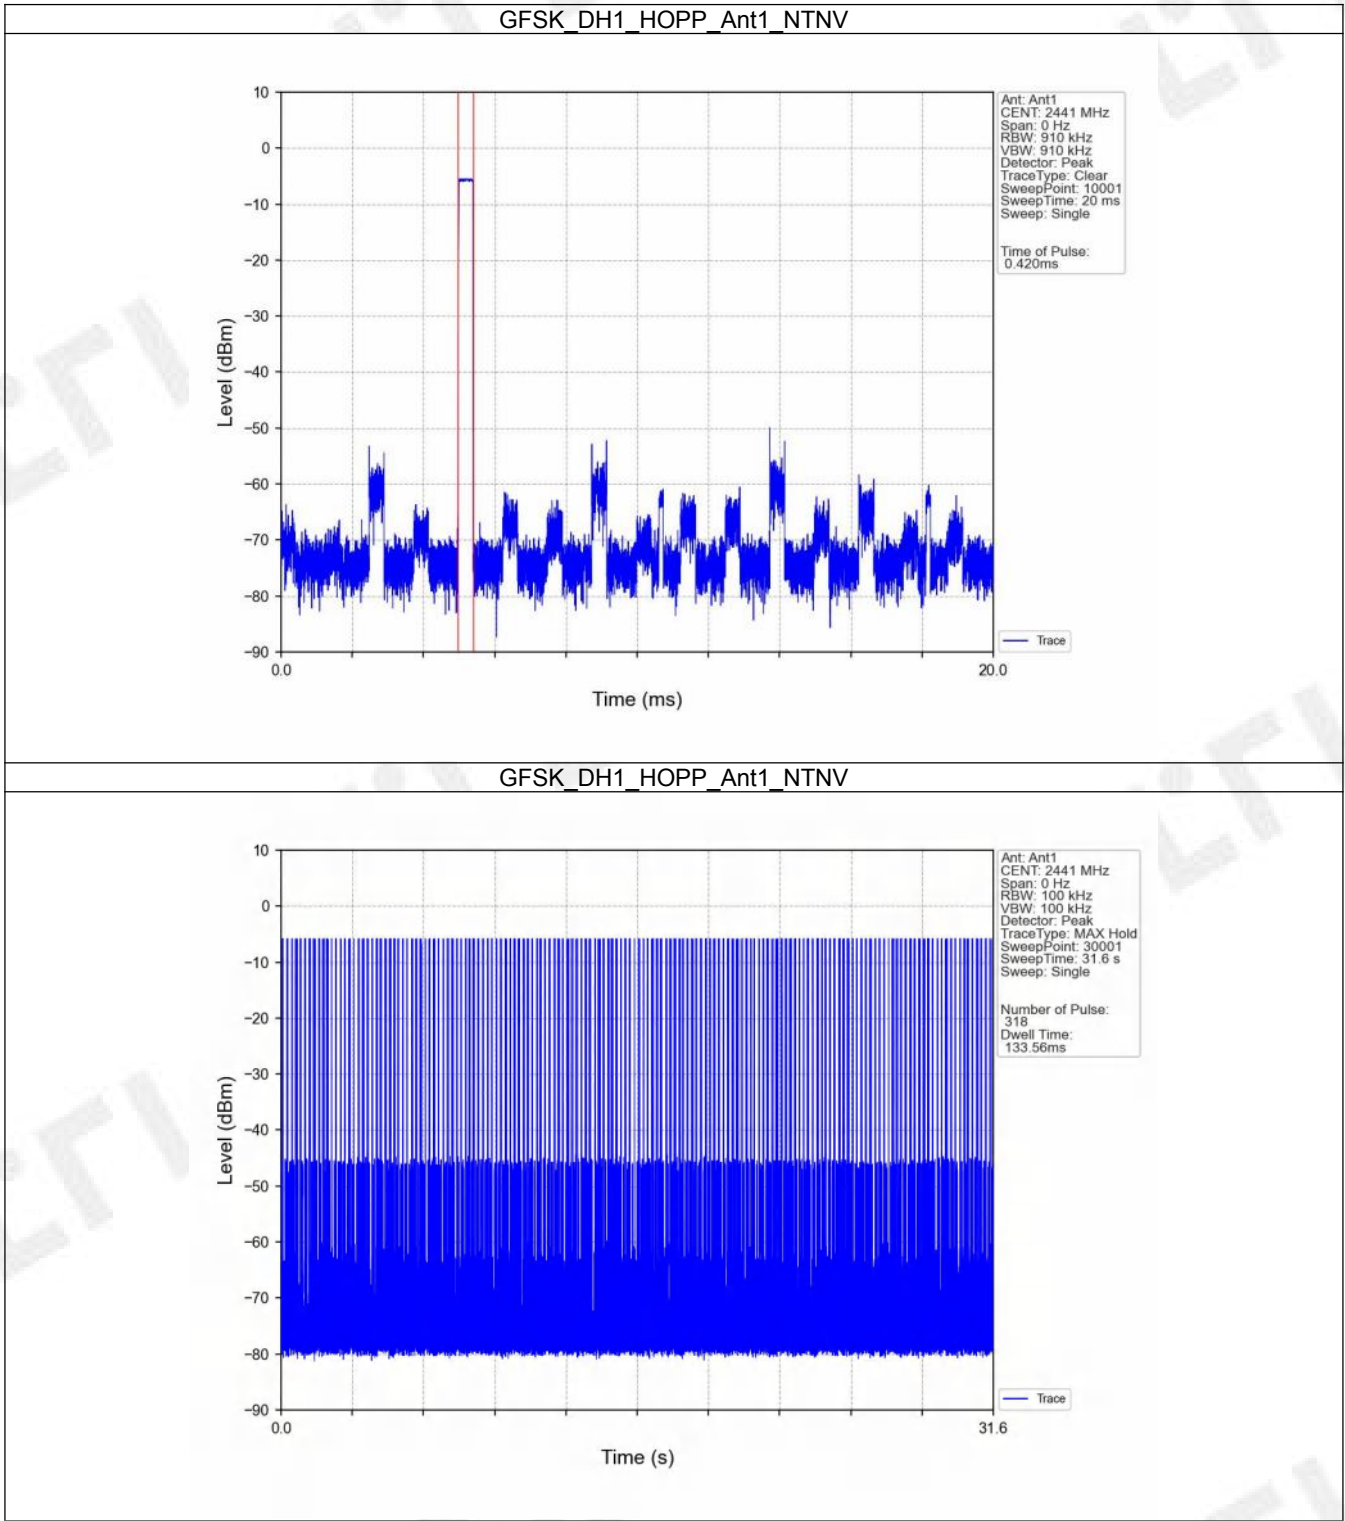


FCCID: 2AUARTKMU8A

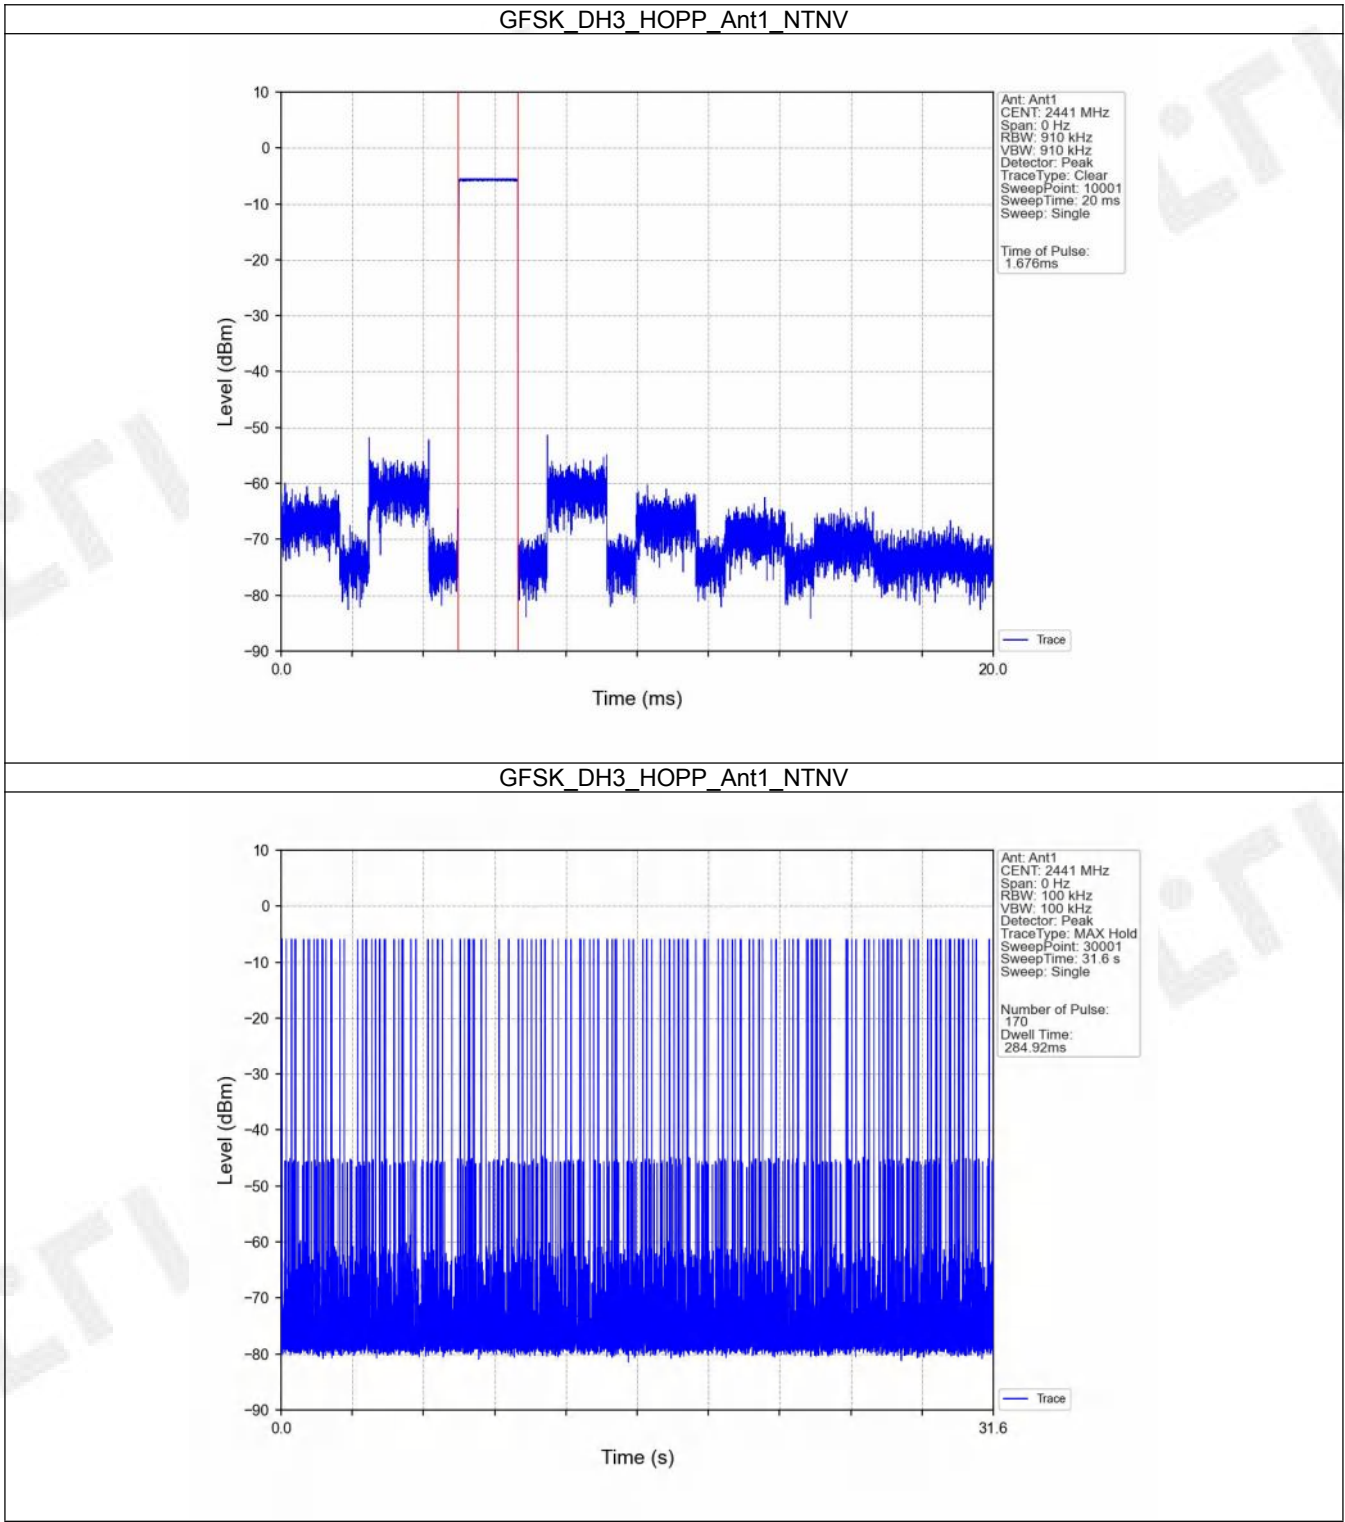


FCCID: 2AUARTKMU8A

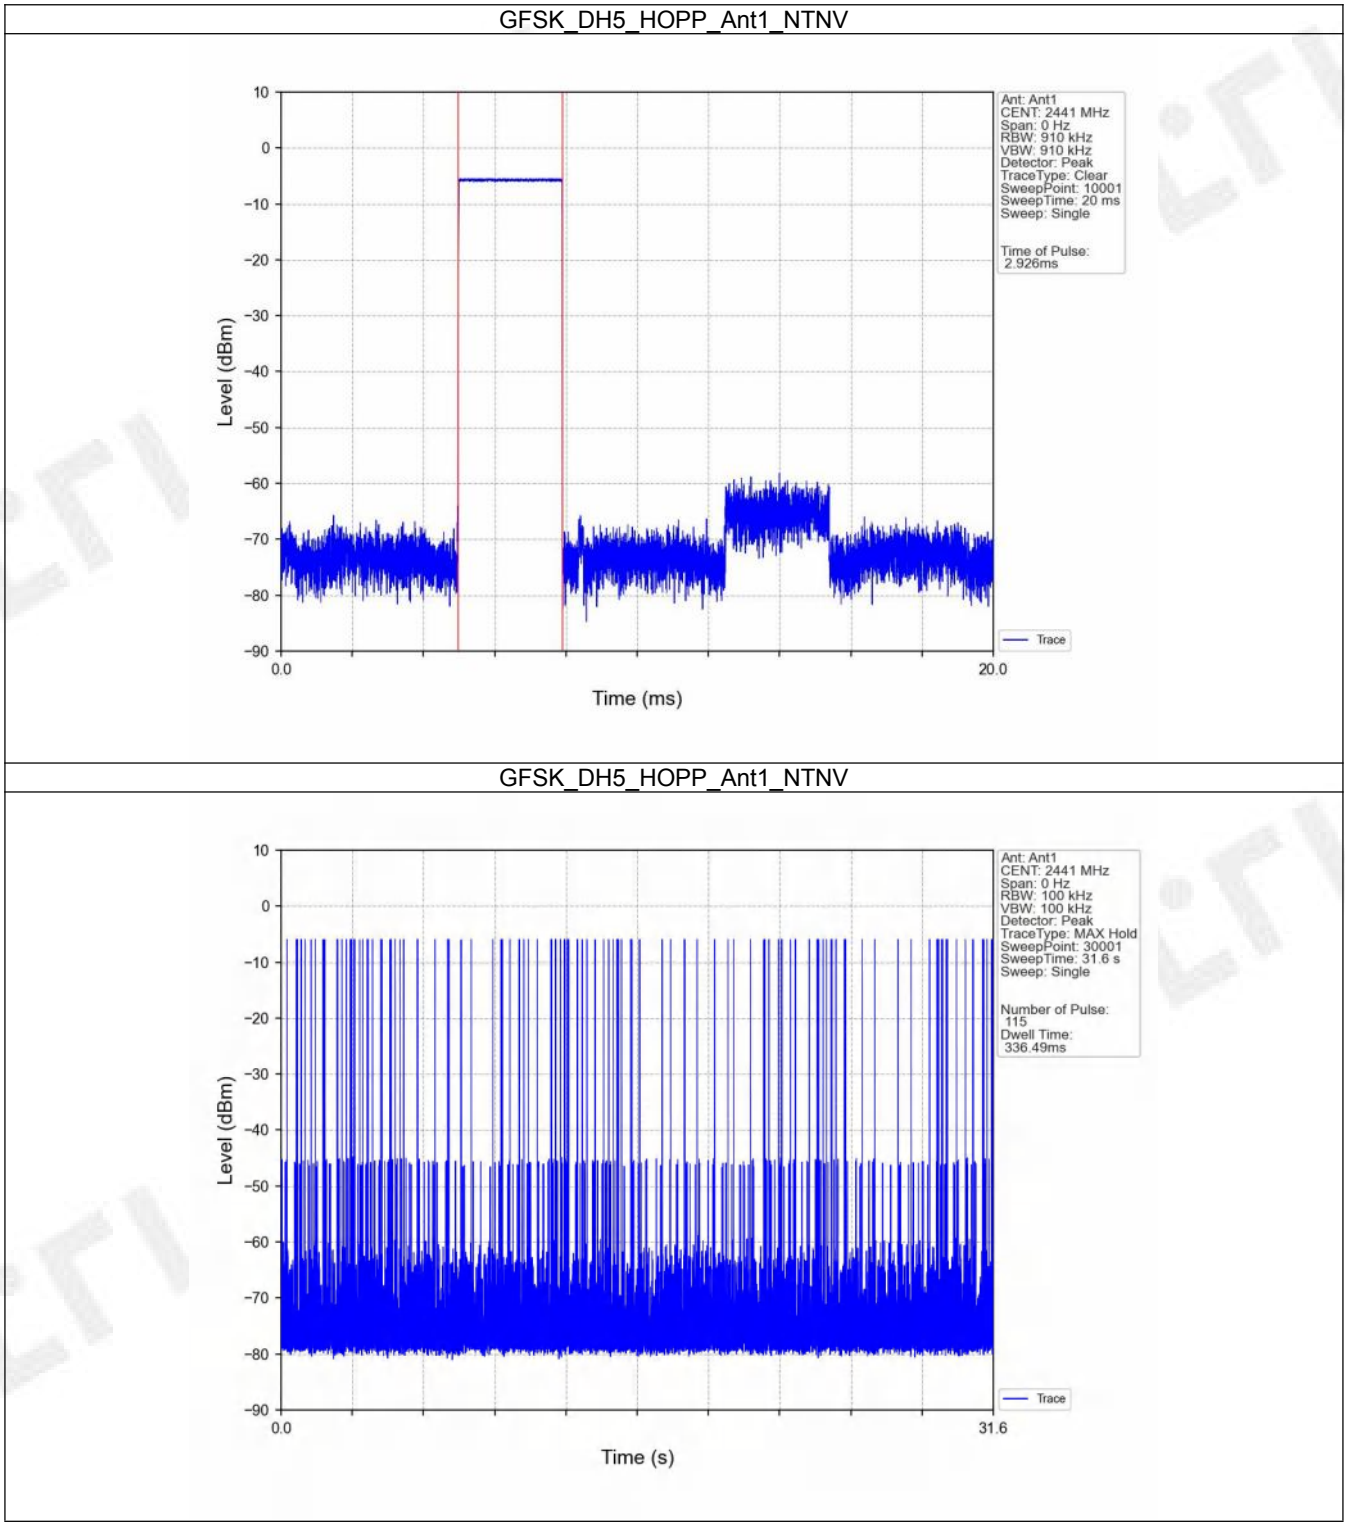


FCCID: 2AUARTKMU8A

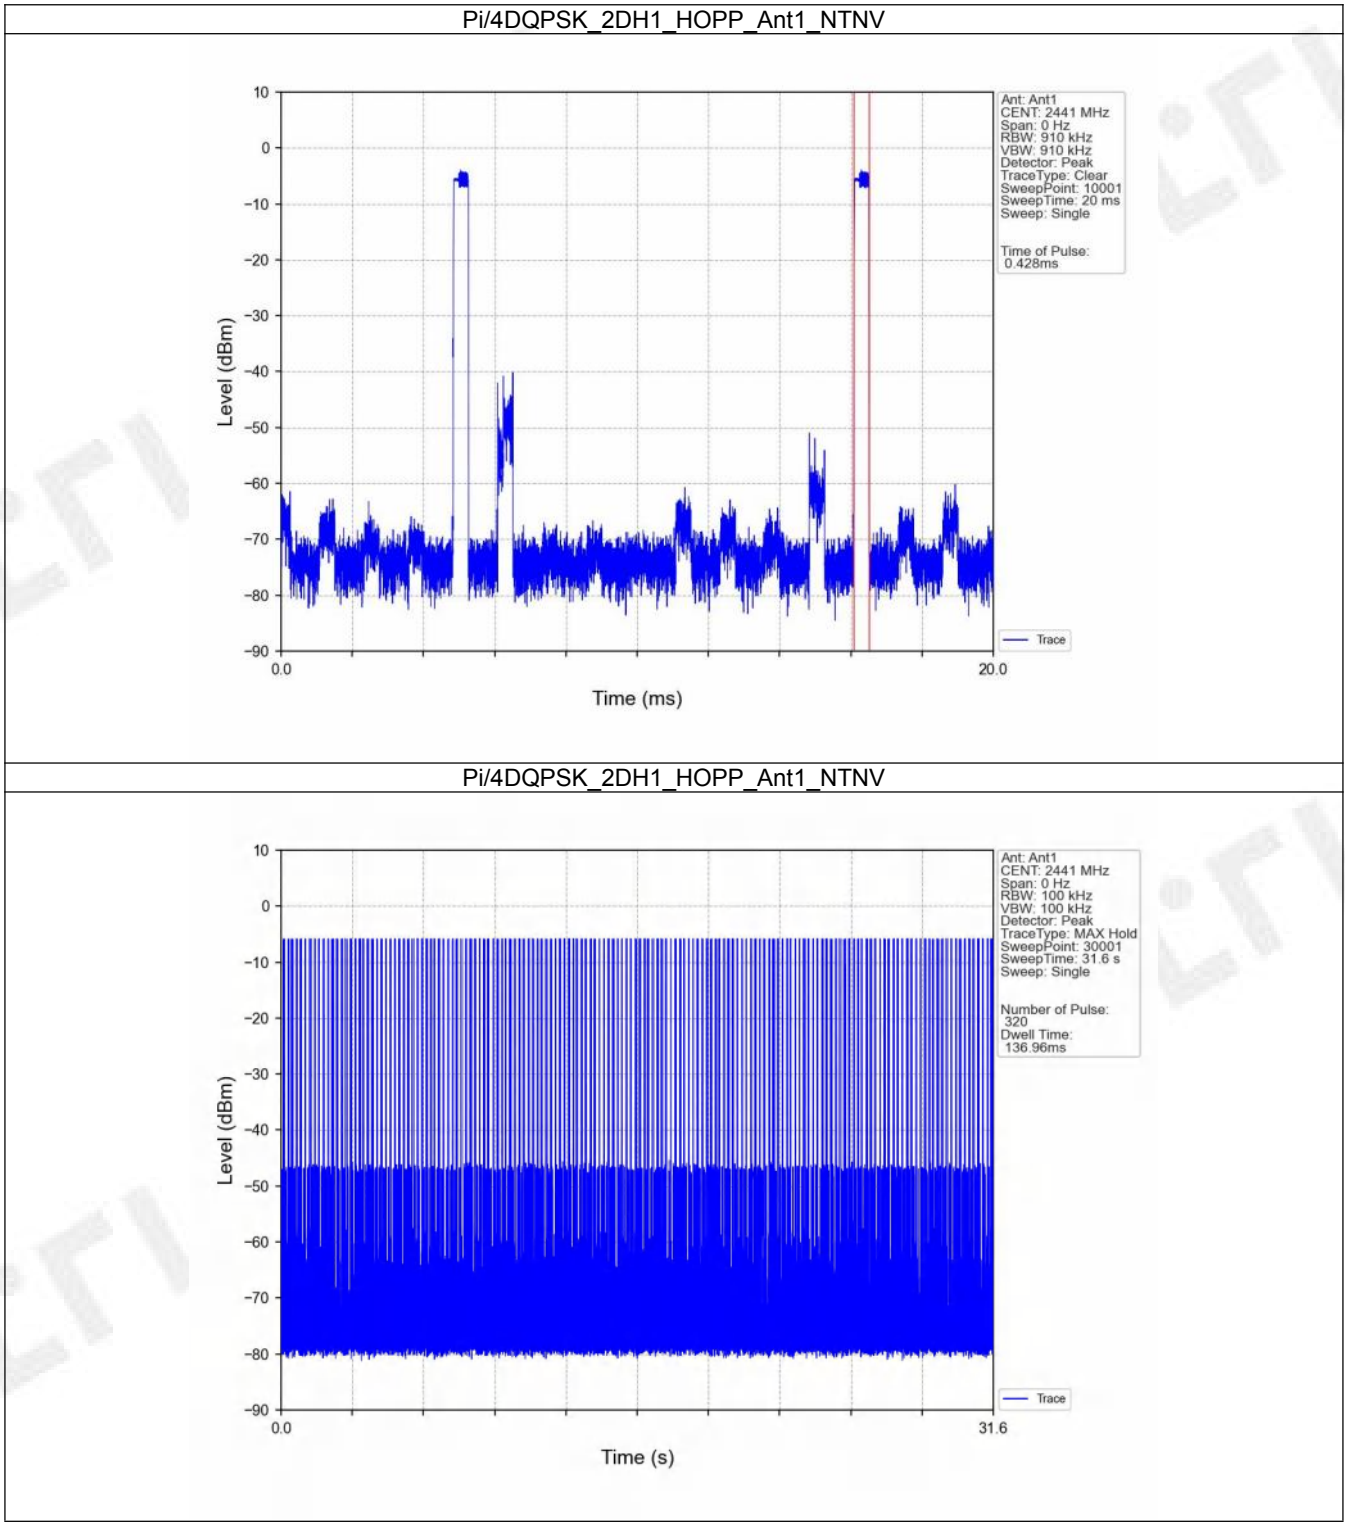


FCCID: 2AUARTKMU8A

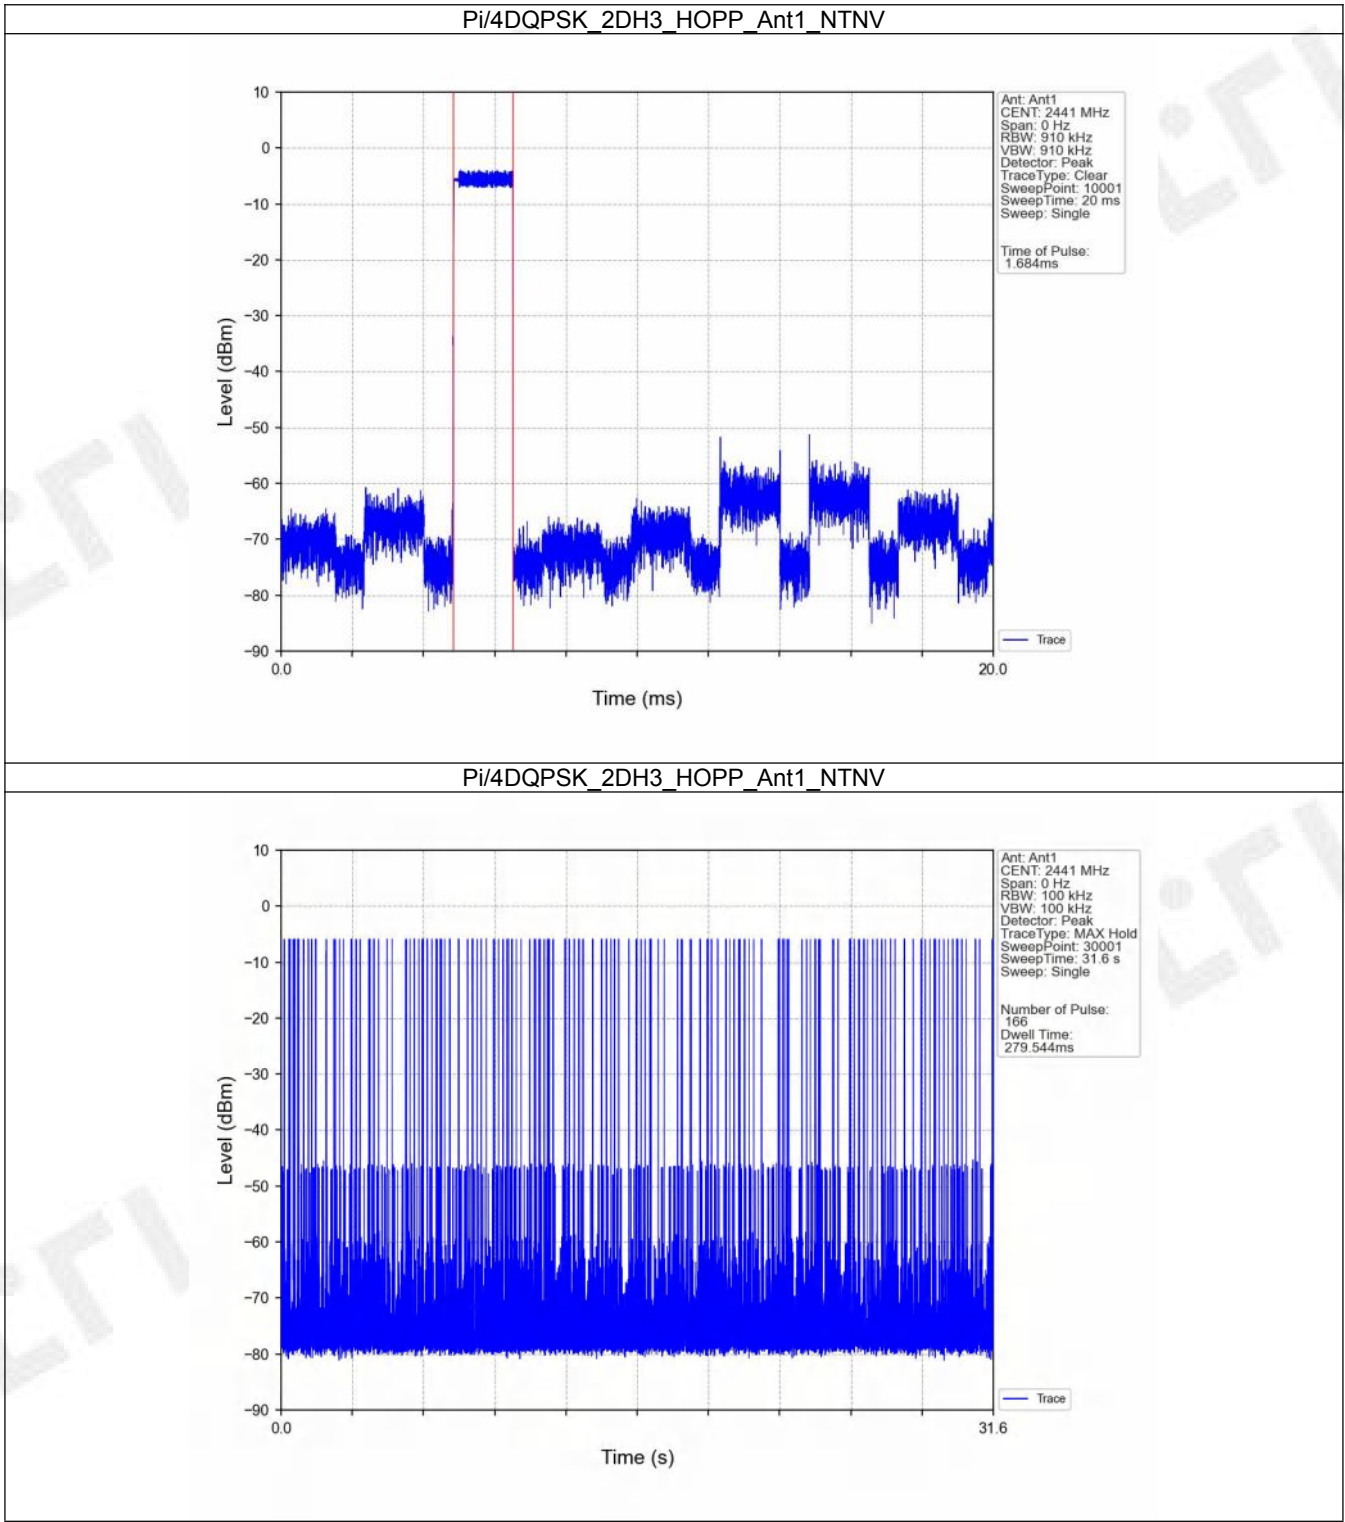


FCCID: 2AUARTKMU8A

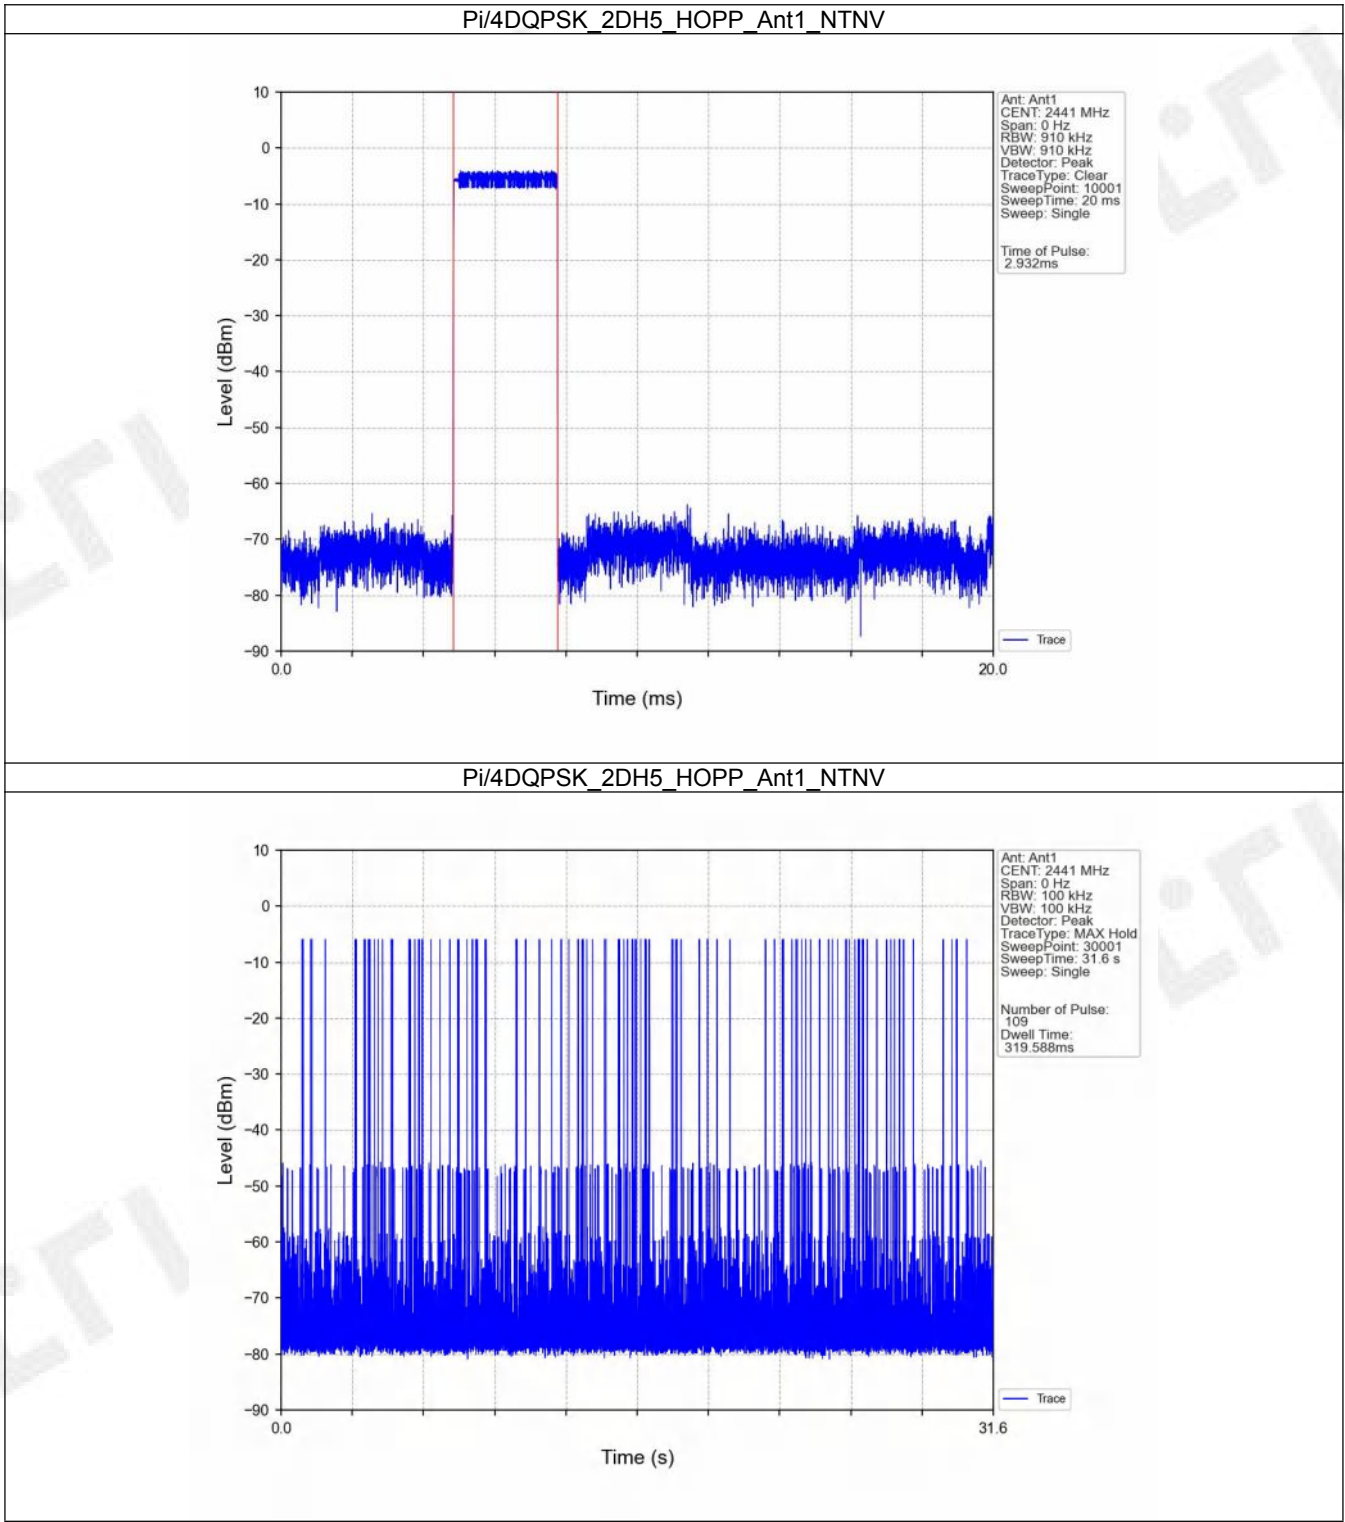


FCCID: 2AUARTKMU8A

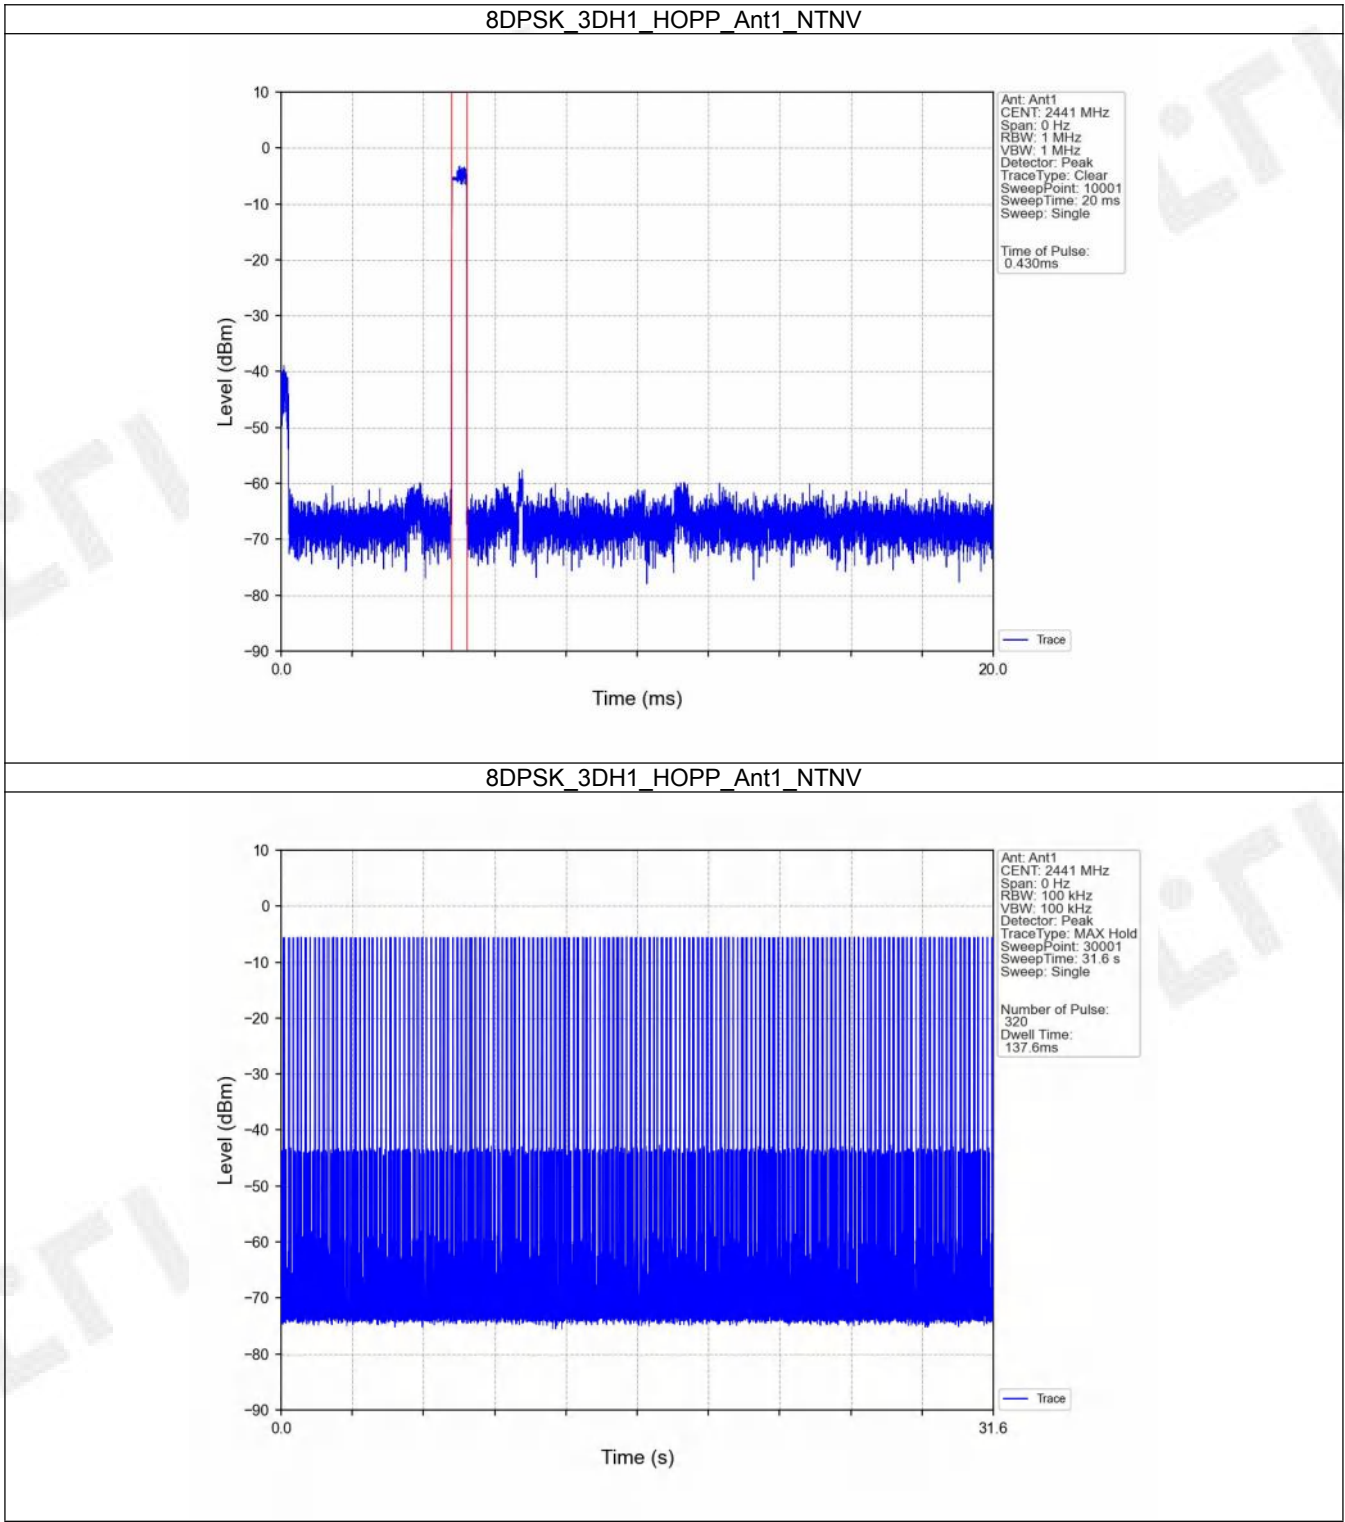

FCCID: 2AUARTKMU8A

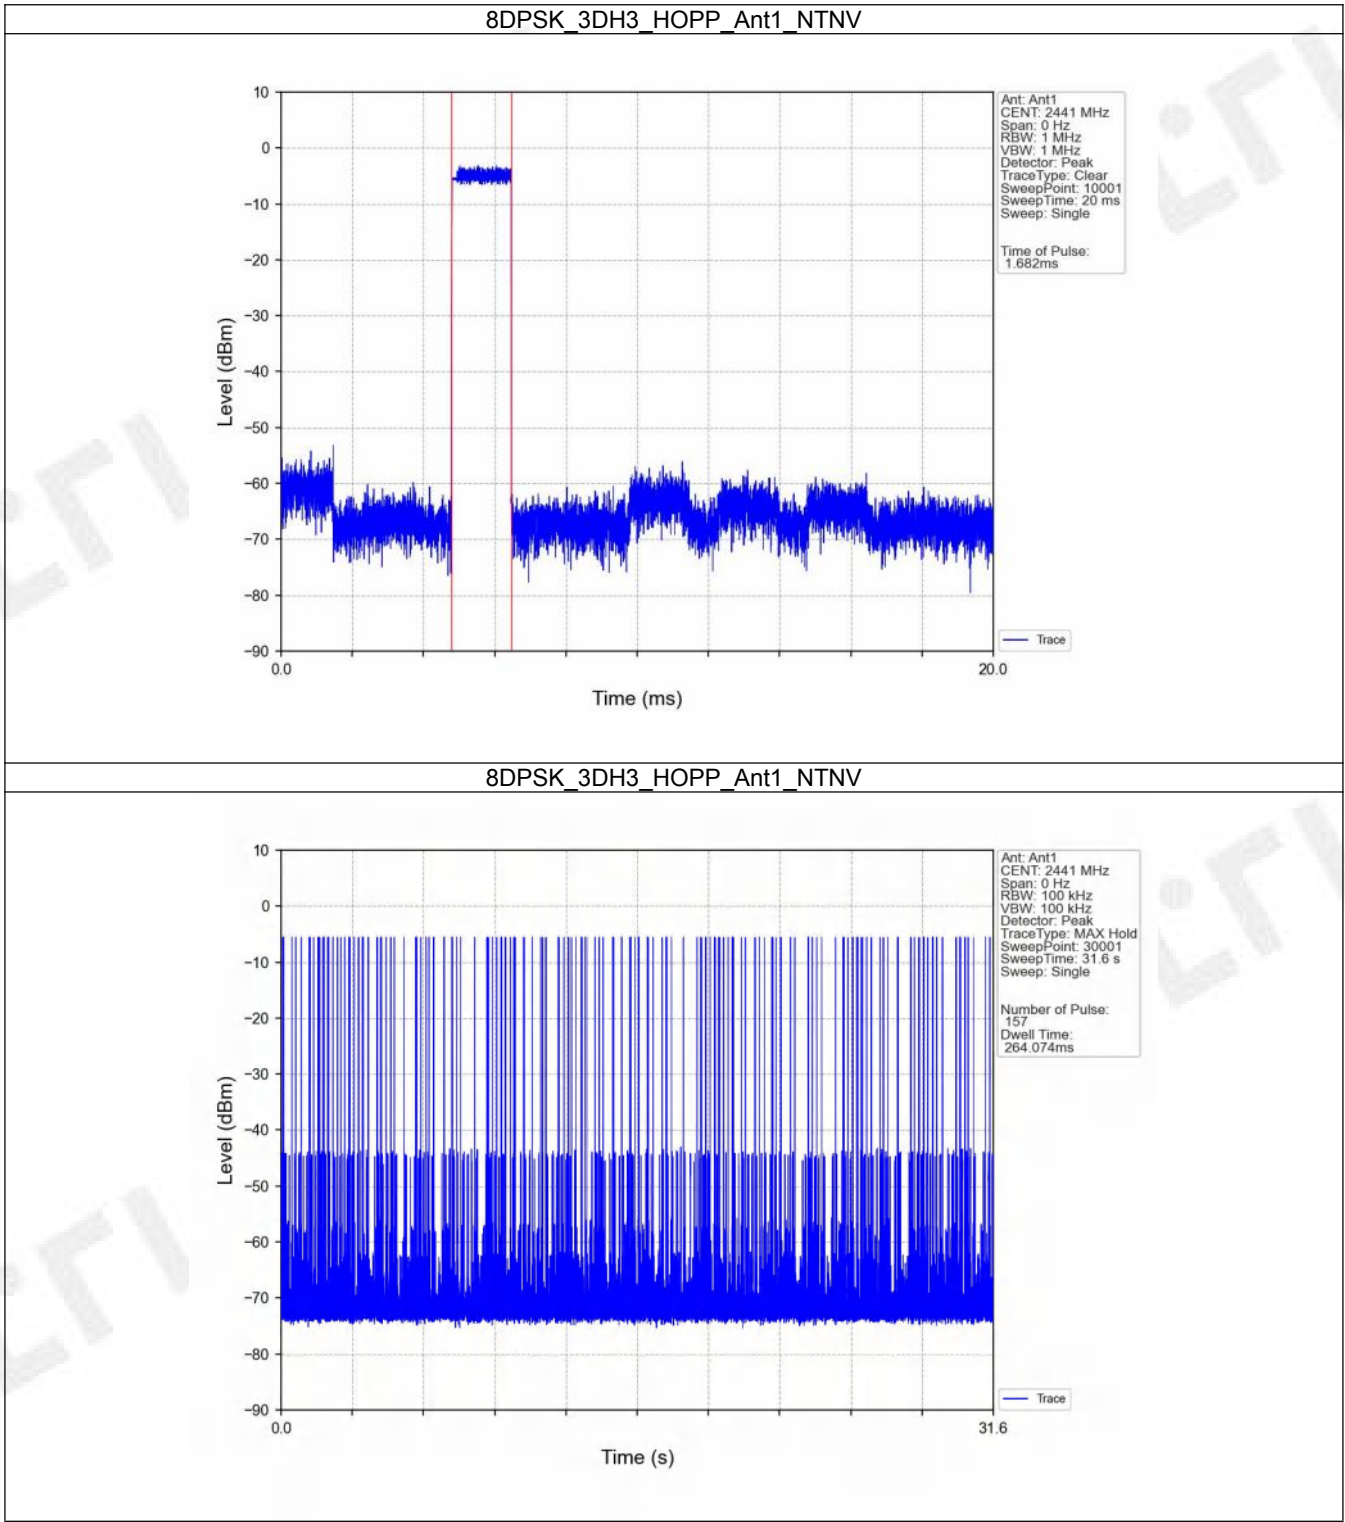

FCCID: 2AUARTKMU8A

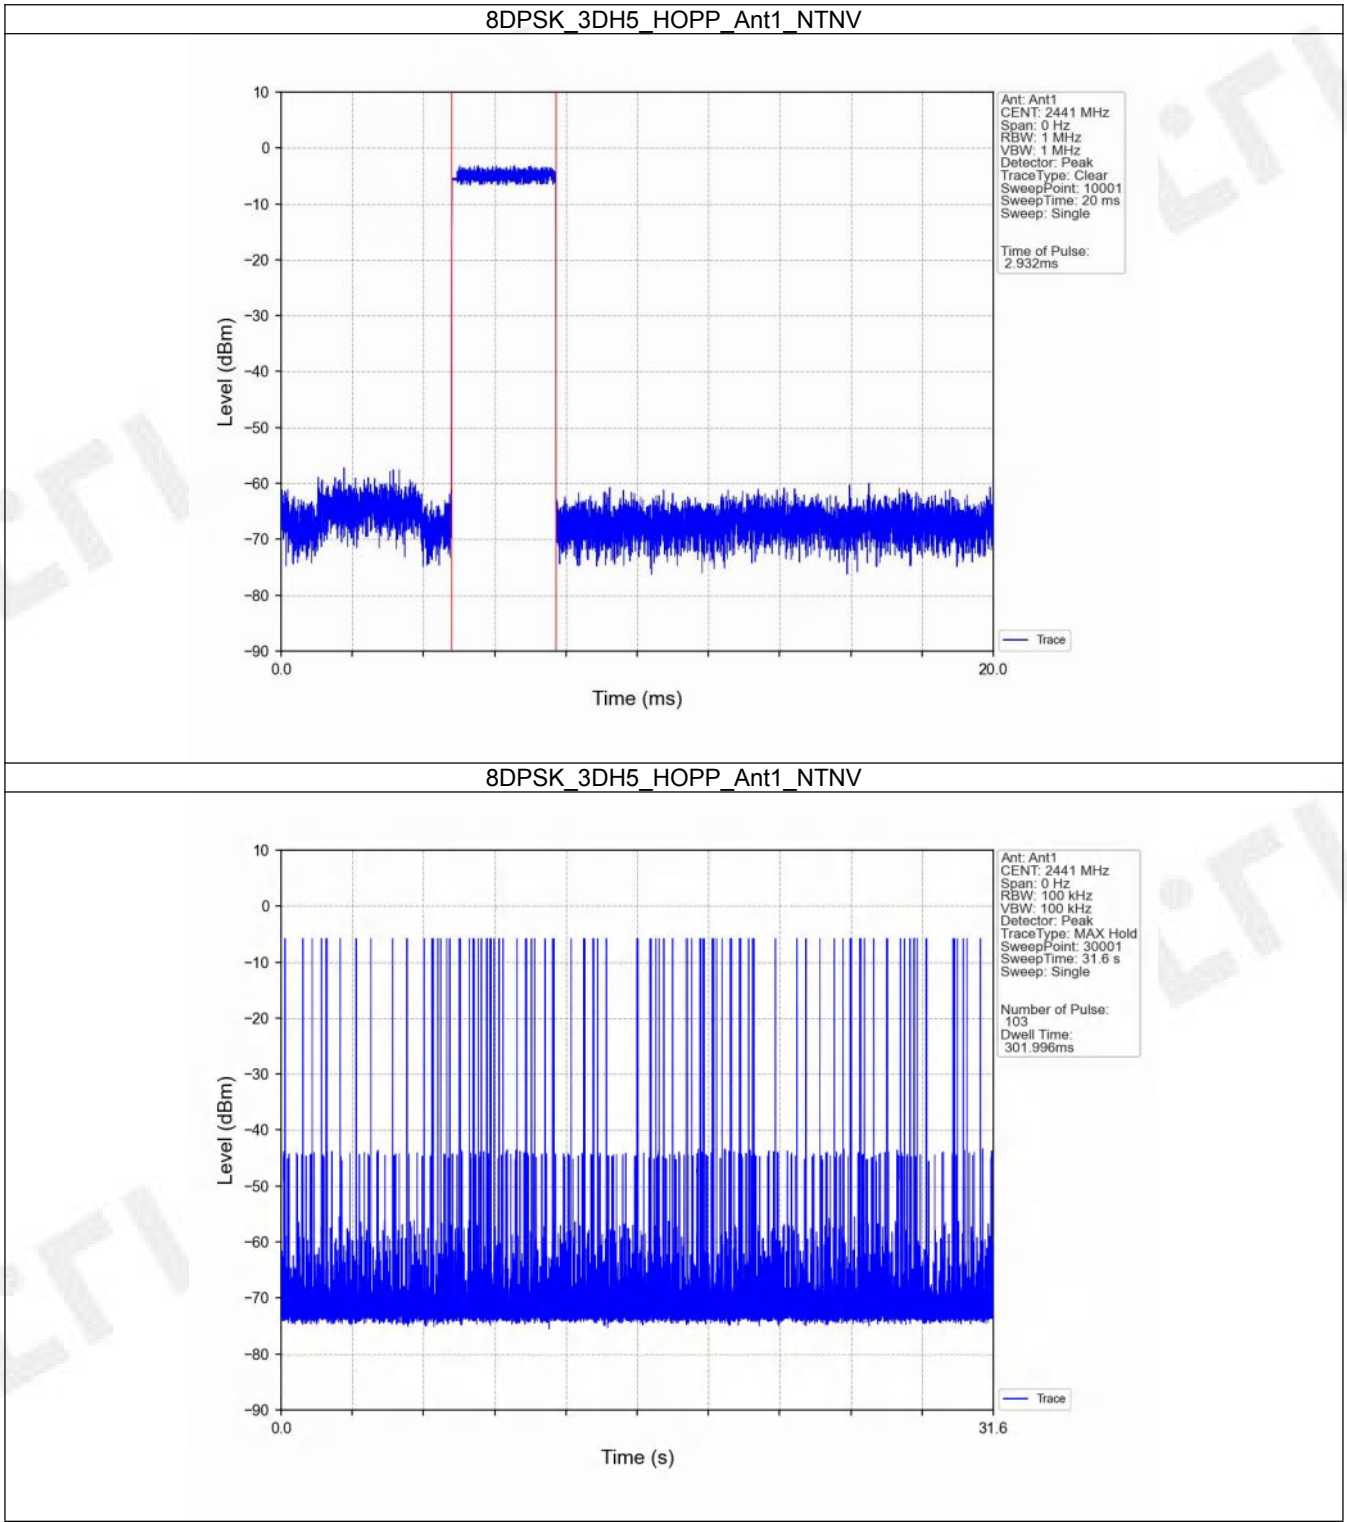

FCCID: 2AUARTKMU8A

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-6.84
		2441	DH5	1	-5.68
		2480	DH5	1	-5.28
Pi/4DQPSK	SISO	2402	2DH5	1	-6.95
		2441	2DH5	1	-5.84
		2480	2DH5	1	-5.42
8DPSK	SISO	2402	3DH5	1	-6.92
		2441	3DH5	1	-5.62
		2480	3DH5	1	-5.29

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

6.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	-5.28	-25.28	Pass
		2441	DH5	1	-5.28	-25.28	Pass
		2480	DH5	1	-5.28	-25.28	Pass
		HOPP	DH5	1	-5.28	-25.28	Pass
					-5.28	-25.28	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-5.42	-25.42	Pass
		2441	2DH5	1	-5.42	-25.42	Pass
		2480	2DH5	1	-5.42	-25.42	Pass
		HOPP	2DH5	1	-5.42	-25.42	Pass
					-5.42	-25.42	Pass
8DPSK	SISO	2402	3DH5	1	-5.29	-25.29	Pass
		2441	3DH5	1	-5.29	-25.29	Pass
		2480	3DH5	1	-5.29	-25.29	Pass
		HOPP	3DH5	1	-5.29	-25.29	Pass
					-5.29	-25.29	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


FCCID: 2AUARTKMU8A

6.2 Test Graph


6.2.1 Ref

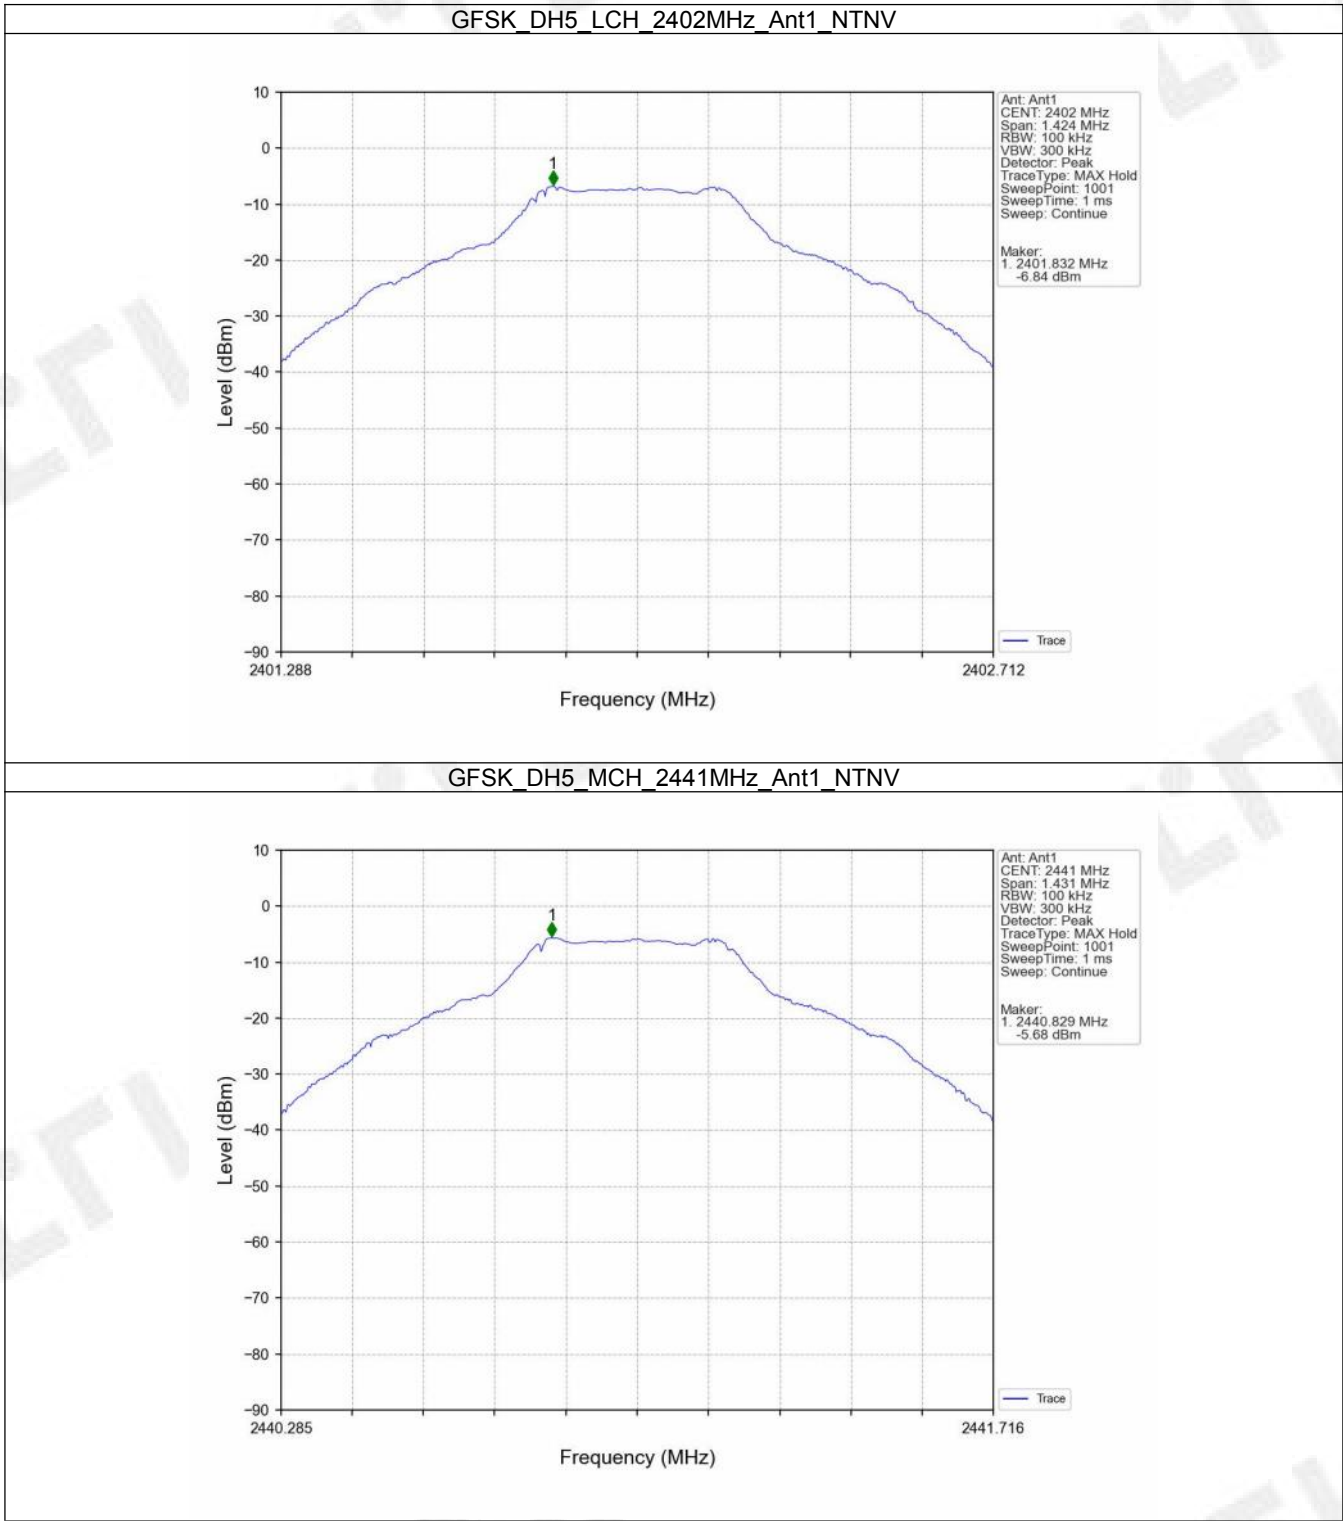


FCCID: 2AUARTKMU8A

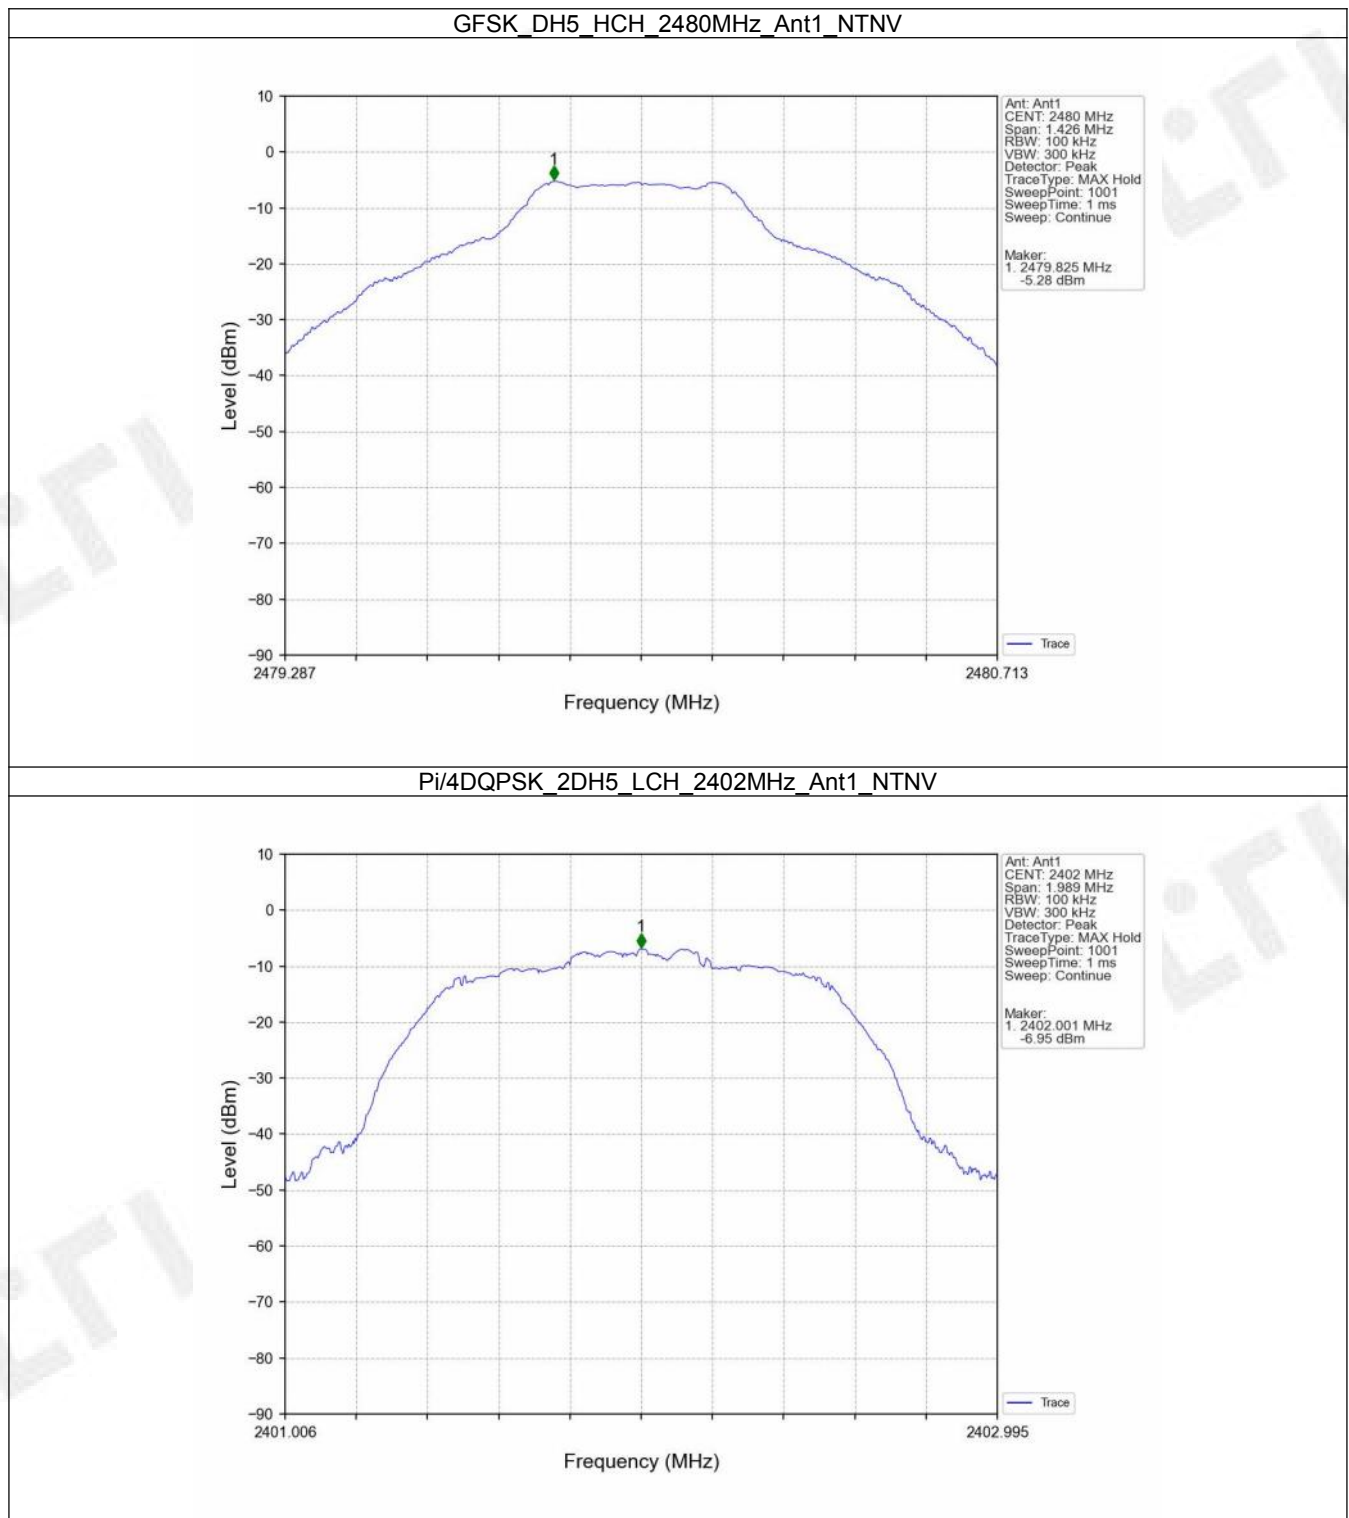


FCCID: 2AUARTKMU8A

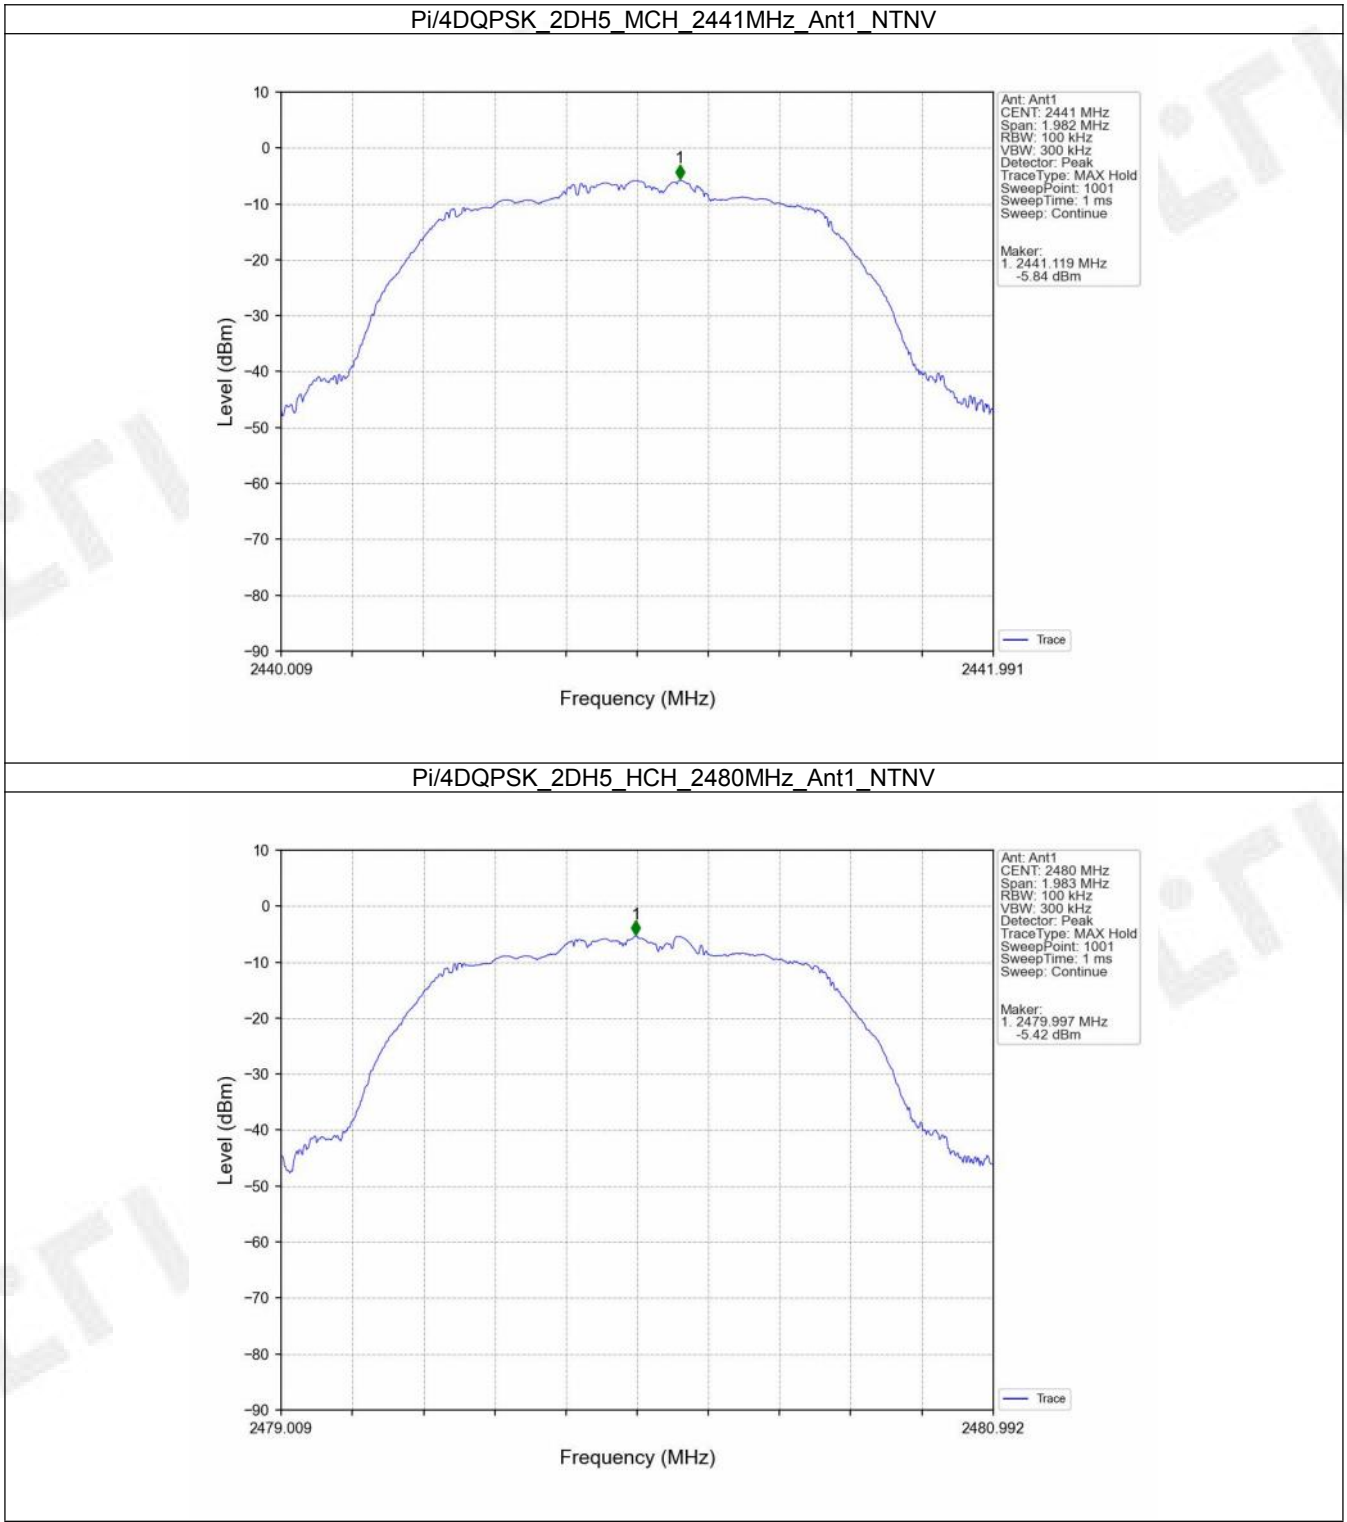

FCCID: 2AUARTKMU8A

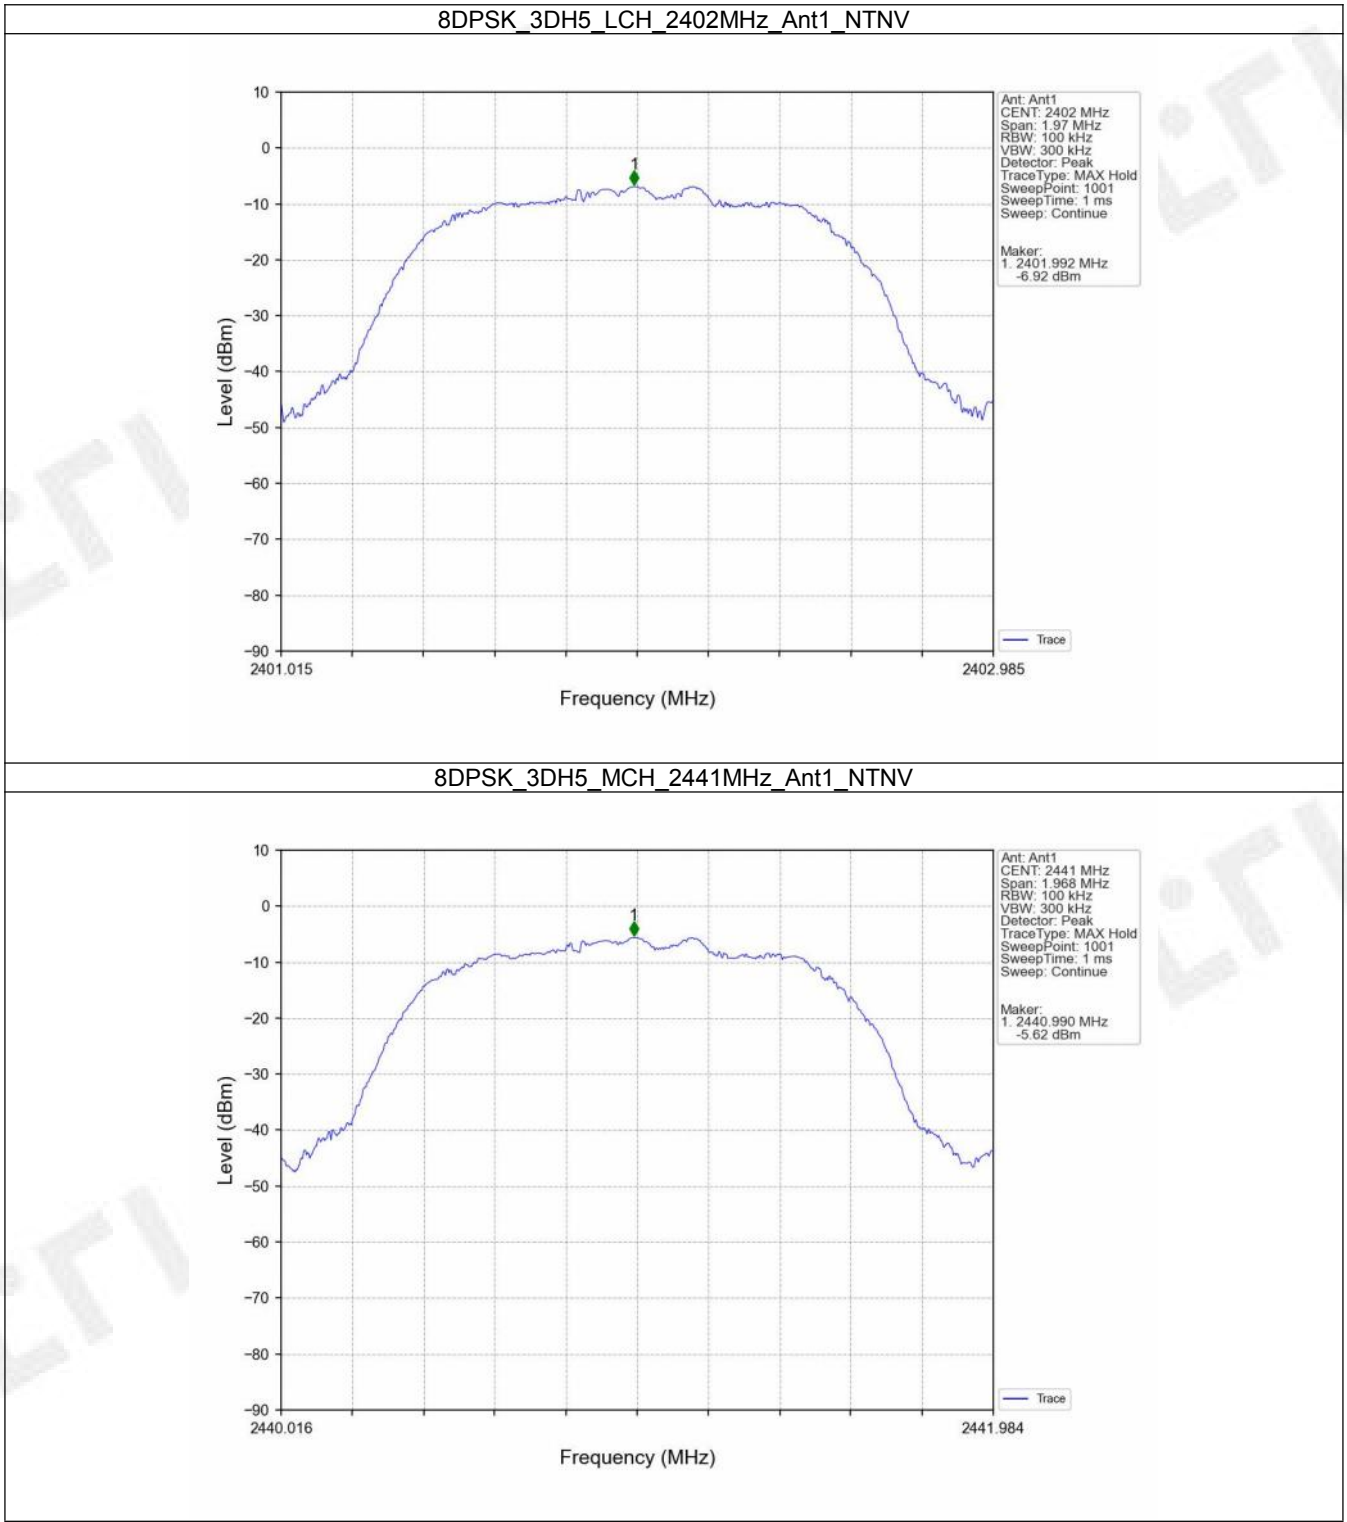


FCCID: 2AUARTKMU8A

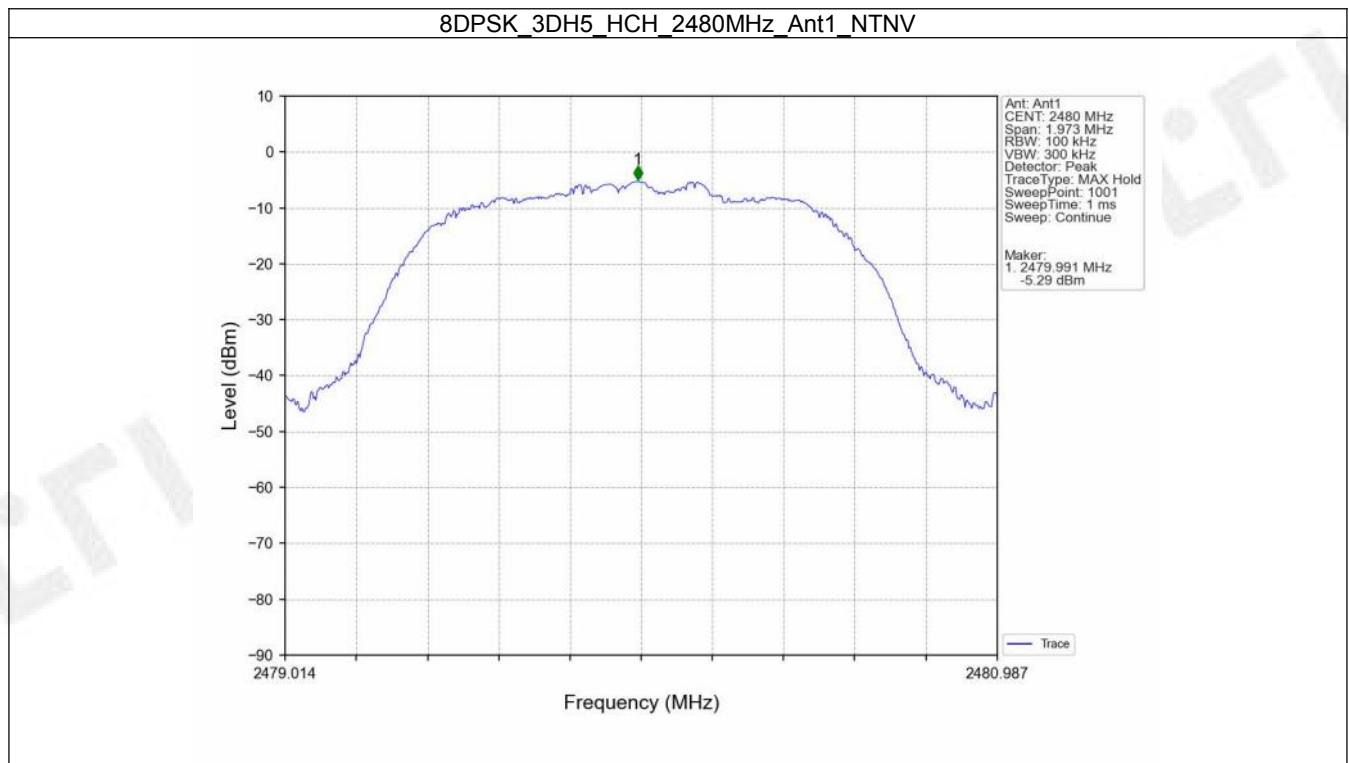


FCCID: 2AUARTKMU8A


6.2.2 CSE

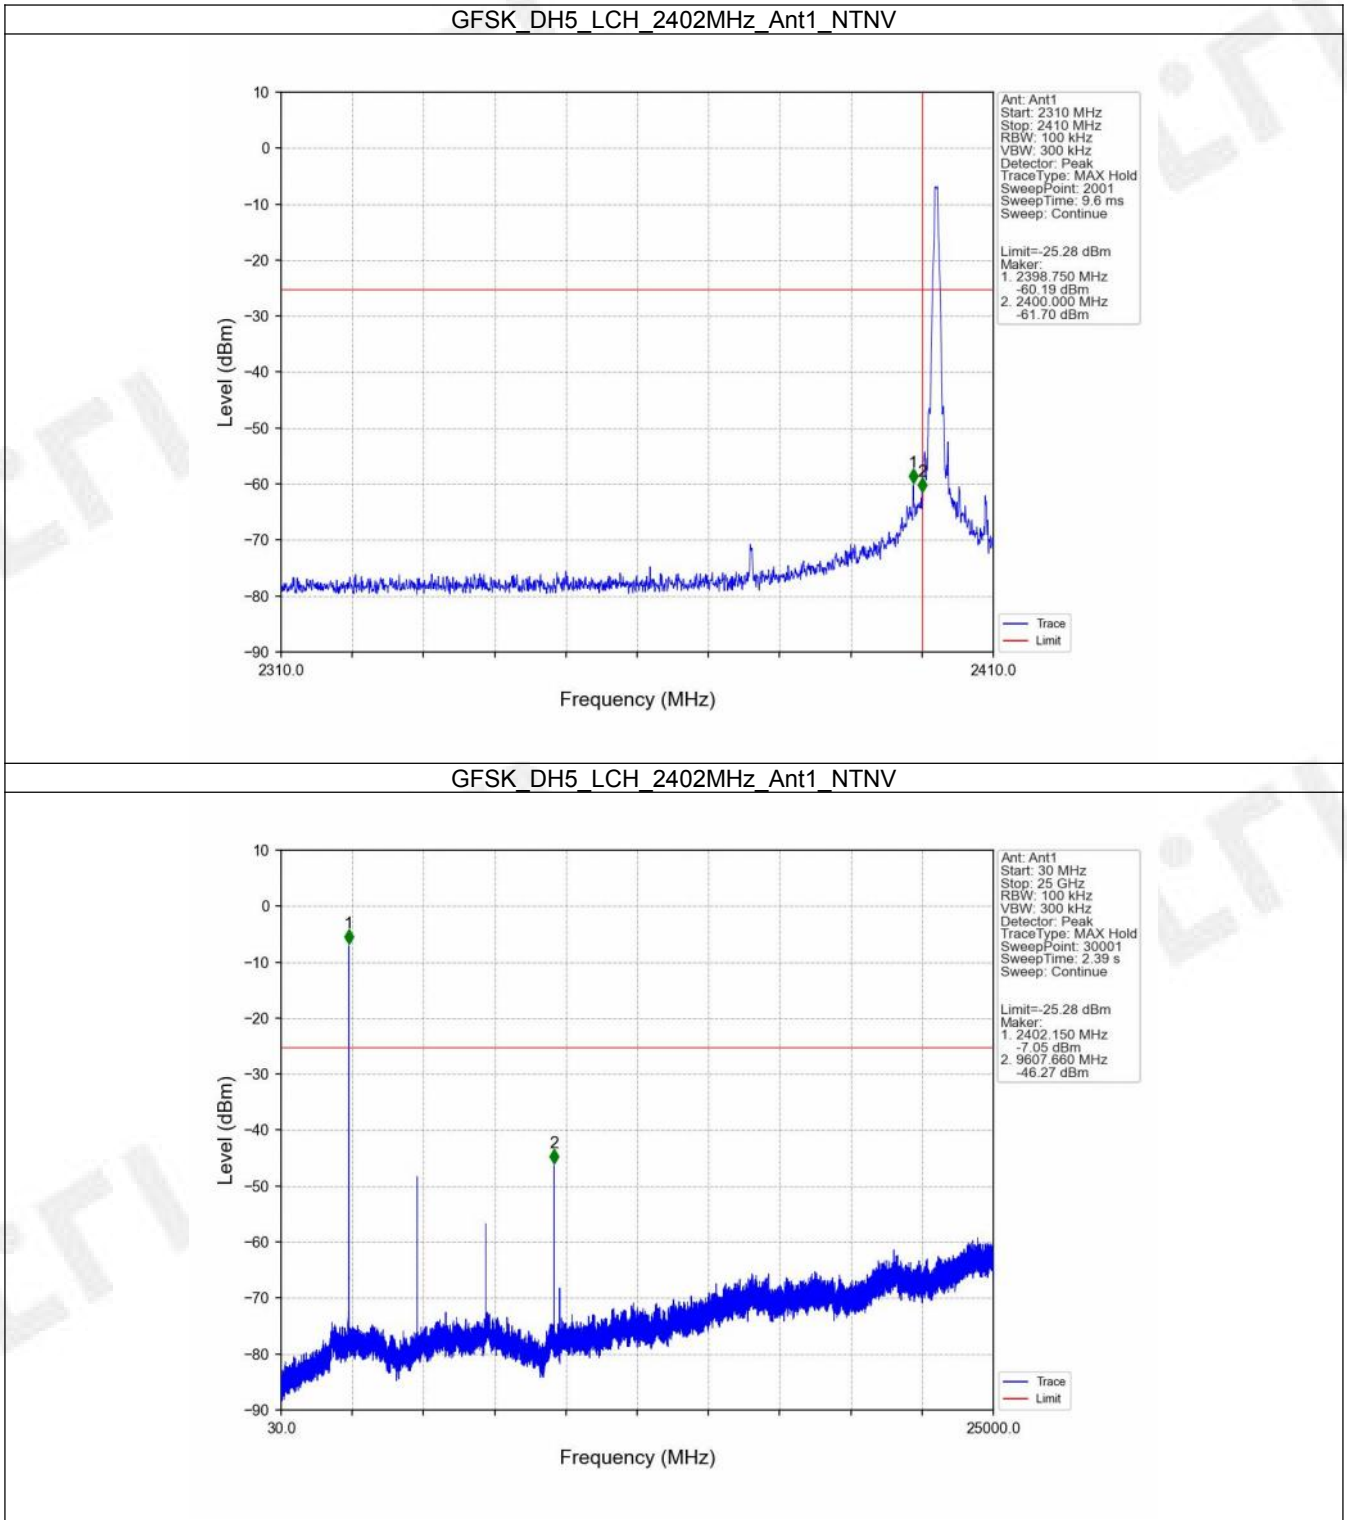


FCCID: 2AUARTKMU8A

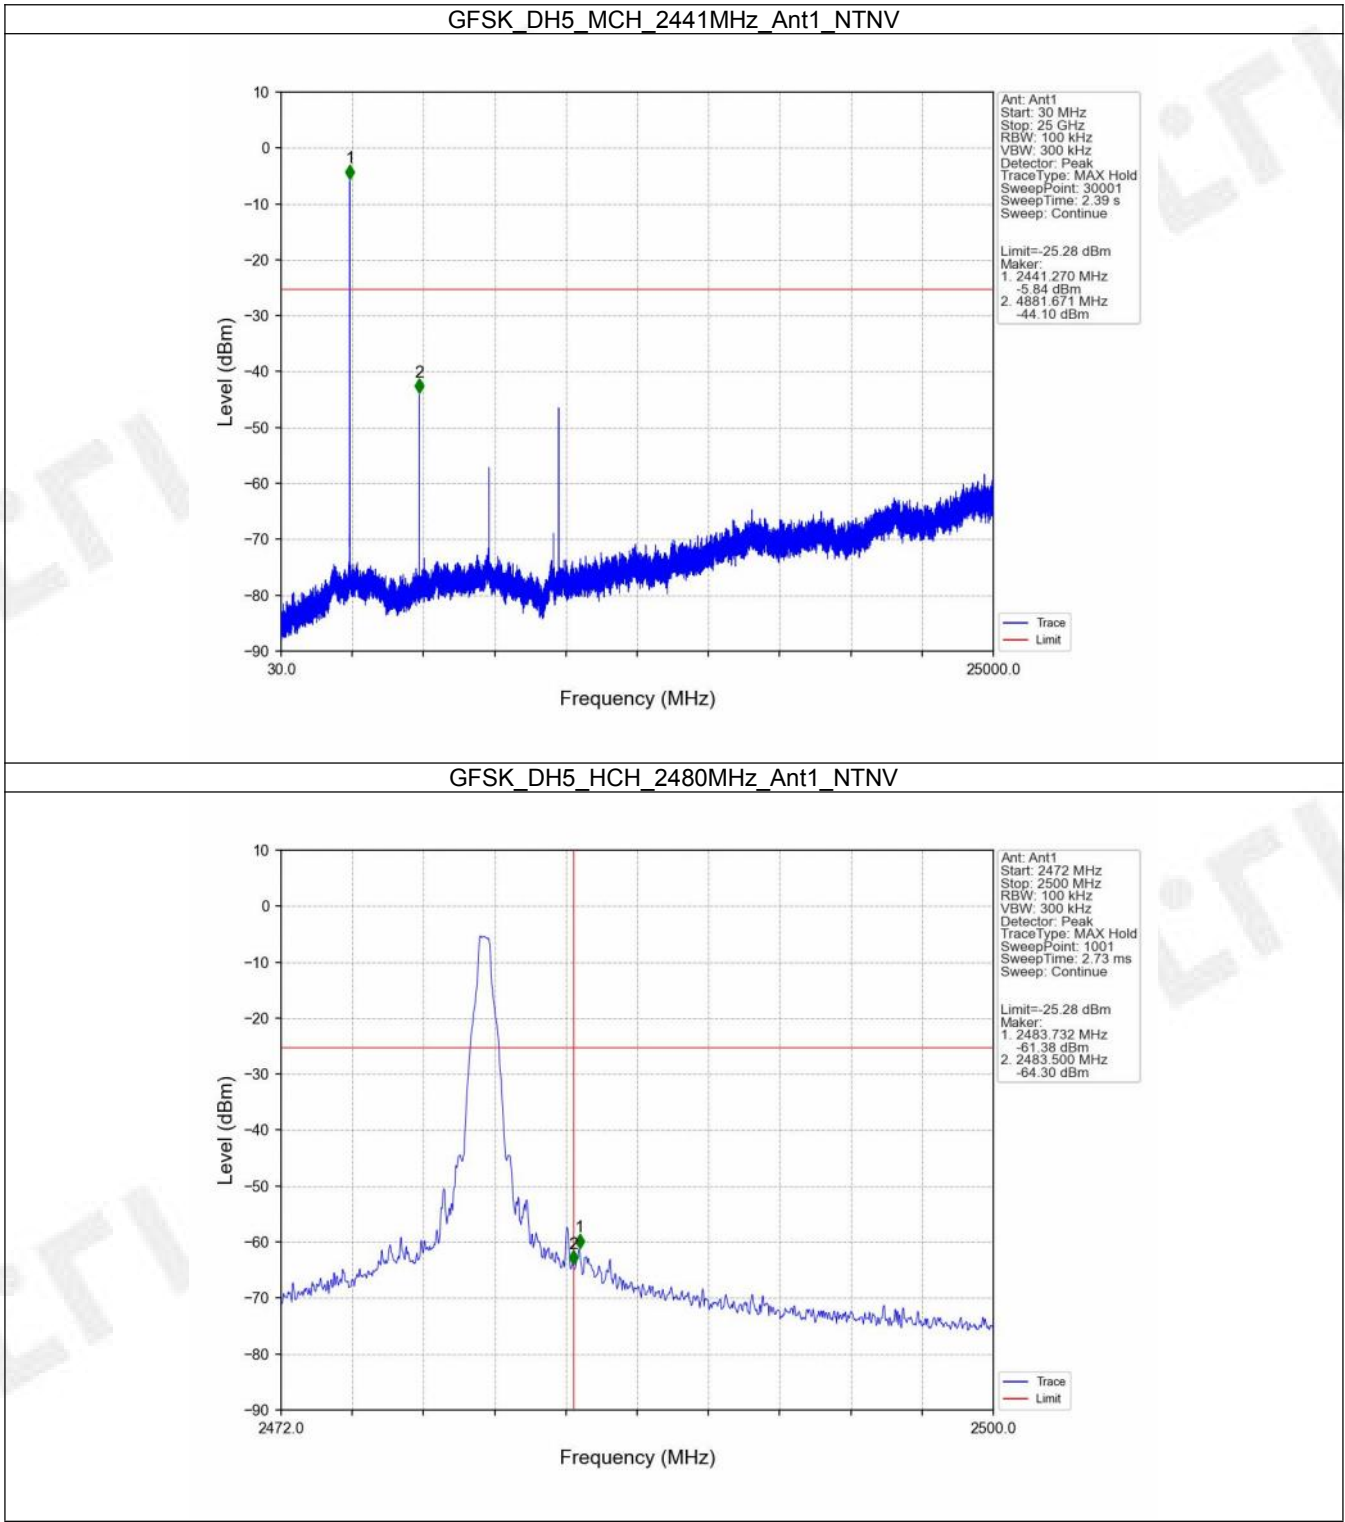


FCCID: 2AUARTKMU8A

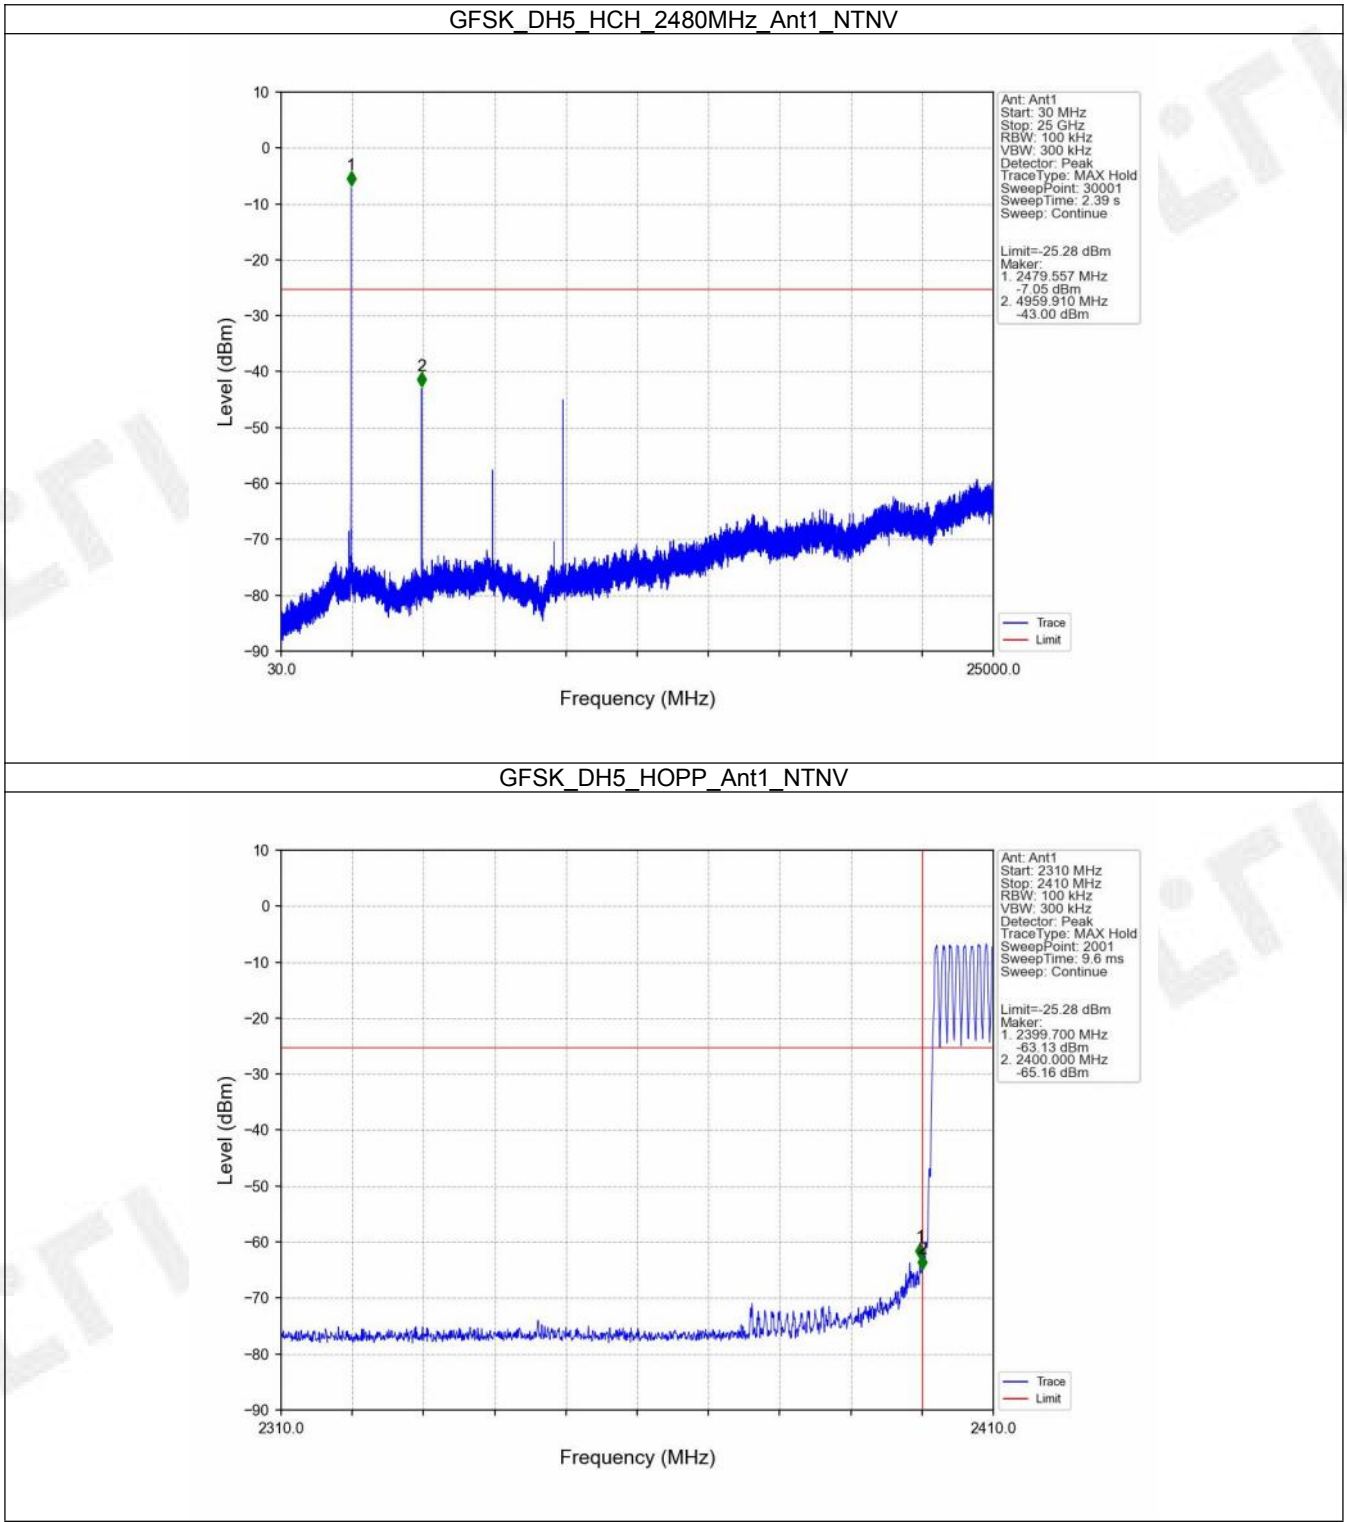


FCCID: 2AUARTKMU8A

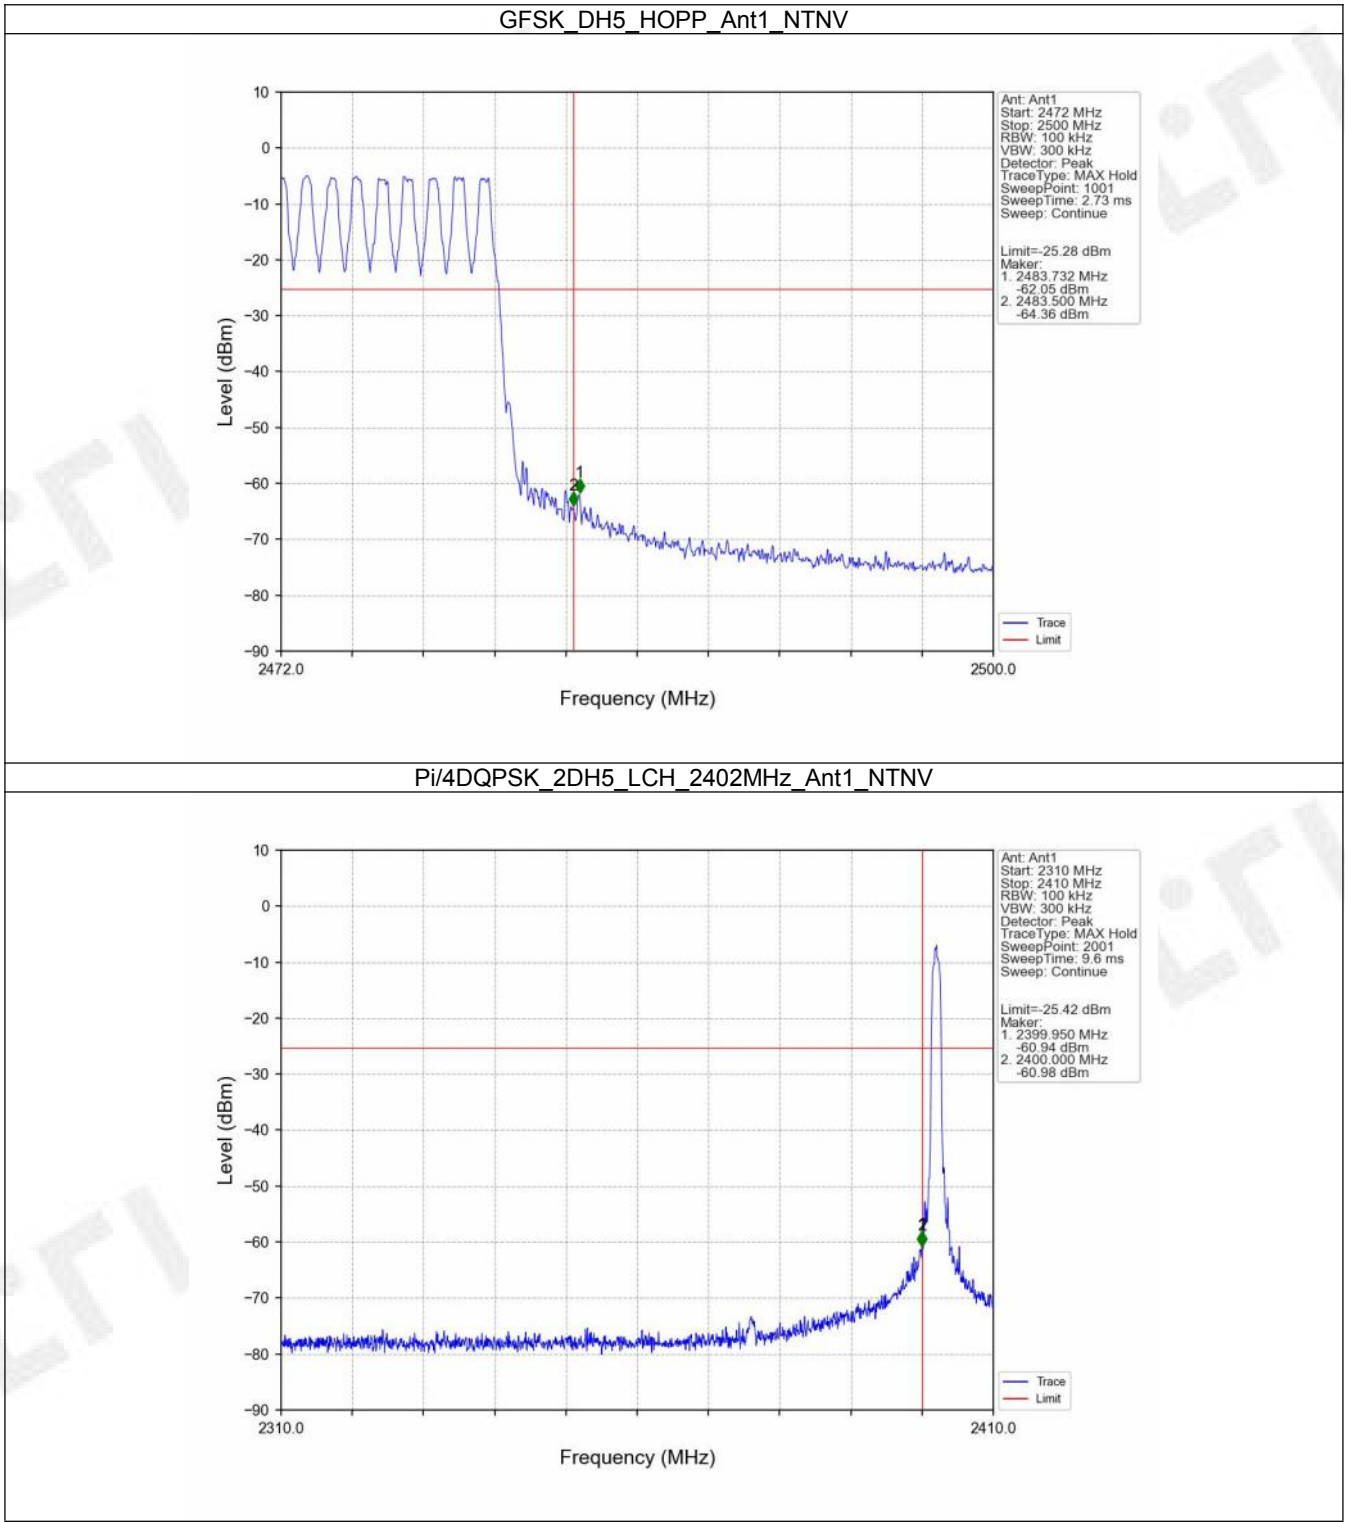


FCCID: 2AUARTKMU8A

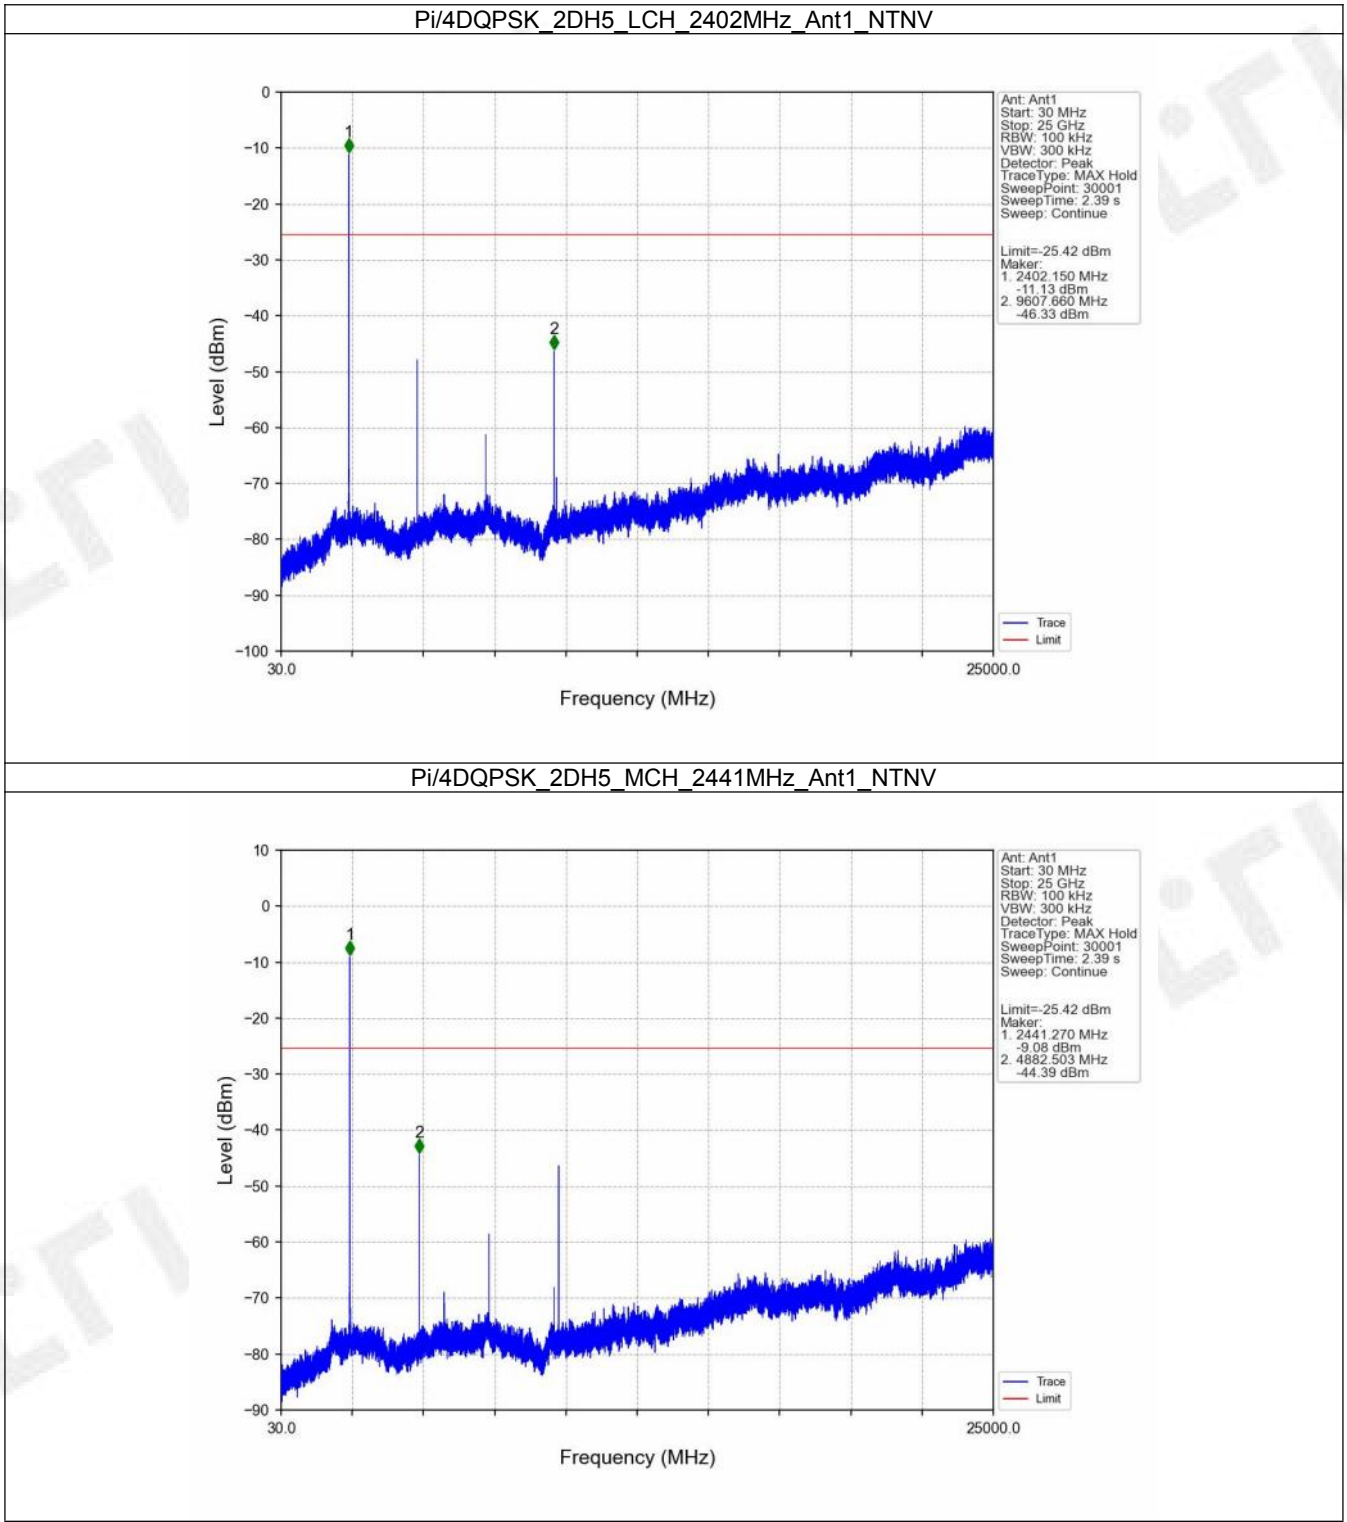


FCCID: 2AUARTKMU8A

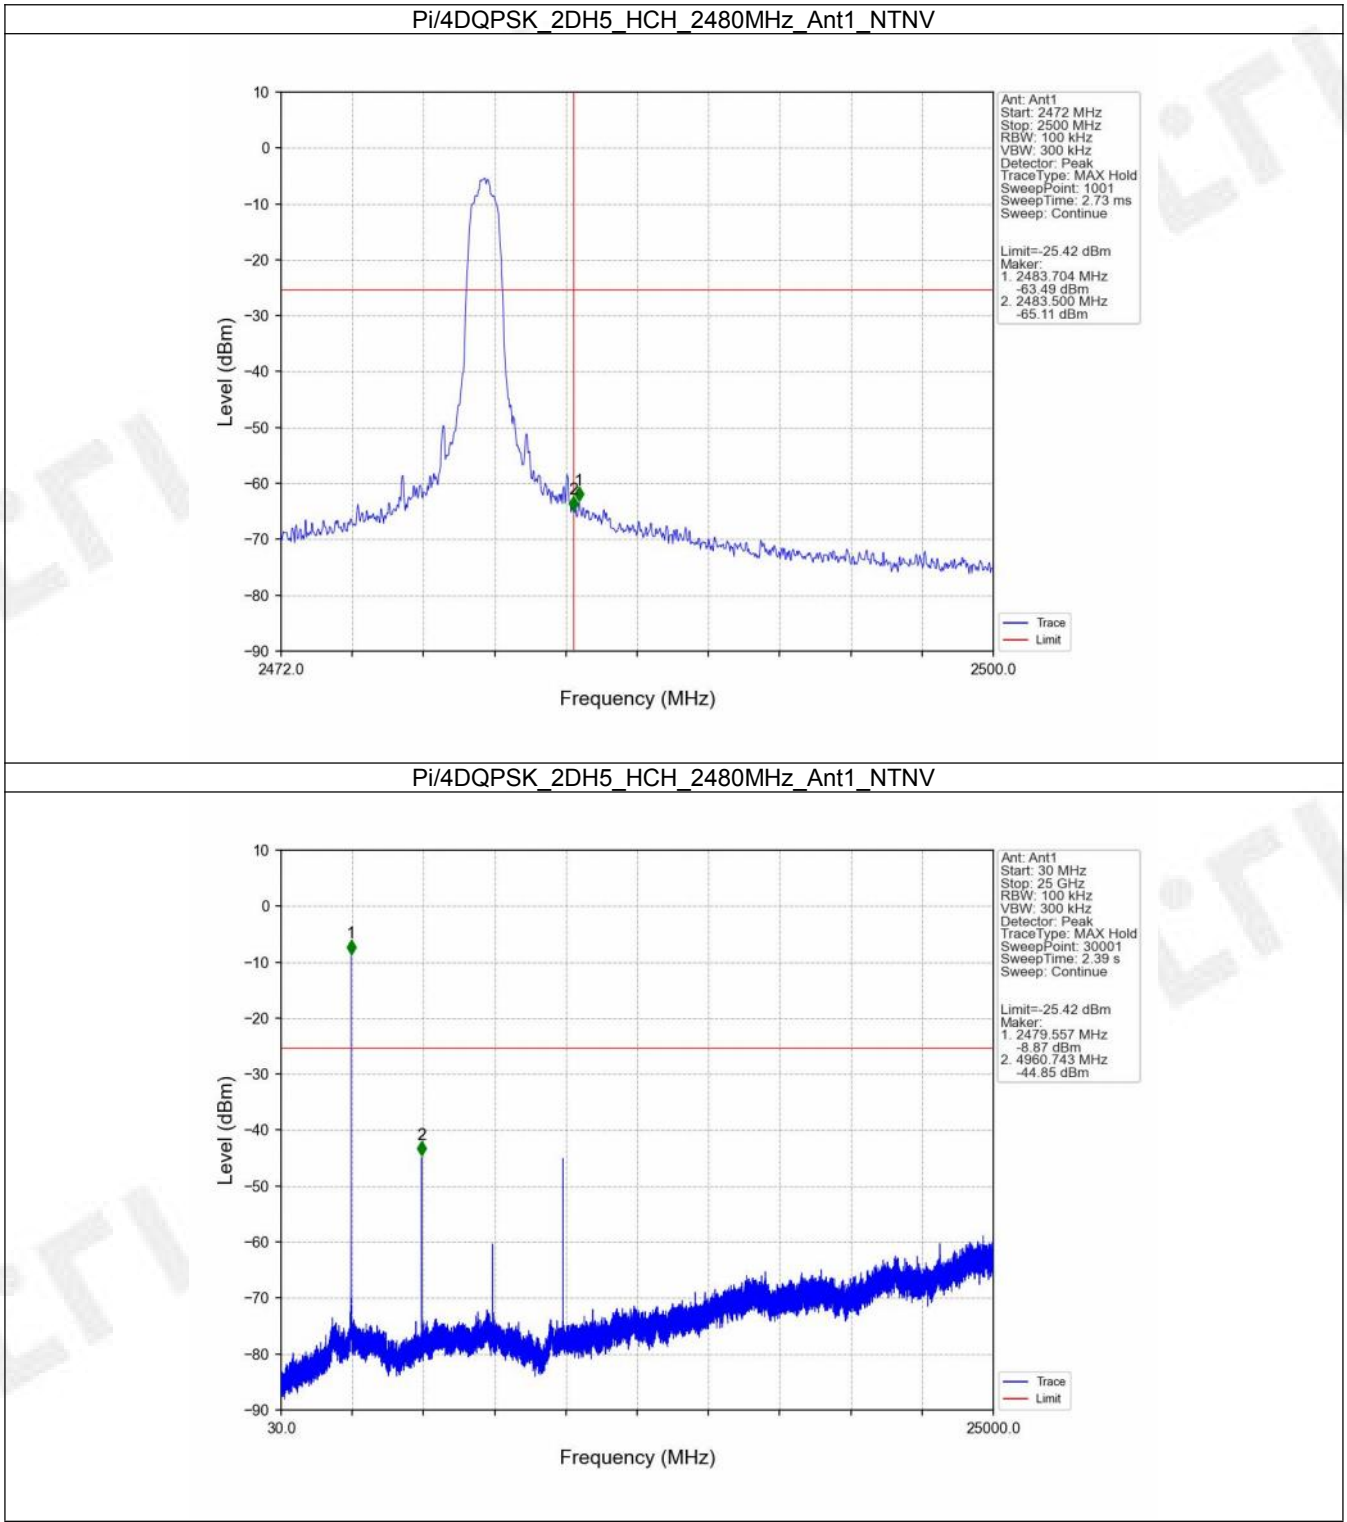


FCCID: 2AUARTKMU8A

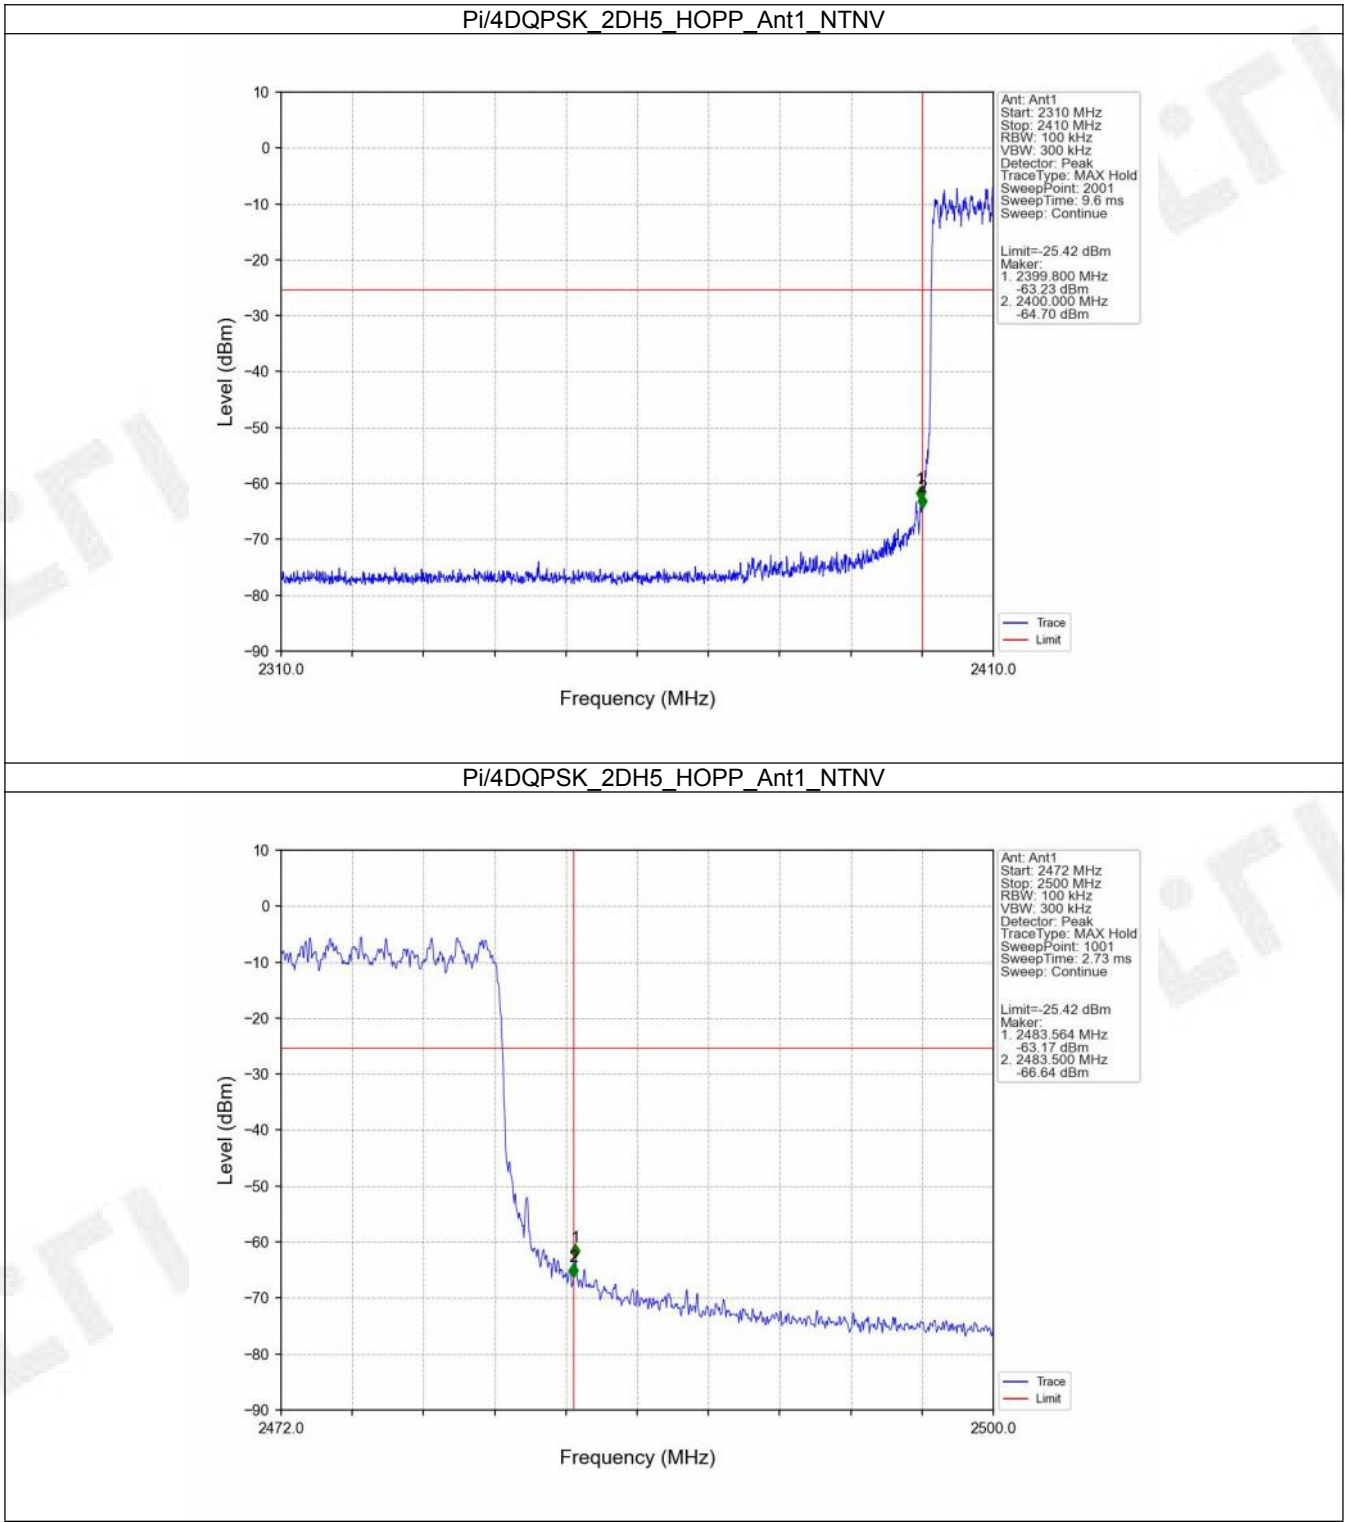


FCCID: 2AUARTKMU8A

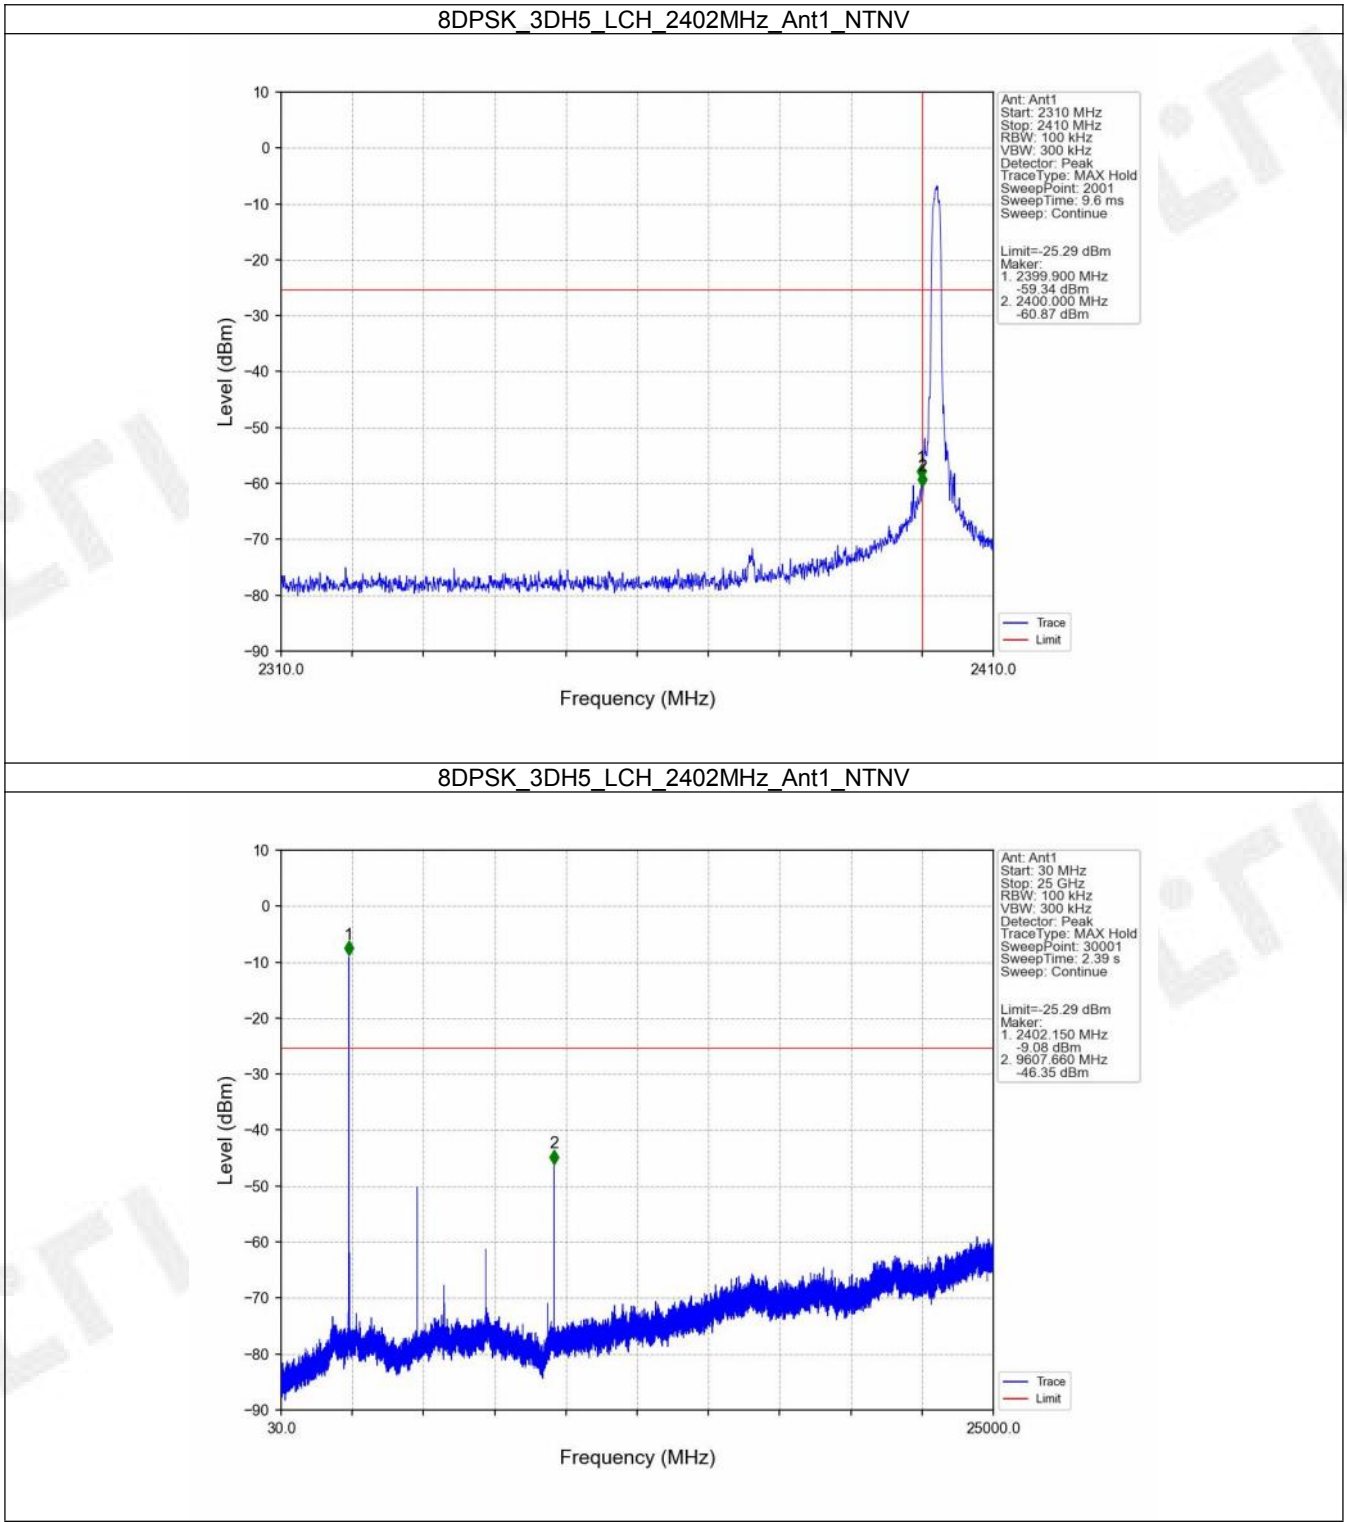

FCCID: 2AUARTKMU8A

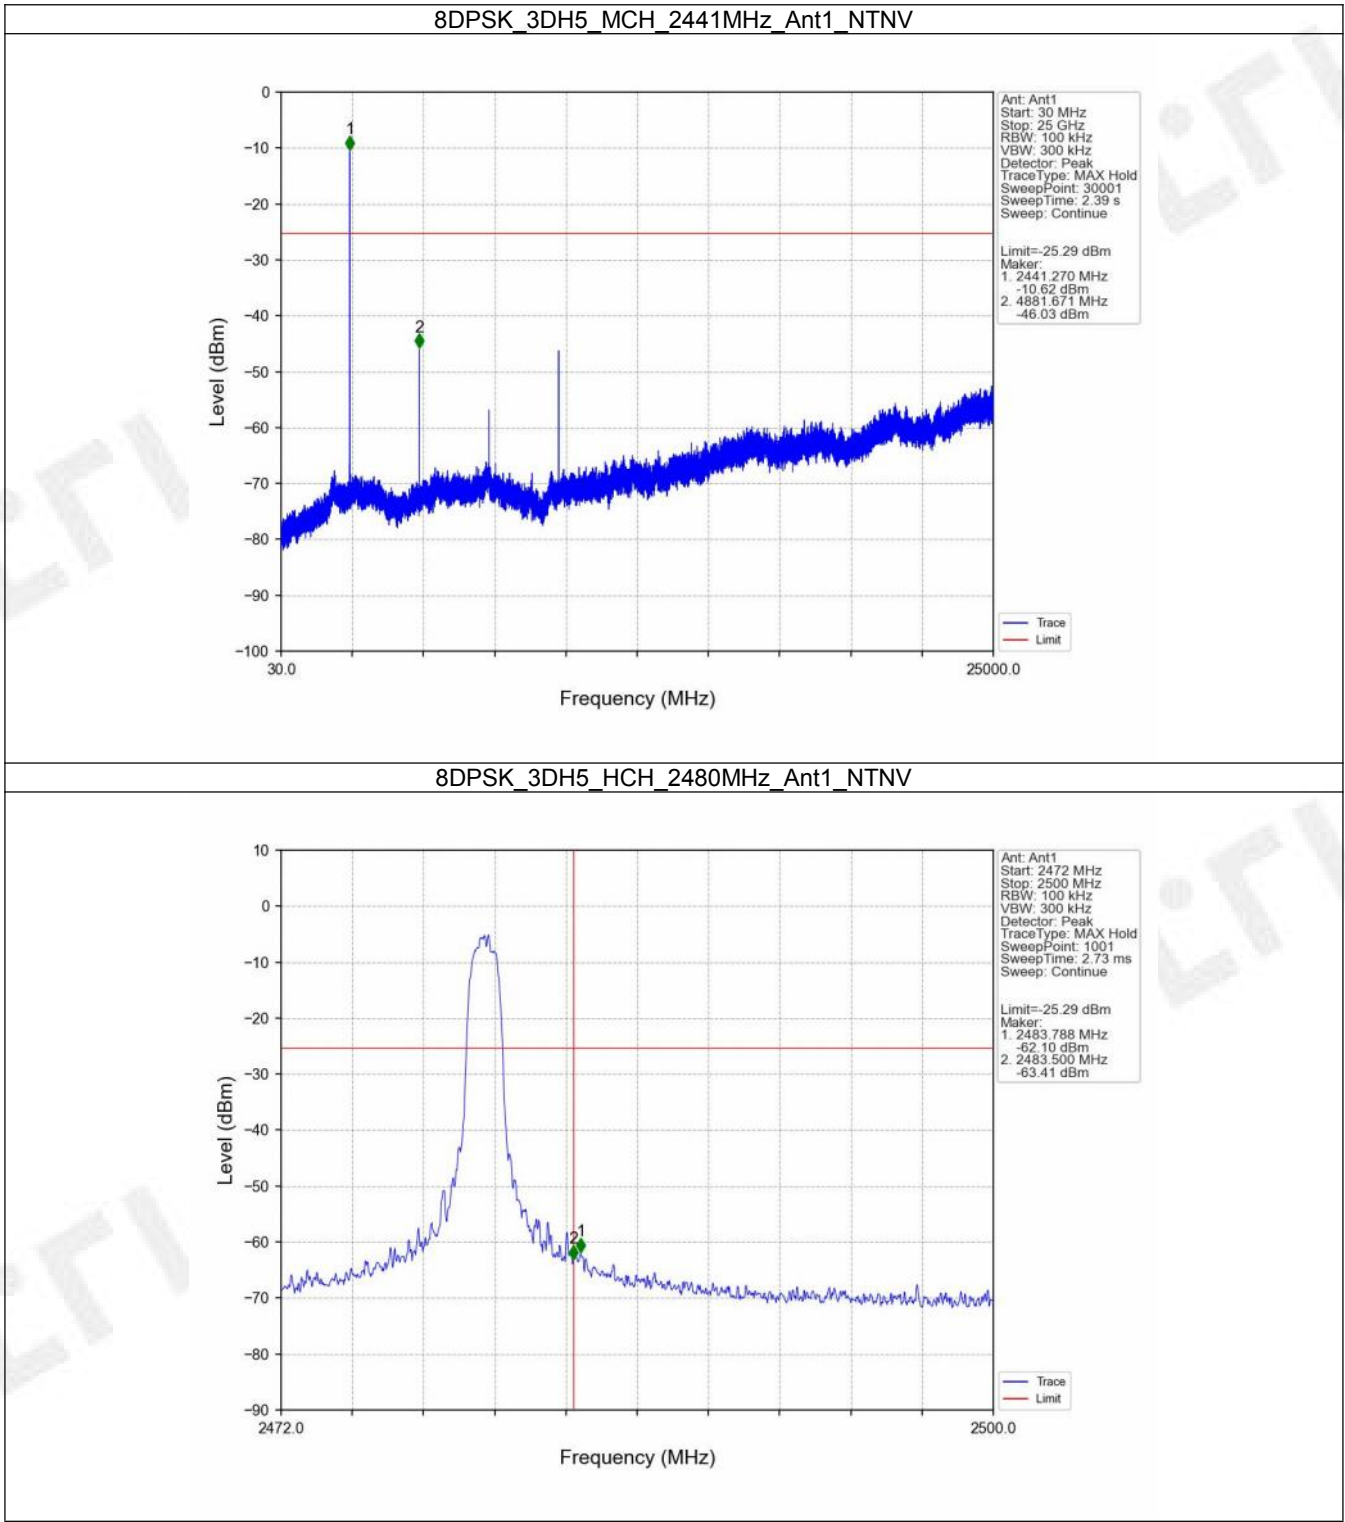

FCCID: 2AUARTKMU8A

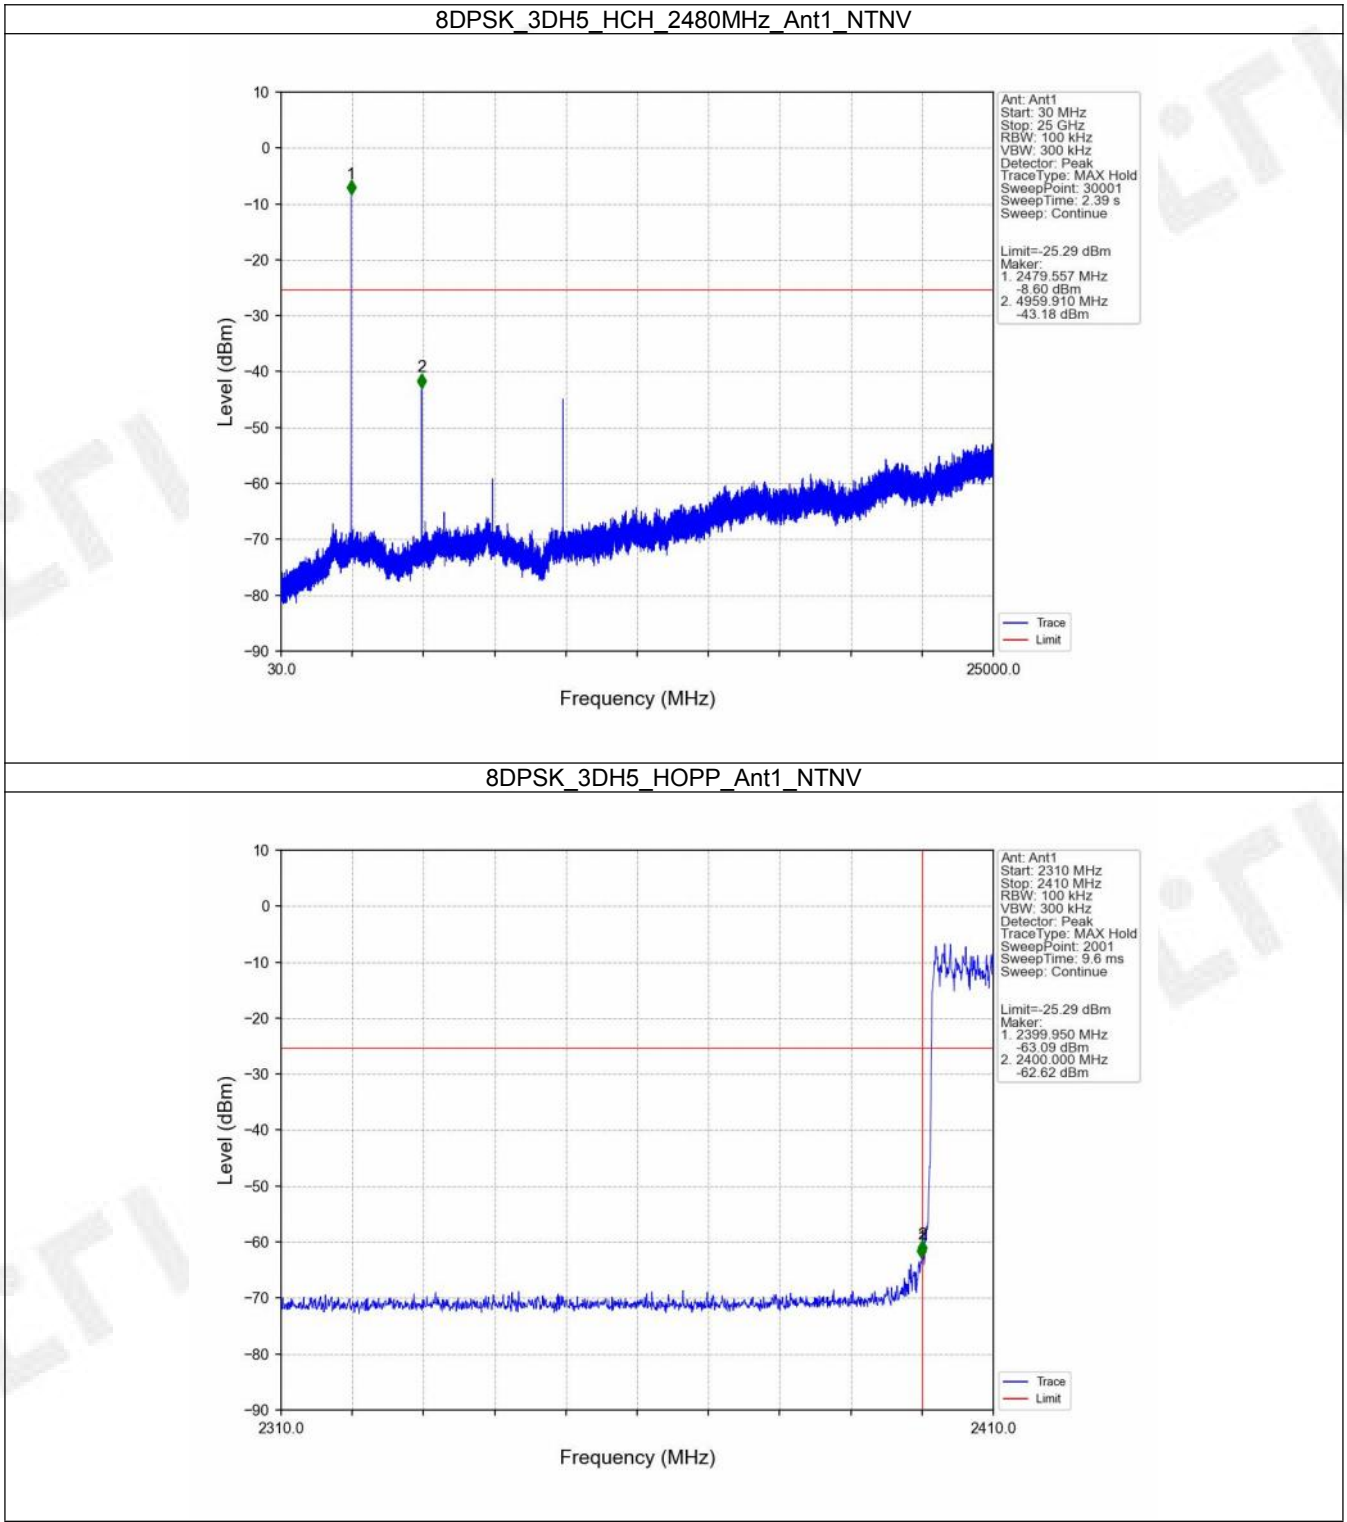

FCCID: 2AUARTKMU8A

