


UHF WIRELESS MICROPHONE SYSTEM

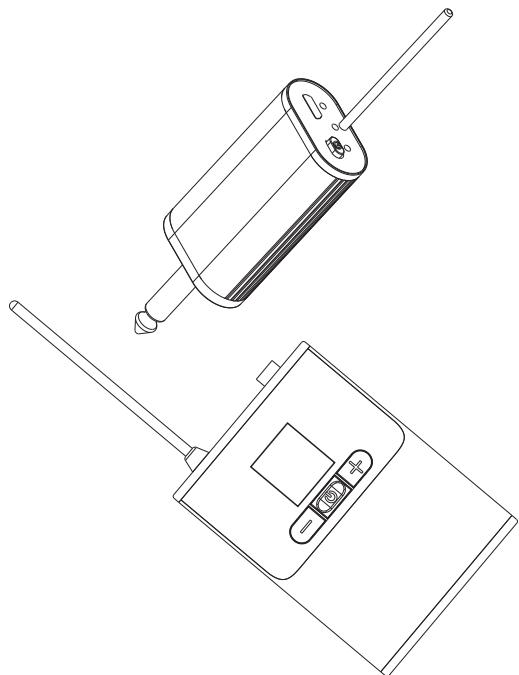

USER MANUAL

Please read through this user guide and make yourself familiar with the operations below before you use the product.

1. Plug the Mini Receiver into the 6.35mm mic input of your audio device.
2. Hold and press the "POWER" button of the Mini Receiver for about 3 seconds to power it on.
3. Hold and press the "POWER" button of the Transmitter for about 3 seconds to power it on.
4. When you see the "RF" indicator in the Mini Receiver lights up, the wireless microphone system is ready to be used.

*****If you would like to use multiple sets together, pair the system manually following the steps below:***

Step1: Power off the Transmitter and receiver. Press the "-" button in the Transmitter, then hold and press the POWER button in the Transmitter until you see ---- displays in the LCD screen.


Step2: Power on the Mini Receiver. When you see the RF indicator lights up, the Transmitter is paired with the receiver.

Step3: Hold and press the "+" or "-" button in the Transmitter for about 3 seconds until you see "CHXX" displays in the LCD screen, short press "+" or "-" button to select the most appropriate frequency point. Make sure every set is working at different frequency points.

Step4: The Transmitter will exit frequency selection in about 5 seconds. You will be able to short press the "+" or "-" button to change the microphone volume.


Product Illustration

Mini Receiver

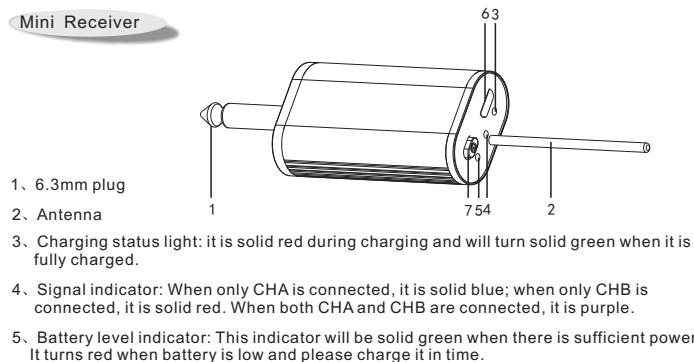

6. Charging port: Charge it using DC 5V1A power adapter.
 7. Power button: long press for about 3 seconds to power it on or off.

Bodypack Transmitter

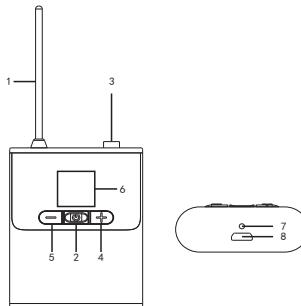

2. Power button: long press for about 3 seconds to power it on or off
 3. Microphone input port: you can plug and screw in the clip mic, headset mic or the short mic here
 4. Function button "+": Short press this button for volume up, long press (about 3 seconds) to add up frequency point
 5. Function button "-": Short press this button for volume down, long press (about 3 seconds) to reduce the frequency point
 6. LCD screen: it displays the battery level, frequency point and the Channel number (CHA or CHB)
 7. Charging status light: it is solid red during charge and it turns solid green when it is fully charged.
 8. Charging port: Charge it using DC 5V1A power adapter.

Product Specification

System specifications:

Modulation Mode	Digital Frequency Modulate
Frequency Range	905-920.5MHz
Preset Frequencies	32(auto paring)
Frequency Response	75Hz~18kHz ± 3dB
Max.Deviation Range	±50kHz (with level limiting)
T.H.D	< 1.0% @ 1kHz
S/N	>98dB
Working Range	Up to 50m
RF Carrier Stability	±0.005% (-10°C-50°C)

Mini Receiver:

Dimension	90x18x32(mm)
Power Supply	Built-in Li-on rechargeable battery (650mA)
Power Consumption	80mA (±15mA)
Recharging Time	About 2-3 hours (5V/1A)

Bodypack Transmitter:

Dimension	64*18*50mm
Carrier Frequency Power	10mw
Battery Type	650mAh
Power Consumption	110mA(±10mA)
Recharging Time	About 2-3hour(5V1A)

Notes:

- * This UHF wireless microphone system has 50 preset frequency points. Select a different frequency point according to the environment to avoid interference.
- * When the battery is low in either the Mini Receiver or the Transmitter, charge it or change battery in time. Do not charge the Mini Receiver or the Transmitter when it is in use.
- * Do not bend or fold the antenna of the Mini Receiver or Transmitter.
- * Contact the local distributor if there are any issues with the product. Do not disassemble the product without professional instructions from the manufacturer.

Warning Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.