


5.2G

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	85.3	0.69	5.88
NVNT	a	5200	Ant1	85.32	0.69	5.88
NVNT	a	5240	Ant1	85.28	0.69	5.88
NVNT	n20	5180	Ant1	84.52	0.73	6.25
NVNT	n20	5200	Ant1	84.47	0.73	5.88
NVNT	n20	5240	Ant1	84.49	0.73	5.88
NVNT	n40	5190	Ant1	77.61	1.1	10
NVNT	n40	5230	Ant1	77.54	1.1	10
NVNT	ac20	5180	Ant1	84.8	0.72	5.88
NVNT	ac20	5200	Ant1	84.8	0.72	5.88
NVNT	ac20	5240	Ant1	84.9	0.71	5.88
NVNT	ac40	5190	Ant1	76.4	1.17	11.11
NVNT	ac40	5230	Ant1	76.45	1.17	11.11
NVNT	ac80	5210	Ant1	69.45	1.58	16.67


Test Graphs


Duty Cycle NVNT a 5180MHz Ant1

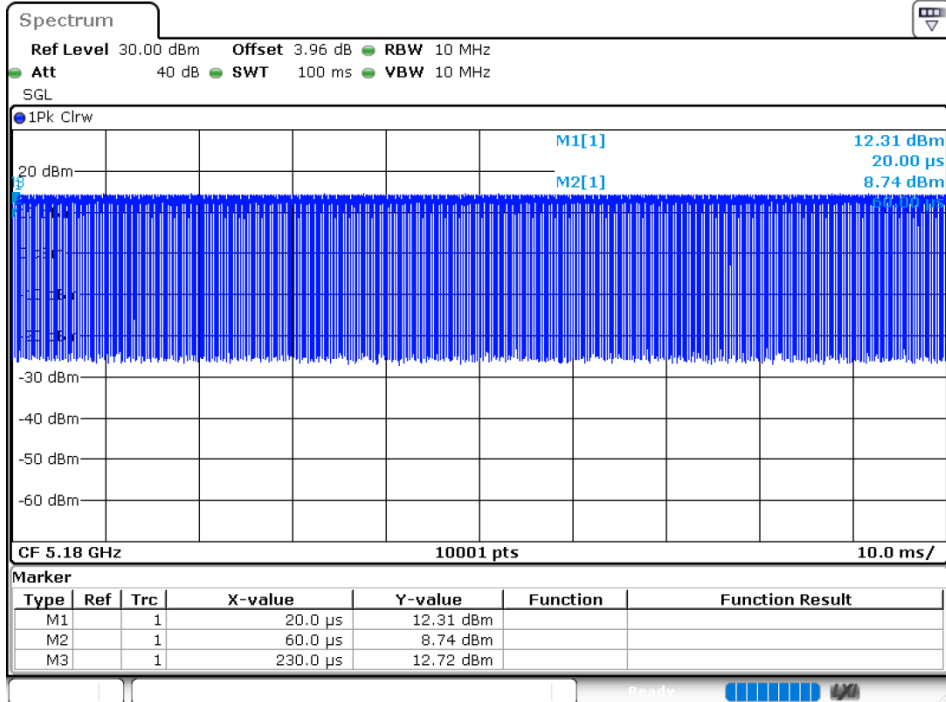



Duty Cycle NVNT a 5200MHz Ant1

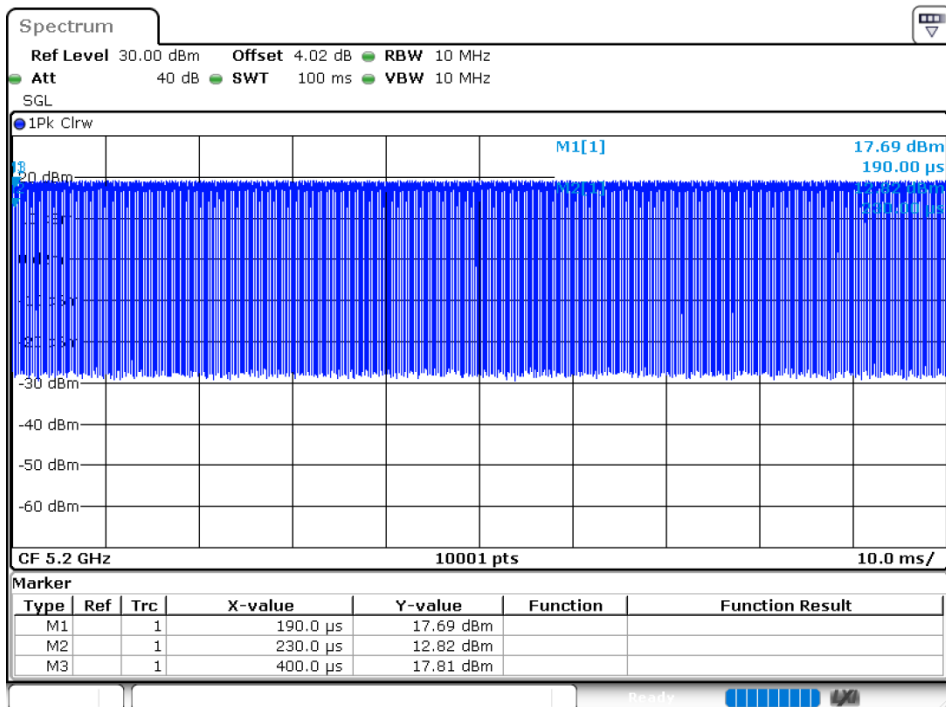


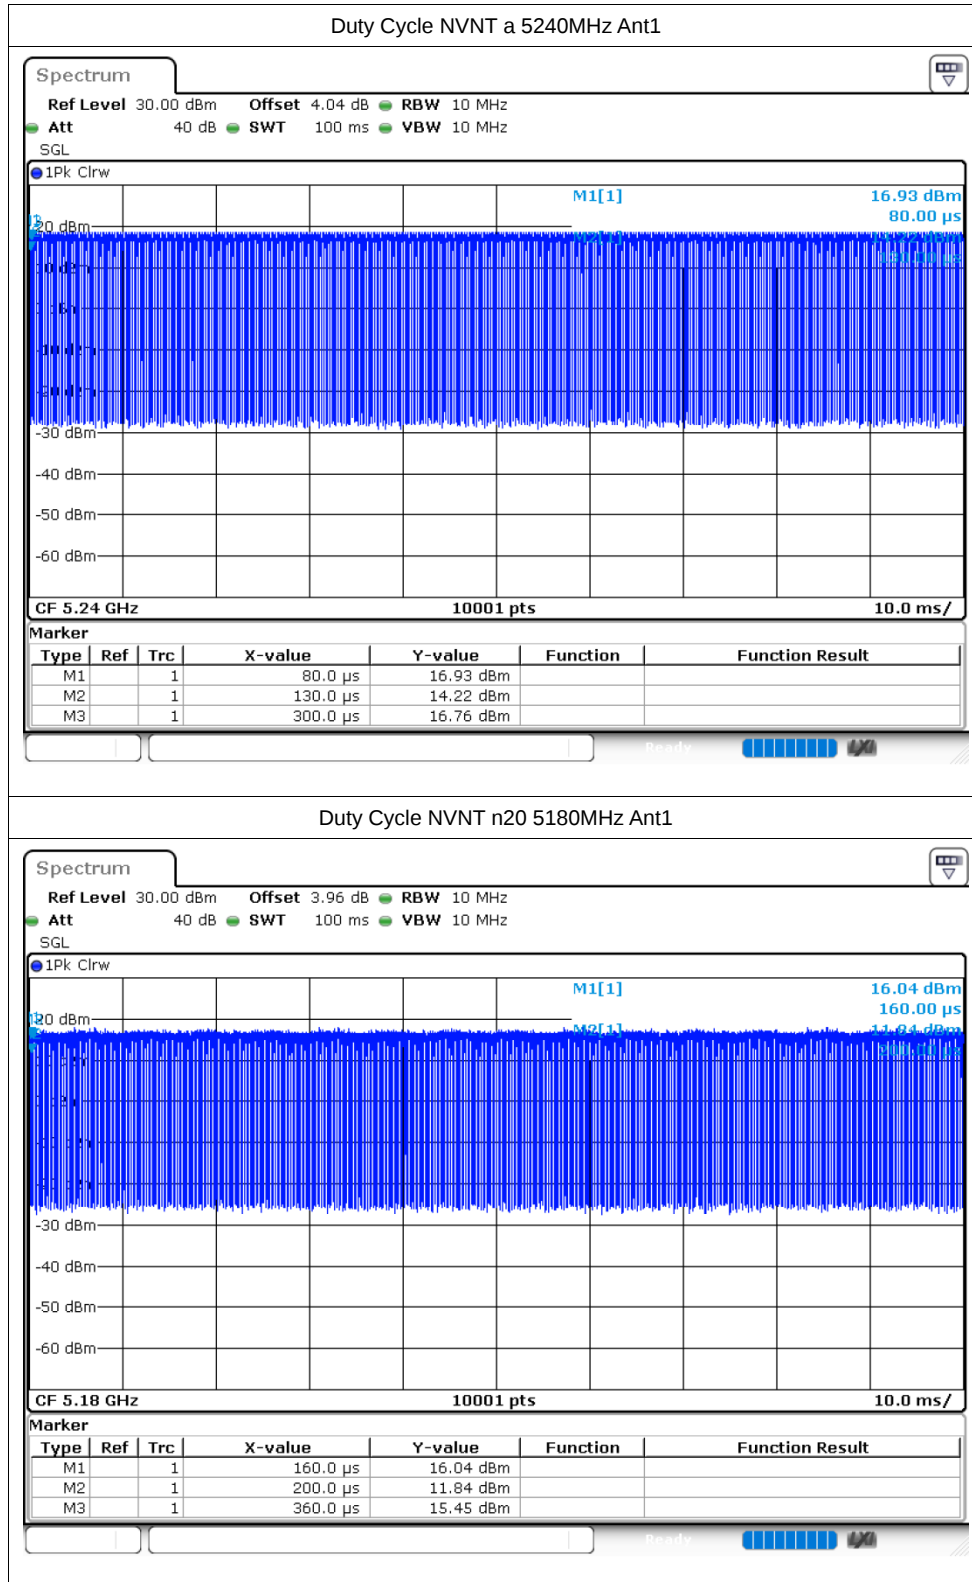


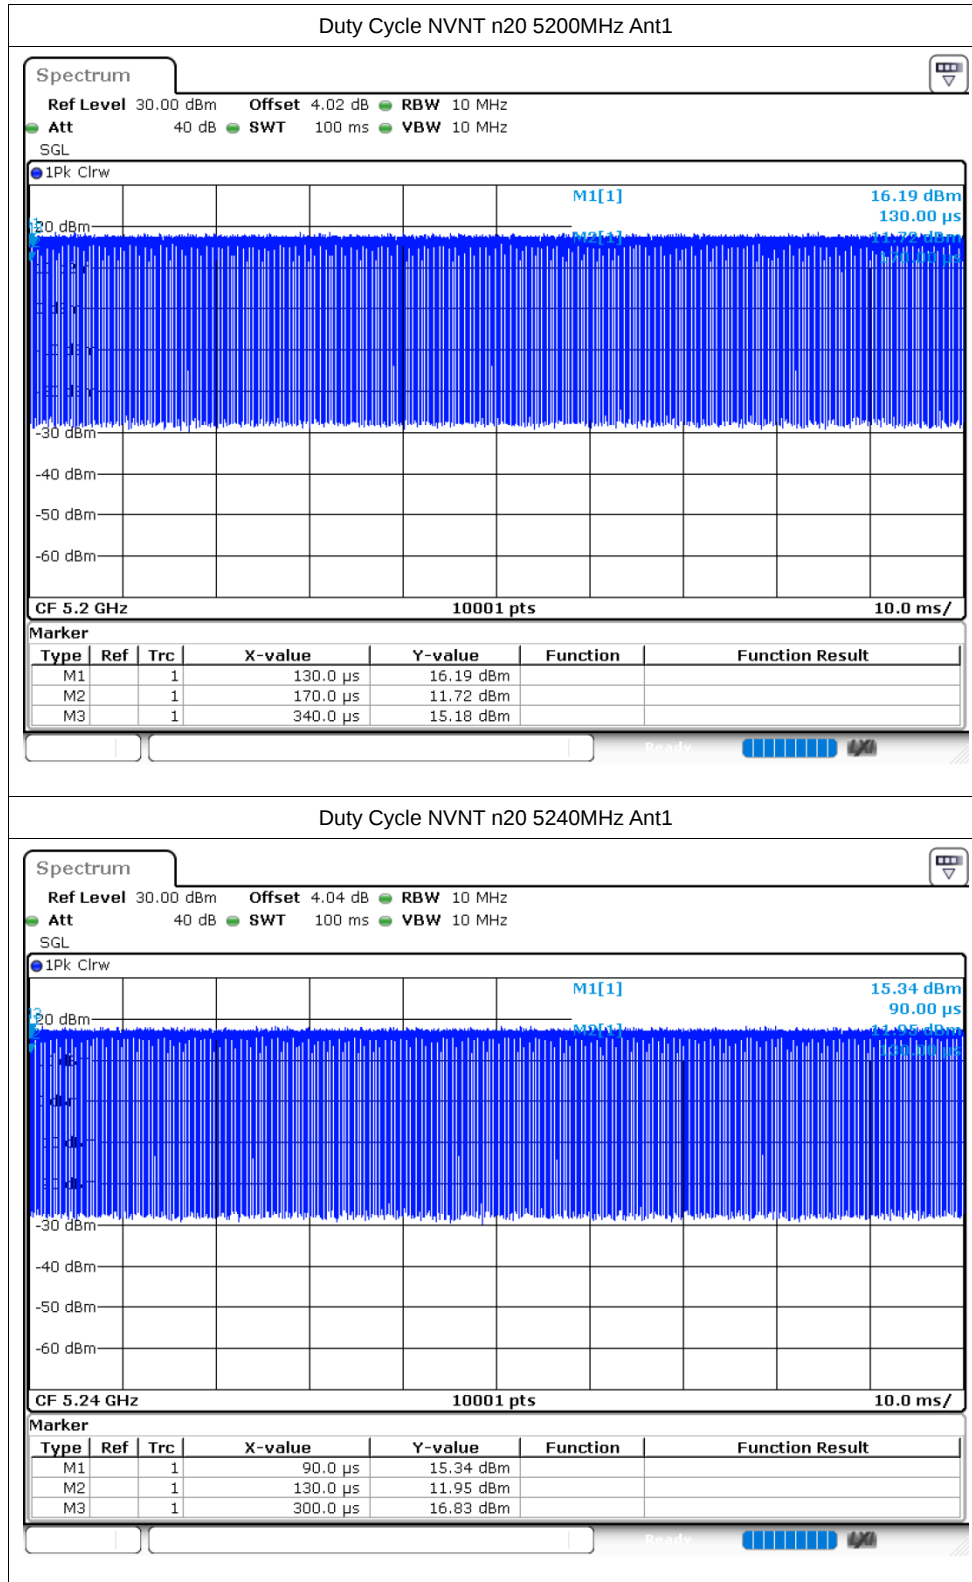

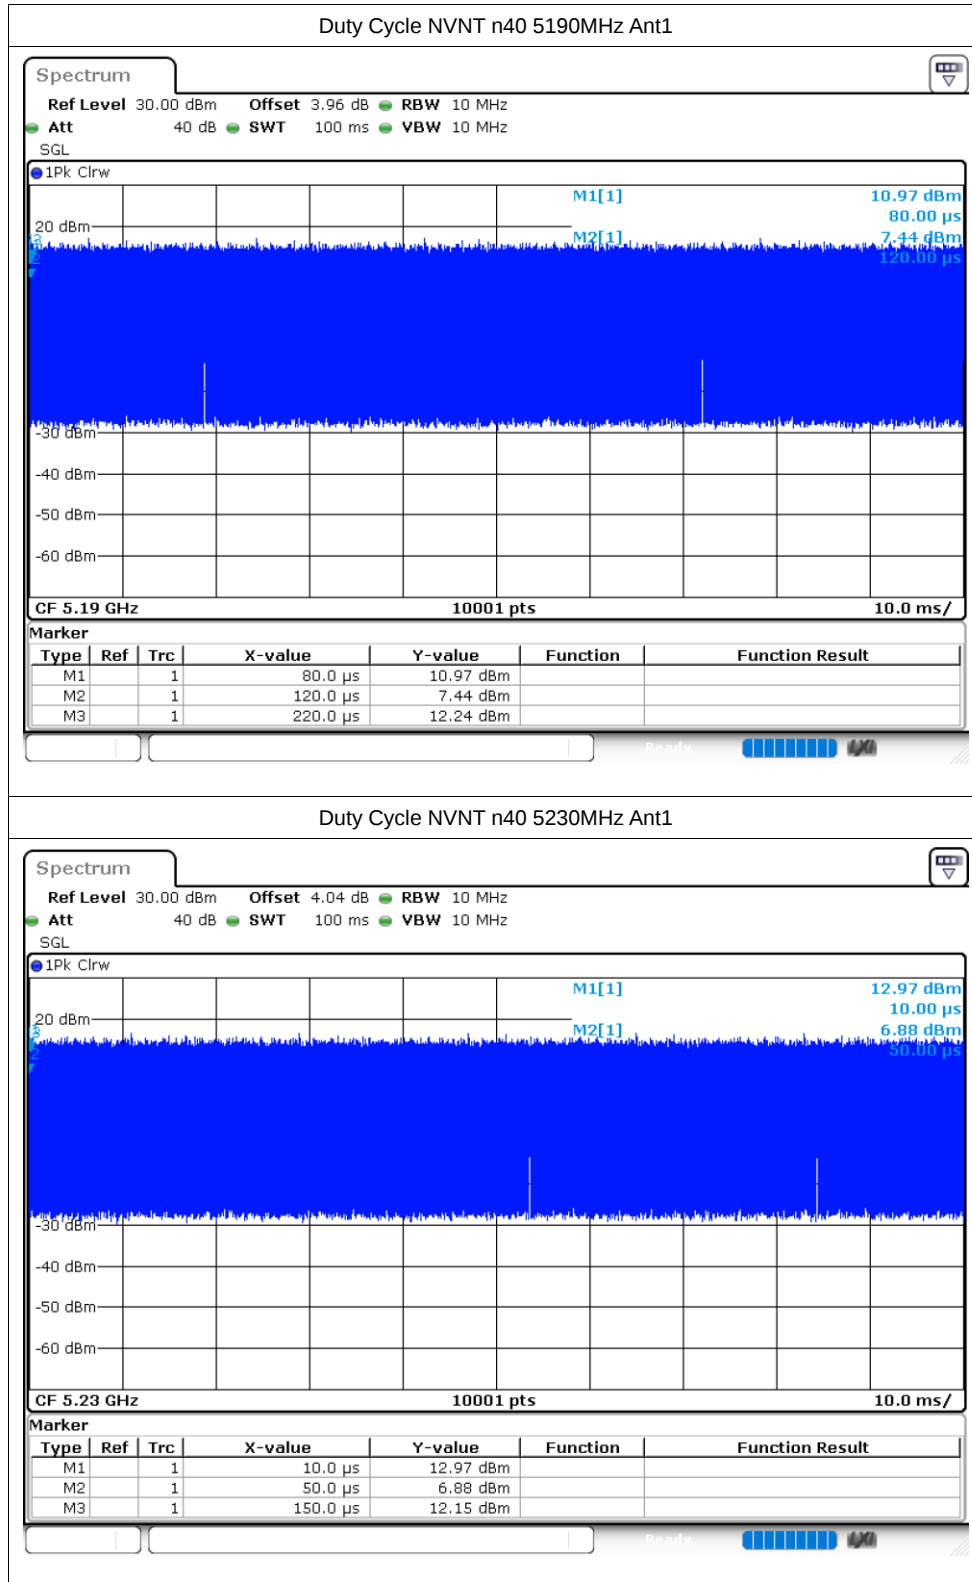

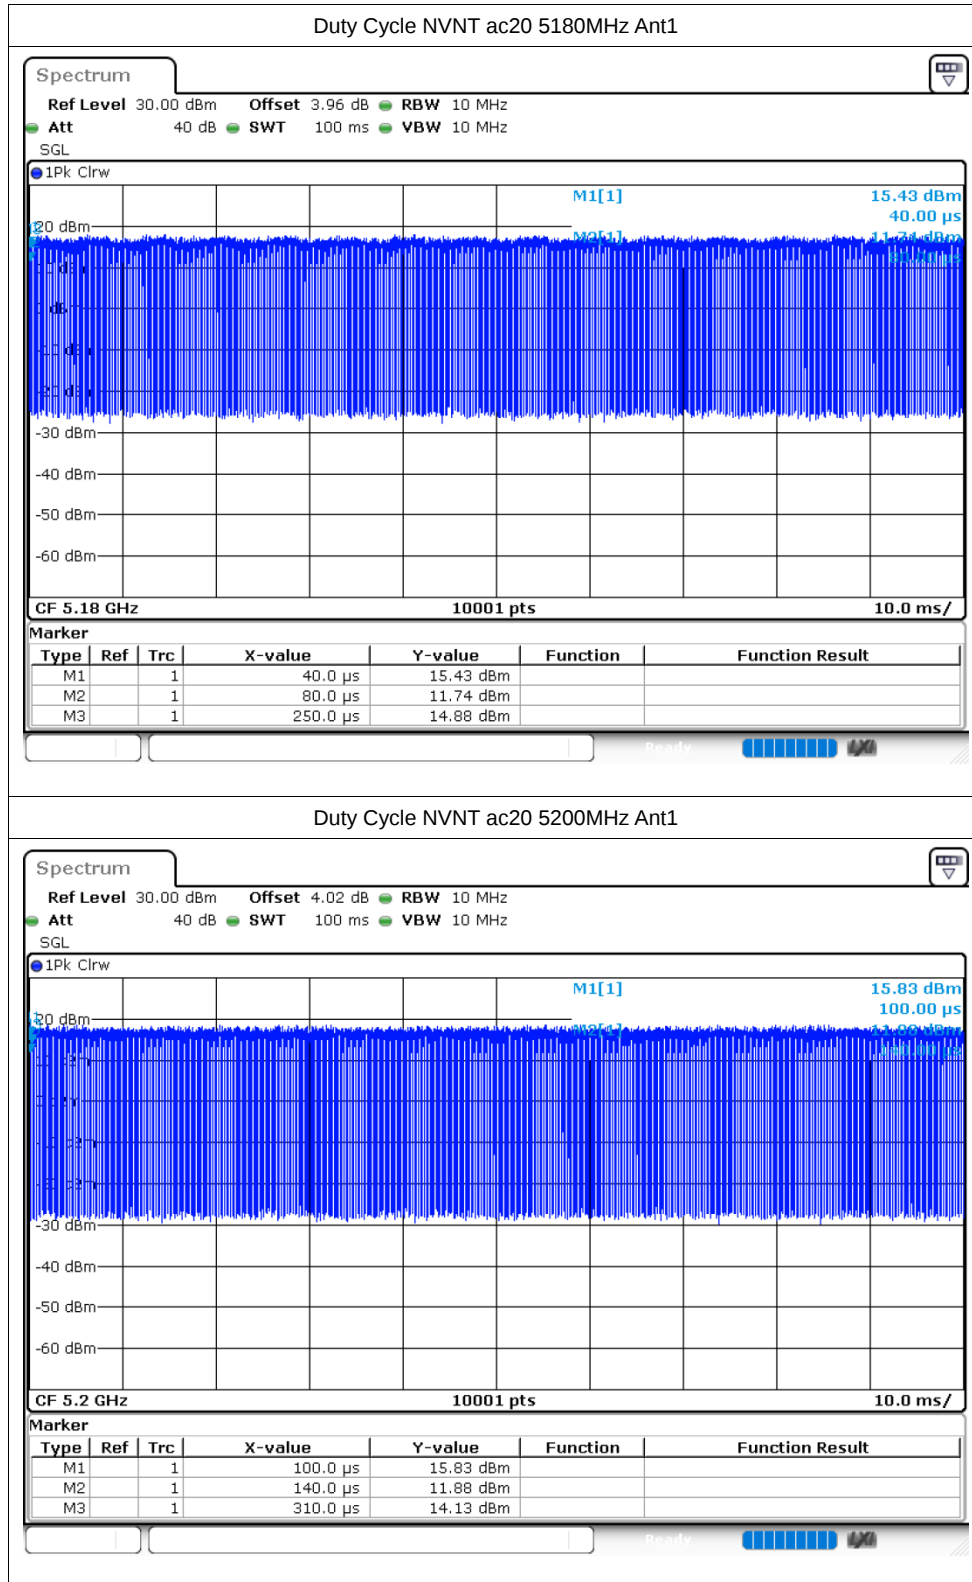

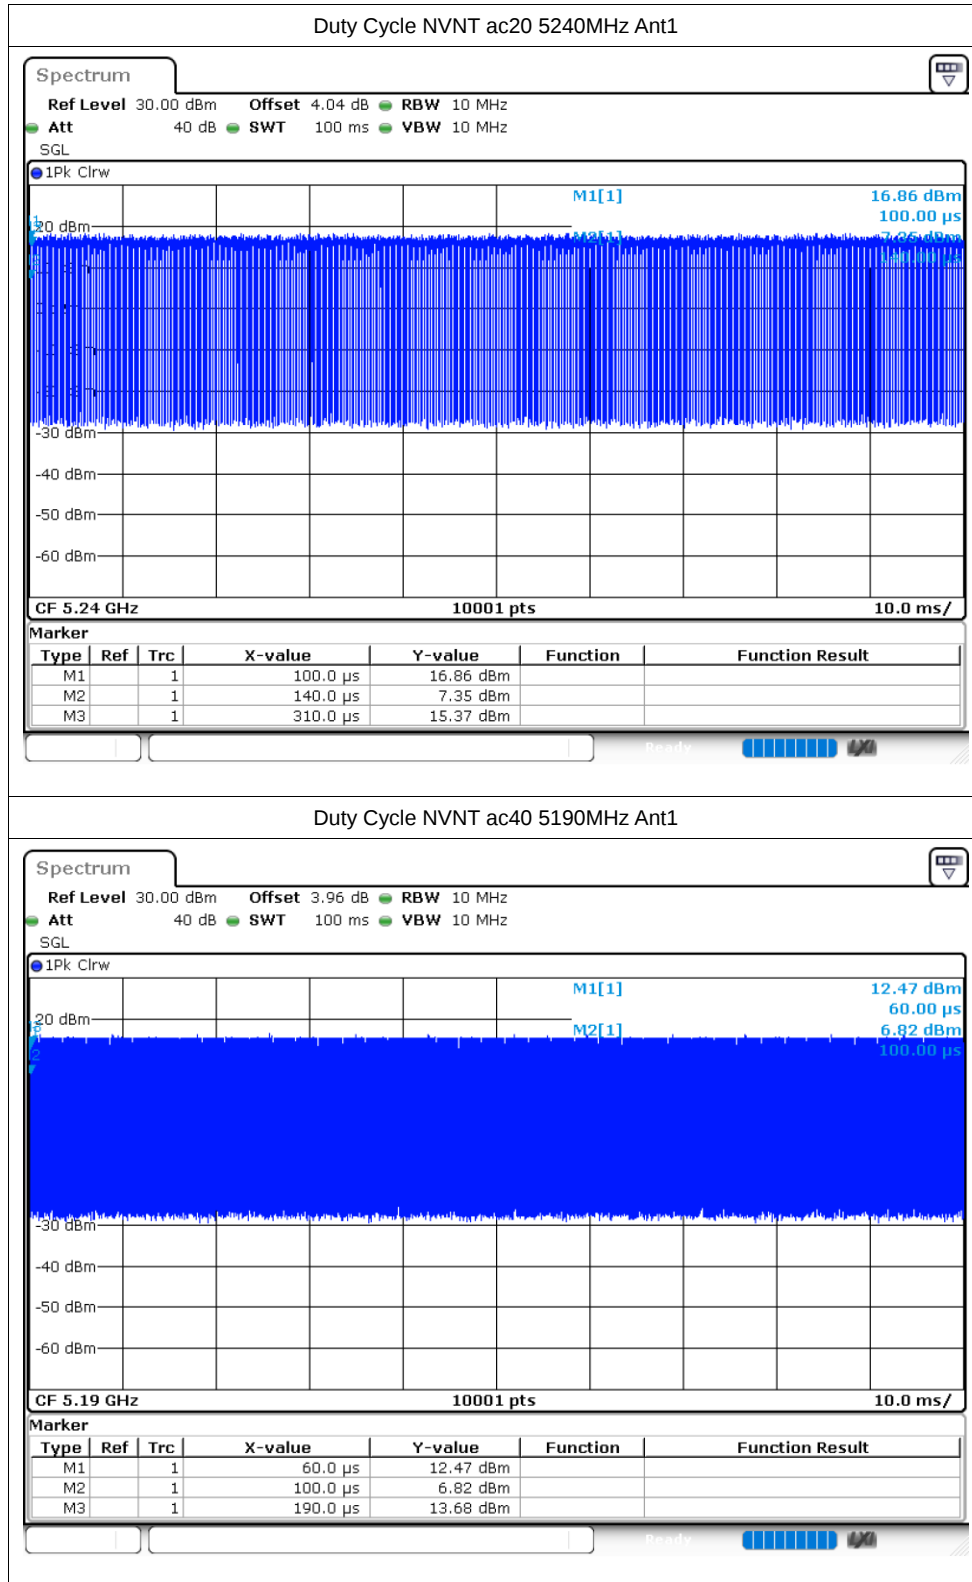

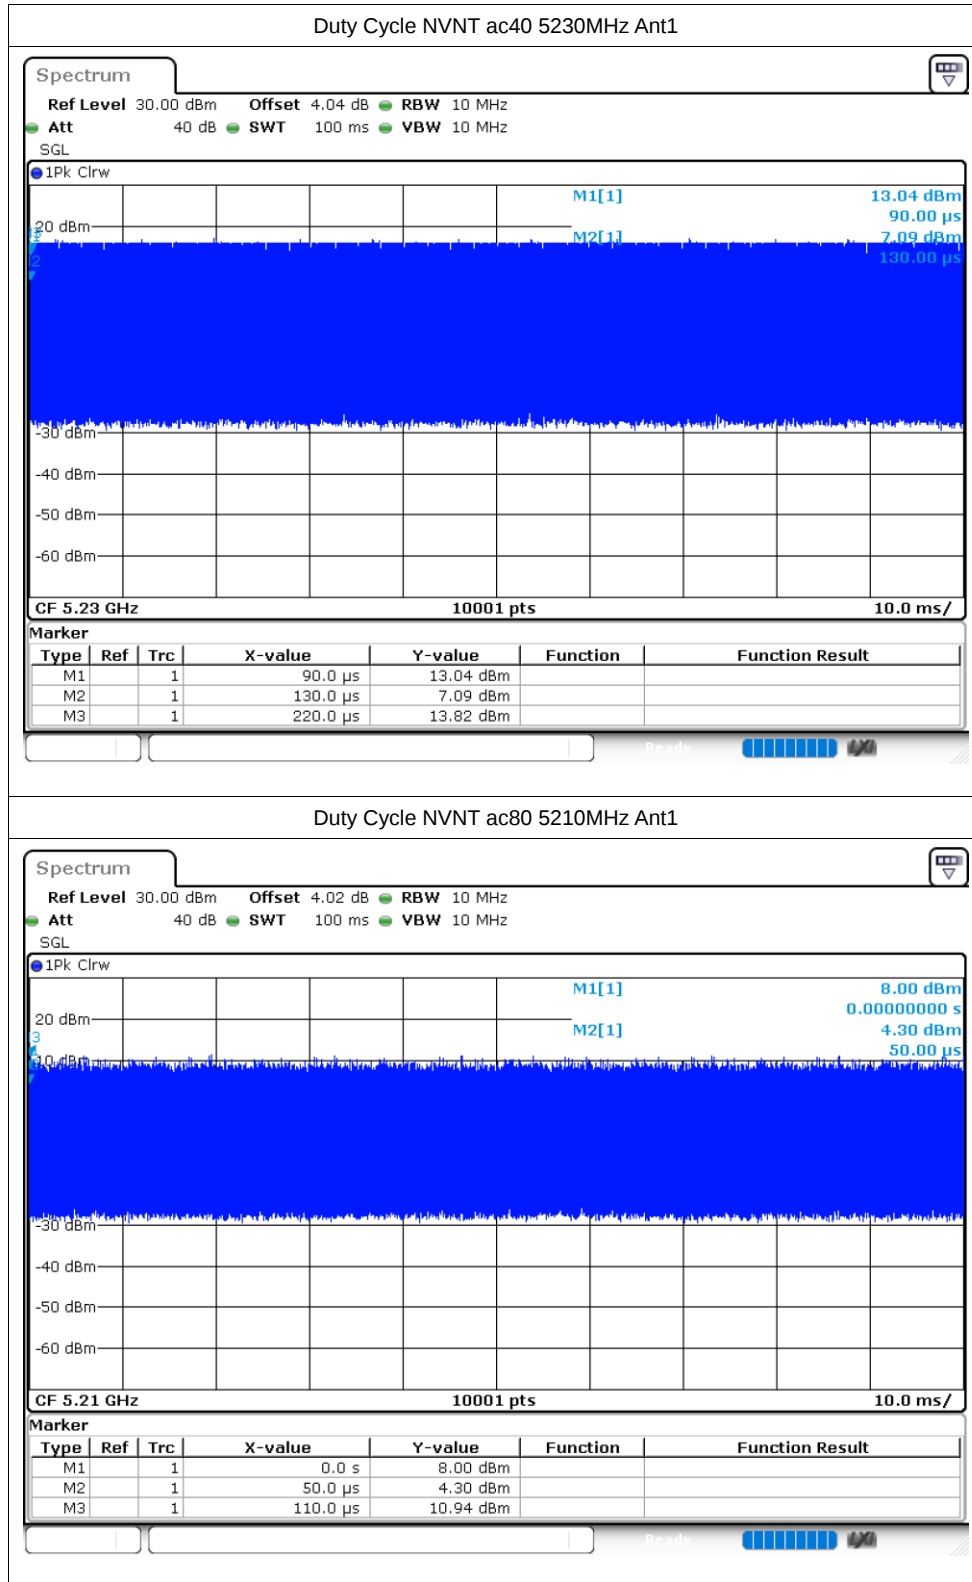

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	13.15	24	Pass
NVNT	a	5200	Ant1	13.12	24	Pass
NVNT	a	5240	Ant1	13.13	24	Pass
NVNT	n20	5180	Ant1	11.85	24	Pass
NVNT	n20	5200	Ant1	11.89	24	Pass
NVNT	n20	5240	Ant1	11.84	24	Pass
NVNT	n40	5190	Ant1	10.62	24	Pass
NVNT	n40	5230	Ant1	10.81	24	Pass
NVNT	ac20	5180	Ant1	12.01	24	Pass
NVNT	ac20	5200	Ant1	11.82	24	Pass
NVNT	ac20	5240	Ant1	11.9	24	Pass
NVNT	ac40	5190	Ant1	10.74	24	Pass
NVNT	ac40	5230	Ant1	10.99	24	Pass
NVNT	ac80	5210	Ant1	7.98	24	Pass

-26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	20.838	Pass
NVNT	a	5200	Ant1	20.547	Pass
NVNT	a	5240	Ant1	20.61	Pass
NVNT	n20	5180	Ant1	20.889	Pass
NVNT	n20	5200	Ant1	20.673	Pass
NVNT	n20	5240	Ant1	20.892	Pass
NVNT	n40	5190	Ant1	39.432	Pass
NVNT	n40	5230	Ant1	43.914	Pass
NVNT	ac20	5180	Ant1	20.808	Pass
NVNT	ac20	5200	Ant1	21.174	Pass
NVNT	ac20	5240	Ant1	21.072	Pass
NVNT	ac40	5190	Ant1	39.912	Pass
NVNT	ac40	5230	Ant1	39.906	Pass
NVNT	ac80	5210	Ant1	80.664	Pass

Test Graphs


-26dB Bandwidth NVNT a 5180MHz Ant1

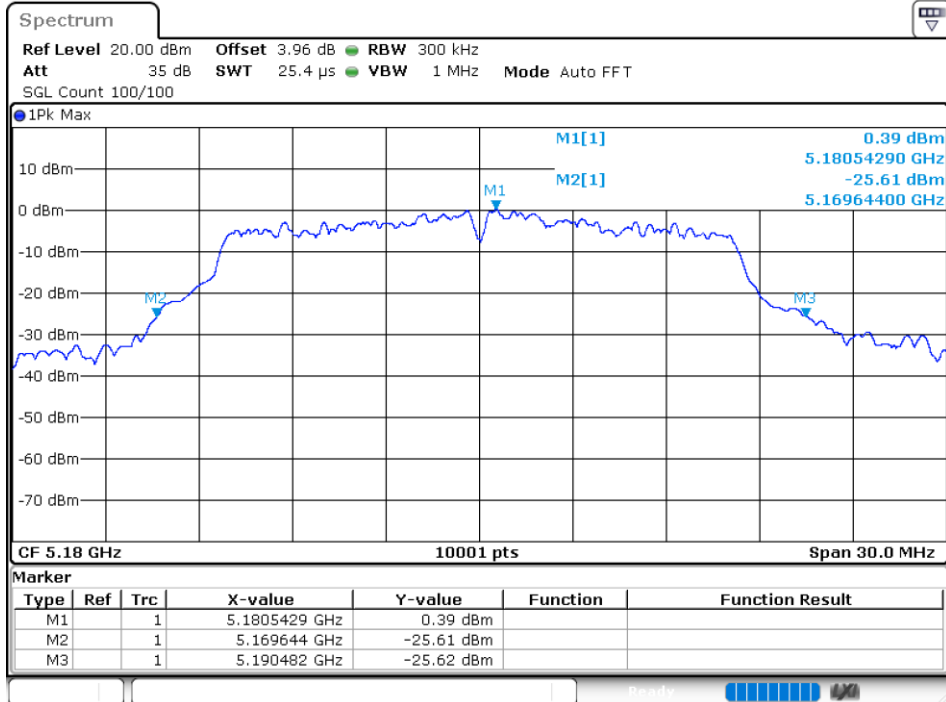


-26dB Bandwidth NVNT a 5200MHz Ant1

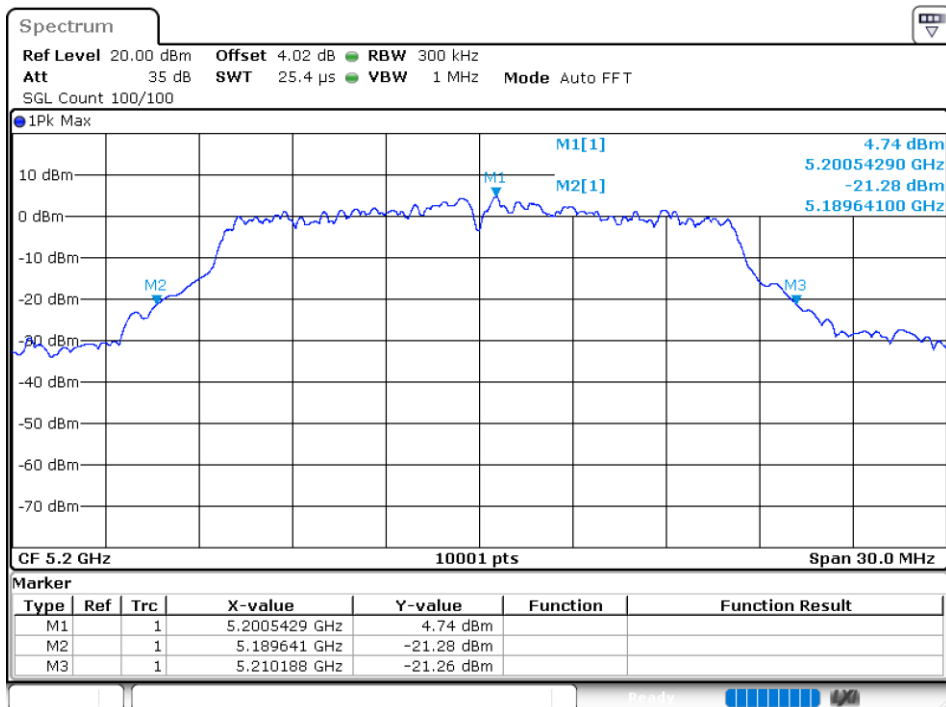



-26dB Bandwidth NVNT a 5240MHz Ant1

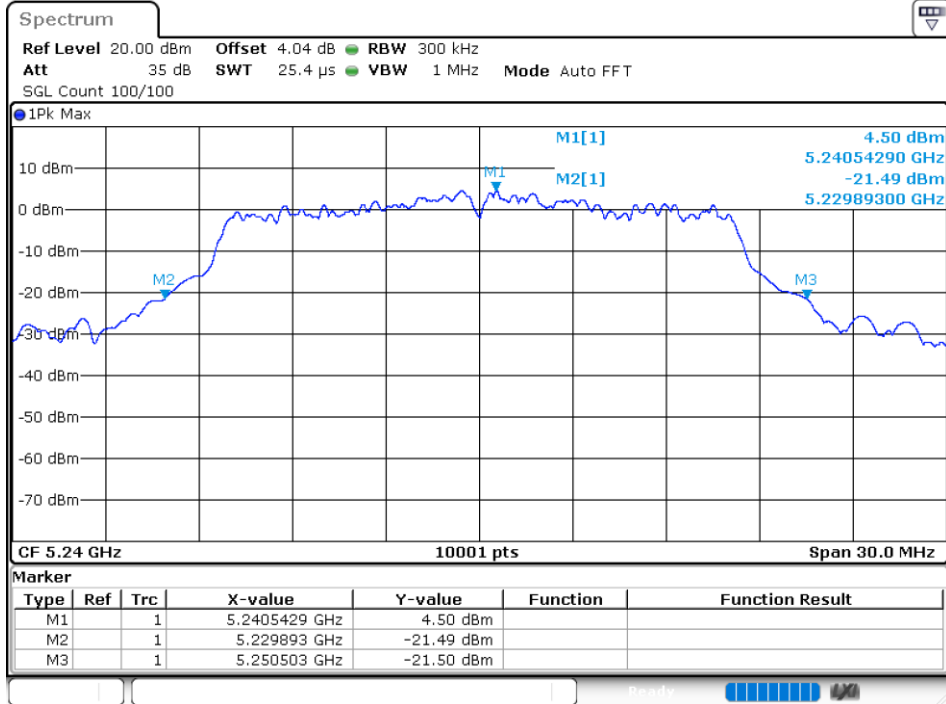



-26dB Bandwidth NVNT n20 5180MHz Ant1

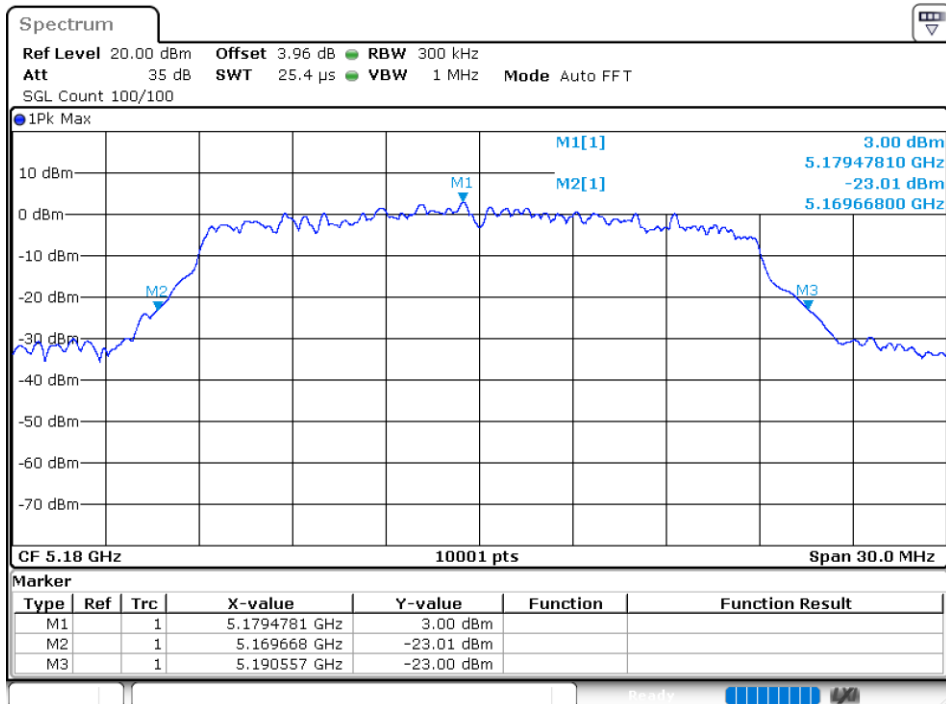


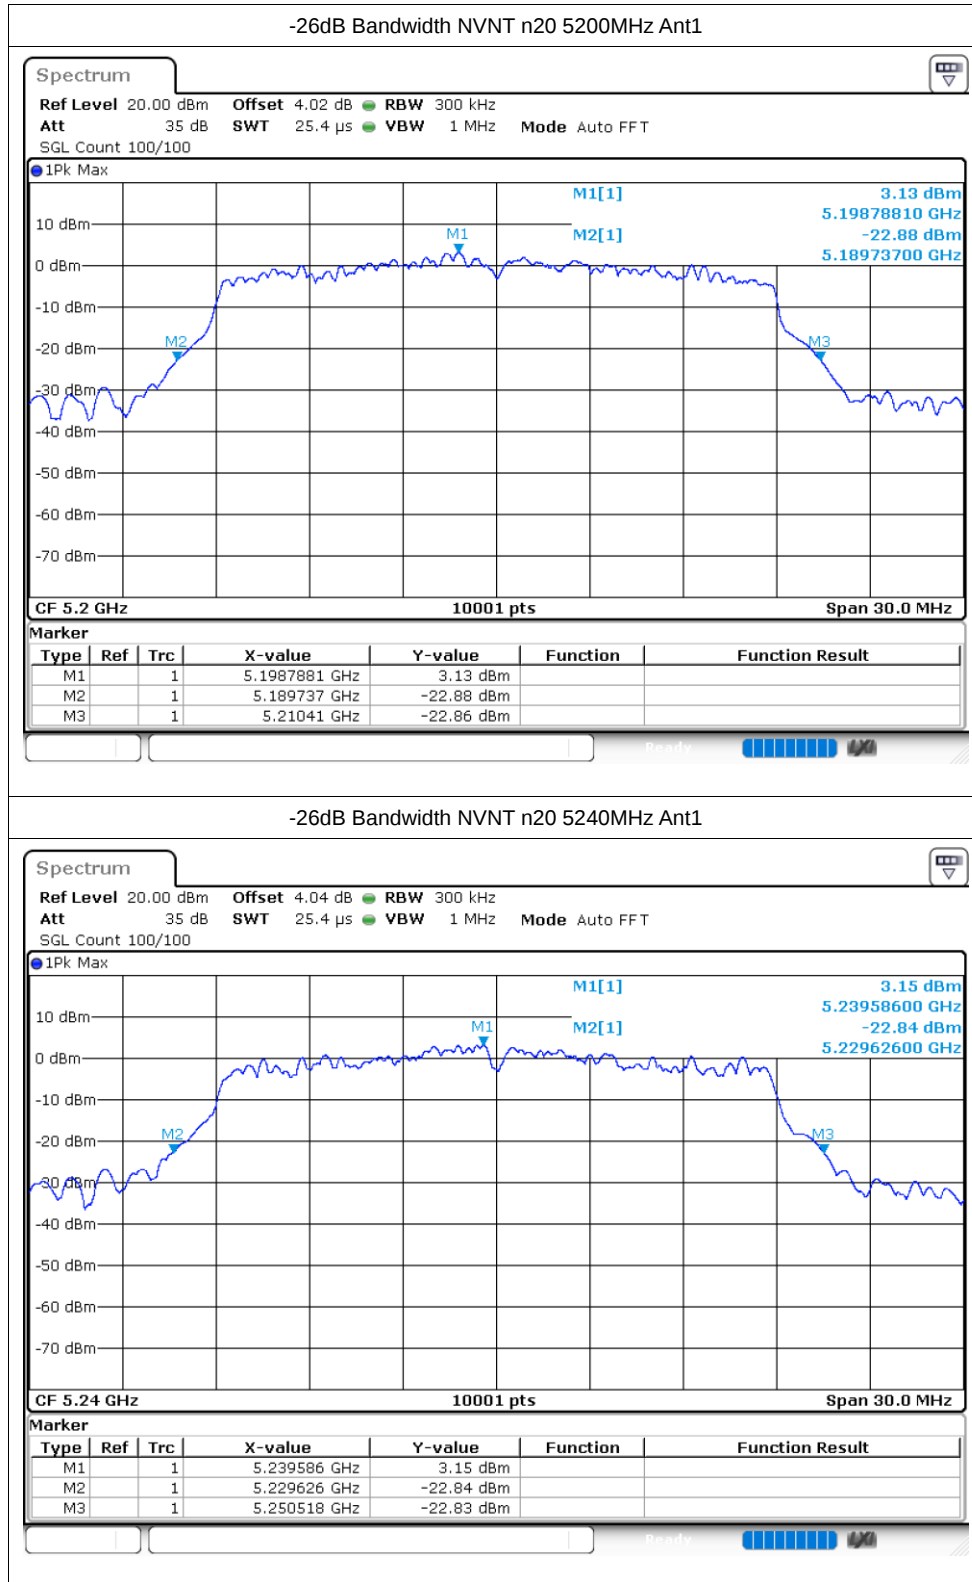

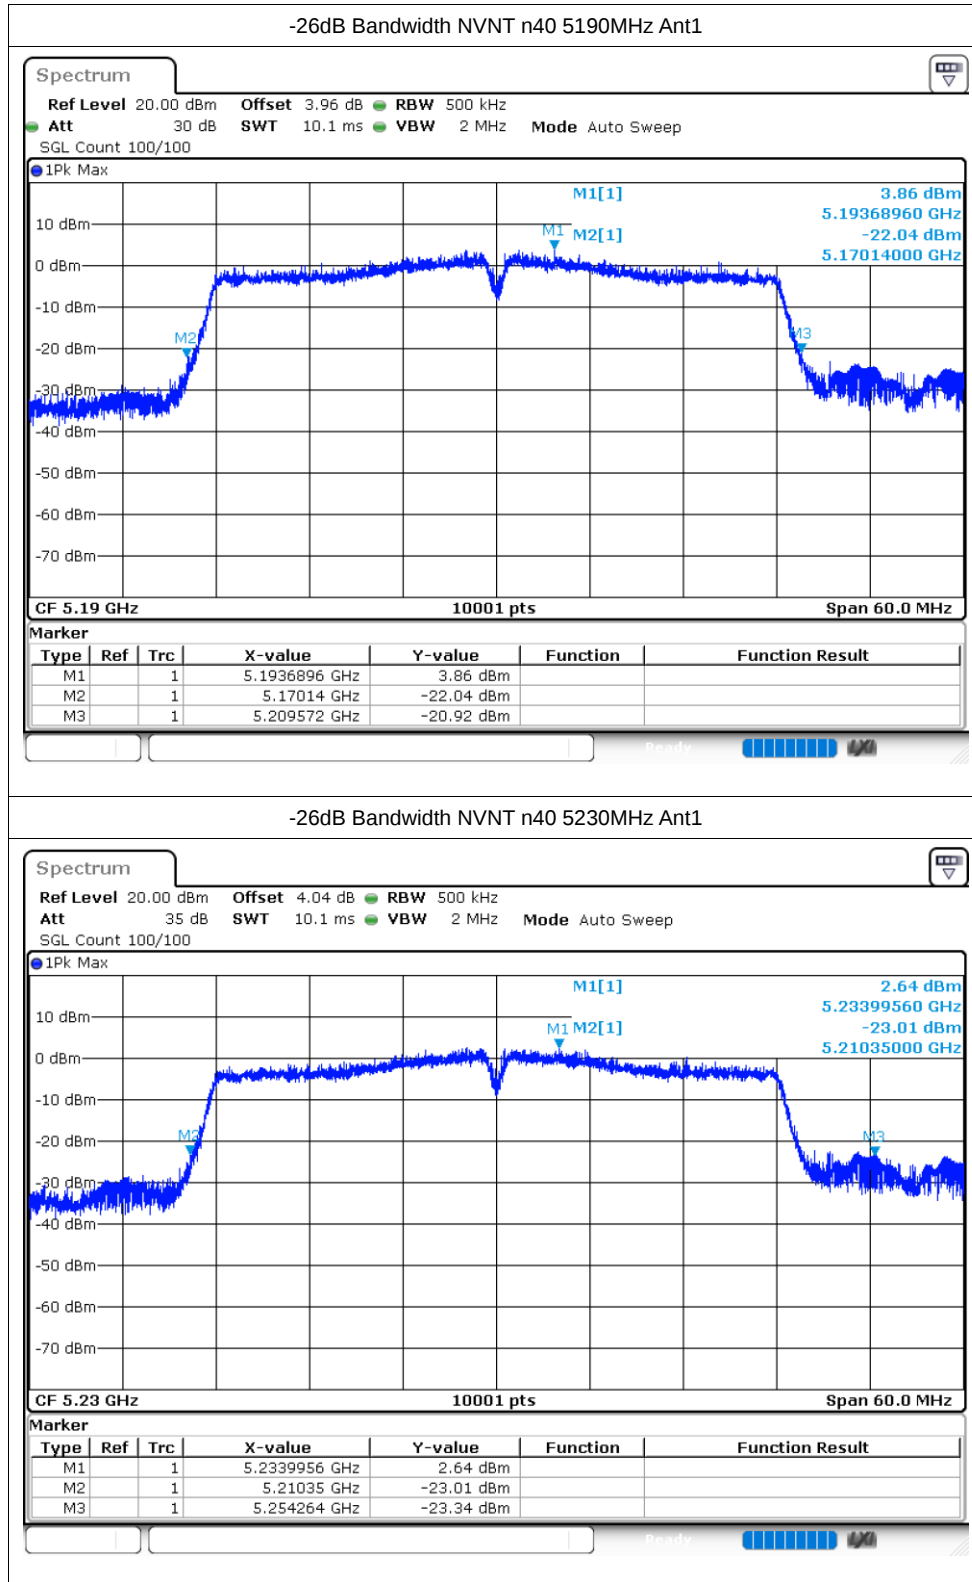

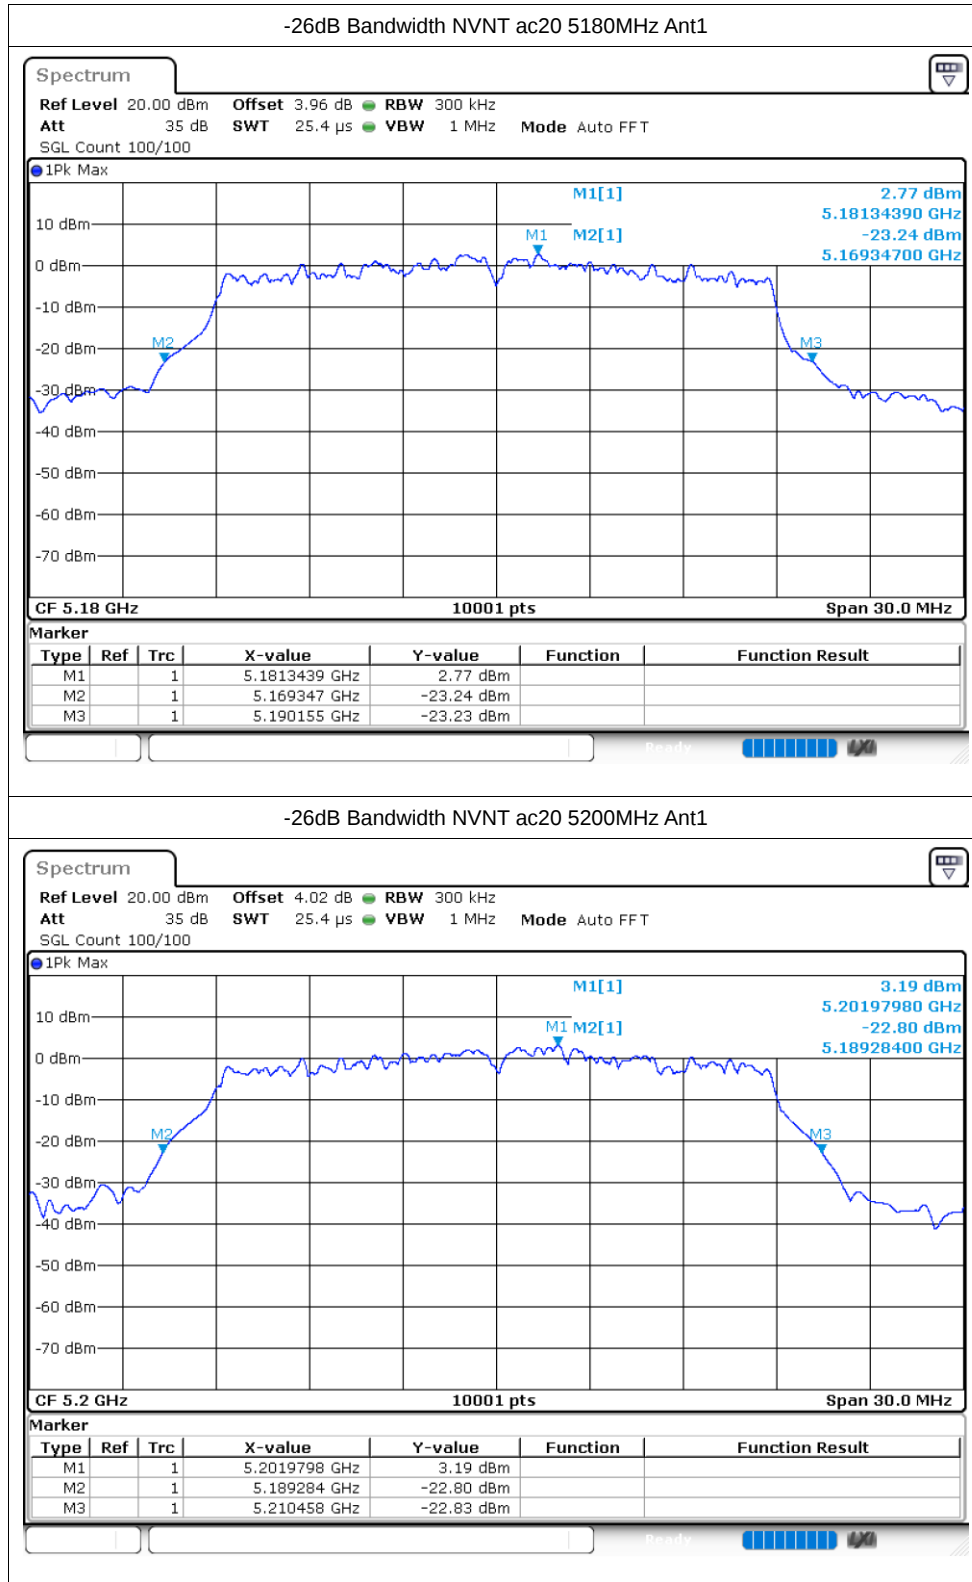

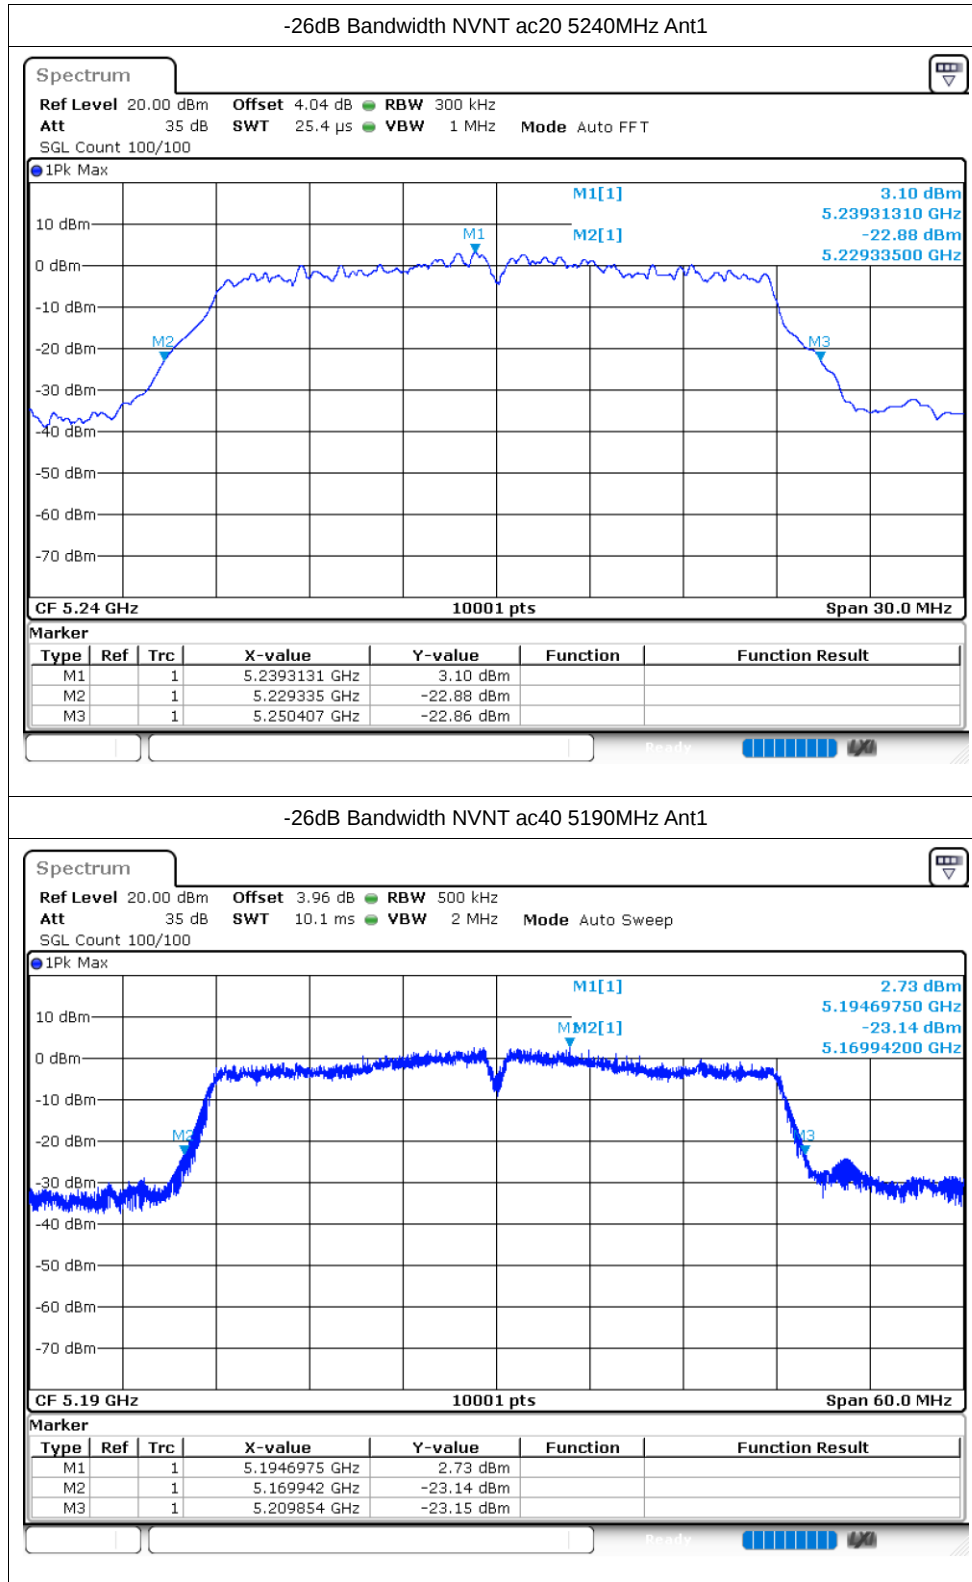

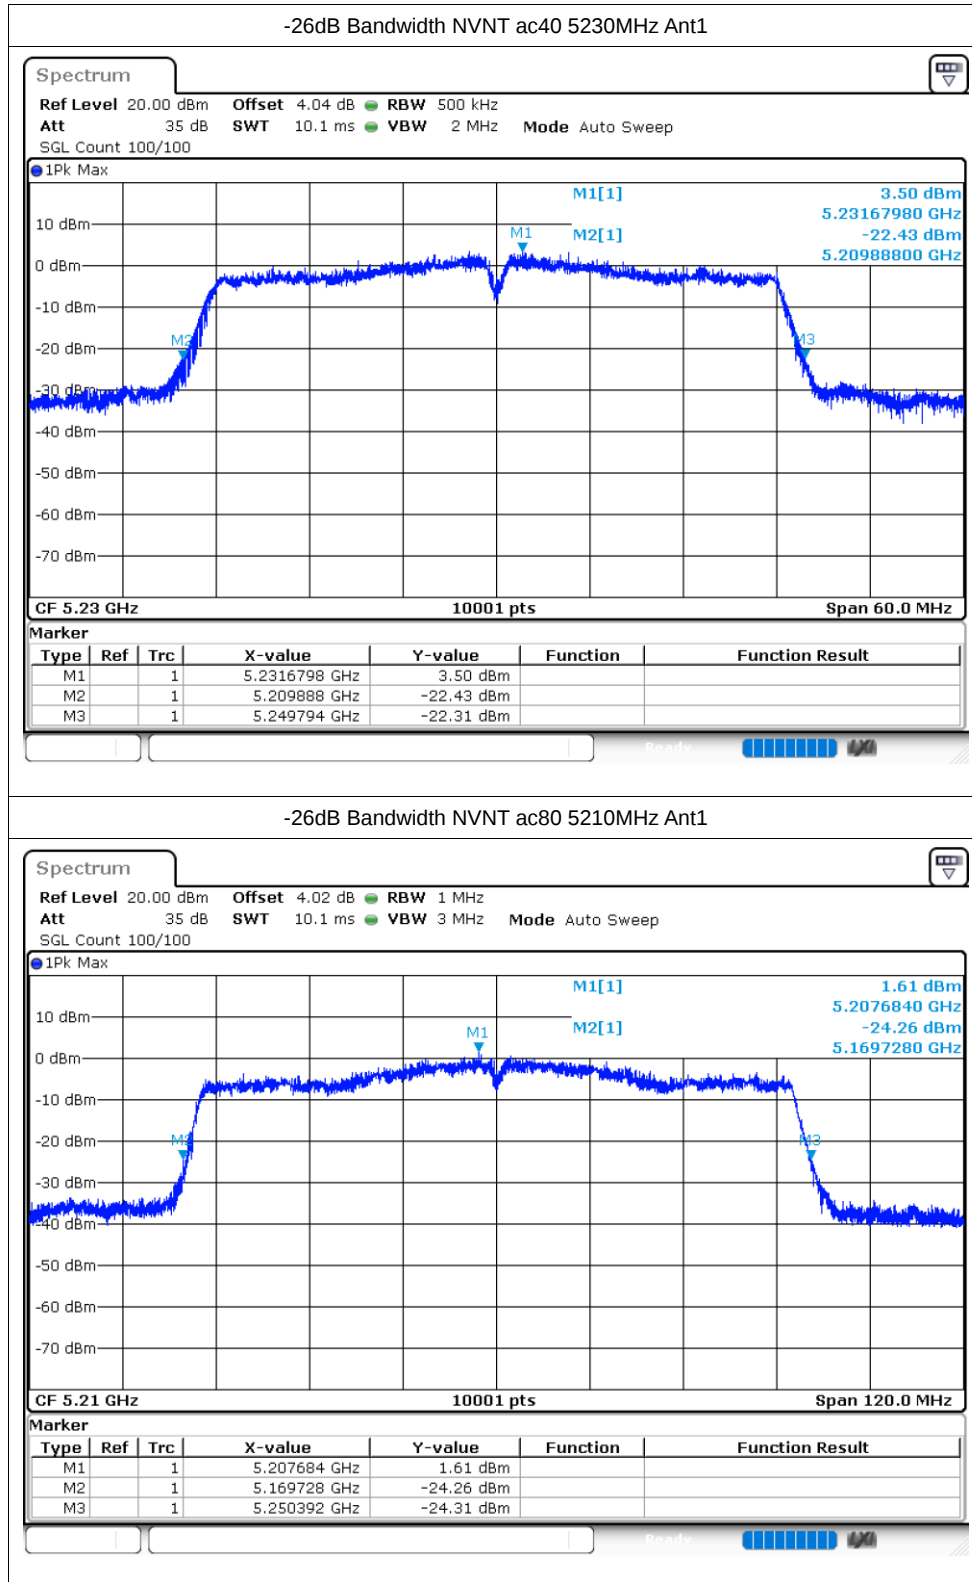


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.423
NVNT	a	5200	Ant1	16.369
NVNT	a	5240	Ant1	16.366
NVNT	n20	5180	Ant1	17.548
NVNT	n20	5200	Ant1	17.686
NVNT	n20	5240	Ant1	17.635
NVNT	n40	5190	Ant1	36.146
NVNT	n40	5230	Ant1	36.116
NVNT	ac20	5180	Ant1	17.602
NVNT	ac20	5200	Ant1	17.608
NVNT	ac20	5240	Ant1	17.743
NVNT	ac40	5190	Ant1	36.35
NVNT	ac40	5230	Ant1	36.386
NVNT	ac80	5210	Ant1	75.328


Test Graphs


OBW NVNT a 5180MHz Ant1

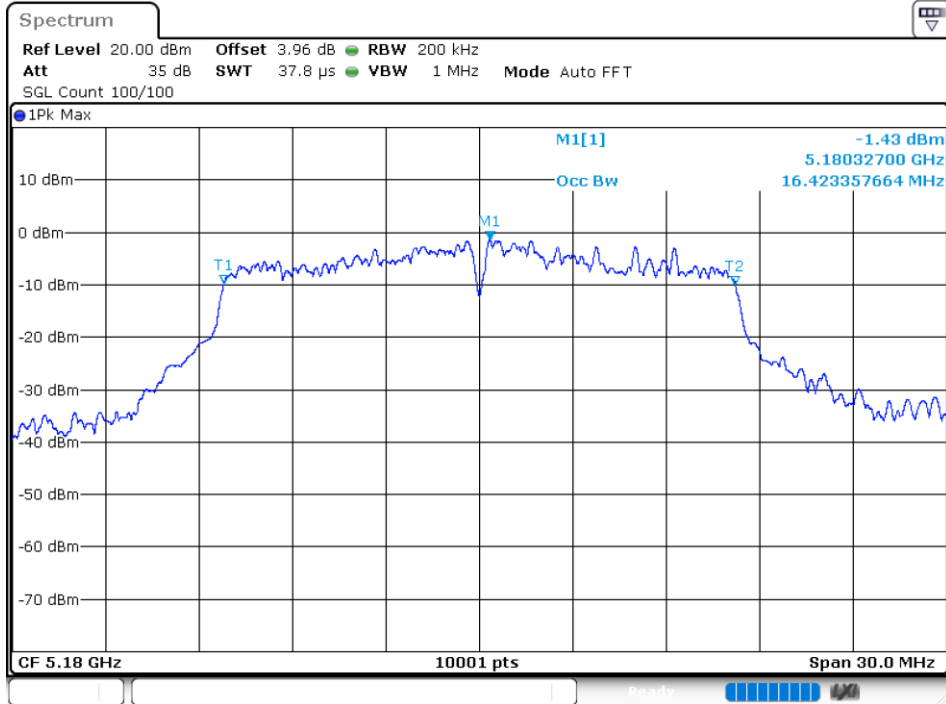



OBW NVNT a 5200MHz Ant1

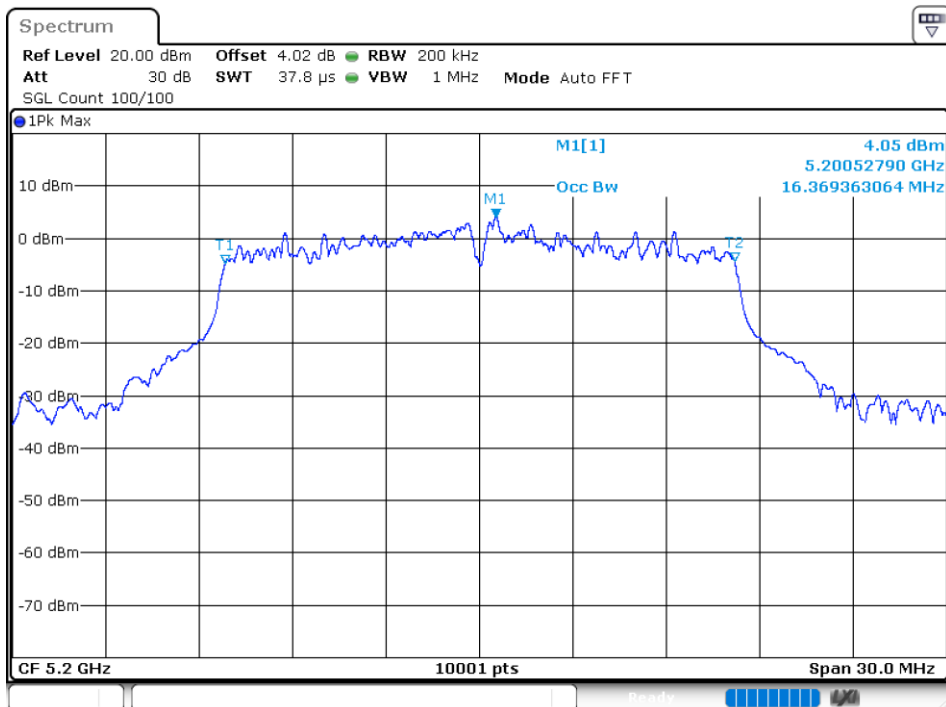


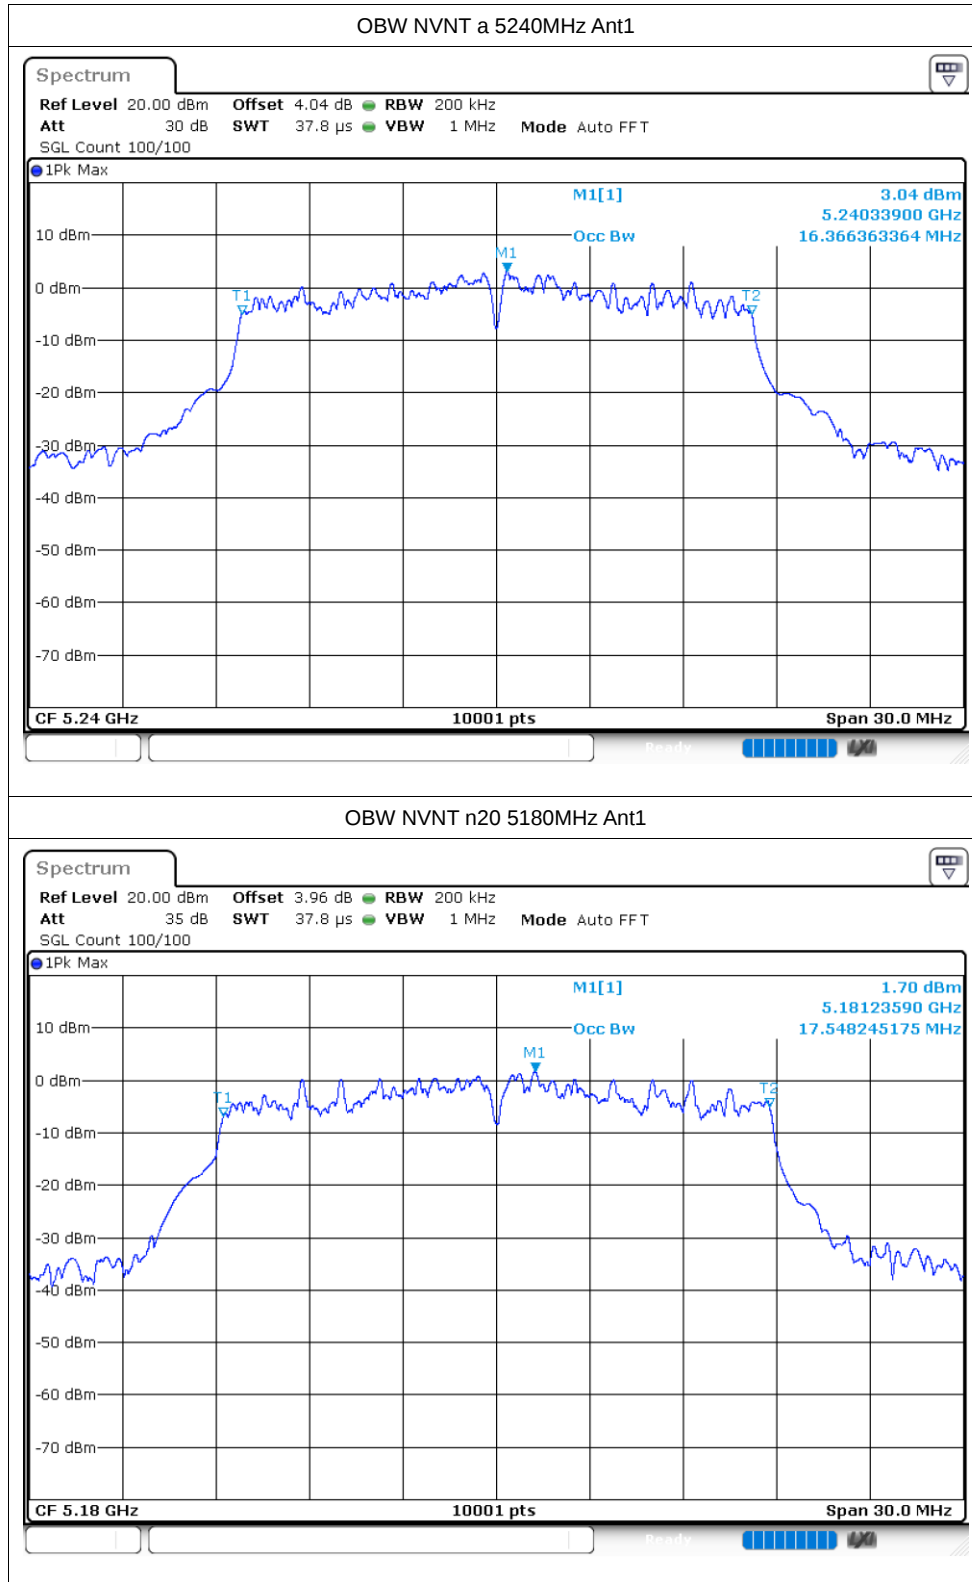


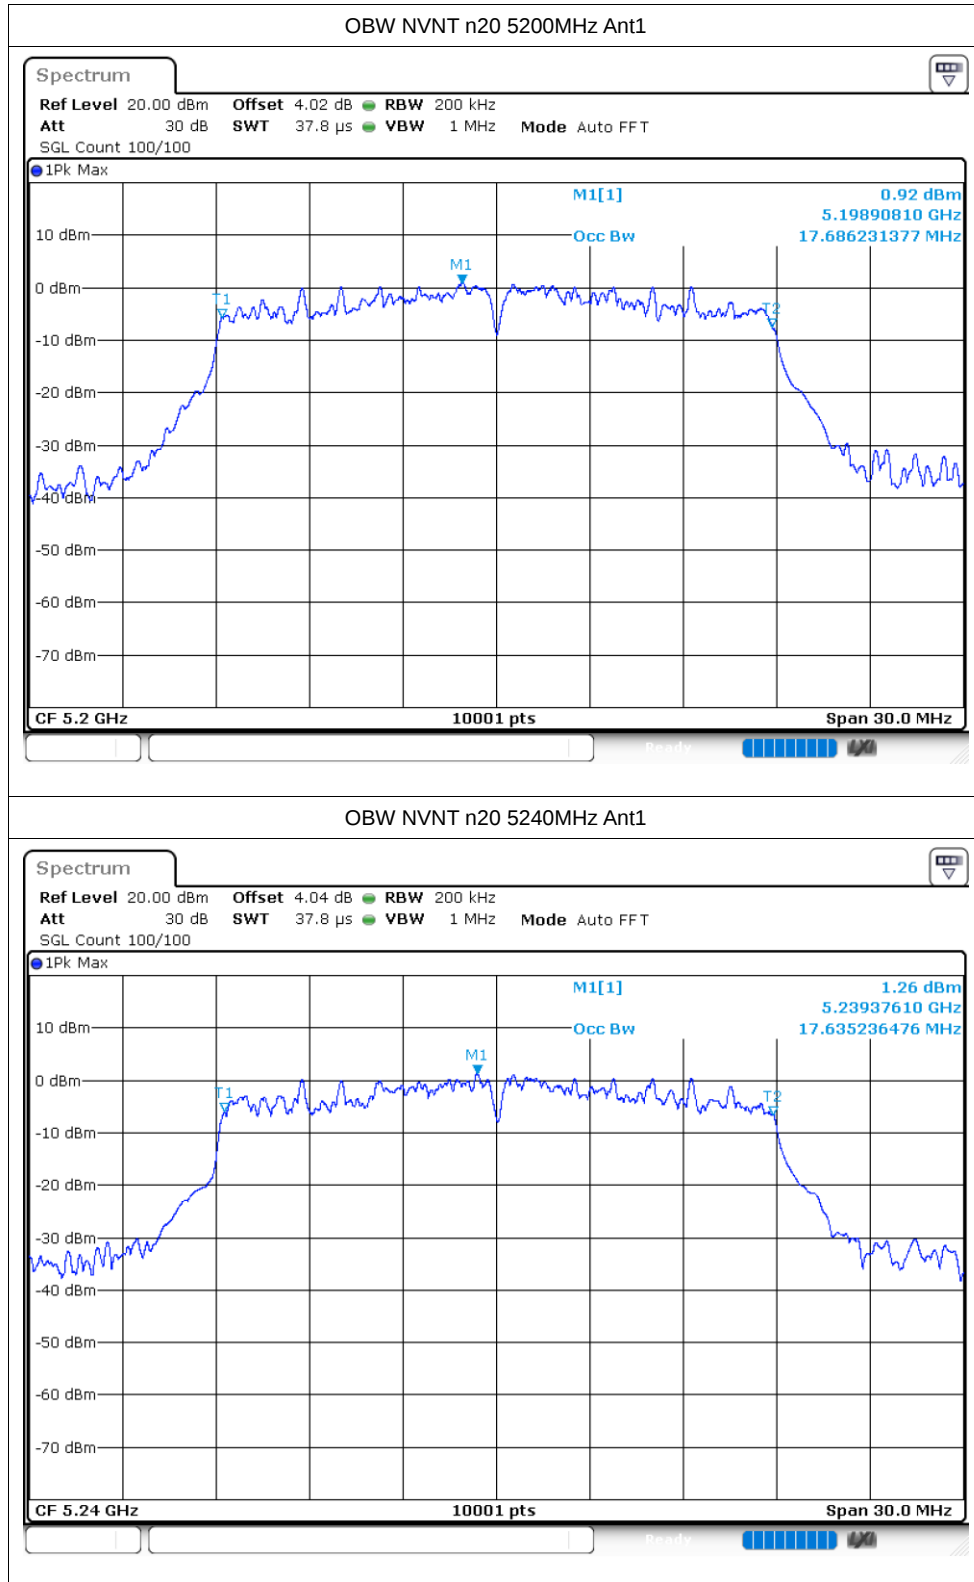

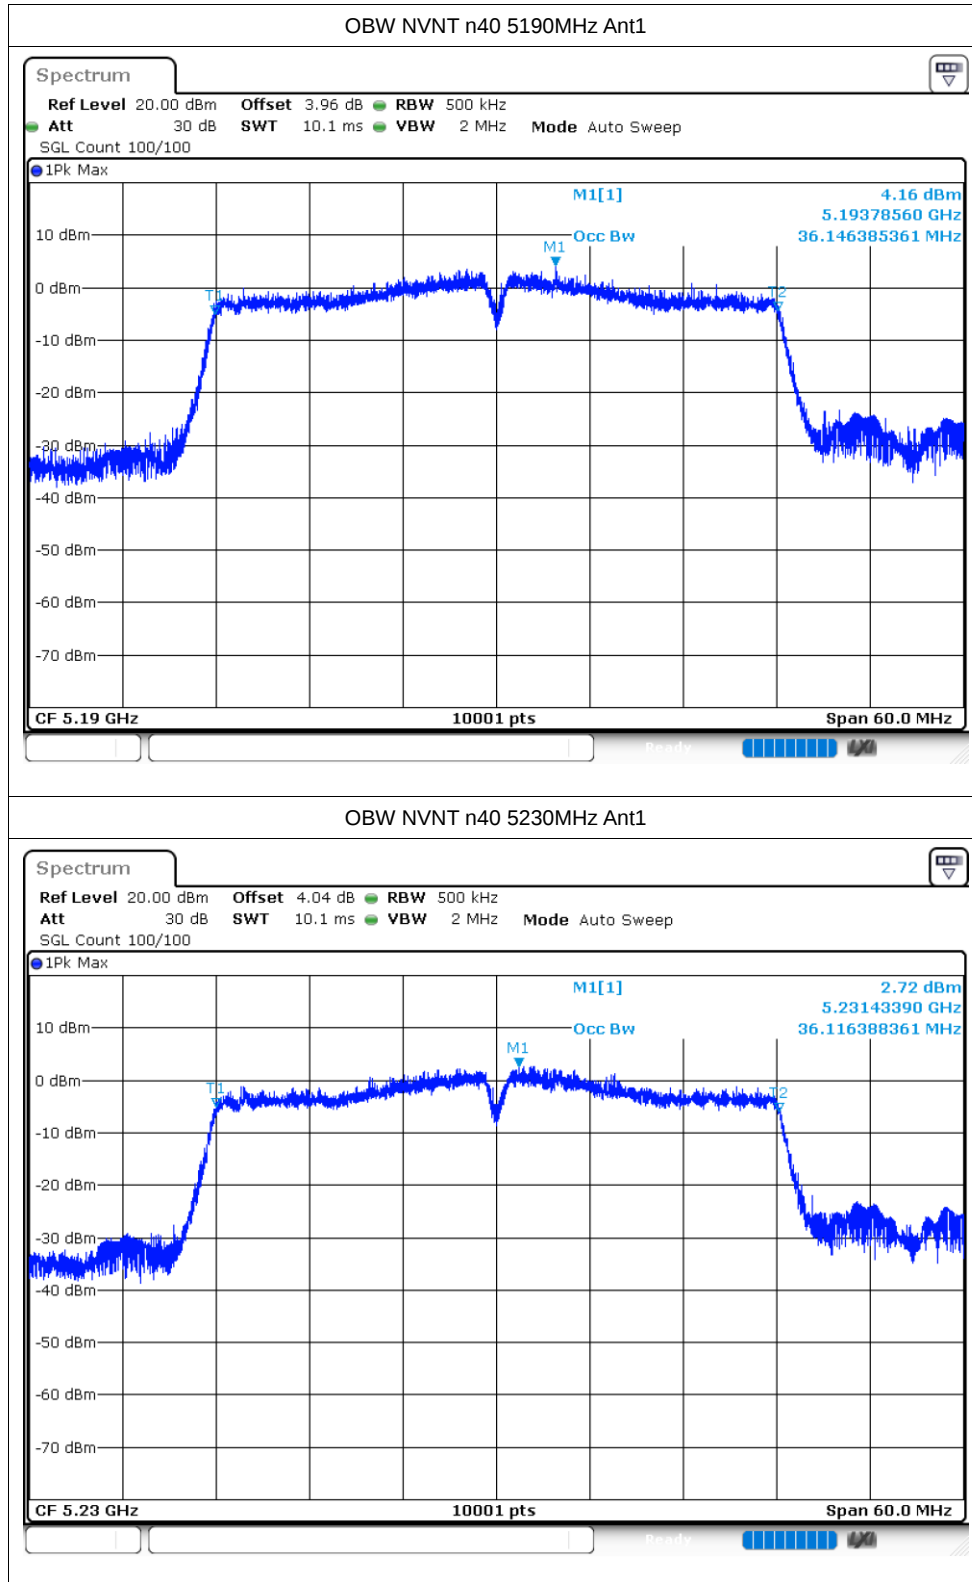

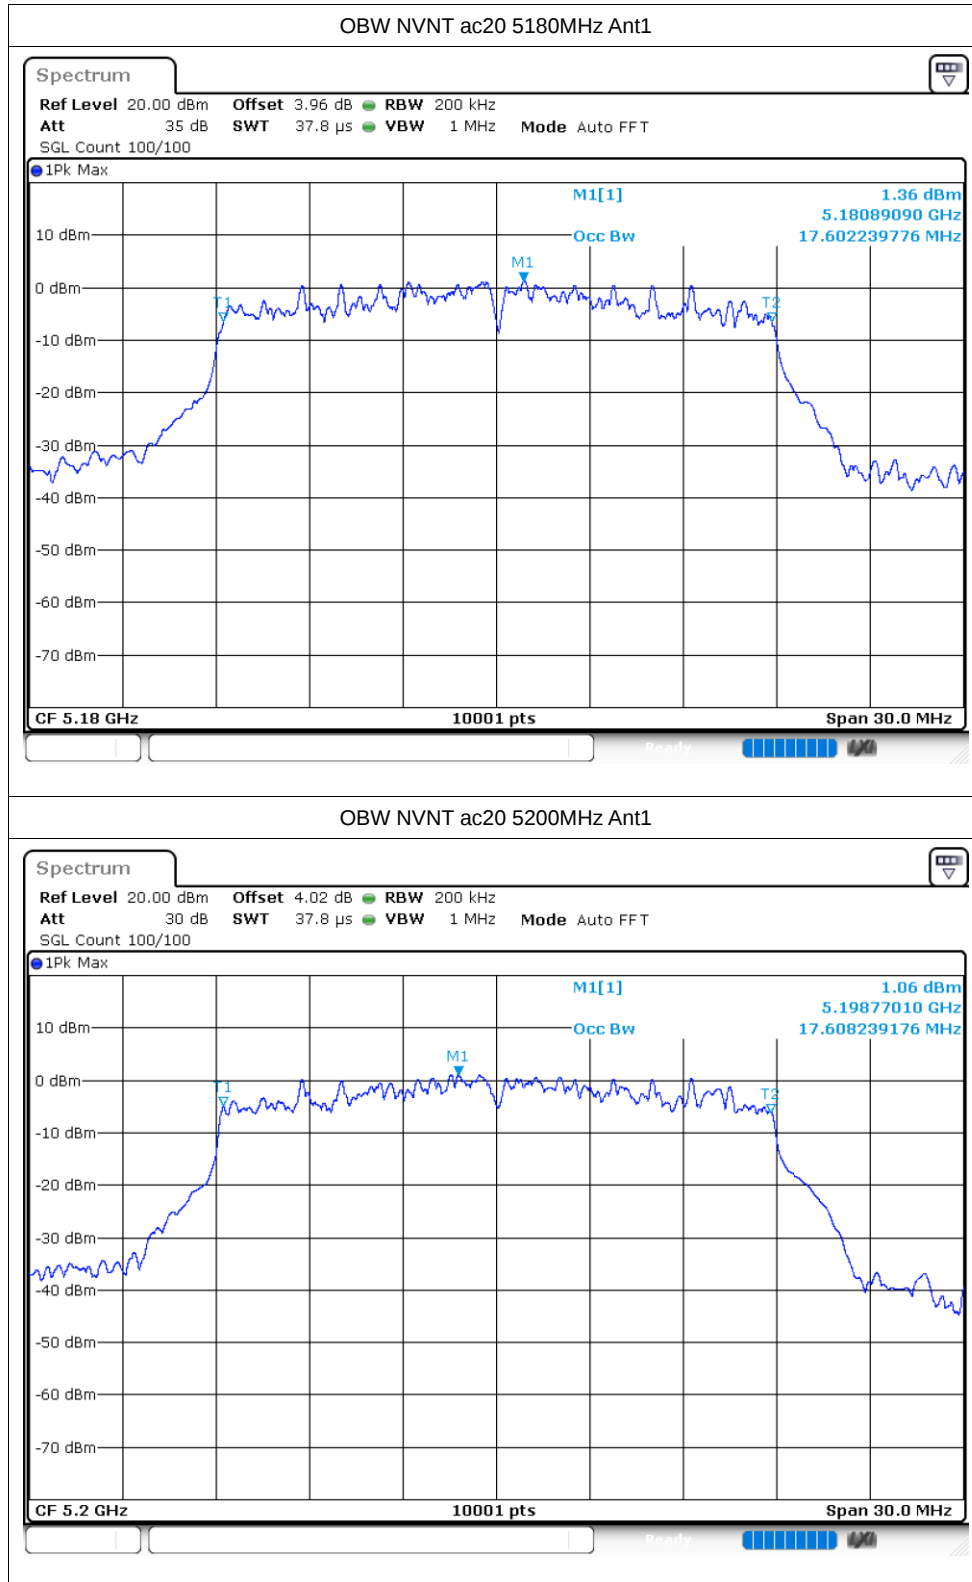

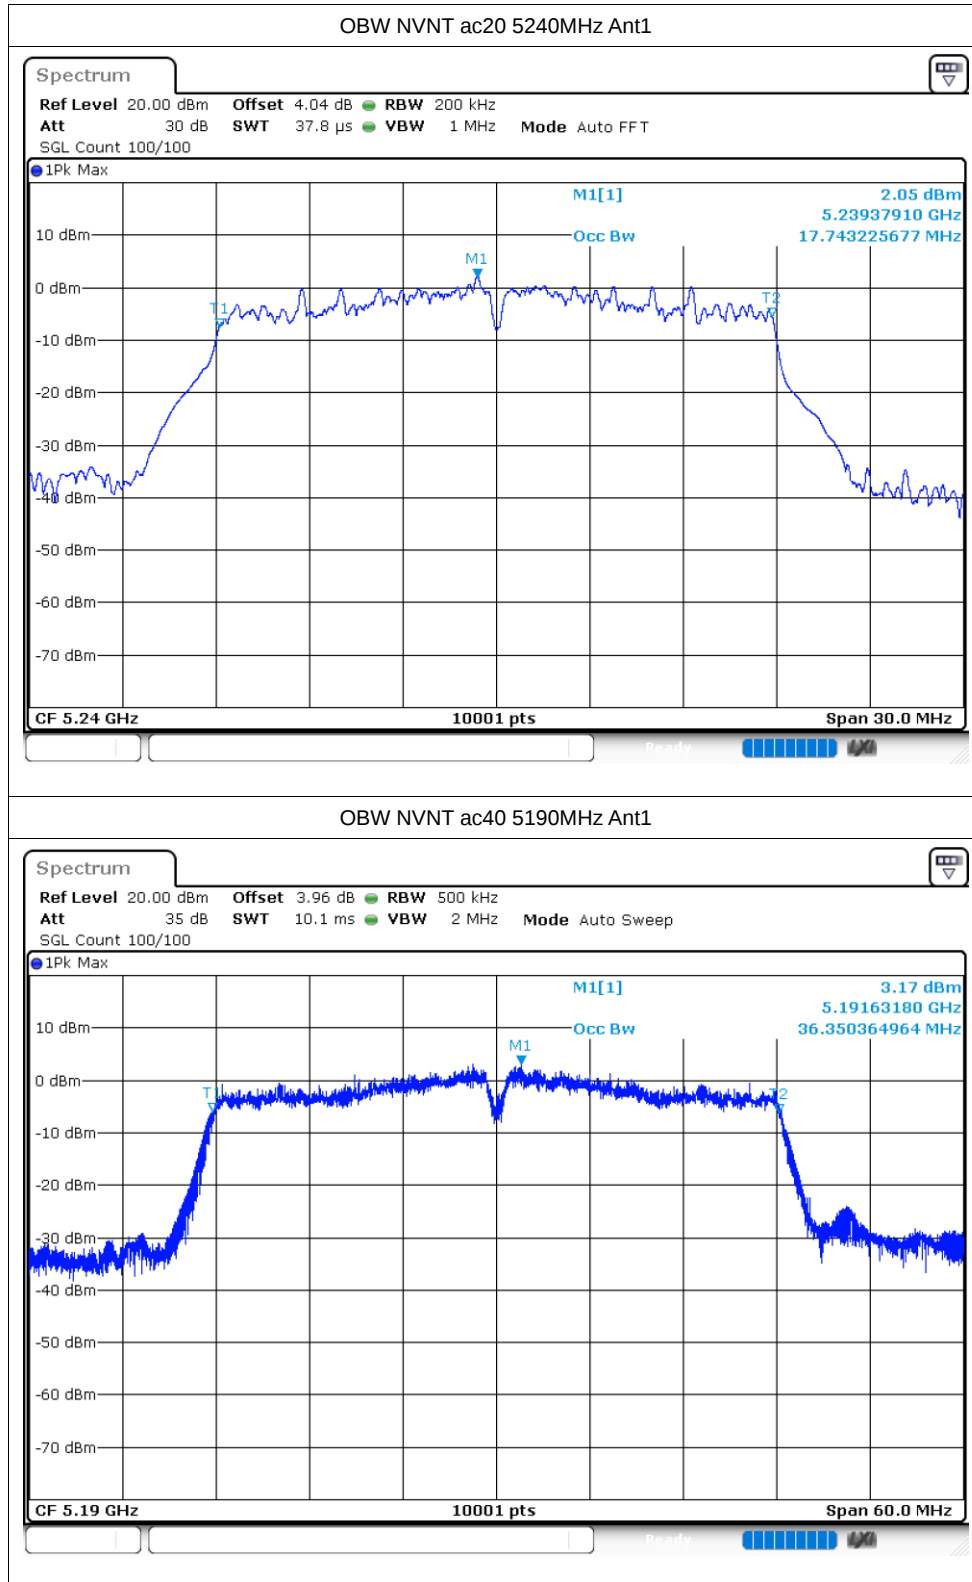

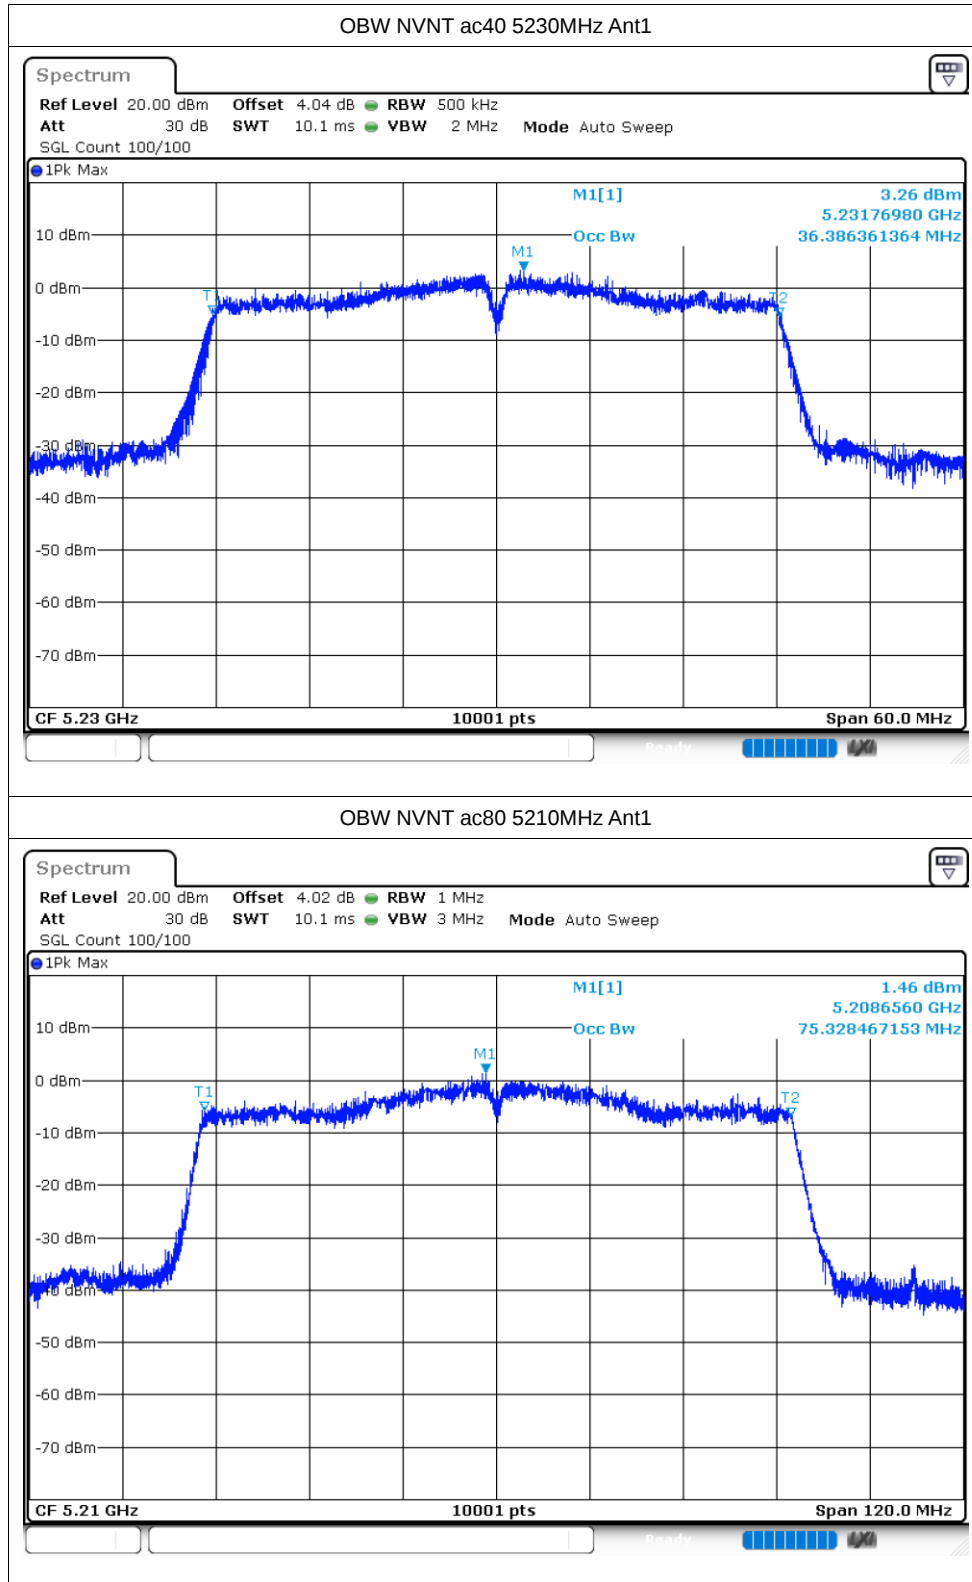


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-7.58	0.69	-6.89	11	Pass
NVNT	a	5200	Ant1	-7.32	0.69	-6.63	11	Pass
NVNT	a	5240	Ant1	-7.72	0.69	-7.03	11	Pass
NVNT	n20	5180	Ant1	-8.76	0.73	-8.03	11	Pass
NVNT	n20	5200	Ant1	-8.78	0.73	-8.05	11	Pass
NVNT	n20	5240	Ant1	-8.36	0.73	-7.63	11	Pass
NVNT	n40	5190	Ant1	-16.78	1.1	-15.68	11	Pass
NVNT	n40	5230	Ant1	-17.5	1.1	-16.4	11	Pass
NVNT	ac20	5180	Ant1	-7.5	0.72	-6.78	11	Pass
NVNT	ac20	5200	Ant1	-6.98	0.72	-6.26	11	Pass
NVNT	ac20	5240	Ant1	-6.09	0.71	-5.38	11	Pass
NVNT	ac40	5190	Ant1	-16.95	1.17	-15.78	11	Pass
NVNT	ac40	5230	Ant1	-17.5	1.17	-16.33	11	Pass
NVNT	ac80	5210	Ant1	-25.14	1.58	-23.56	11	Pass


Test Graphs


PSD NVNT a 5180MHz Ant1

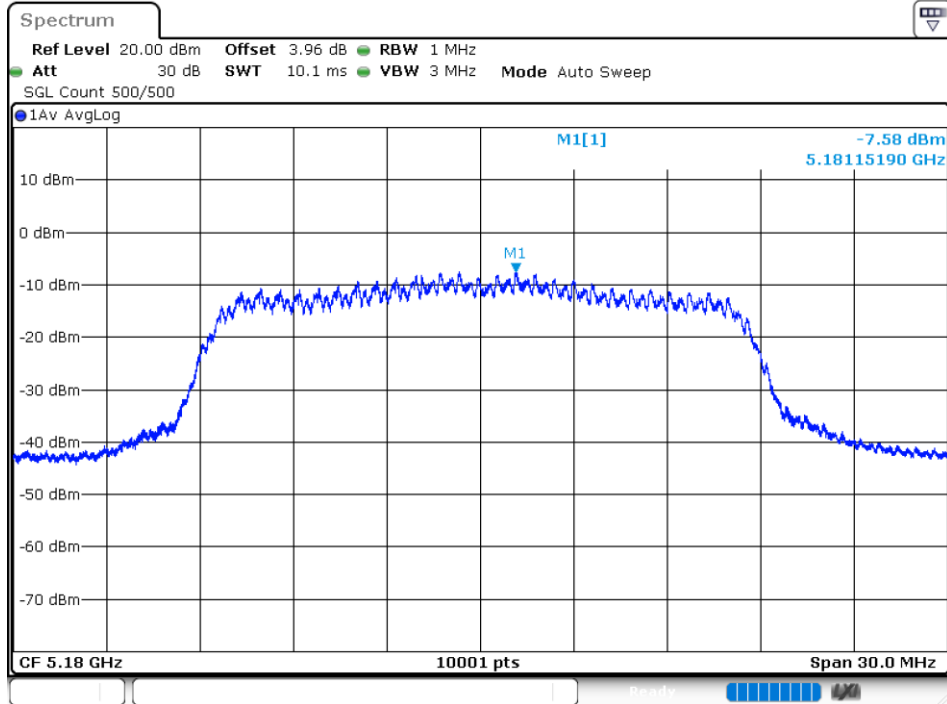



PSD NVNT a 5200MHz Ant1

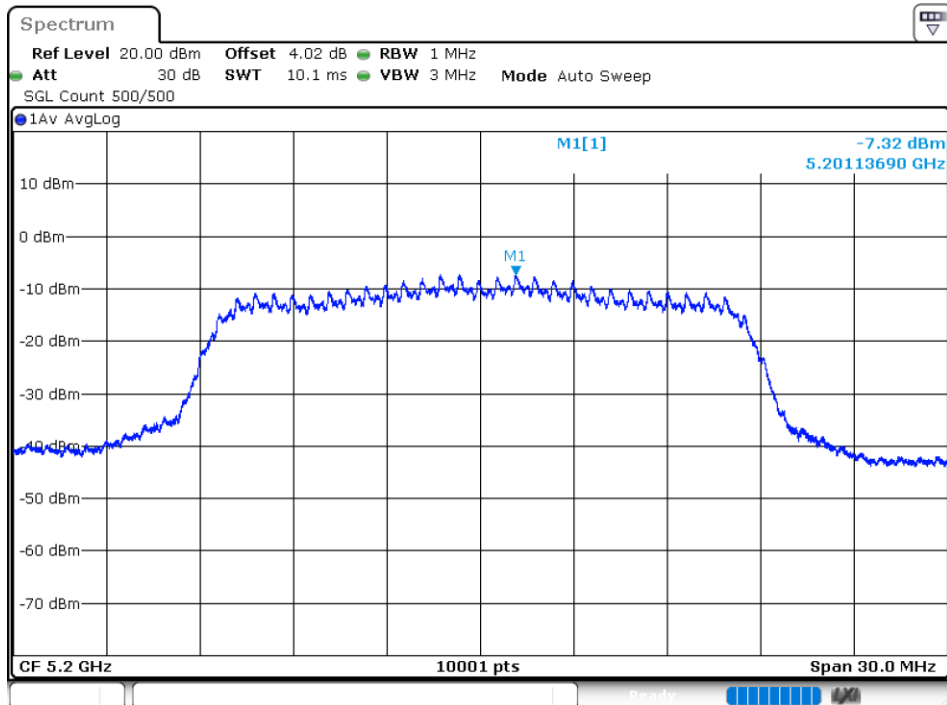


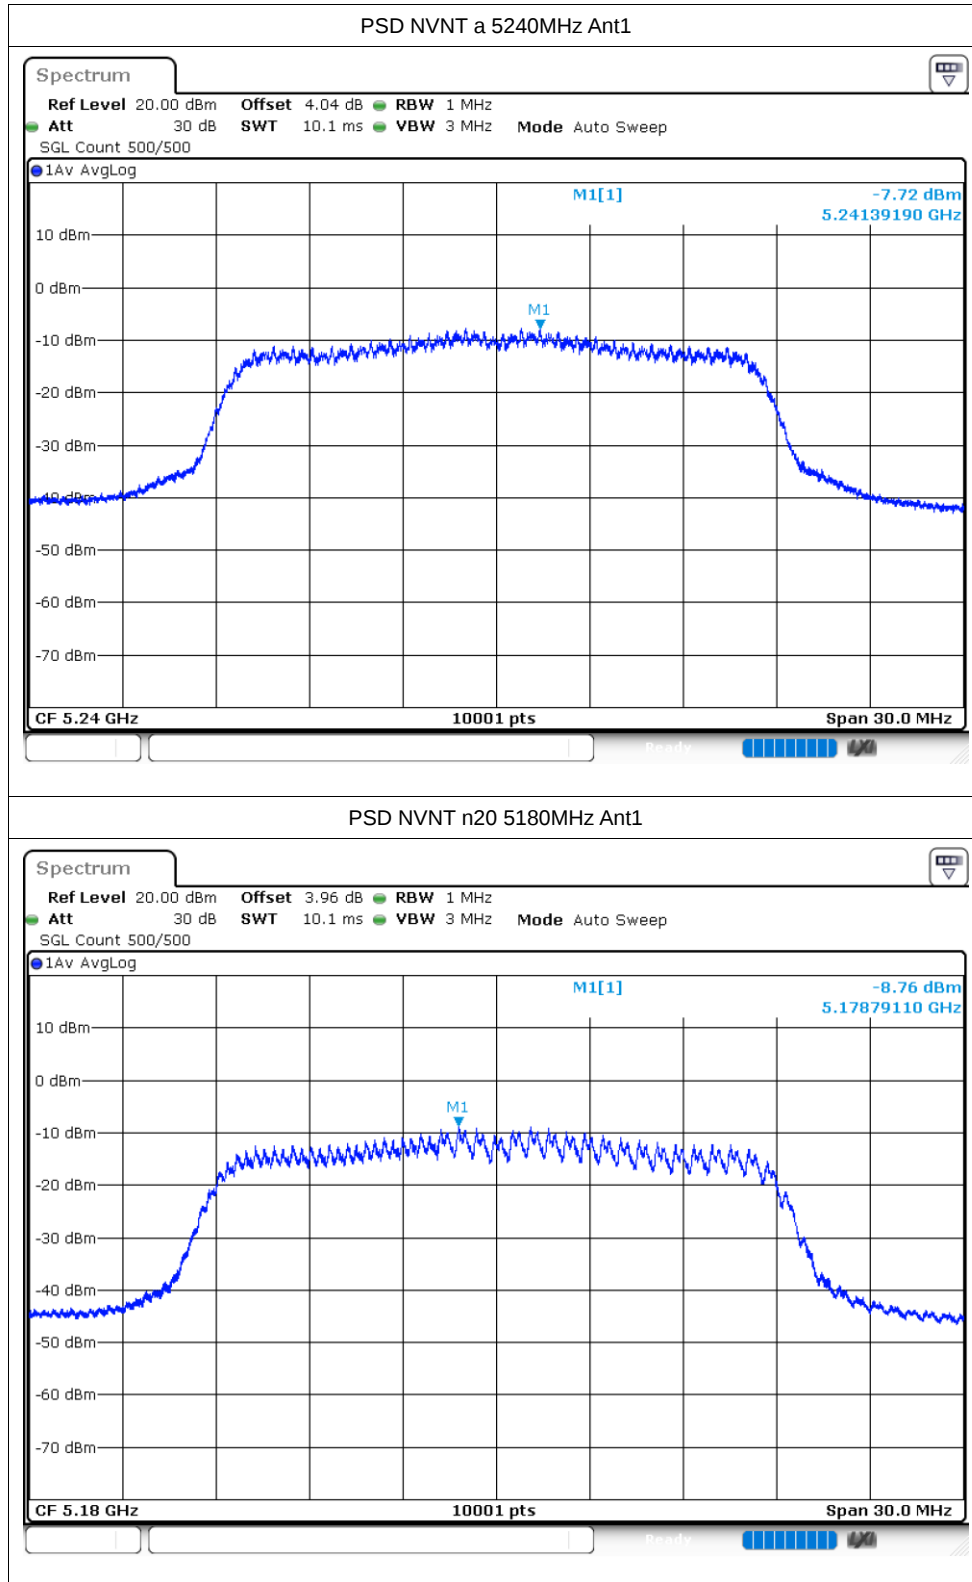


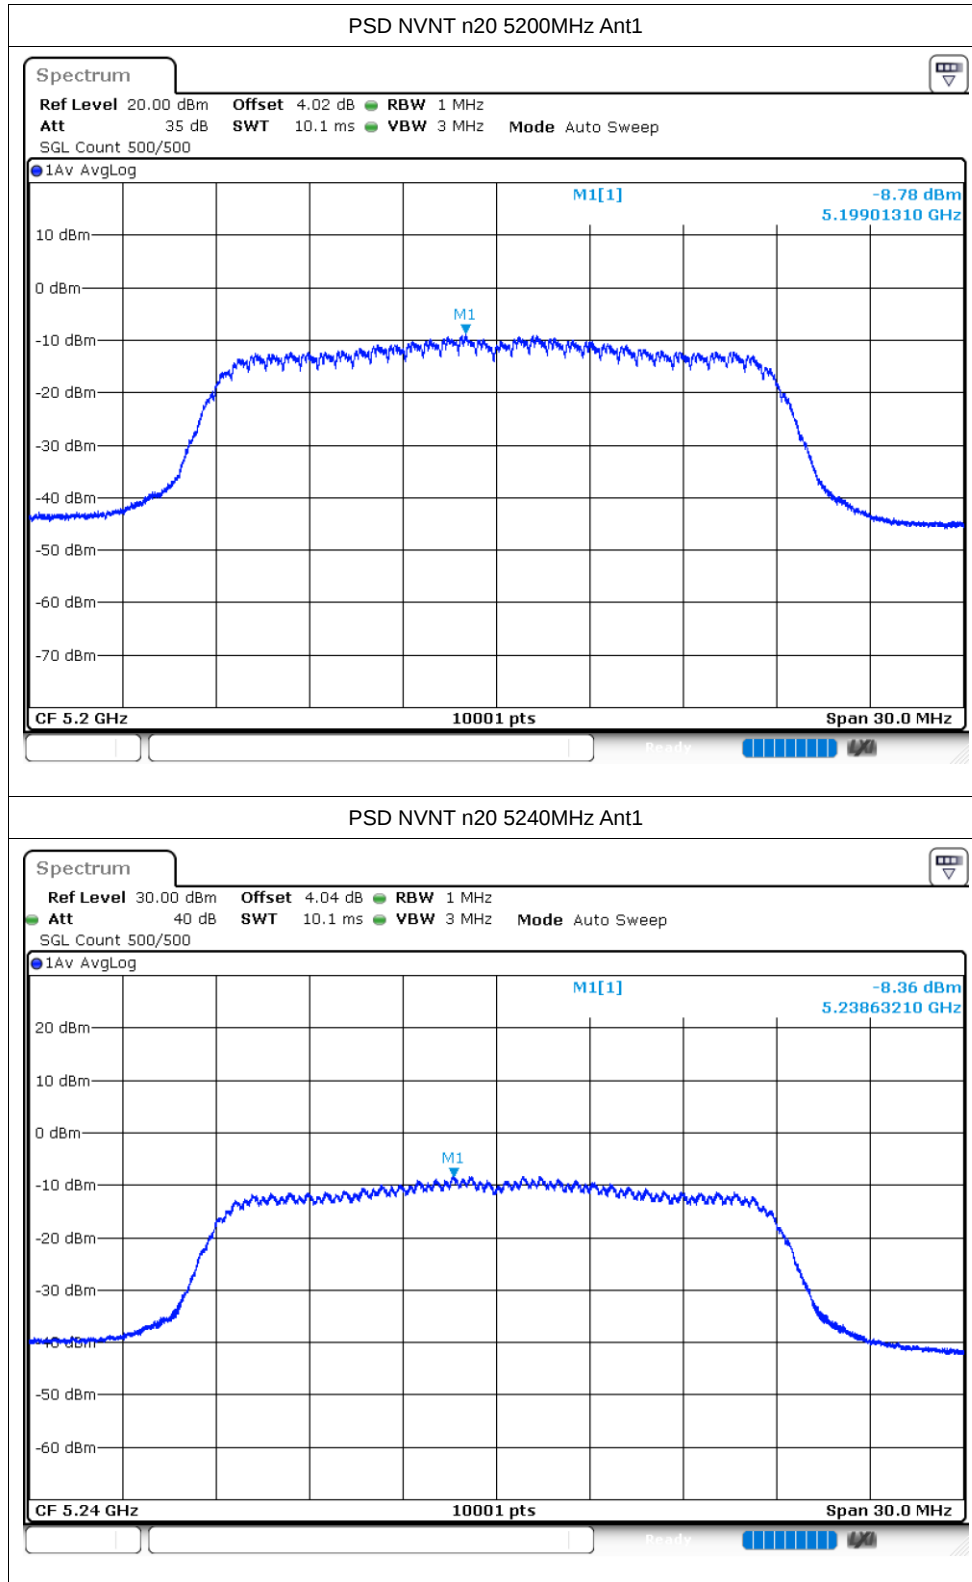

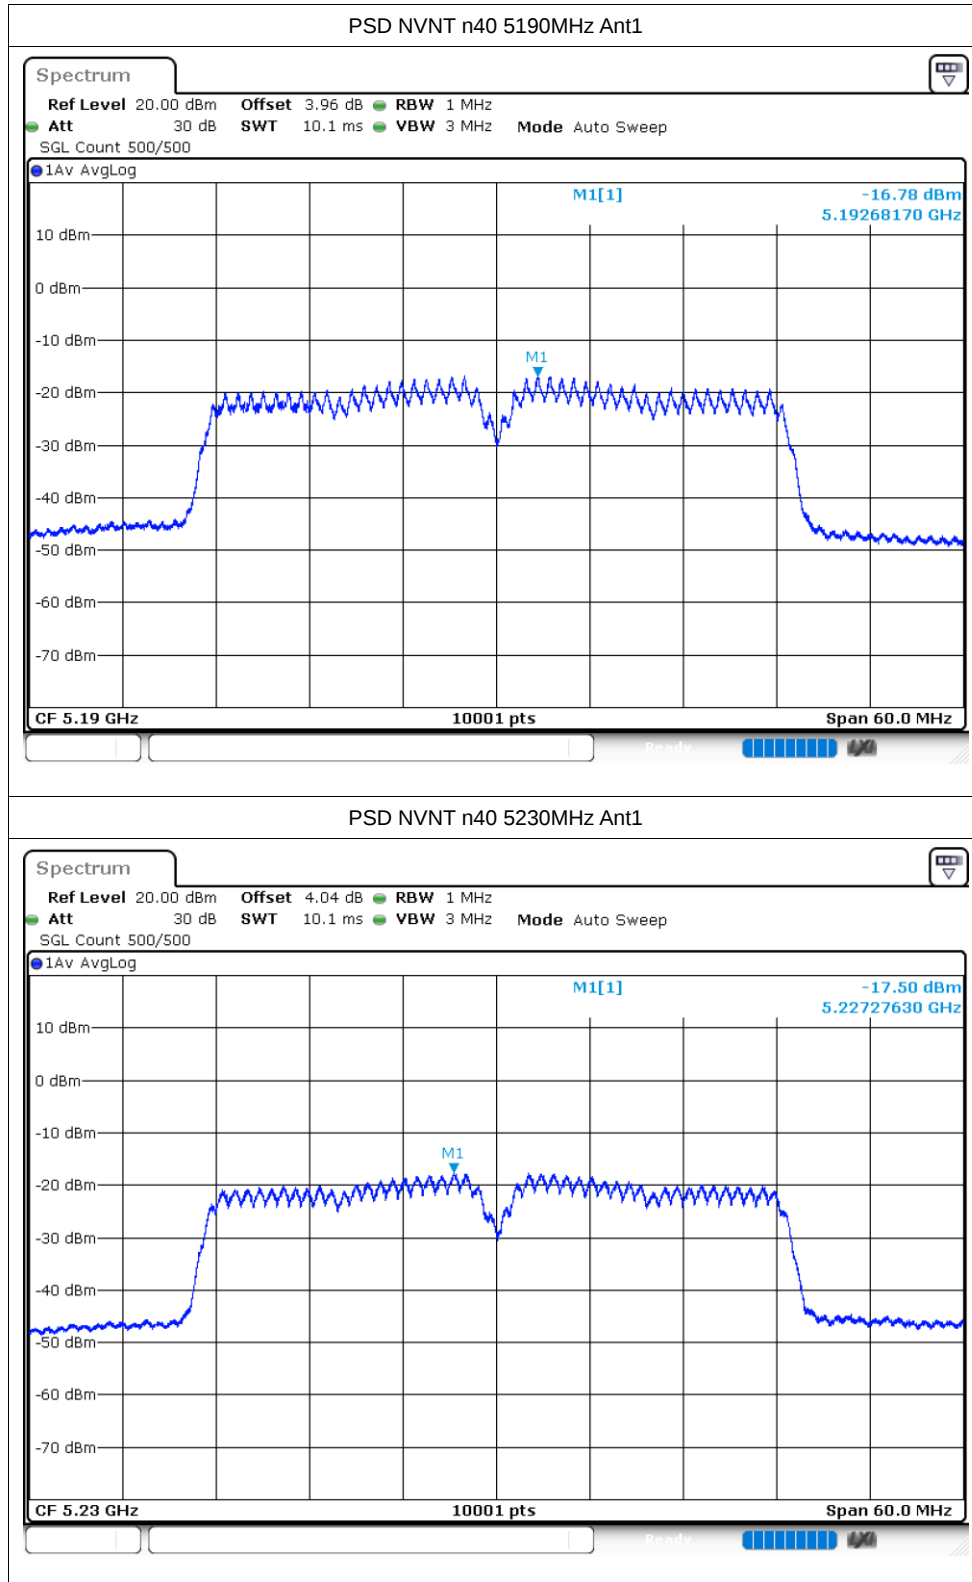

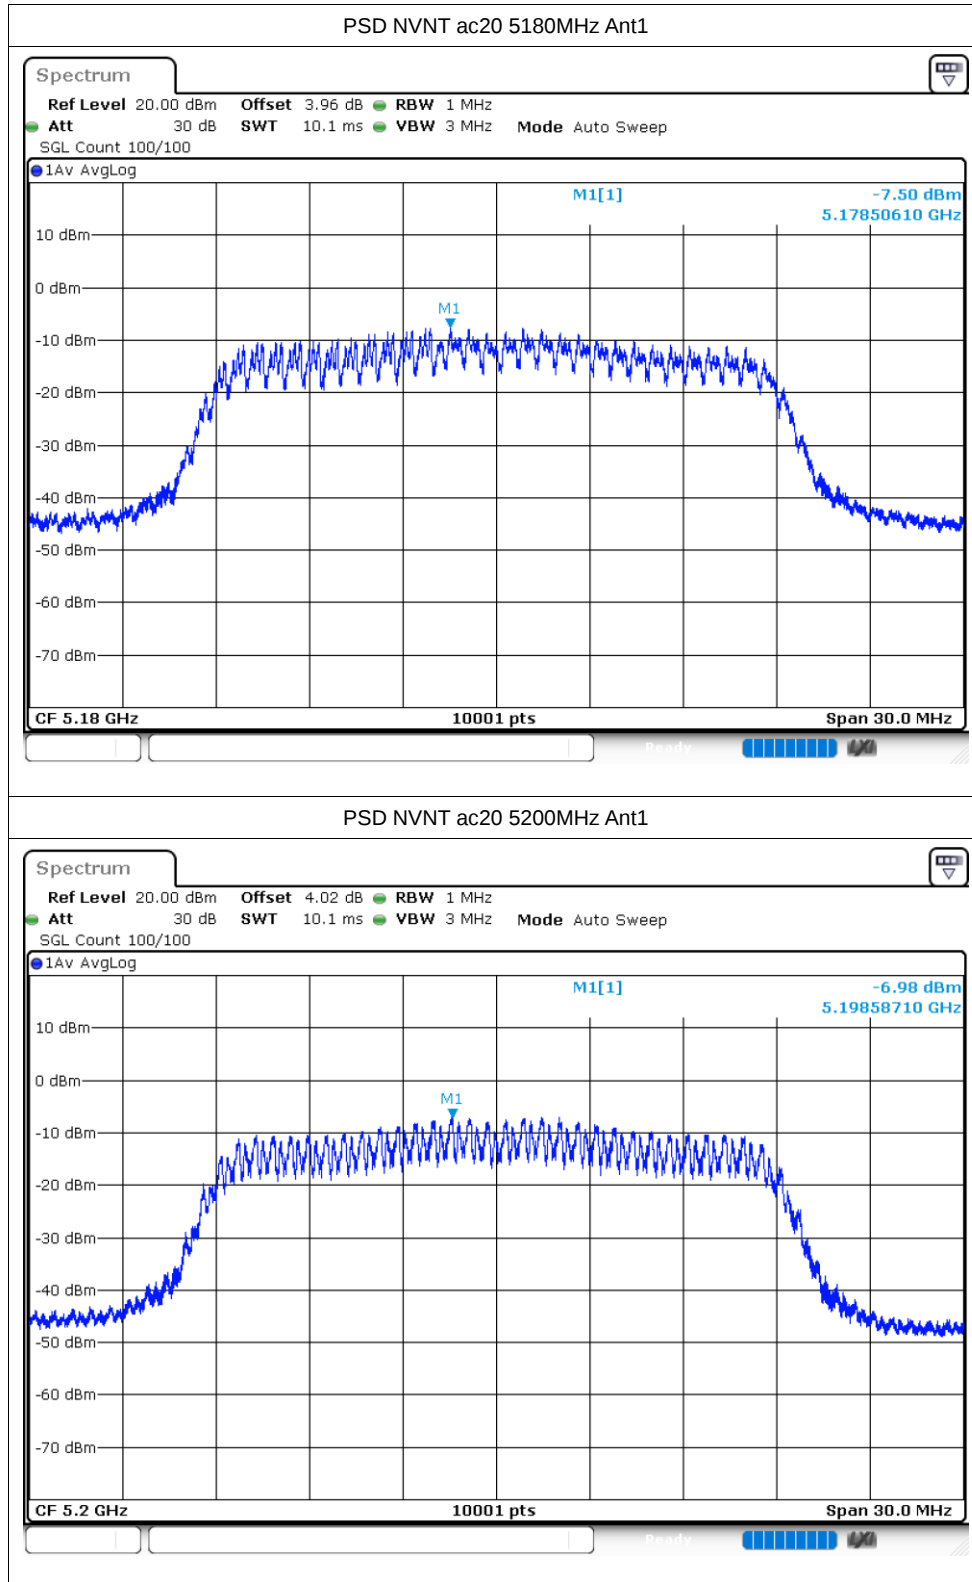

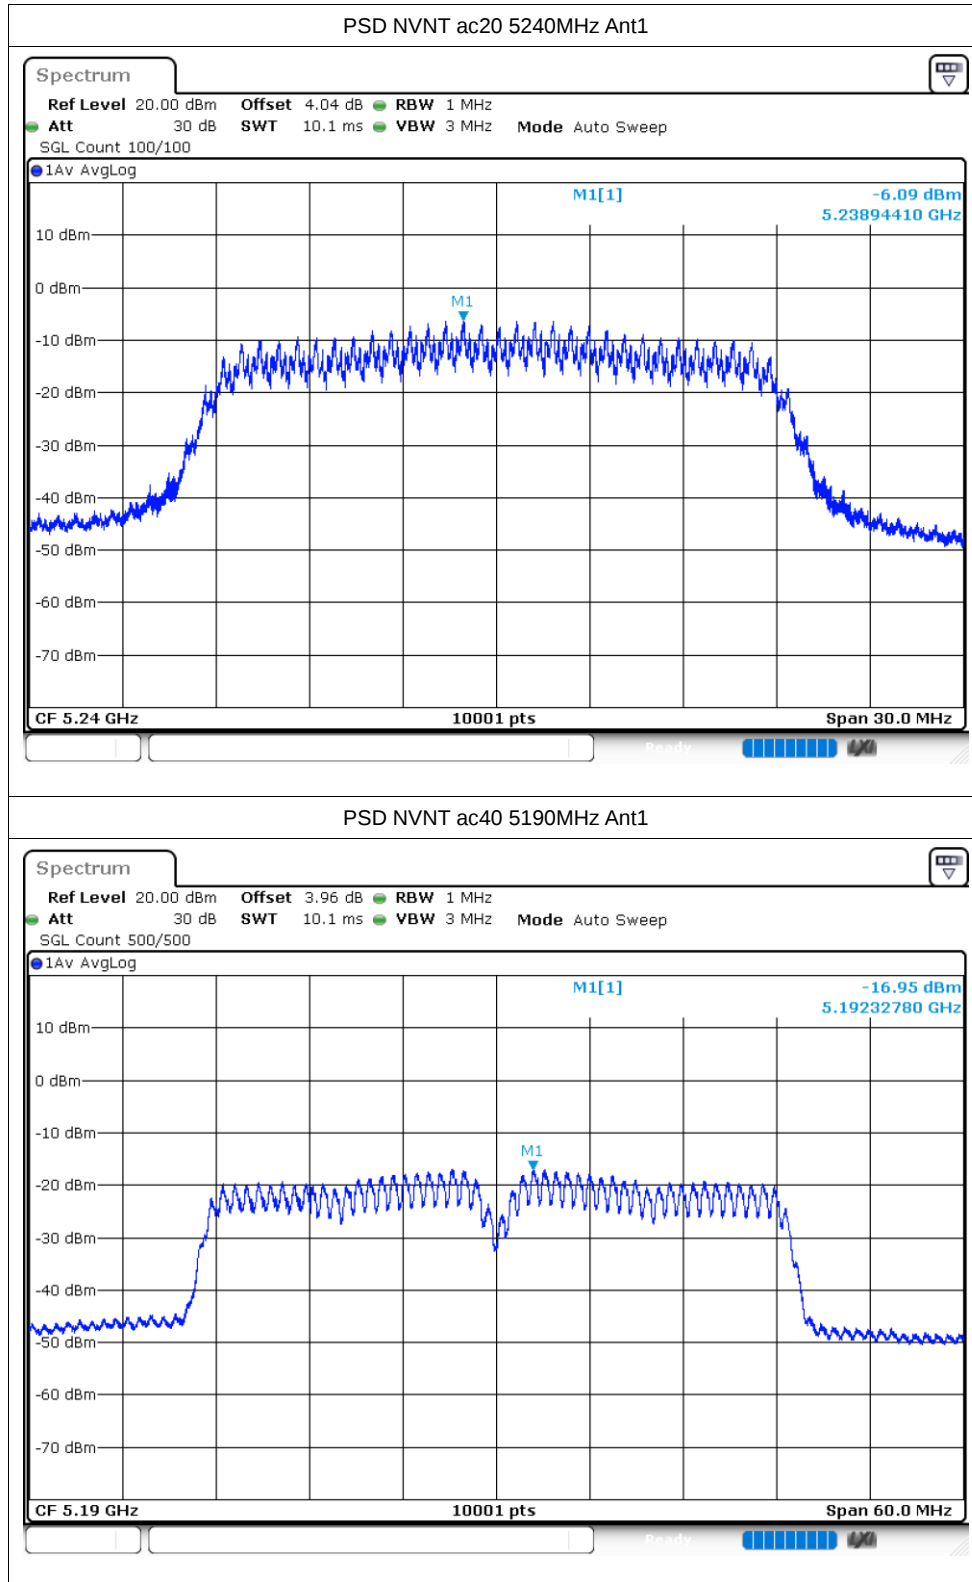

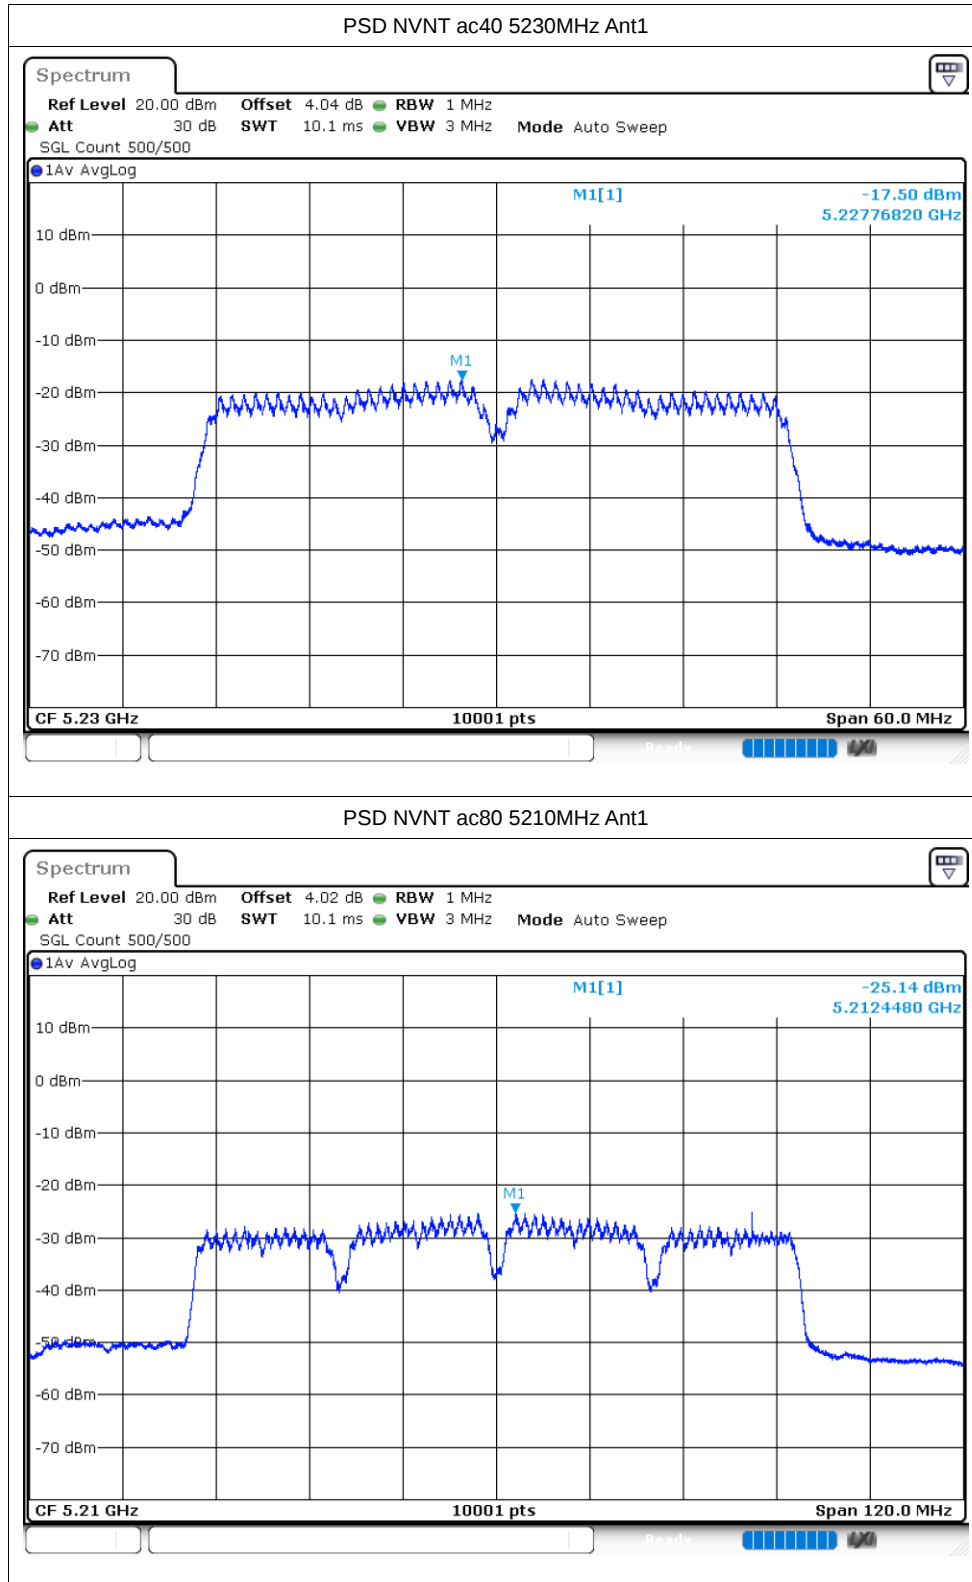


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-30.02	-27	Pass
NVNT	a	5240	Ant1	-40.96	-27	Pass
NVNT	n20	5180	Ant1	-29.47	-27	Pass
NVNT	n20	5240	Ant1	-41.63	-27	Pass
NVNT	n40	5190	Ant1	-27.32	-27	Pass
NVNT	n40	5230	Ant1	-41.54	-27	Pass
NVNT	ac20	5180	Ant1	-30.04	-27	Pass
NVNT	ac20	5240	Ant1	-41.22	-27	Pass
NVNT	ac40	5190	Ant1	-27.89	-27	Pass
NVNT	ac40	5230	Ant1	-41.62	-27	Pass
NVNT	ac80	5210	Ant1	-40.99	-27	Pass


Test Graphs

Band Edge NVNT a 5180MHz Low Ant1

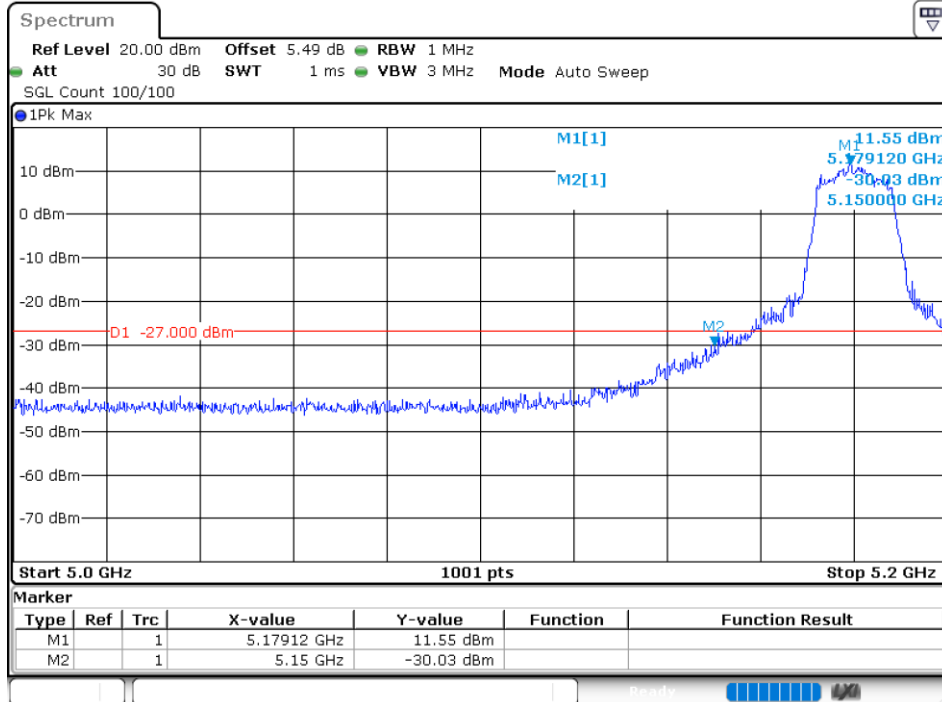

Band Edge NVNT a 5240MHz High Ant1

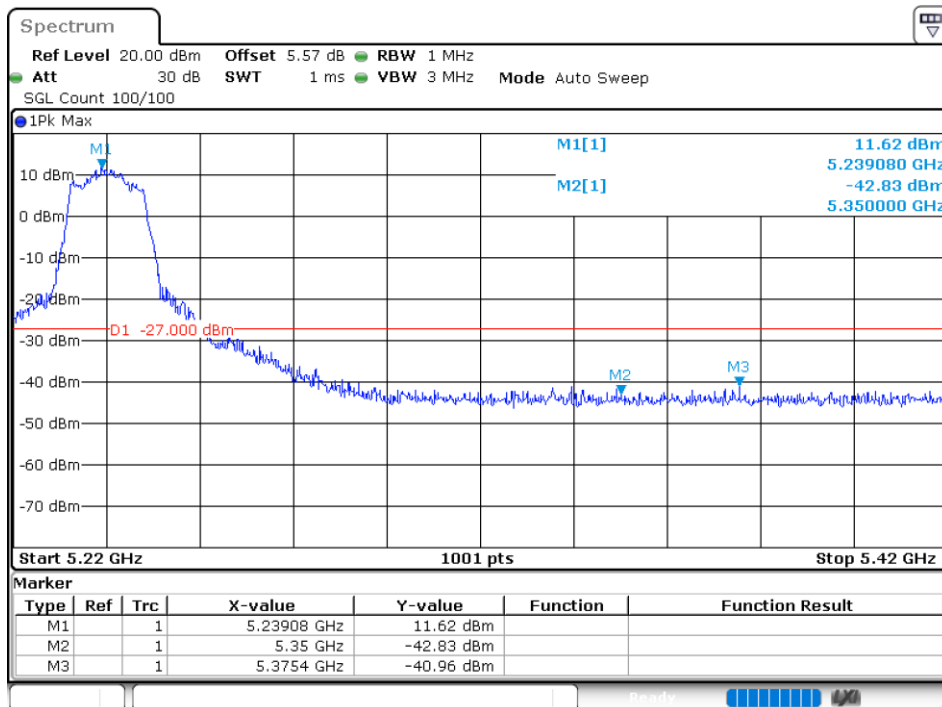

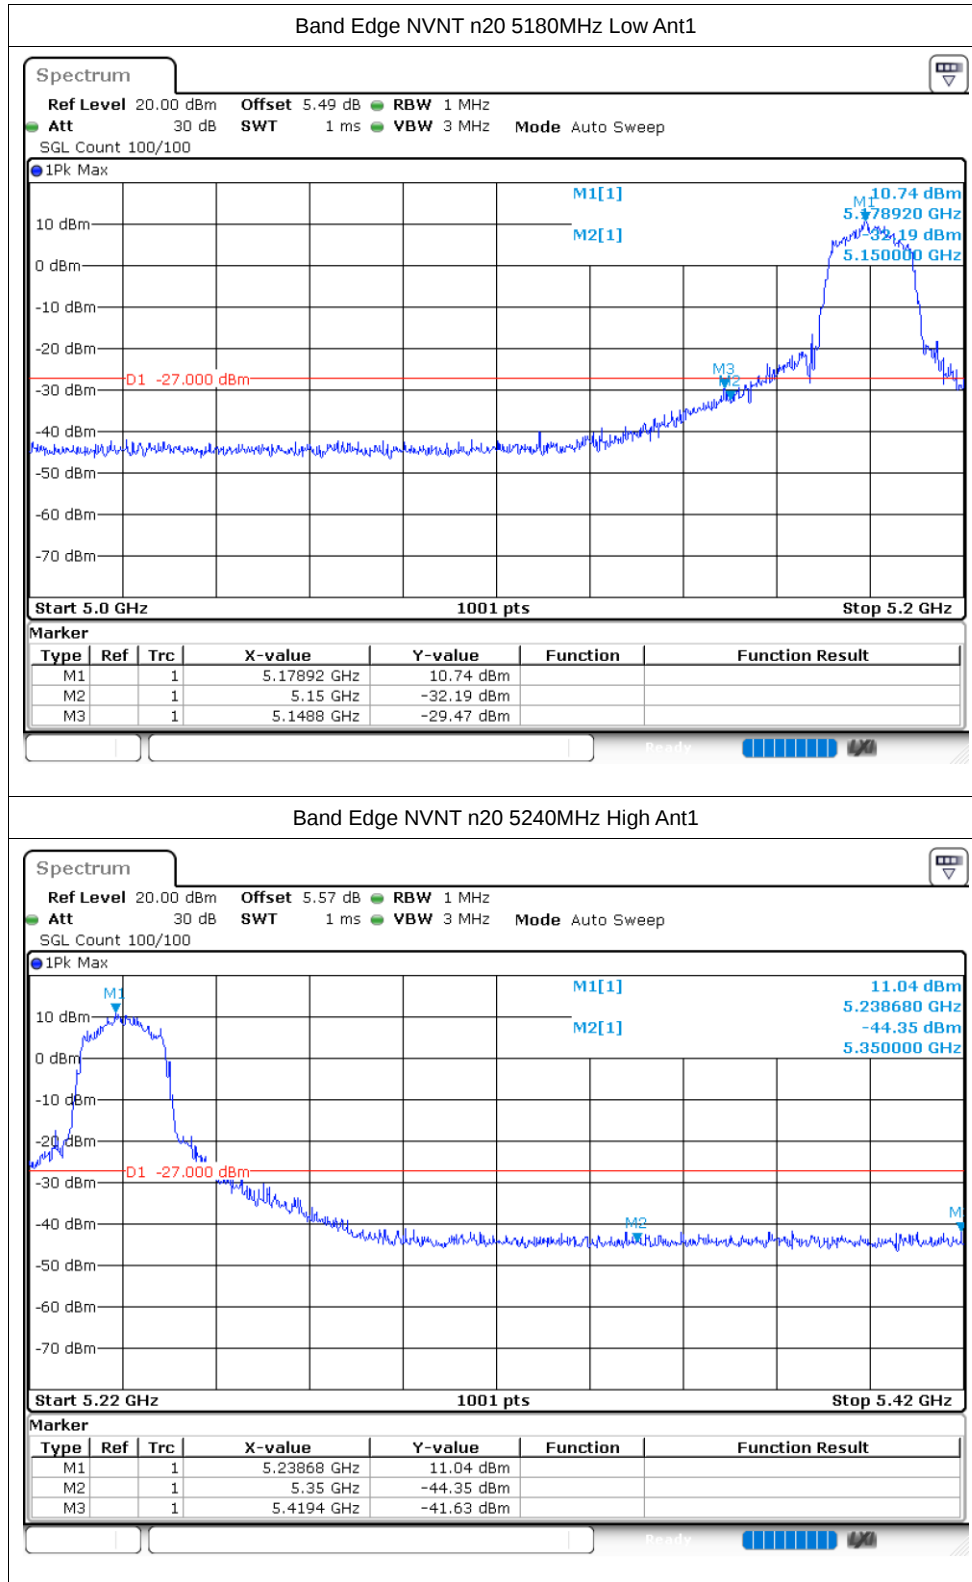


Band Edge NVNT n40 5190MHz Low Ant1

Spectrum

Ref Level 20.00 dBm Offset 5.49 dB RBW 1 MHz
Att 30 dB SWT 1 ms VBW 3 MHz Mode Auto Sweep
SGL Count 100/100

1Pk Max

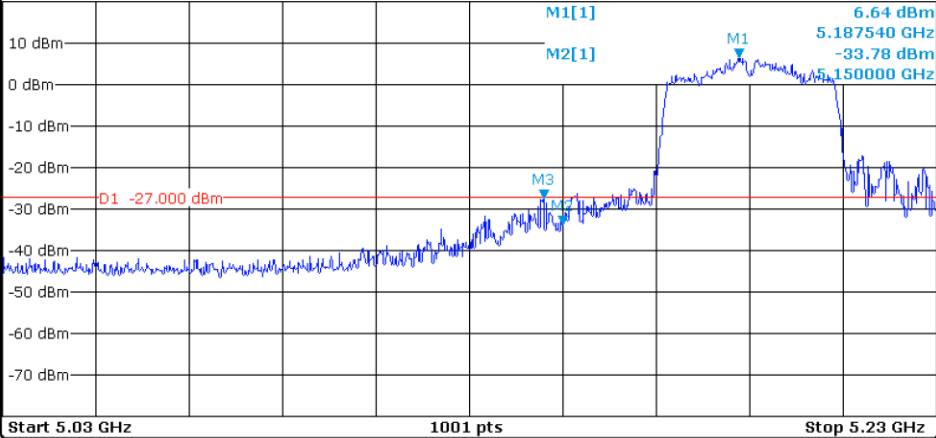

Marker


Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	5.18754 GHz	6.64 dBm		
M2	1	1	5.15 GHz	-33.78 dBm		
M3	1	1	5.146 GHz	-27.32 dBm		

Band Edge NVNT n40 5230MHz High Ant1

Spectrum


Ref Level 20.00 dBm Offset 5.57 dB RBW 1 MHz
Att 30 dB SWT 1 ms VBW 3 MHz Mode Auto Sweep
SGL Count 100/100


1Pk Max

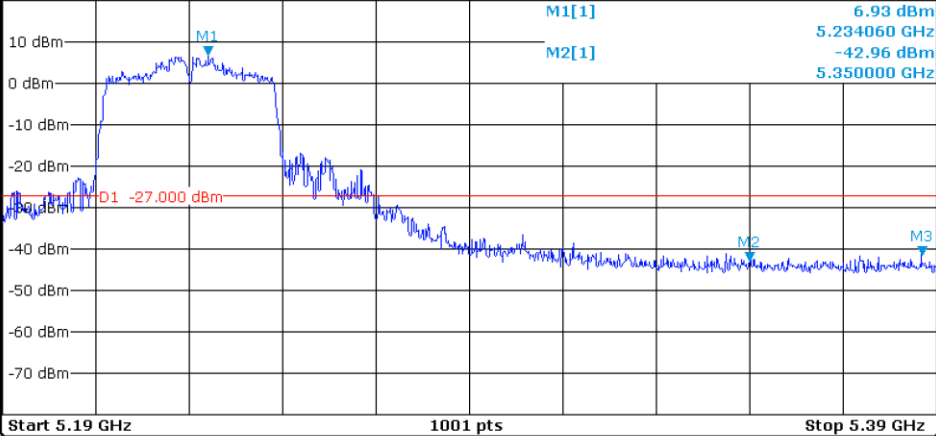


Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1	1	5.23406 GHz	6.93 dBm		
M2	1	1	5.35 GHz	-42.96 dBm		
M3	1	1	5.3868 GHz	-41.55 dBm		

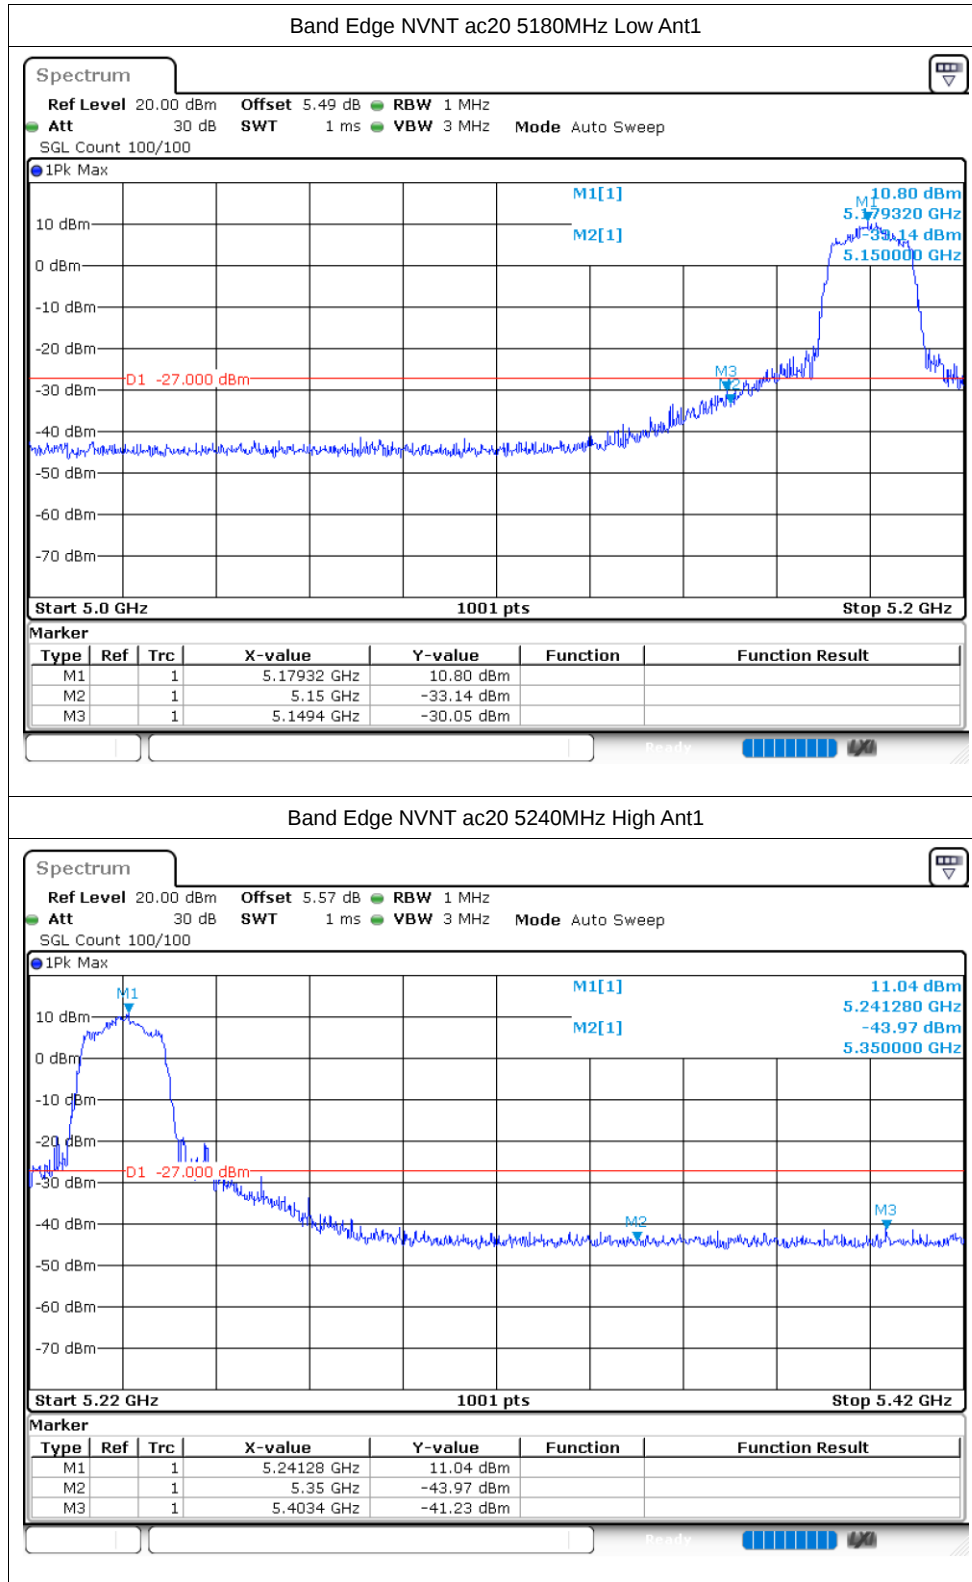

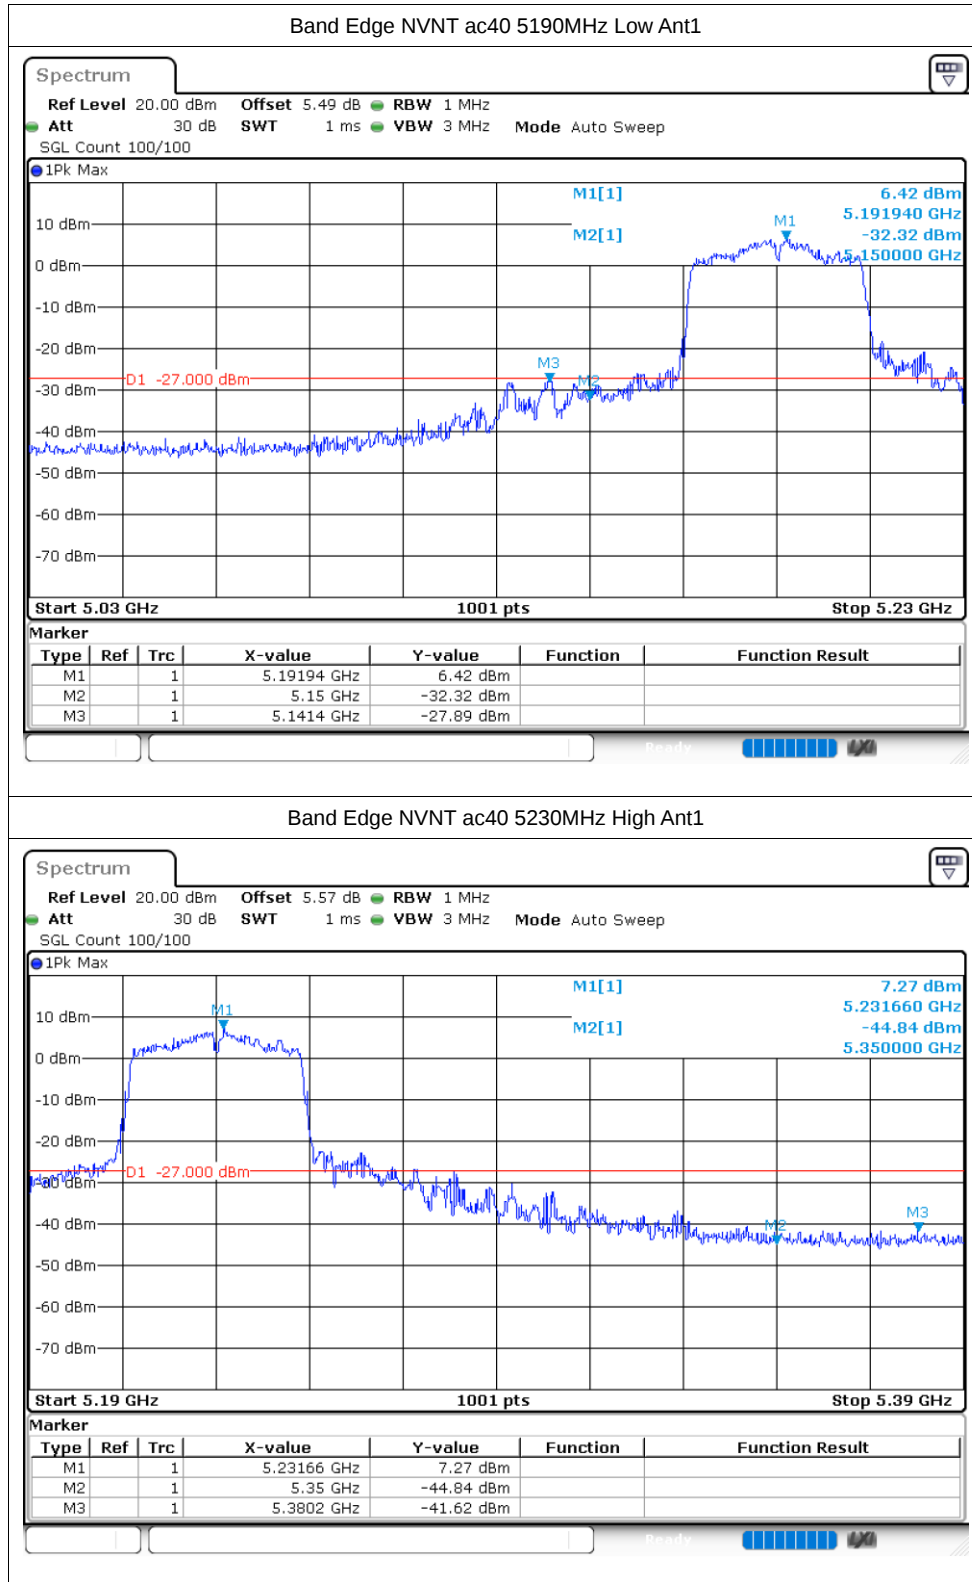

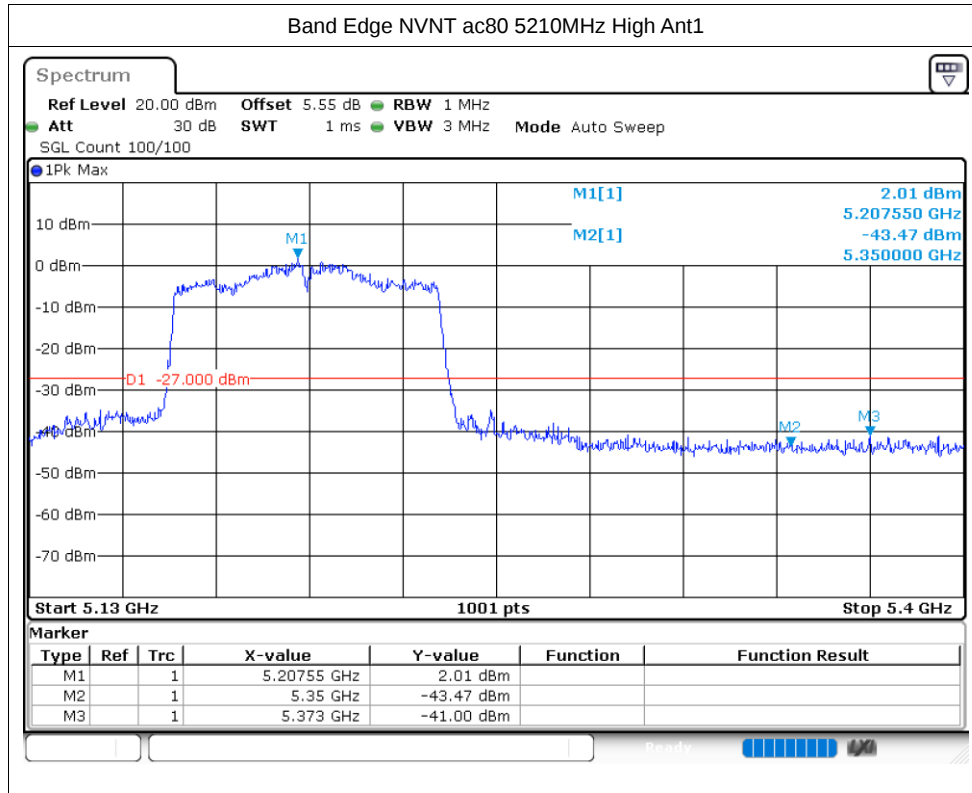


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	Ant1	-32.79	-27	Pass
NVNT	a	5200	Ant1	-33.24	-27	Pass
NVNT	a	5240	Ant1	-33.2	-27	Pass
NVNT	n20	5180	Ant1	-32.68	-27	Pass
NVNT	n20	5200	Ant1	-32.66	-27	Pass
NVNT	n20	5240	Ant1	-33.02	-27	Pass
NVNT	n40	5190	Ant1	-33.12	-27	Pass
NVNT	n40	5230	Ant1	-33.18	-27	Pass
NVNT	ac20	5180	Ant1	-32.87	-27	Pass
NVNT	ac20	5200	Ant1	-33.17	-27	Pass
NVNT	ac20	5240	Ant1	-32.62	-27	Pass
NVNT	ac40	5190	Ant1	-33.44	-27	Pass
NVNT	ac40	5230	Ant1	-32.33	-27	Pass
NVNT	ac80	5210	Ant1	-33.05	-27	Pass

Test Graphs


Tx. Spurious NVNT a 5180MHz Ant1 Emission

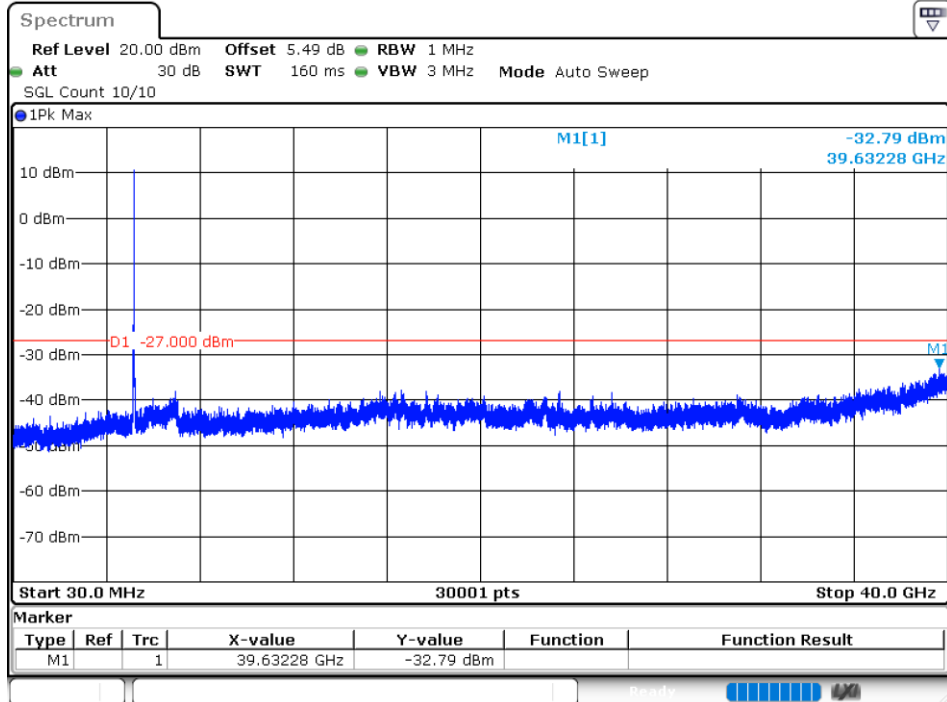

Tx. Spurious NVNT a 5200MHz Ant1 Emission

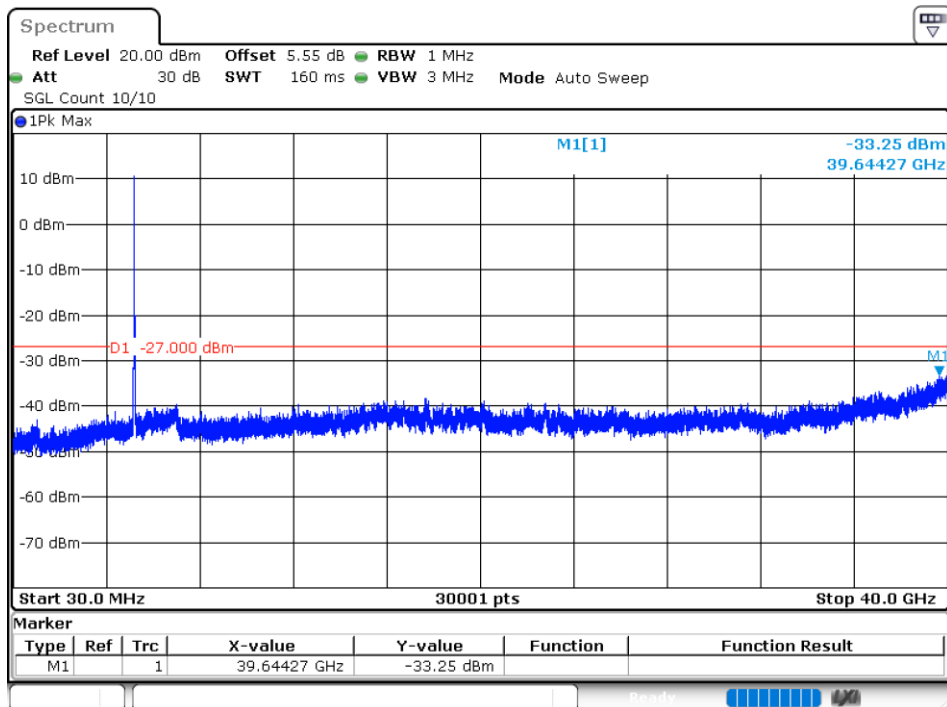

Tx. Spurious NVNT a 5240MHz Ant1 Emission

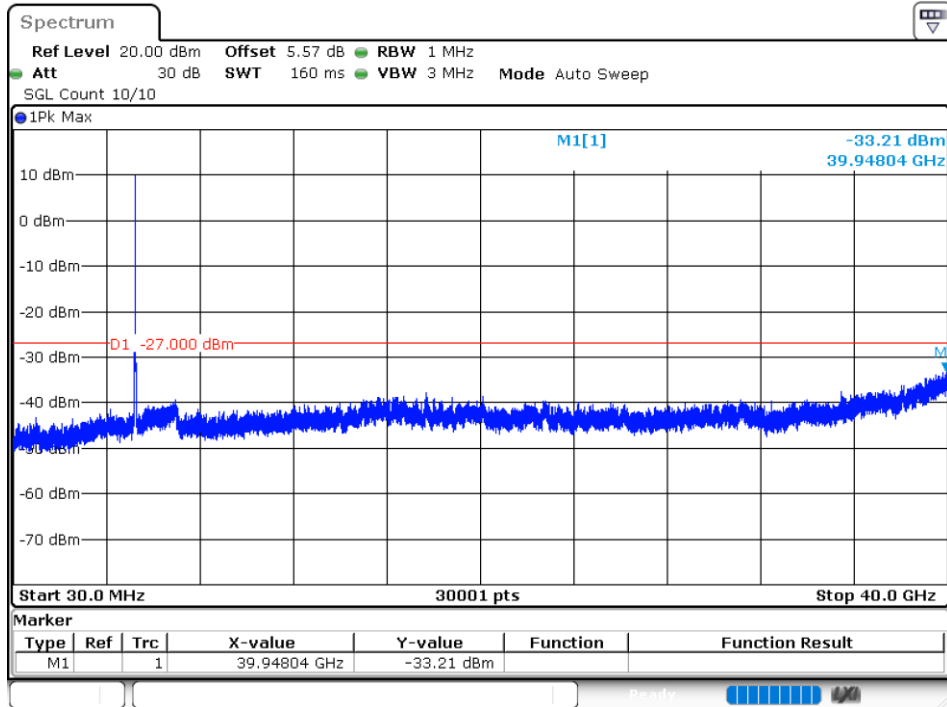

Tx. Spurious NVNT n20 5180MHz Ant1 Emission

