



FCC TEST REPORT

FCC ID:2A2A8JCDN18000

Product	:	Integrated machine
Model Name	:	JC-DN180-00
Brand	:	N/A
Report No.	:	PTC20090703102E-FC03
Prepared for		
FUJIAN SECURE MEDICAL TECHNOLOGY CO.,LTD		
BUILDING 8#,E DISTRICT,FUZHOU SOFTWARE PARK,FUZHOU 350003,CHINA		
Prepared by		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China.		



1. TEST RESULT CERTIFICATION

Applicant's name : FUJIAN SECURE MEDICAL TECHNOLOGY CO.,LTD

Address : BUILDING 8#,E DISTRICT,FUZHOU SOFTWARE PARK,FUZHOU 350003,CHINA

Manufacturer's name : FUJIAN SECURE MEDICAL TECHNOLOGY CO.,LTD

Address : BUILDING 8#,E DISTRICT,FUZHOU SOFTWARE PARK,FUZHOU 350003,CHINA

Product name : Integrated machine

Model name : JC-DN180-00

Standards : FCC Part15 Subpart E , Paragraph 15.407
ANSI C63.10: 2013,

Test procedure : KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB662911 D01 Multiple Transmitter Output v02r01

Test Date : Mar 01, 2021 to Apr 20, 2021

Date of Issue : Apr 20, 2021

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads 'Leo Yang'.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read 'Chris Du'.

Chris Du / Manager



Contents

1. TEST RESULT CERTIFICATION.....	2
2. General Information.....	4
2.1. Auxiliary Equipment Used During Test.....	6
2.2. Description of Test Modes.....	6
2.3. List of channels.....	7
2.4. Description Of Test Setup.....	8
2.5. Test Equipment List.....	9
2.6. Measurement Uncertainty.....	10
2.7. Description of Test Facility.....	10
3. Summary of Test Results.....	10
4. Conducted Emission Test.....	11
4.1. Test Standard and Limit.....	11
4.2. Test Setup.....	11
4.3. Test Procedure.....	11
4.4. Test Data.....	11
5. Radiation Spurious Emission and Band Edge.....	14
5.1. Test Standard and Limit.....	14
5.2. Test Setup.....	14
5.3. Test Procedure.....	15
5.4. Test Data.....	16
6. Maximum Peak Output Power Test.....	51
6.1. Test Standard and Limit.....	51
6.2. Test Setup.....	51
6.3. Test Procedure.....	51
6.4. Test Data.....	51
7. Occupy Bandwidth Test.....	55
7.1. Test Standard.....	55
7.2. Test Setup.....	55
7.3. Test Procedure.....	55
7.4. Test Data.....	56
8. Power Spectral Density Test.....	72
8.1. Test Standard and Limit.....	72
8.2. Test Setup.....	72
8.3. Test Procedure.....	72
8.4. Test Data.....	73
9. Antenna Requirement.....	89
9.1. Test Standard and Requirement.....	89
9.2. Antenna Connected Construction.....	90
10. APPENDIX I -- PHOTOGRAPH.....	91



2. General Information

Antenna Information

Ant No	Brand	Model	AntennaType	Connector	Gain(dbi)
A	-	-	columnar antenna	-	6
B	-	-	columnar antenna	-	6

Note:

1. The EUT has Two antennas, which can support IEEE802.11A/N20/N40/AC20/AC40/AC80, and can support IEEE802.11N20/N40/AC20/AC40/AC80 with the MIMO function
2. According to ANSI C63.10:2013 14.4.3.2.5 a):
Directional gain=6dbi+10xlog(2/1)db=9.01dBi>6dBi



Description of Device (EUT)

Product Name	:	Integrated machine
Model Name	:	JC-DN180-00
Additional model	:	JC-DN180-00, JDB-5341, JDB-M5341, JDB-5741, JDB-M5741, JDB-5782, JDB-M5782, JDB-5781, JDB-5382, JDB-5712, JDB-M5712 Note: These models are exactly the same except for the hard drive and different memory. Maximum memory and hard disk drives were selected for testing
Operation Frequency	:	WiFi 5.1G: 5180MHz~5240MHz
Number of Channel	:	4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80)
Type of Modulation	:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
Antenna installation	:	columnar antenna
Antenna Gain	:	6 dBi
The directional gain	:	9.01 dBi
Power supply	:	InputAC100-240V 50-60Hz DC 18.3V 5A
Hardware Version	:	N/A
Software Version	:	N/A

2.1.Auxiliary Equipment Used During Test

Adapter	Model: PSA301-120250U Input:AC100-240V 50-60Hz Output : DC 18.3V 5A
keyboards	Input:3.7V battery
Mouse	Input:3.7V battery

2.2.Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Mode	Test channel	Frequency (MHz)
OFDM(802.11a/n20/ac20)	CH 36	5180MHz
	CH 40	5200MHz
	CH 48	5240MHz
OFDM(802.11n40/ac40)	CH 38	5190MHz
	CH 46	5230MHz
OFDM(802.11ac80)	CH 42	5210MHz

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.
3. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB
4. The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is more than 98%

2.3. List of channels

802.11a/n20/ac20

Channel	Freq. (MHz)	Channel	Freq. (MHz)
36	5180	44	5220
40	5200	48	5240



802.11n40/ac40

Channel	Freq. (MHz)	Channel	Freq. (MHz)
38	5190	46	5230

802.11ac80

Channel	Freq. (MHz)
42	5210

2.4. Description Of Test Setup

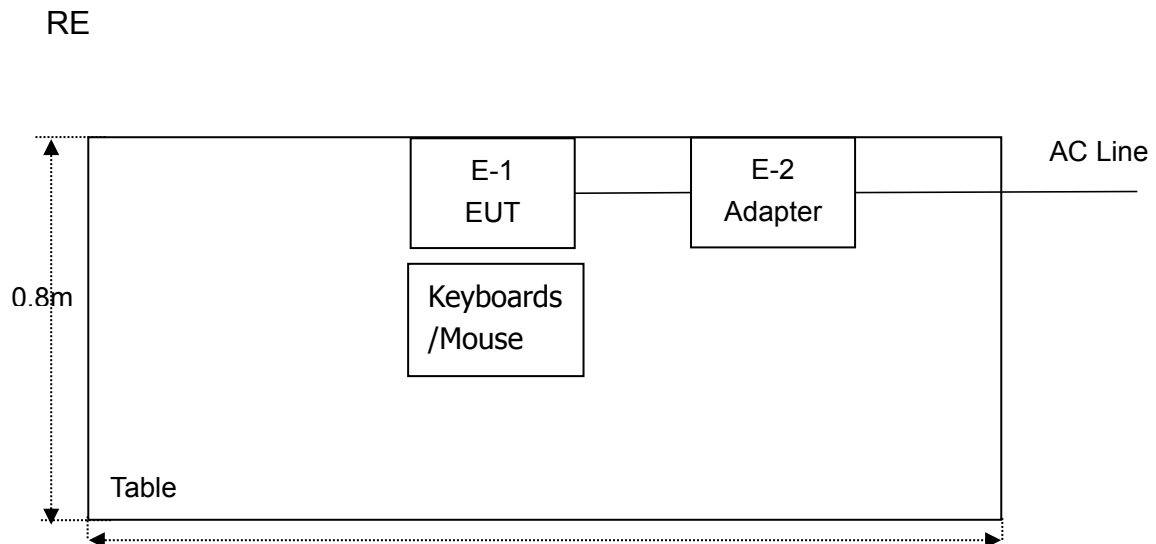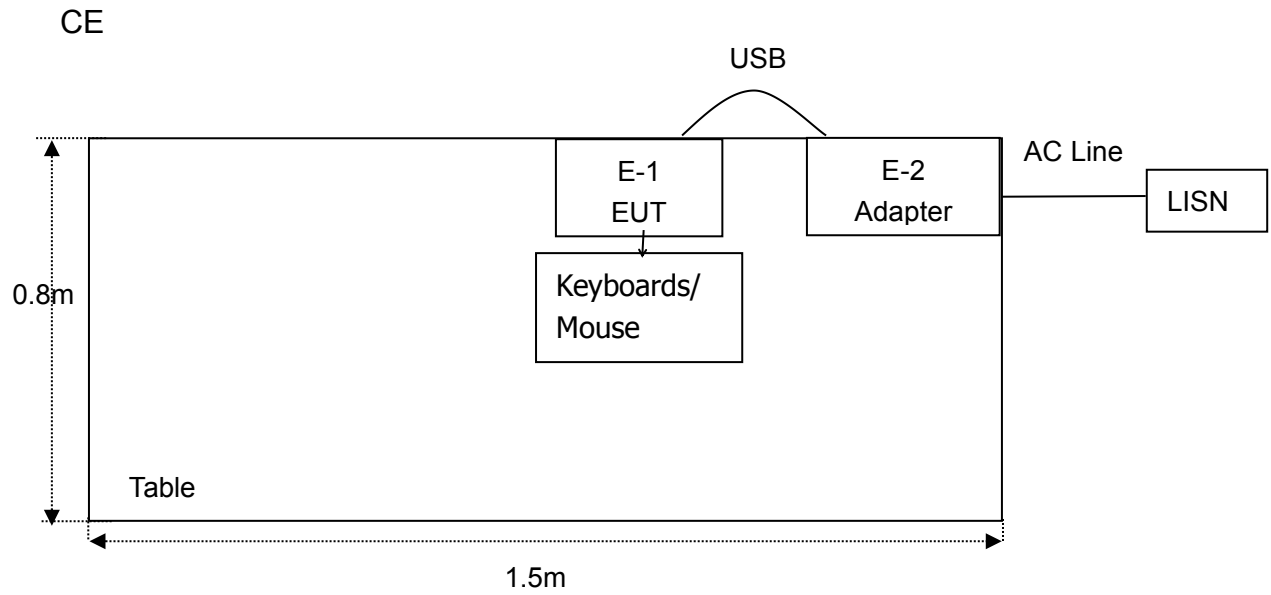



2.5. Test Equipment List

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due	Cal. Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2021	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2021	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2021	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2021	1 Year
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2021	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2021	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2021	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2021	1 Year
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2021	1 Year
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2021	1 Year
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2021	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2021	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2021	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 19, 2021	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 19, 2021	1 Year

2.6.Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

2.7.Description of Test Facility

Precise Testing & Certification Co., Ltd.

Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

3. Summary of Test Results

Standard	Test Type	Result
15.207 & 15.407	Conducted Emission	PASS
15.205/15.209/15.407(b)(1)	Spurious Emission	PASS
15.407(b)	Band Edge	PASS
15.407(a)(5)	Occupy Bandwidth	PASS
15.407(a)(1)(ii)	Maximum Conducted Output Power	PASS
15.407(a)(1)	Power Spectral Density	PASS
15.203	Antenna Requirement	PASS


4. Conducted Emission Test

4.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207&15.407		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

4.2. Test Setup

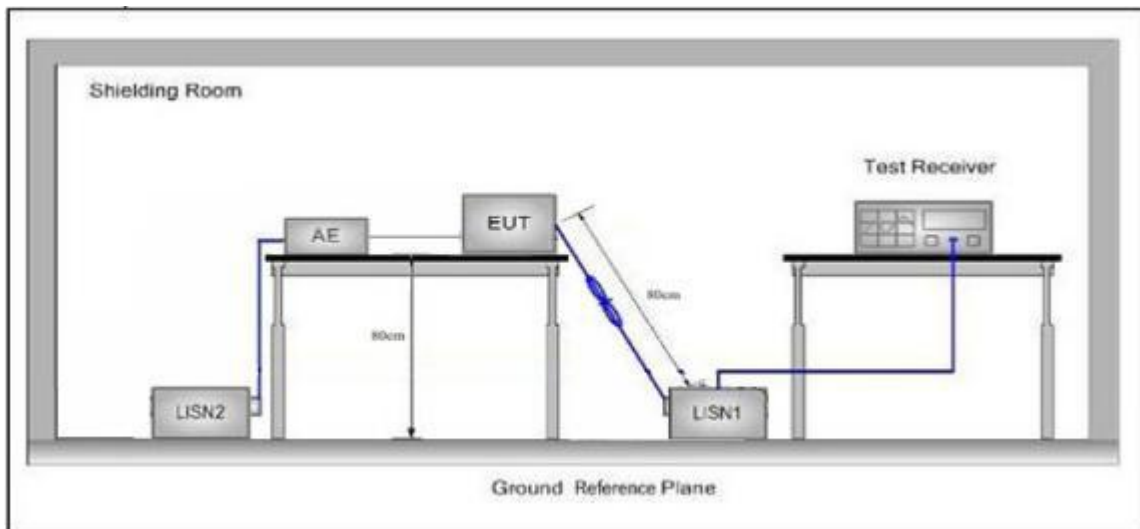

4.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

4.4. Test Data

Note: During the test, pre-scan 120Vac/60Hz and 240Vac/60Hz of the Power supply, found 120Vac/60Hz was worse case mode, the report only reflects the worst mode.

Conducted Emission Test Data


Operating Condition: 802.11n(HT40) CH38
Test Specification: AC 120V
Comment: Live Line
Tem.: 23.5°C Hum.: 55%

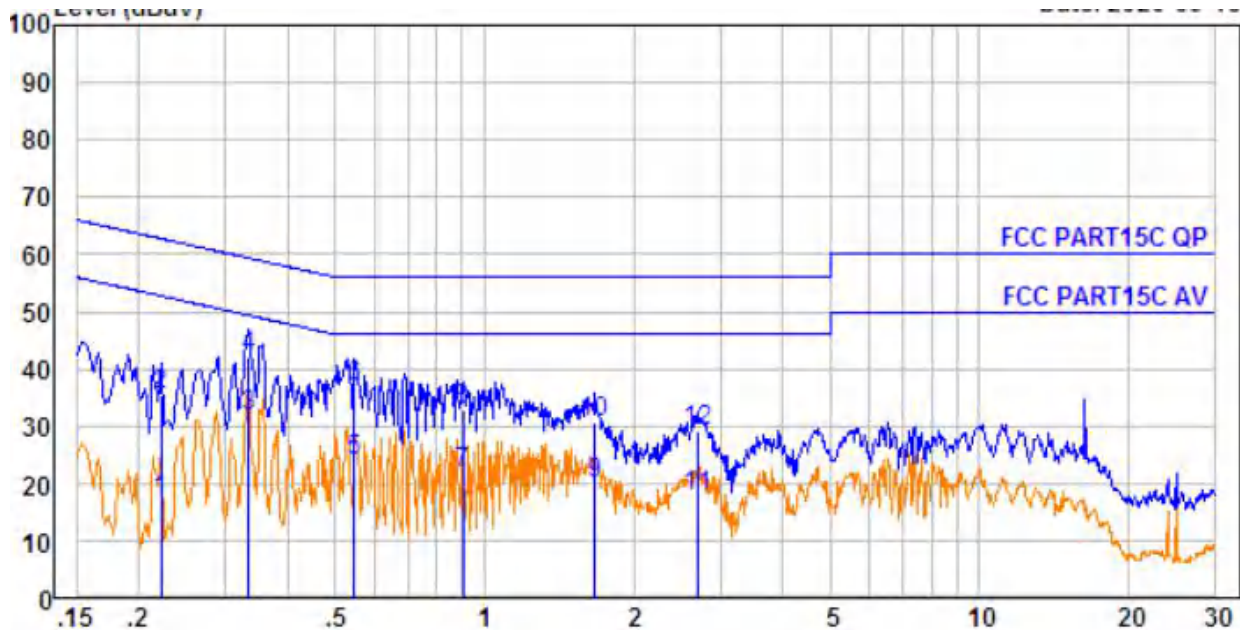

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.222	0.30	9.59	6.96	16.85	52.74	-35.89	Average
2.	0.222	0.30	9.59	25.70	35.59	62.74	-27.15	QP
3.	0.334	0.38	9.60	21.87	31.85	49.35	-17.50	Average
4.	0.334	0.38	9.60	31.94	41.92	59.35	-17.43	QP
5.	0.546	0.43	9.61	13.78	23.82	46.00	-22.18	Average
6.	0.546	0.43	9.61	26.92	36.96	56.00	-19.04	QP
7.	0.904	0.45	9.61	11.63	21.69	46.00	-24.31	Average
8.	0.904	0.45	9.61	22.65	32.71	56.00	-23.29	QP
9.	1.671	0.47	9.61	9.69	19.77	46.00	-26.23	Average
10.	1.671	0.47	9.61	20.68	30.76	56.00	-25.24	QP
11.	2.692	0.47	9.62	7.52	17.61	46.00	-28.39	Average
12.	2.692	0.47	9.62	18.89	28.98	56.00	-27.02	QP

Conducted Emission Test Data

Operating Condition: 802.11n(HT40) CH38
Test Specification: AC 120V
Comment: Neutral Line
Tem.: 23.5°C Hum.: 55%

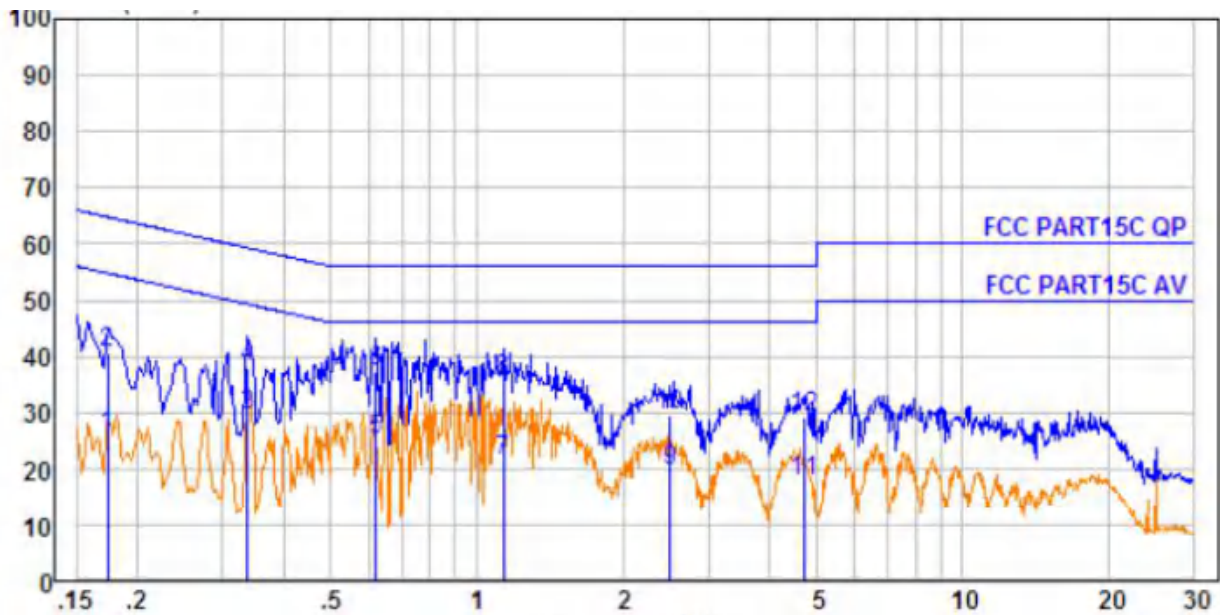

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	0.174	0.24	9.60	15.90	25.74	54.77	-29.03	Average
2.	0.174	0.24	9.60	30.80	40.64	64.77	-24.13	QP
3.	0.337	0.38	9.62	19.58	29.58	49.27	-19.69	Average
4.	0.337	0.38	9.62	28.09	38.09	59.27	-21.18	QP
5.	0.621	0.44	9.64	14.95	25.03	46.00	-20.97	Average
6.	0.621	0.44	9.64	27.26	37.34	56.00	-18.66	QP
7.	1.135	0.46	9.64	11.27	21.37	46.00	-24.63	Average
8.	1.135	0.46	9.64	25.71	35.81	56.00	-20.19	QP
9.	2.500	0.47	9.65	9.51	19.63	46.00	-26.37	Average
10.	2.500	0.47	9.65	19.46	29.58	56.00	-26.42	QP
11.	4.721	0.49	9.70	7.49	17.68	46.00	-28.32	Average
12.	4.721	0.49	9.70	18.79	28.98	56.00	-27.02	QP

5. Radiation Spurious Emission and Band Edge

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.407				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	68.2	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

(3)Above 1GHz limit: $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = -27\text{dBm}$.

5.2. Test Setup

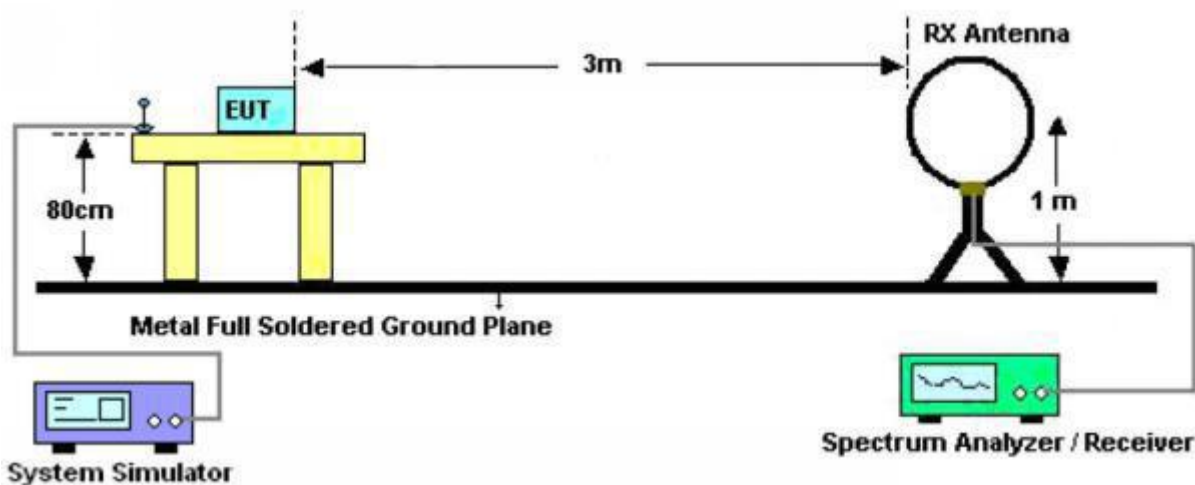


Figure 1. Below 30MHz

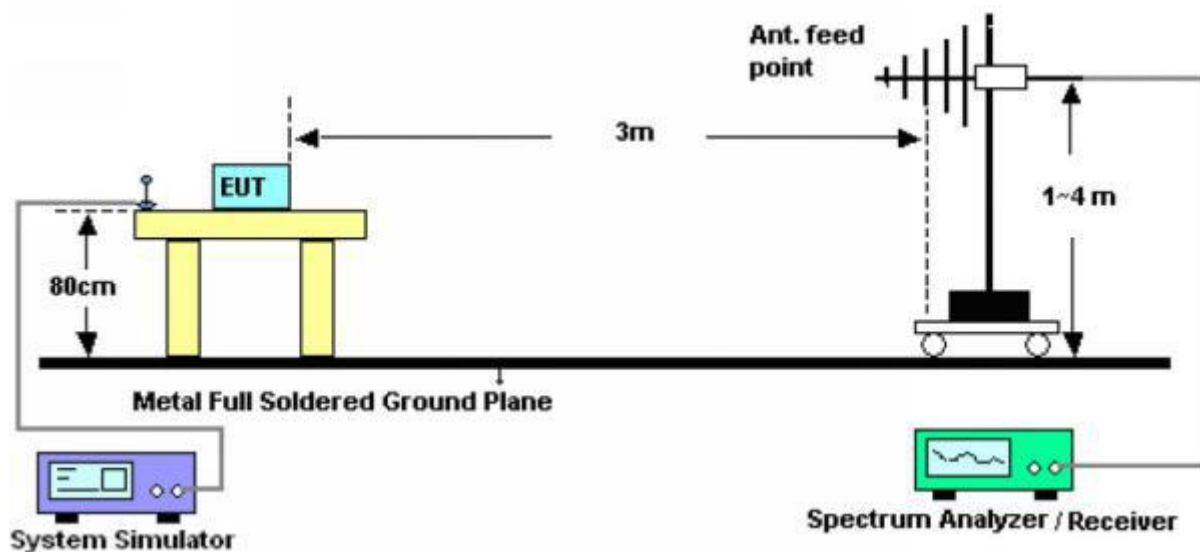


Figure 2. 30MHz to 1GHz

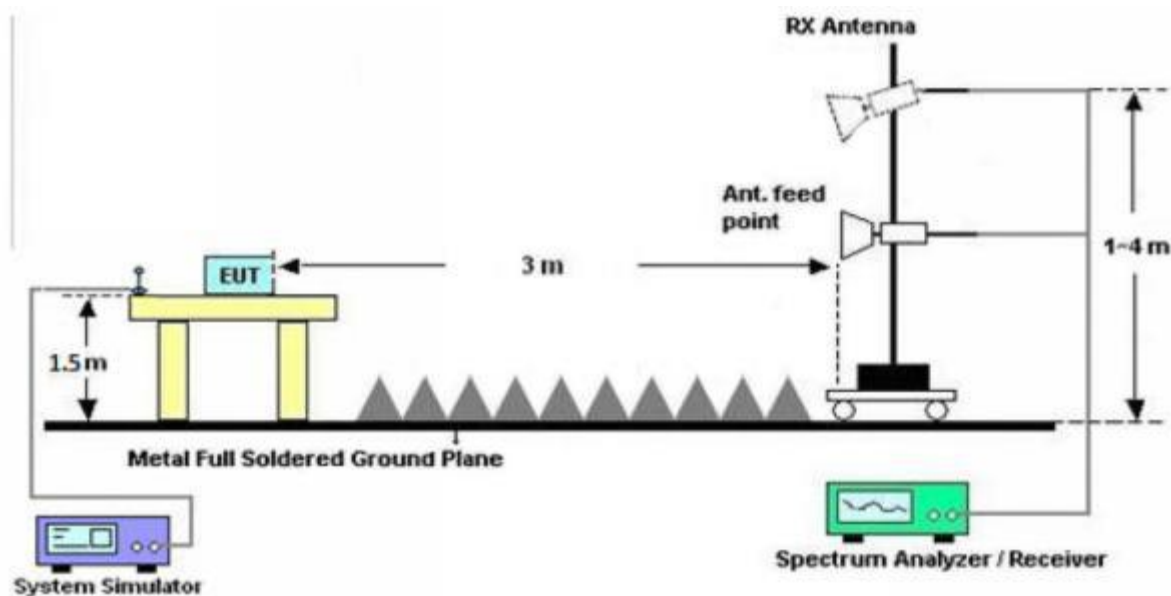


Figure 3. Above 1 GHz

5.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of

emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

5.4. Test Data

PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, and found MIMO 802.11N20-5180MHz mode is the worst case and only the worst case is recorded in the report.



Test Results (30~1000MHz)

Polarization: Horizontal


Temp.(°C)/Hum.(%RH): 24.5°C/52%RH

Test Mode: TX Mode

Power Source: AC 120V

JC-DN180-00

DDR4

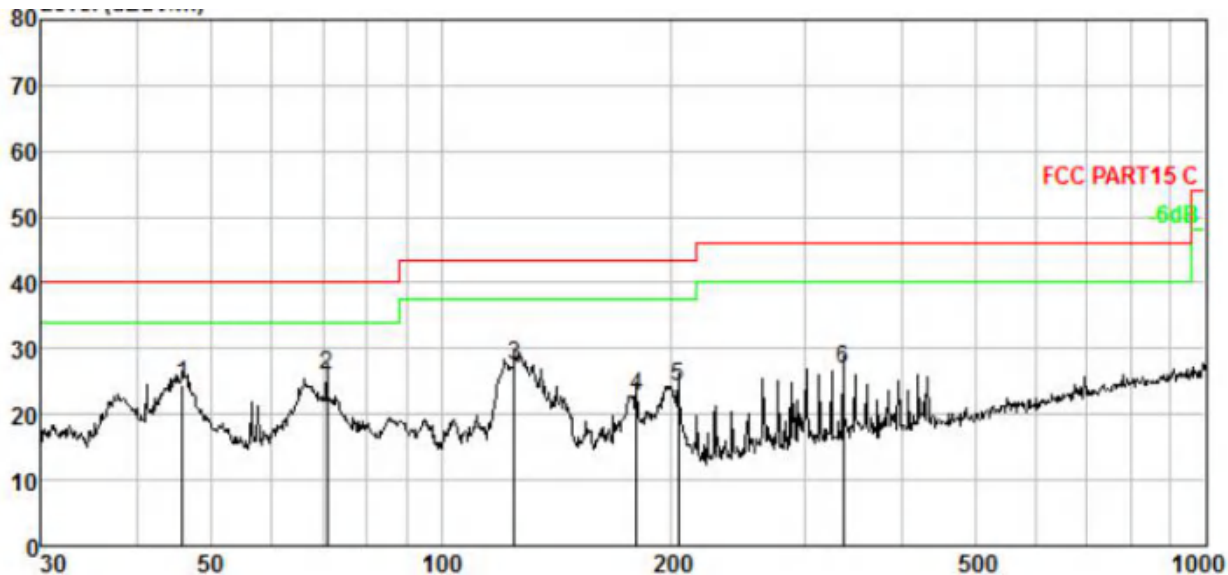

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	45.855	1.93	12.26	40.17	29.92	24.44	40.00	-15.56	QP
2.	70.832	2.68	9.98	43.16	29.96	25.86	40.00	-14.14	QP
3.	124.569	3.65	12.32	41.61	30.01	27.57	43.50	-15.93	QP
4.	180.017	4.28	12.50	35.97	30.03	22.72	43.50	-20.78	QP
5.	204.238	4.50	11.14	38.57	30.05	24.16	43.50	-19.34	QP
6.	336.035	5.36	14.08	37.94	30.47	26.91	46.00	-19.09	QP


Test Results (30~1000MHz)

Polarization: Vertical

Temp.(°C)/Hum.(%RH): 24.5°C/52%RH

Test Mode: TX Mode


Power Source: AC 120V

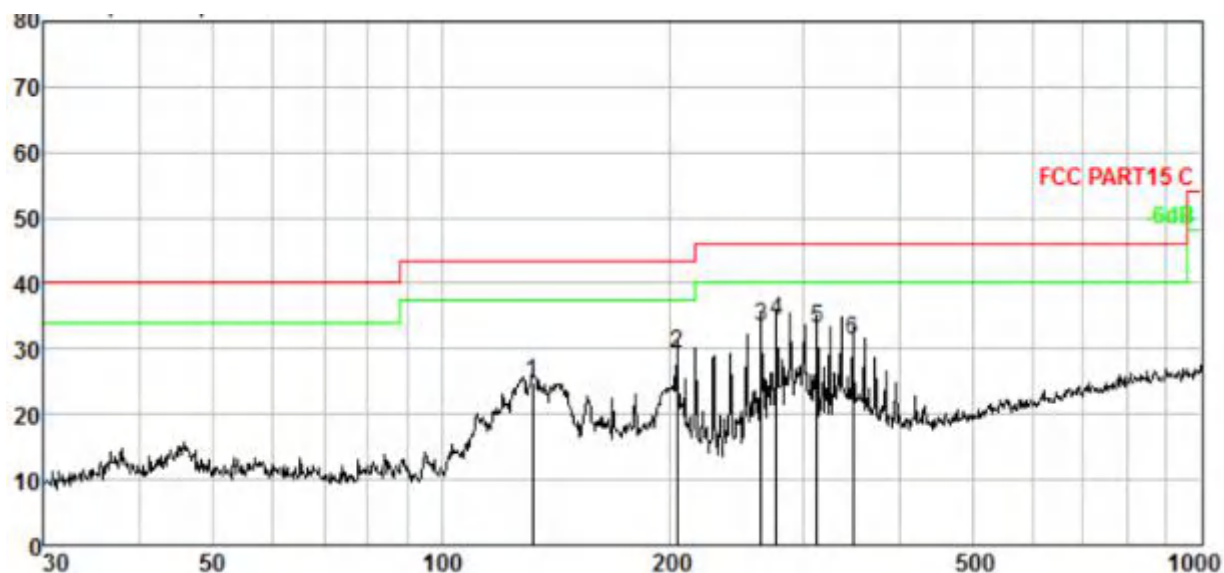

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	131.758	3.75	12.79	38.22	30.01	24.75	43.50	-18.75	QP
2.	204.238	4.50	11.14	43.74	30.05	29.33	43.50	-14.17	QP
3.	263.819	4.94	12.71	45.99	30.23	33.41	46.00	-12.59	QP
4.	276.124	5.02	12.88	46.47	30.26	34.11	46.00	-11.89	QP
5.	312.179	5.23	13.51	44.82	30.37	33.19	46.00	-12.81	QP
6.	348.027	5.42	14.36	42.01	30.52	31.27	46.00	-14.73	QP


JDB-5781: (8GB DDR3 1600) (128G SSD)

Horizontal

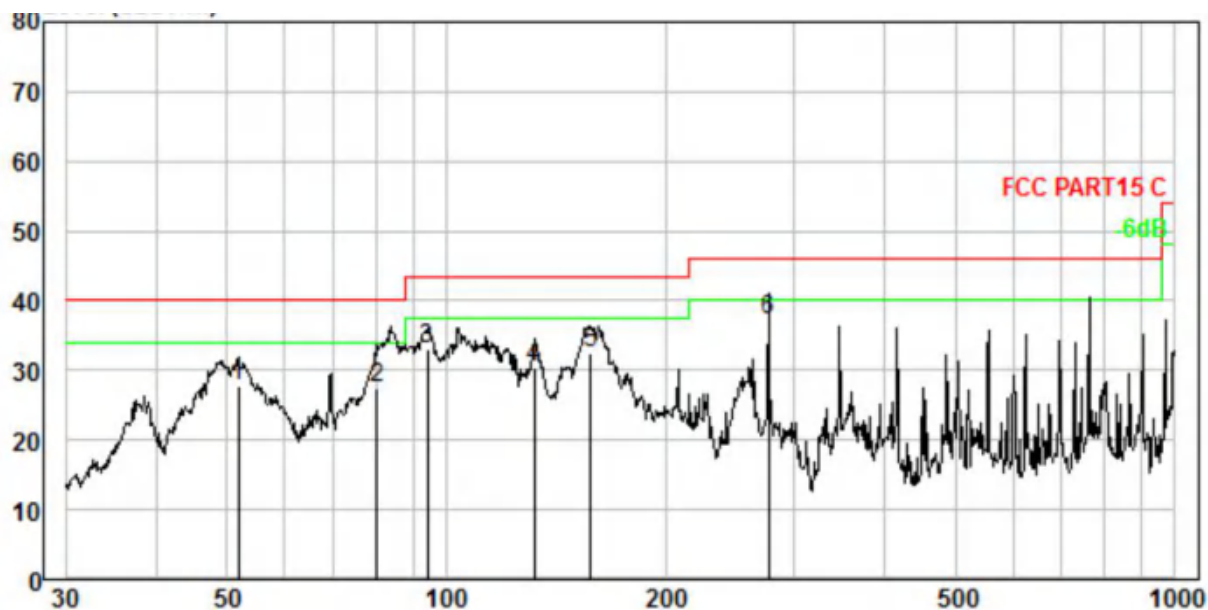

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	51.843	2.14	12.10	43.42	29.92	27.74	40.00	-12.26	QP
2.	80.362	2.90	8.98	45.60	29.97	27.51	40.00	-12.49	QP
3.	94.098	3.17	9.12	50.78	29.98	33.09	43.50	-10.41	QP
4.	132.221	3.75	12.82	43.88	30.01	30.44	43.50	-13.06	QP
5.	158.112	4.06	14.03	44.33	30.02	32.40	43.50	-11.10	QP
6.	277.094	5.02	12.90	49.49	30.27	37.14	46.00	-8.86	QP

Vertical

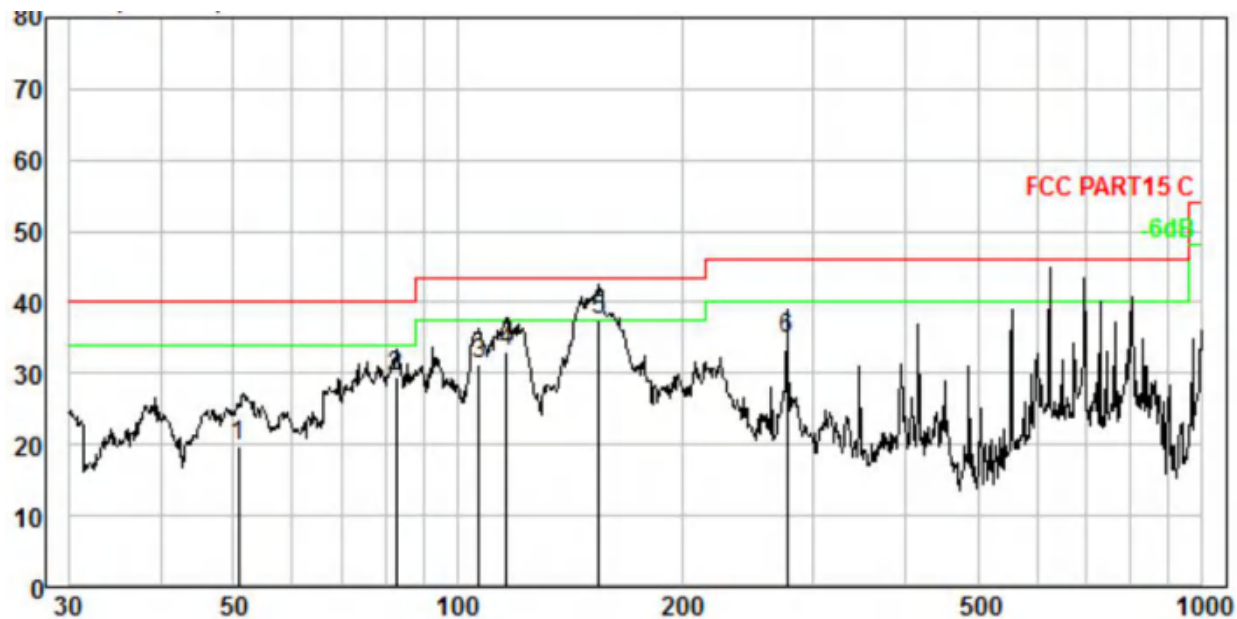

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	50.764	2.11	12.10	35.53	29.92	19.82	40.00	-20.18	QP
2.	82.648	2.95	8.84	47.64	29.97	29.46	40.00	-10.54	QP
3.	106.759	3.38	10.42	47.41	29.99	31.22	43.50	-12.28	QP
4.	116.132	3.53	11.55	47.84	30.00	32.92	43.50	-10.58	QP
5.	154.821	4.02	13.90	49.56	30.02	37.46	43.50	-6.04	QP
6.	277.094	5.02	12.90	47.23	30.27	34.88	46.00	-11.12	QP

**Test Results (Above 1000MHz)****ANT A:**

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.73	32.29	4.10	28.45	48.67	68.20	-19.53	V
15570.00	34.50	35.99	6.22	27.83	48.88	68.20	-19.32	V
10380.00	39.33	32.29	4.10	28.45	47.27	68.20	-20.93	H
15570.00	34.21	35.99	6.22	27.83	48.59	68.20	-19.61	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.78	32.29	4.10	28.45	37.72	54.00	-16.28	V
15570.00	23.35	35.99	6.22	27.83	37.73	54.00	-16.27	V
10380.00	28.85	32.29	4.10	28.45	36.79	54.00	-17.21	H
15570.00	22.79	35.99	6.22	27.83	37.17	54.00	-16.83	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.79	32.29	4.10	28.45	48.73	68.20	-19.47	V
15570.00	34.53	35.99	6.22	27.83	48.91	68.20	-19.29	V
10380.00	39.38	32.29	4.10	28.45	47.32	68.20	-20.88	H
15570.00	34.24	35.99	6.22	27.83	48.62	68.20	-19.58	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.83	32.29	4.10	28.45	37.77	54.00	-16.23	V
15570.00	23.39	35.99	6.22	27.83	37.77	54.00	-16.23	V
10380.00	28.89	32.29	4.10	28.45	36.83	54.00	-17.17	H
15570.00	22.81	35.99	6.22	27.83	37.19	54.00	-16.81	H

Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11n(HT40) mode is worse case , the report only record this mode.

2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor

All other emissions for frequency 1G~40GHz are attenuated 20dB below the limits, so it does not recorded in report.



Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.01	27.39	2.77	34.01	48.16	74.00	-25.84	H
5350.00	61.15	27.42	2.78	34.01	57.34	74.00	-16.66	H
5150.00	53.72	27.39	2.77	34.01	49.87	74.00	-24.13	V
5350.00	63.04	27.42	2.78	34.01	59.23	74.00	-14.77	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.67	27.39	2.77	34.01	34.82	54.00	-19.18	H
5350.00	47.00	27.42	2.78	34.01	43.19	54.00	-10.81	H
5150.00	40.52	27.39	2.77	34.01	36.67	54.00	-17.33	V
5350.00	48.15	27.42	2.78	34.01	44.34	54.00	-9.66	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.06	27.39	2.77	34.01	48.21	74.00	-25.79	H
5350.00	61.21	27.42	2.78	34.01	57.40	74.00	-16.60	H
5150.00	53.77	27.39	2.77	34.01	49.92	74.00	-24.08	V
5350.00	63.12	27.42	2.78	34.01	59.31	74.00	-14.69	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.70	27.39	2.77	34.01	34.85	54.00	-19.15	H
5350.00	47.04	27.42	2.78	34.01	43.23	54.00	-10.77	H
5150.00	40.56	27.39	2.77	34.01	36.71	54.00	-17.29	V
5350.00	48.20	27.42	2.78	34.01	44.39	54.00	-9.61	V



Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.16	27.39	2.77	34.01	48.31	74.00	-25.69	H
5350.00	61.34	27.42	2.78	34.01	57.53	74.00	-16.47	H
5150.00	53.88	27.39	2.77	34.01	50.03	74.00	-23.97	V
5350.00	63.28	27.42	2.78	34.01	59.47	74.00	-14.53	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.77	27.39	2.77	34.01	34.92	54.00	-19.08	H
5350.00	47.12	27.42	2.78	34.01	43.31	54.00	-10.69	H
5150.00	40.63	27.39	2.77	34.01	36.78	54.00	-17.22	V
5350.00	48.29	27.42	2.78	34.01	44.48	54.00	-9.52	V

Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.13	27.39	2.77	34.01	48.28	74.00	-25.72	H
5350.00	61.31	27.42	2.78	34.01	57.50	74.00	-16.50	H
5150.00	53.85	27.39	2.77	34.01	50.00	74.00	-24.00	V
5350.00	63.24	27.42	2.78	34.01	59.43	74.00	-14.57	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.76	27.39	2.77	34.01	34.91	54.00	-19.09	H
5350.00	47.10	27.42	2.78	34.01	43.29	54.00	-10.71	H
5150.00	40.61	27.39	2.77	34.01	36.76	54.00	-17.24	V
5350.00	48.26	27.42	2.78	34.01	44.45	54.00	-9.55	V



Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.21	27.39	2.77	34.01	48.36	74.00	-25.64	H
5350.00	61.41	27.42	2.78	34.01	57.60	74.00	-16.40	H
5150.00	53.93	27.39	2.77	34.01	50.08	74.00	-23.92	V
5350.00	63.35	27.42	2.78	34.01	59.54	74.00	-14.46	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.81	27.39	2.77	34.01	34.96	54.00	-19.04	H
5350.00	47.16	27.42	2.78	34.01	43.35	54.00	-10.65	H
5150.00	40.67	27.39	2.77	34.01	36.82	54.00	-17.18	V
5350.00	48.33	27.42	2.78	34.01	44.52	54.00	-9.48	V

Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.03	27.39	2.77	34.01	48.18	74.00	-25.82	H
5350.00	61.18	27.42	2.78	34.01	57.37	74.00	-16.63	H
5150.00	53.74	27.39	2.77	34.01	49.89	74.00	-24.11	V
5350.00	63.08	27.42	2.78	34.01	59.27	74.00	-14.73	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.68	27.39	2.77	34.01	34.83	54.00	-19.17	H
5350.00	47.02	27.42	2.78	34.01	43.21	54.00	-10.79	H
5150.00	40.53	27.39	2.77	34.01	36.68	54.00	-17.32	V
5350.00	48.17	27.42	2.78	34.01	44.36	54.00	-9.64	V


For conducted test:



802.11a: Band Edge, Left Side




802.11a: Band Edge, Right Side

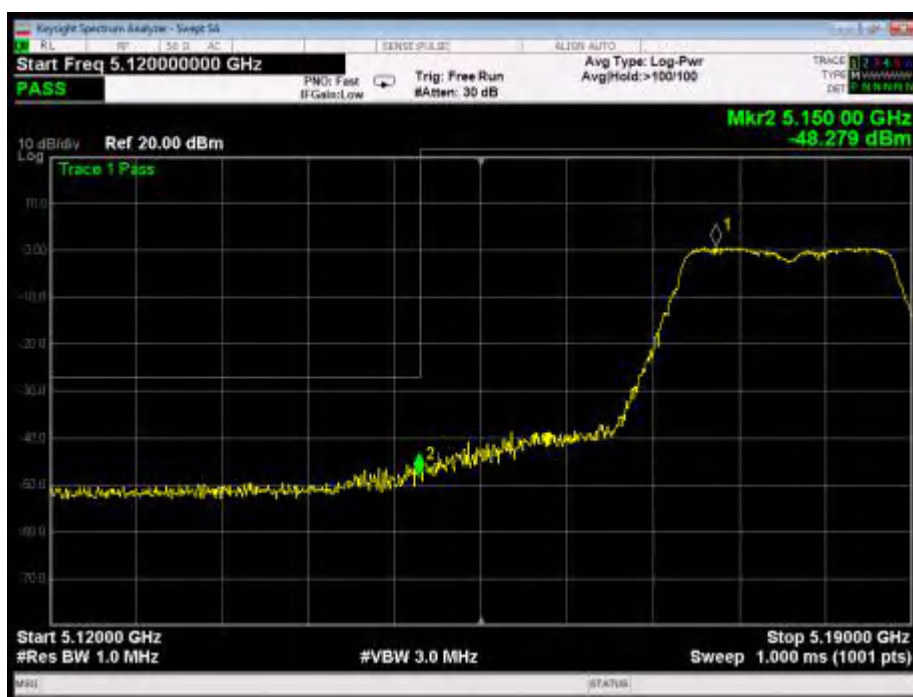


802.11n(20): Band Edge, Left Side




802.11n(20): Band Edge, Right Side

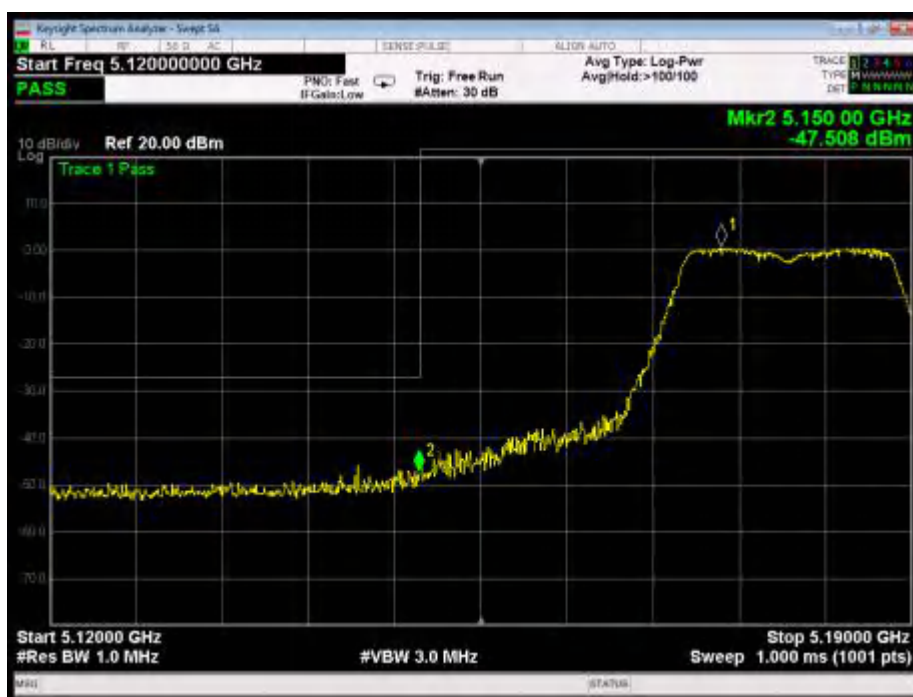

802.11ac(20): Band Edge, Left Side

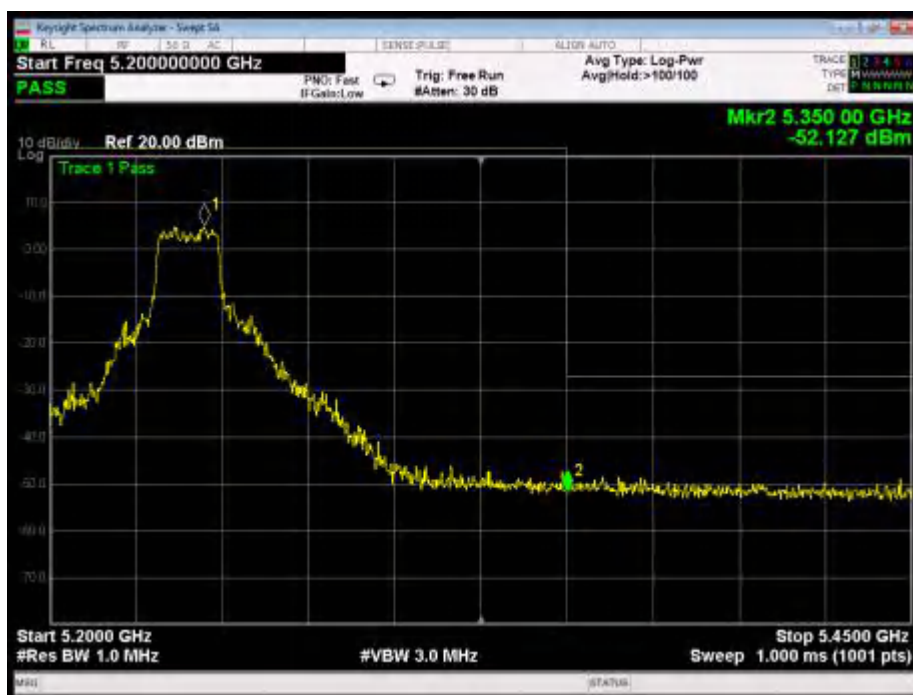


802.11ac(20): Band Edge, Right Side

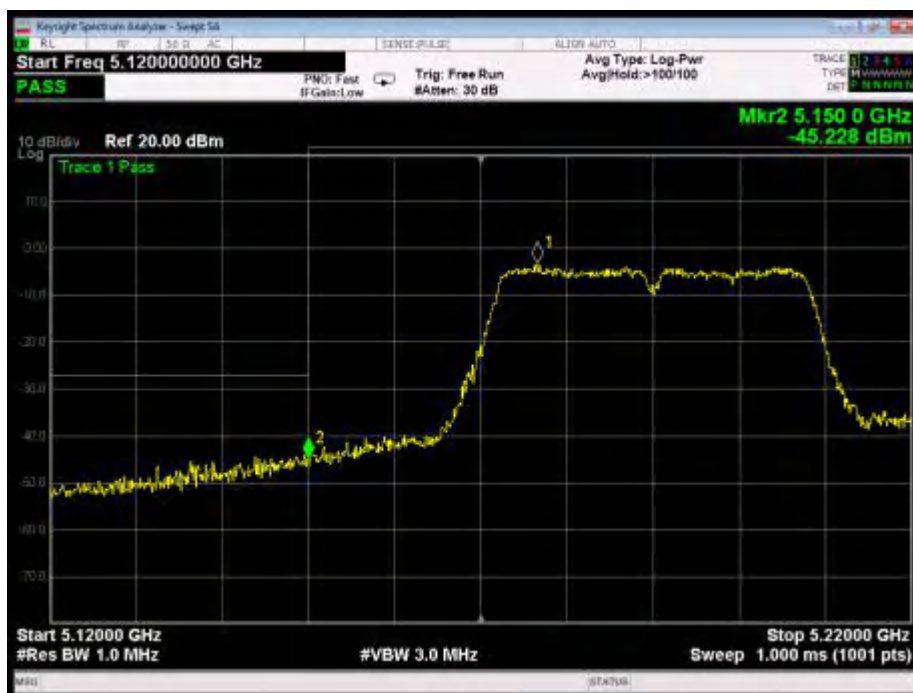

802.11n(40): Band Edge, Left Side




802.11n(40): Band Edge, Right Side

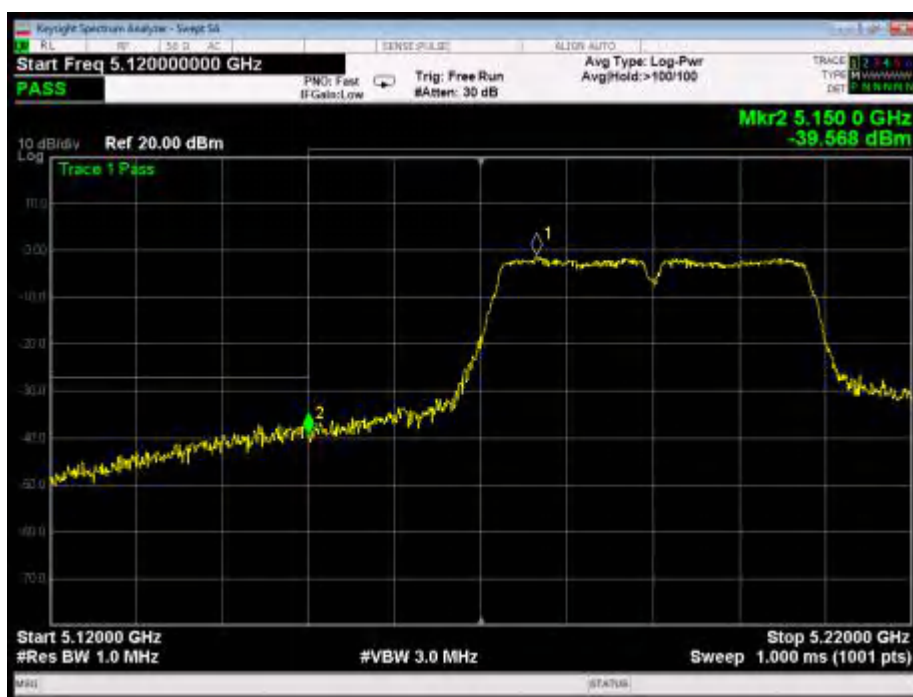


802.11ac(40): Band Edge, Left Side



802.11ac(40): Band Edge, Right Side

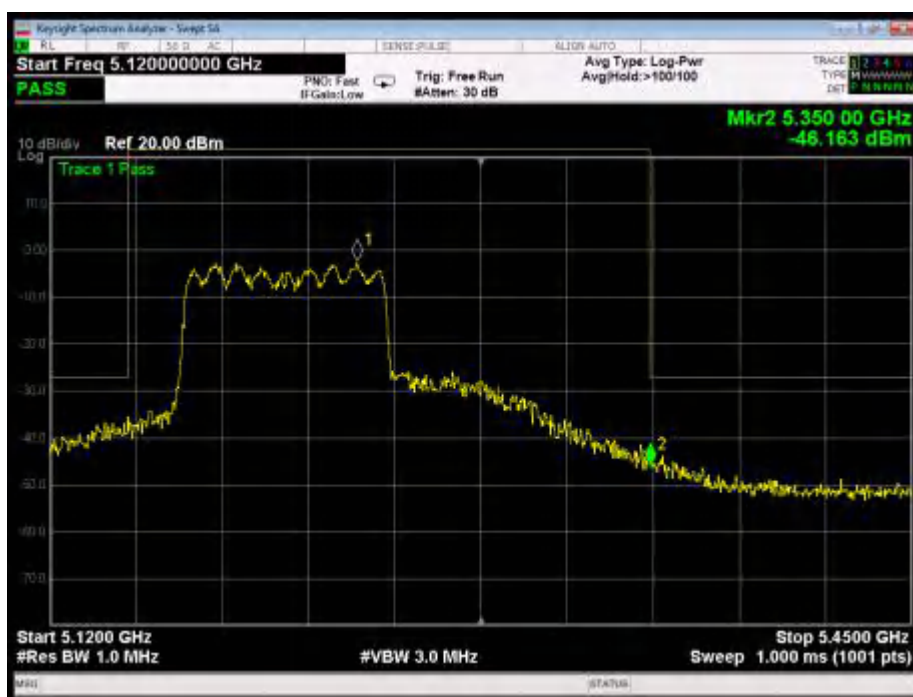

802.11ac(80): Band Edge

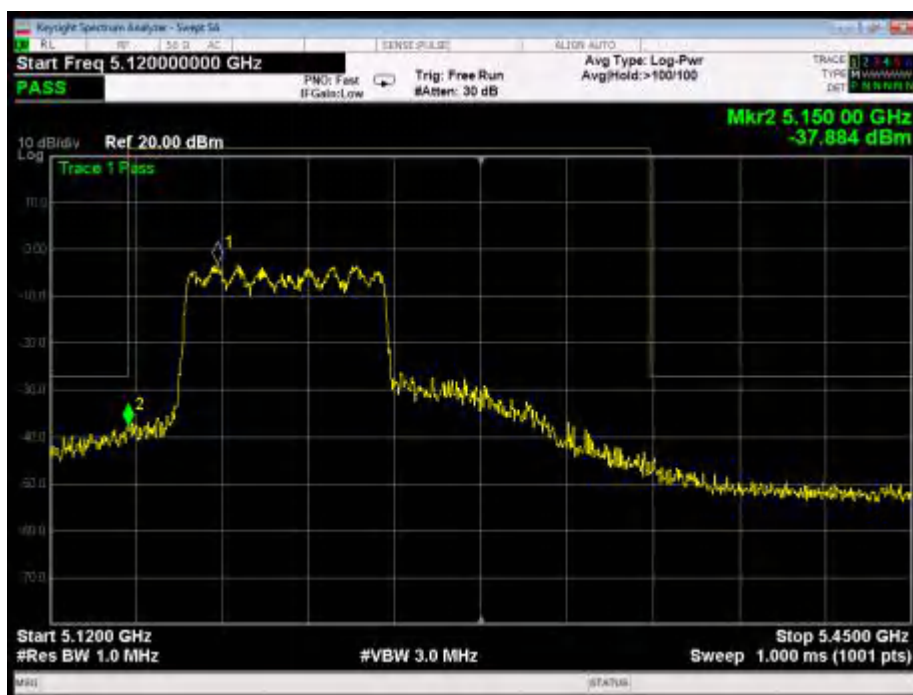

802.11ac(80): Band Edge



Test Results (Above 1000MHz)

ANT B:

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.03	32.29	4.10	28.45	48.97	68.20	-19.23	V
15570.00	34.68	35.99	6.22	27.83	49.06	68.20	-19.14	V
10380.00	39.58	32.29	4.10	28.45	47.52	68.20	-20.68	H
15570.00	34.37	35.99	6.22	27.83	48.75	68.20	-19.45	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.05	32.29	4.10	28.45	37.99	54.00	-16.01	V
15570.00	23.53	35.99	6.22	27.83	37.91	54.00	-16.09	V
10380.00	29.08	32.29	4.10	28.45	37.02	54.00	-16.98	H
15570.00	22.94	35.99	6.22	27.83	37.32	54.00	-16.68	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.53	32.29	4.10	28.45	49.47	68.20	-18.73	V
15570.00	35.00	35.99	6.22	27.83	49.38	68.20	-18.82	V
10380.00	40.01	32.29	4.10	28.45	47.95	68.20	-20.25	H
15570.00	34.65	35.99	6.22	27.83	49.03	68.20	-19.17	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.52	32.29	4.10	28.45	38.46	54.00	-15.54	V
15570.00	23.84	35.99	6.22	27.83	38.22	54.00	-15.78	V
10380.00	29.48	32.29	4.10	28.45	37.42	54.00	-16.58	H
15570.00	23.21	35.99	6.22	27.83	37.59	54.00	-16.41	H



Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.26	32.29	4.10	28.45	49.20	68.20	-19.00	V
15570.00	34.83	35.99	6.22	27.83	49.21	68.20	-18.99	V
10380.00	39.78	32.29	4.10	28.45	47.72	68.20	-20.48	H
15570.00	34.50	35.99	6.22	27.83	48.88	68.20	-19.32	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	30.27	32.29	4.10	28.45	38.21	54.00	-15.79	V
15570.00	23.68	35.99	6.22	27.83	38.06	54.00	-15.94	V
10380.00	29.27	32.29	4.10	28.45	37.21	54.00	-16.79	H
15570.00	23.07	35.99	6.22	27.83	37.45	54.00	-16.55	H

Remark:

1. During the test, pre-scan the 802.11a,n(HT20),ac(HT20),n(HT40),ac(HT40),ac(HT80) mode, and found the 802.11ac(HT20) mode is worse case , the report only record this mode.

2. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor

All other emissions for frequency 1G~40GHz are attenuated 20dB below the limits, so it does not recorded in report.


Radiated Band Edge:

Test Mode: 802.11a								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.26	27.39	2.77	34.01	48.41	74.00	-25.59	H
5350.00	61.47	27.42	2.78	34.01	57.66	74.00	-16.34	H
5150.00	53.98	27.39	2.77	34.01	50.13	74.00	-23.87	V
5350.00	63.43	27.42	2.78	34.01	59.62	74.00	-14.38	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.84	27.39	2.77	34.01	34.99	54.00	-19.01	H
5350.00	47.20	27.42	2.78	34.01	43.39	54.00	-10.61	H
5150.00	40.71	27.39	2.77	34.01	36.86	54.00	-17.14	V
5350.00	48.37	27.42	2.78	34.01	44.56	54.00	-9.44	V

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.38	27.39	2.77	34.01	48.53	74.00	-25.47	H
5350.00	61.63	27.42	2.78	34.01	57.82	74.00	-16.18	H
5150.00	54.11	27.39	2.77	34.01	50.26	74.00	-23.74	V
5350.00	63.63	27.42	2.78	34.01	59.82	74.00	-14.18	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.93	27.39	2.77	34.01	35.08	54.00	-18.92	H
5350.00	47.30	27.42	2.78	34.01	43.49	54.00	-10.51	H
5150.00	40.81	27.39	2.77	34.01	36.96	54.00	-17.04	V
5350.00	48.48	27.42	2.78	34.01	44.67	54.00	-9.33	V

Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.
5150.00	52.50	27.39	2.77	34.01	48.65	74.00	-25.35	H
5350.00	61.80	27.42	2.78	34.01	57.99	74.00	-16.01	H
5150.00	54.24	27.39	2.77	34.01	50.39	74.00	-23.61	V
5350.00	63.82	27.42	2.78	34.01	60.01	74.00	-13.99	V
Average Value								
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.
5150.00	39.02	27.39	2.77	34.01	35.17	54.00	-18.83	H
5350.00	47.40	27.42	2.78	34.01	43.59	54.00	-10.41	H
5150.00	40.90	27.39	2.77	34.01	37.05	54.00	-16.95	V
5350.00	48.59	27.42	2.78	34.01	44.78	54.00	-9.22	V


Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.
5150.00	51.52	27.39	2.77	34.01	47.67	74.00	-26.33	H
5350.00	60.49	27.42	2.78	34.01	56.68	74.00	-17.32	H
5150.00	53.20	27.39	2.77	34.01	49.35	74.00	-24.65	V
5350.00	62.26	27.42	2.78	34.01	58.45	74.00	-15.55	V
Average Value								
Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Pol.
5150.00	38.32	27.39	2.77	34.01	34.47	54.00	-19.53	H
5350.00	46.60	27.42	2.78	34.01	42.79	54.00	-11.21	H
5150.00	40.13	27.39	2.77	34.01	36.28	54.00	-17.72	V
5350.00	47.72	27.42	2.78	34.01	43.91	54.00	-10.09	V




Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	51.28	27.39	2.77	34.01	47.43	74.00	-26.57	H
5350.00	60.17	27.42	2.78	34.01	56.36	74.00	-17.64	H
5150.00	52.94	27.39	2.77	34.01	49.09	74.00	-24.91	V
5350.00	61.87	27.42	2.78	34.01	58.06	74.00	-15.94	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.15	27.39	2.77	34.01	34.30	54.00	-19.70	H
5350.00	46.40	27.42	2.78	34.01	42.59	54.00	-11.41	H
5150.00	39.94	27.39	2.77	34.01	36.09	54.00	-17.91	V
5350.00	47.50	27.42	2.78	34.01	43.69	54.00	-10.31	V

Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	52.45	27.39	2.77	34.01	48.60	74.00	-25.40	H
5350.00	61.73	27.42	2.78	34.01	57.92	74.00	-16.08	H
5150.00	54.19	27.39	2.77	34.01	50.34	74.00	-23.66	V
5350.00	63.75	27.42	2.78	34.01	59.94	74.00	-14.06	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	38.98	27.39	2.77	34.01	35.13	54.00	-18.87	H
5350.00	47.36	27.42	2.78	34.01	43.55	54.00	-10.45	H
5150.00	40.87	27.39	2.77	34.01	37.02	54.00	-16.98	V
5350.00	48.55	27.42	2.78	34.01	44.74	54.00	-9.26	V


For conducted test:

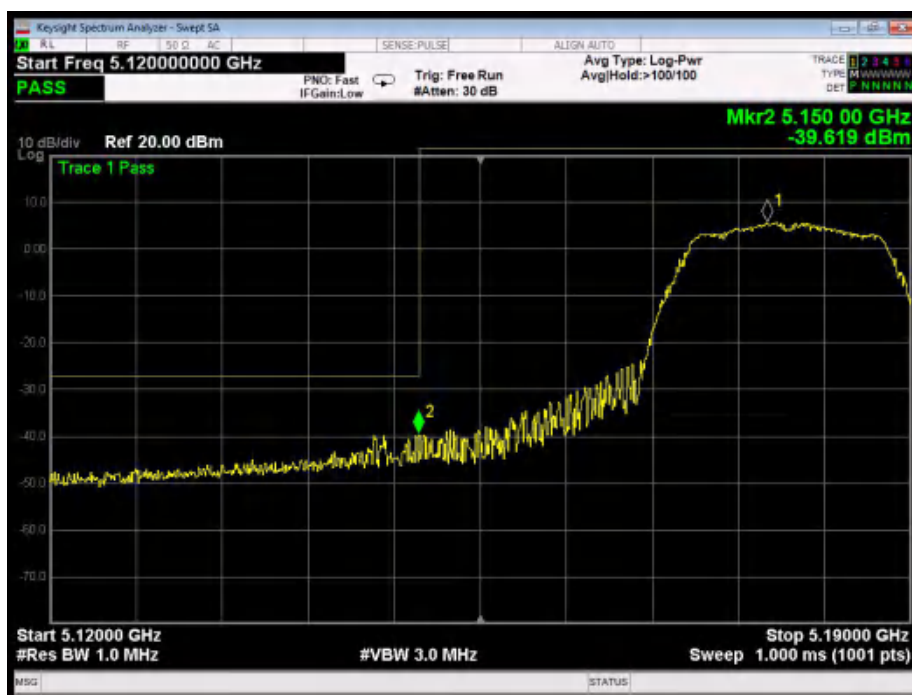


802.11a: Band Edge, Left Side

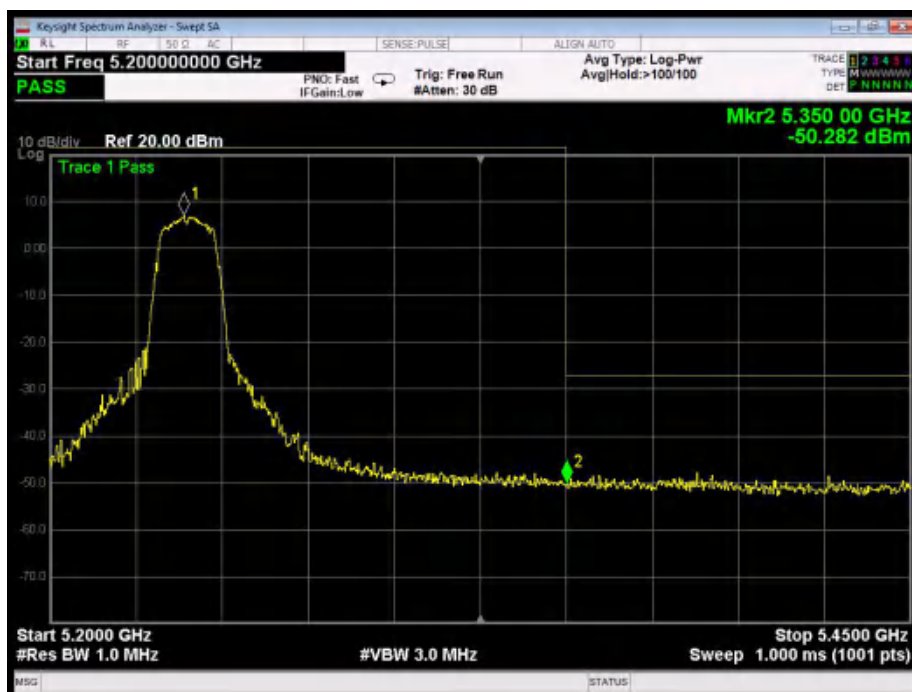


802.11a: Band Edge, Right Side

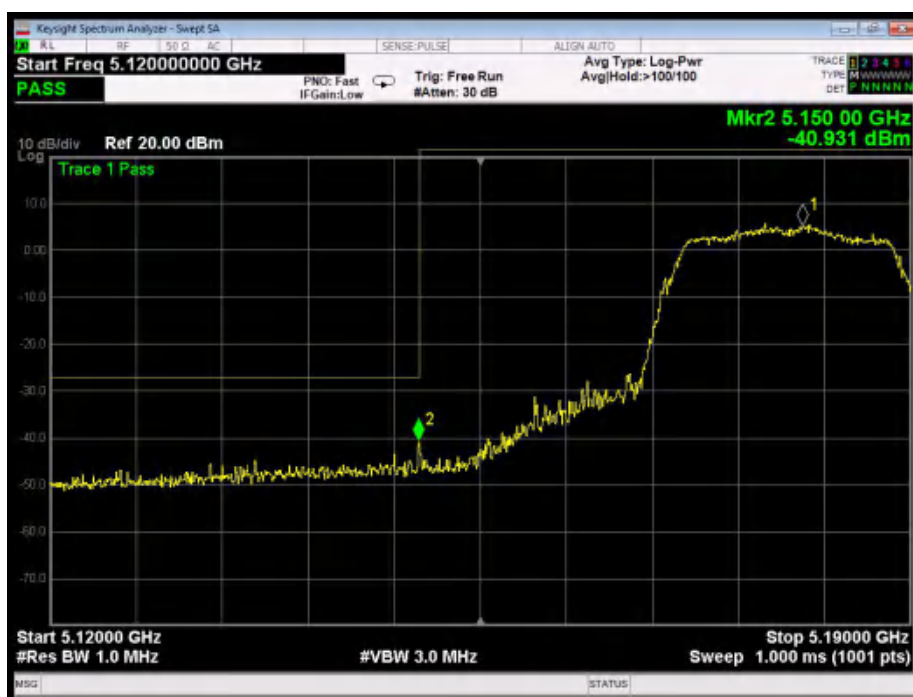


802.11n(20): Band Edge, Left Side

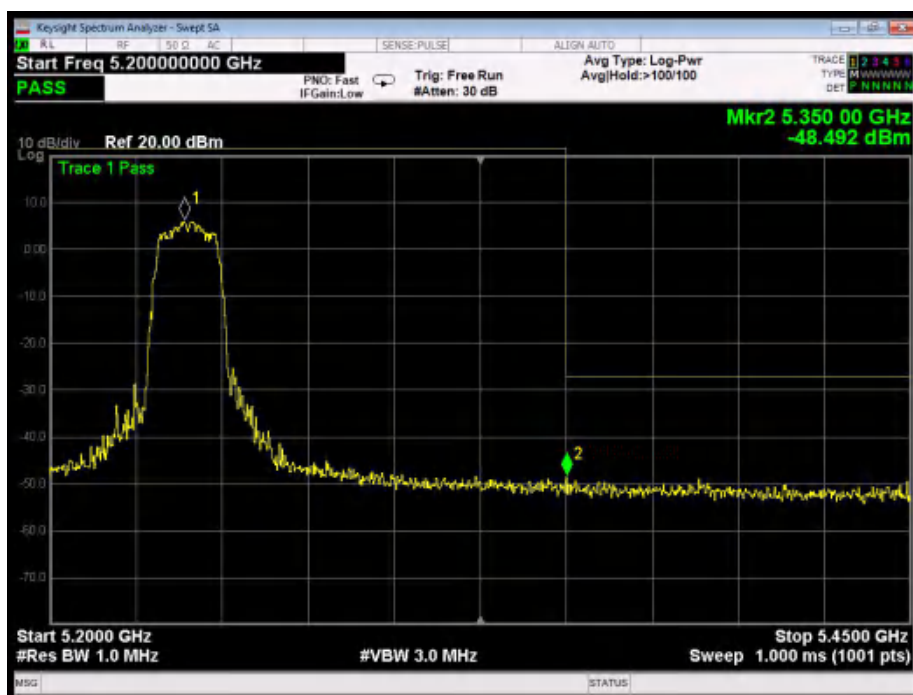

802.11n(20): Band Edge, Right Side

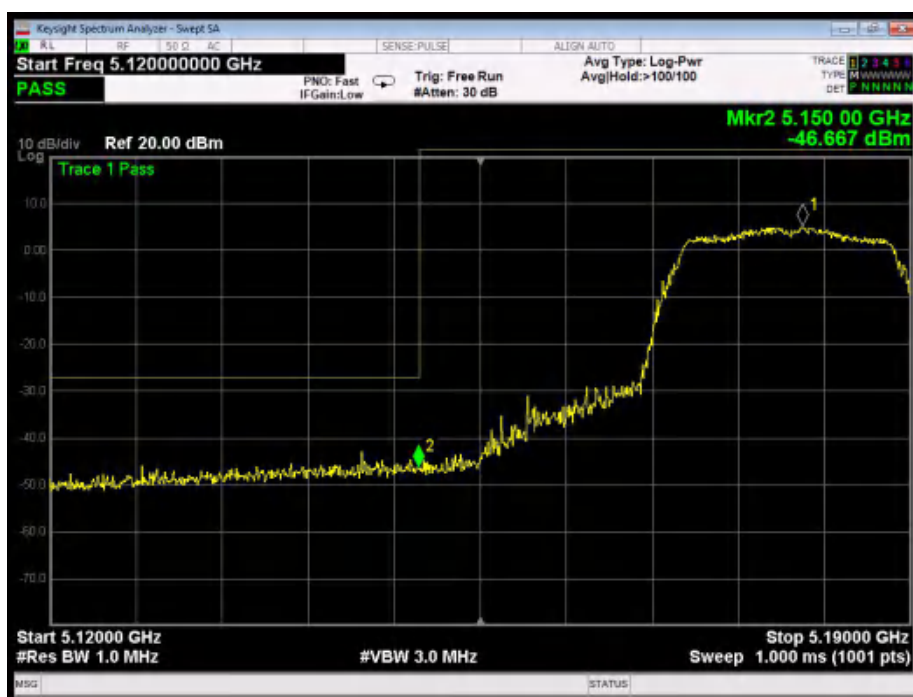


802.11ac(20): Band Edge, Left Side

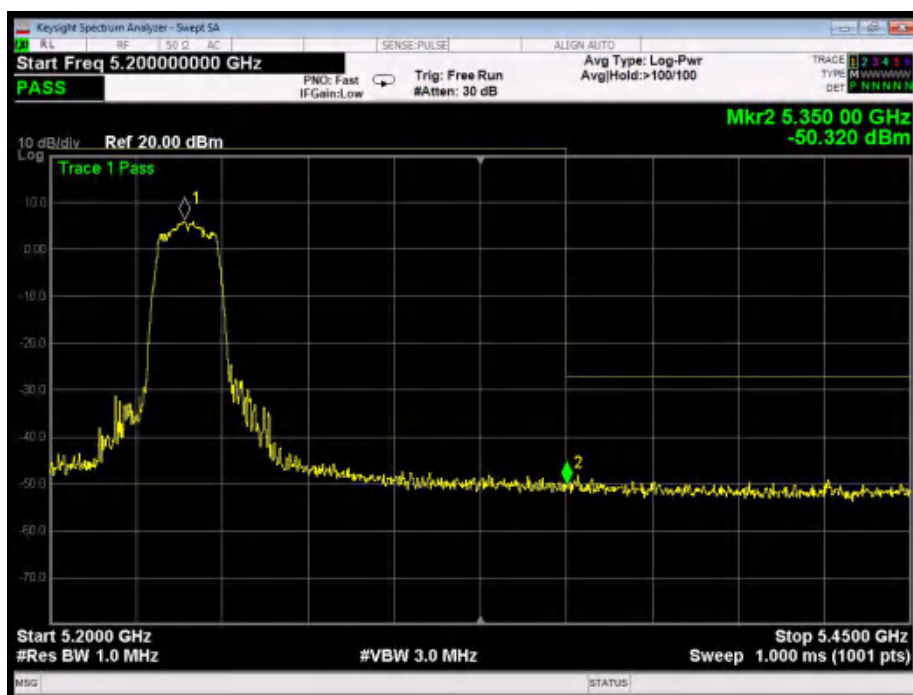


802.11ac(20): Band Edge, Right Side




802.11n(40): Band Edge, Left Side

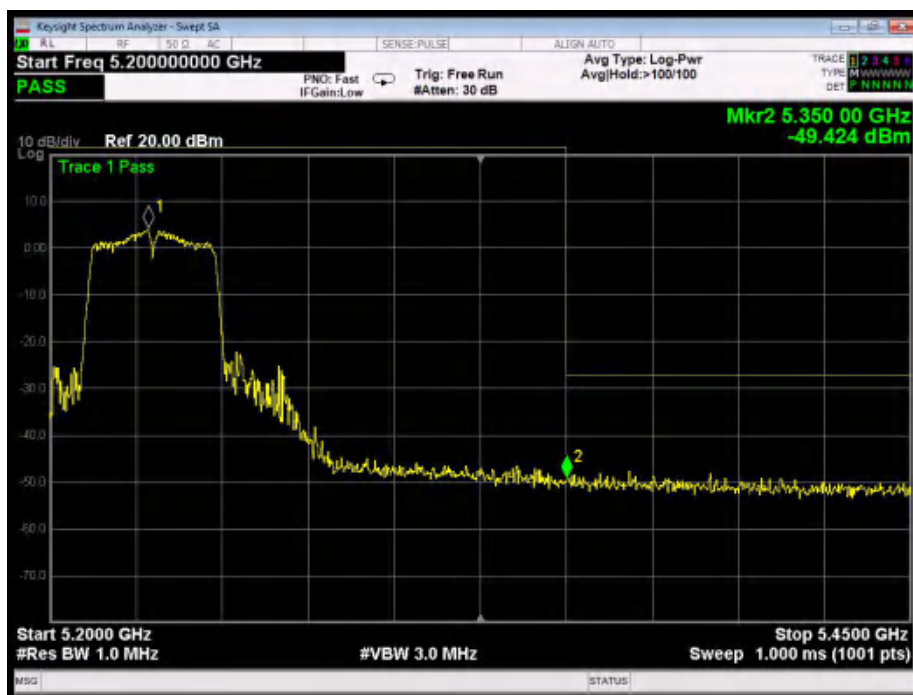


802.11n(40): Band Edge, Right Side

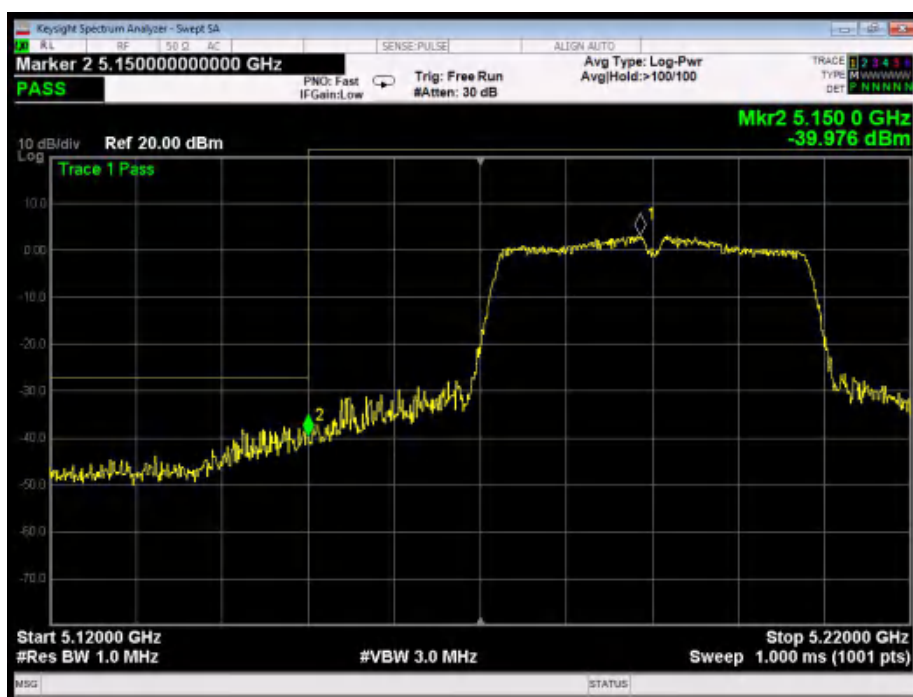


802.11ac(40): Band Edge, Left Side

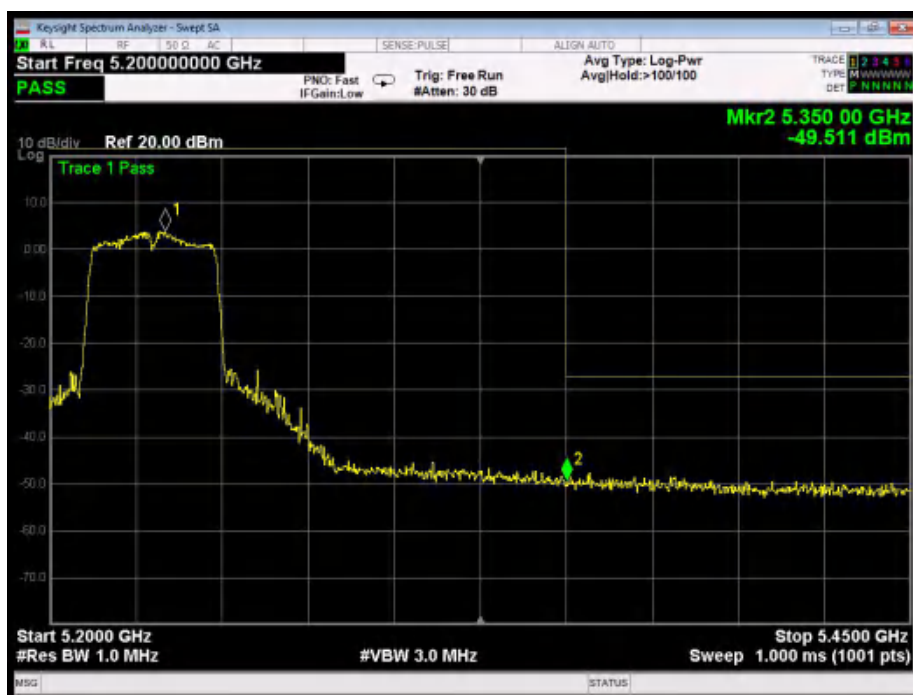

802.11ac(40): Band Edge, Right Side

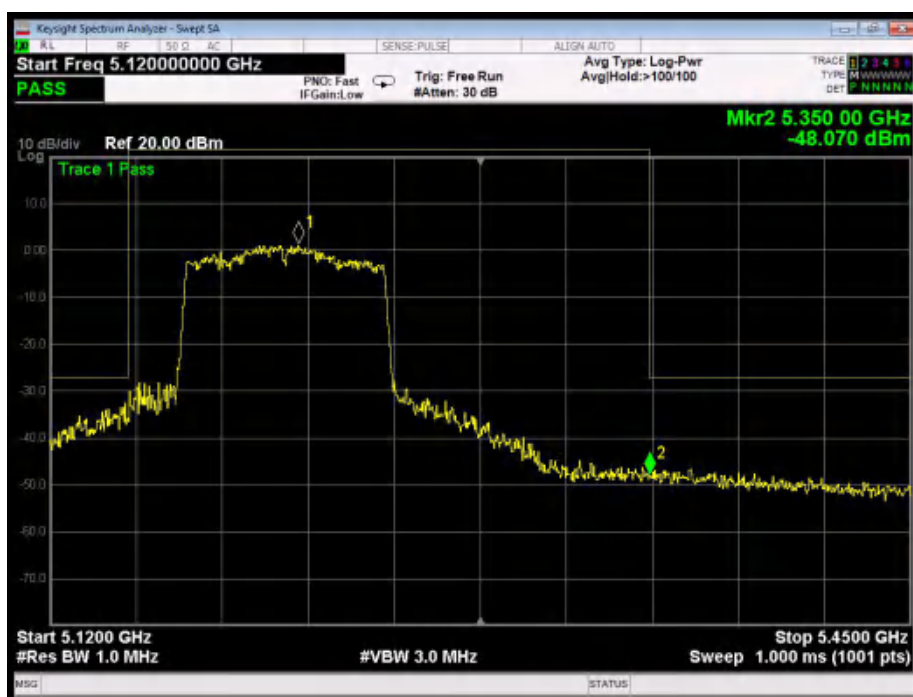

802.11ac(80): Band Edge

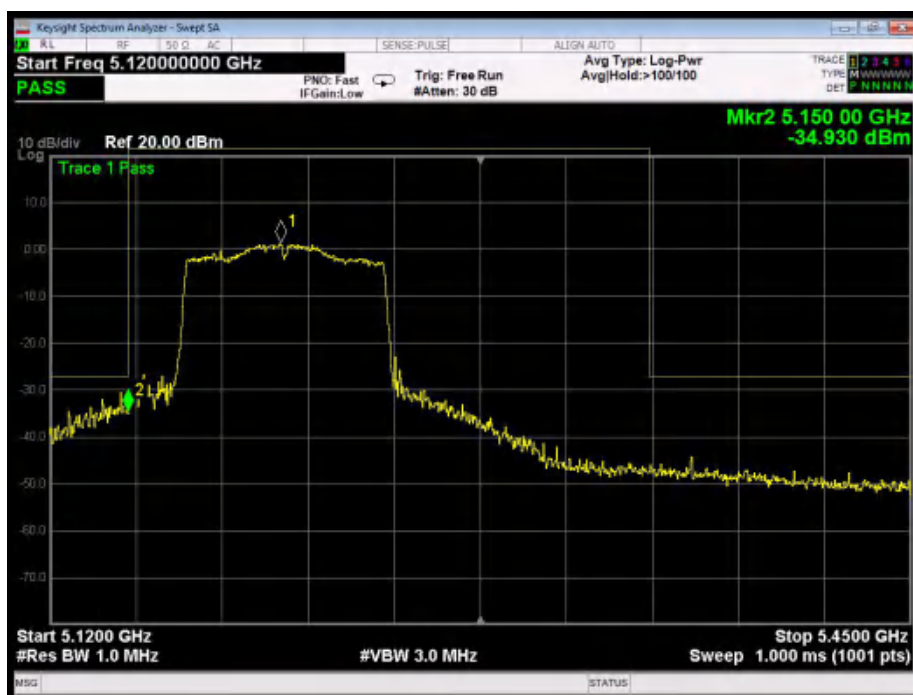

802.11ac(80): Band Edge



Test Results (Above 1000MHz)

ANT A+B

Test mode:	IEEE 802.11n(HT20)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	40.81	32.35	4.12	28.44	48.84	68.20	-19.36	V
15570.00	35.21	36.08	6.30	27.74	49.85	68.20	-18.35	V
10380.00	41.06	32.35	4.12	28.44	49.09	68.20	-19.11	H
15570.00	33.74	36.08	6.30	27.74	48.38	68.20	-19.82	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.55	32.35	4.12	28.44	39.58	54.00	-14.42	V
15570.00	23.50	36.08	6.30	27.74	38.14	54.00	-15.86	V
10380.00	31.10	32.35	4.12	28.44	39.13	54.00	-14.87	H
15570.00	22.80	36.08	6.30	27.74	37.44	54.00	-16.56	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	Mid CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	42.32	32.29	4.10	28.45	50.26	68.20	-17.94	V
15570.00	35.50	35.99	6.22	27.83	49.88	68.20	-18.32	V
10380.00	40.68	32.29	4.10	28.45	48.62	68.20	-19.58	H
15570.00	35.09	35.99	6.22	27.83	49.47	68.20	-18.73	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.25	32.29	4.10	28.45	39.19	54.00	-14.81	V
15570.00	24.32	35.99	6.22	27.83	38.70	54.00	-15.30	V



10380.00	30.11	32.29	4.10	28.45	38.05	54.00	-15.95	H
15570.00	23.64	35.99	6.22	27.83	38.02	54.00	-15.98	H

Test mode:	IEEE 802.11n(HT20)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.03	32.35	4.12	28.44	49.06	68.20	-19.14	V
15570.00	35.35	36.08	6.30	27.74	49.99	68.20	-18.21	V
10380.00	41.25	32.35	4.12	28.44	49.28	68.20	-18.92	H
15570.00	33.86	36.08	6.30	27.74	48.50	68.20	-19.70	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.75	32.35	4.12	28.44	39.78	54.00	-14.22	V
15570.00	23.63	36.08	6.30	27.74	38.27	54.00	-15.73	V
10380.00	31.27	32.35	4.12	28.44	39.30	54.00	-14.70	H
15570.00	22.92	36.08	6.30	27.74	37.56	54.00	-16.44	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	42.45	32.29	4.10	28.45	50.39	68.20	-17.81	V
15570.00	35.58	35.99	6.22	27.83	49.96	68.20	-18.24	V
10380.00	40.79	32.29	4.10	28.45	48.73	68.20	-19.47	H
15570.00	35.16	35.99	6.22	27.83	49.54	68.20	-18.66	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.37	32.29	4.10	28.45	39.31	54.00	-14.69	V
15570.00	24.40	35.99	6.22	27.83	38.78	54.00	-15.22	V



10380.00	30.21	32.29	4.10	28.45	38.15	54.00	-15.85	H
15570.00	23.71	35.99	6.22	27.83	38.09	54.00	-15.91	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	Mid CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.14	32.35	4.12	28.44	49.17	68.20	-19.03	V
15570.00	35.42	36.08	6.30	27.74	50.06	68.20	-18.14	V
10380.00	41.34	32.35	4.12	28.44	49.37	68.20	-18.83	H
15570.00	33.92	36.08	6.30	27.74	48.56	68.20	-19.64	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.85	32.35	4.12	28.44	39.88	54.00	-14.12	V
15570.00	23.70	36.08	6.30	27.74	38.34	54.00	-15.66	V
10380.00	31.36	32.35	4.12	28.44	39.39	54.00	-14.61	H
15570.00	22.98	36.08	6.30	27.74	37.62	54.00	-16.38	H

Test mode:	IEEE 802.11ac(HT20)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	42.51	32.29	4.10	28.45	50.45	68.20	-17.75	V
15570.00	35.62	35.99	6.22	27.83	50.00	68.20	-18.20	V
10380.00	40.83	32.29	4.10	28.45	48.77	68.20	-19.43	H
15570.00	35.19	35.99	6.22	27.83	49.57	68.20	-18.63	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.42	32.29	4.10	28.45	39.36	54.00	-14.64	V
15570.00	24.44	35.99	6.22	27.83	38.82	54.00	-15.18	V



10380.00	30.25	32.29	4.10	28.45	38.19	54.00	-15.81	H
15570.00	23.74	35.99	6.22	27.83	38.12	54.00	-15.88	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	Low CH
------------	--------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	41.18	32.35	4.12	28.44	49.21	68.20	-18.99	V
15570.00	35.45	36.08	6.30	27.74	50.09	68.20	-18.11	V
10380.00	41.38	32.35	4.12	28.44	49.41	68.20	-18.79	H
15570.00	33.94	36.08	6.30	27.74	48.58	68.20	-19.62	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	31.89	32.35	4.12	28.44	39.92	54.00	-14.08	V
15570.00	23.72	36.08	6.30	27.74	38.36	54.00	-15.64	V
10380.00	31.39	32.35	4.12	28.44	39.42	54.00	-14.58	H
15570.00	23.00	36.08	6.30	27.74	37.64	54.00	-16.36	H

Test mode:	IEEE 802.11n(HT40)	Test channel:	High CH
------------	--------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	39.15	32.29	4.10	28.45	47.09	68.20	-21.11	V
15570.00	33.49	35.99	6.22	27.83	47.87	68.20	-20.33	V
10380.00	37.99	32.29	4.10	28.45	45.93	68.20	-22.27	H
15570.00	33.33	35.99	6.22	27.83	47.71	68.20	-20.49	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	28.32	32.29	4.10	28.45	36.26	54.00	-17.74	V
15570.00	22.39	35.99	6.22	27.83	36.77	54.00	-17.23	V



10380.00	27.59	32.29	4.10	28.45	35.53	54.00	-18.47	H
15570.00	21.93	35.99	6.22	27.83	36.31	54.00	-17.69	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	Low CH
------------	---------------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	38.40	32.35	4.12	28.44	46.43	68.20	-21.77	V
15570.00	33.69	36.08	6.30	27.74	48.33	68.20	-19.87	V
10380.00	39.03	32.35	4.12	28.44	47.06	68.20	-21.14	H
15570.00	32.41	36.08	6.30	27.74	47.05	68.20	-21.15	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.33	32.35	4.12	28.44	37.36	54.00	-16.64	V
15570.00	22.03	36.08	6.30	27.74	36.67	54.00	-17.33	V
10380.00	29.19	32.35	4.12	28.44	37.22	54.00	-16.78	H
15570.00	21.51	36.08	6.30	27.74	36.15	54.00	-17.85	H

Test mode:	IEEE 802.11ac(HT40)	Test channel:	High CH
------------	---------------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	39.68	32.29	4.10	28.45	47.62	68.20	-20.58	V
15570.00	33.83	35.99	6.22	27.83	48.21	68.20	-19.99	V
10380.00	38.44	32.29	4.10	28.45	46.38	68.20	-21.82	H
15570.00	33.63	35.99	6.22	27.83	48.01	68.20	-20.19	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	28.81	32.29	4.10	28.45	36.75	54.00	-17.25	V
15570.00	22.71	35.99	6.22	27.83	37.09	54.00	-16.91	V
10380.00	28.01	32.29	4.10	28.45	35.95	54.00	-18.05	H



15570.00	22.22	35.99	6.22	27.83	36.60	54.00	-17.40	H
----------	-------	-------	------	-------	-------	-------	--------	---

Test mode:	IEEE 802.11ac(HT80)	Test channel:	
------------	---------------------	---------------	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	38.84	32.35	4.12	28.44	46.87	68.20	-21.33	V
15570.00	33.97	36.08	6.30	27.74	48.61	68.20	-19.59	V
10380.00	39.40	32.35	4.12	28.44	47.43	68.20	-20.77	H
15570.00	32.65	36.08	6.30	27.74	47.29	68.20	-20.91	H

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Pol.
10380.00	29.73	32.35	4.12	28.44	37.76	54.00	-16.24	V
15570.00	22.29	36.08	6.30	27.74	36.93	54.00	-17.07	V
10380.00	29.54	32.35	4.12	28.44	37.57	54.00	-16.43	H
15570.00	21.74	36.08	6.30	27.74	36.38	54.00	-17.62	H

Note:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss–Preamplifier Factor

All other emissions for frequency 1G~40GHz are attenuated 20dB below the limits, so it does not recorded in report.


Radiated Band Edge:

Test Mode: 802.11n20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.35	27.39	2.77	34.01	50.50	74.00	-23.50	H
5350.00	64.27	27.42	2.78	34.01	60.46	74.00	-13.54	H
5150.00	56.23	27.39	2.77	34.01	52.38	74.00	-21.62	V
5350.00	66.80	27.42	2.78	34.01	62.99	74.00	-11.01	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.34	27.39	2.77	34.01	36.49	54.00	-17.51	H
5350.00	48.92	27.42	2.78	34.01	45.11	54.00	-8.89	H
5150.00	42.37	27.39	2.77	34.01	38.52	54.00	-15.48	V
5350.00	50.26	27.42	2.78	34.01	46.45	54.00	-7.55	V

Test Mode: 802.11ac20								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.26	27.39	2.77	34.01	50.41	74.00	-23.59	H
5350.00	64.14	27.42	2.78	34.01	60.33	74.00	-13.67	H
5150.00	56.12	27.39	2.77	34.01	52.27	74.00	-21.73	V
5350.00	66.64	27.42	2.78	34.01	62.83	74.00	-11.17	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.27	27.39	2.77	34.01	36.42	54.00	-17.58	H
5350.00	48.84	27.42	2.78	34.01	45.03	54.00	-8.97	H
5150.00	42.30	27.39	2.77	34.01	38.45	54.00	-15.55	V
5350.00	50.17	27.42	2.78	34.01	46.36	54.00	-7.64	V



Test Mode: 802.11n40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.40	27.39	2.77	34.01	50.55	74.00	-23.45	H
5350.00	64.34	27.42	2.78	34.01	60.53	74.00	-13.47	H
5150.00	56.28	27.39	2.77	34.01	52.43	74.00	-21.57	V
5350.00	66.88	27.42	2.78	34.01	63.07	74.00	-10.93	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.37	27.39	2.77	34.01	36.52	54.00	-17.48	H
5350.00	48.96	27.42	2.78	34.01	45.15	54.00	-8.85	H
5150.00	42.41	27.39	2.77	34.01	38.56	54.00	-15.44	V
5350.00	50.30	27.42	2.78	34.01	46.49	54.00	-7.51	V

Test Mode: 802.11ac40								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.45	27.39	2.77	34.01	50.60	74.00	-23.40	H
5350.00	64.40	27.42	2.78	34.01	60.59	74.00	-13.41	H
5150.00	56.33	27.39	2.77	34.01	52.48	74.00	-21.52	V
5350.00	66.96	27.42	2.78	34.01	63.15	74.00	-10.85	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.41	27.39	2.77	34.01	36.56	54.00	-17.44	H
5350.00	49.00	27.42	2.78	34.01	45.19	54.00	-8.81	H
5150.00	42.45	27.39	2.77	34.01	38.60	54.00	-15.40	V
5350.00	50.34	27.42	2.78	34.01	46.53	54.00	-7.47	V




Test Mode: 802.11ac80								
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	54.60	27.39	2.77	34.01	50.75	74.00	-23.25	H
5350.00	64.60	27.42	2.78	34.01	60.79	74.00	-13.21	H
5150.00	56.49	27.39	2.77	34.01	52.64	74.00	-21.36	V
5350.00	67.19	27.42	2.78	34.01	63.38	74.00	-10.62	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
5150.00	40.51	27.39	2.77	34.01	36.66	54.00	-17.34	H
5350.00	49.12	27.42	2.78	34.01	45.31	54.00	-8.69	H
5150.00	42.57	27.39	2.77	34.01	38.72	54.00	-15.28	V
5350.00	50.47	27.42	2.78	34.01	46.66	54.00	-7.34	V

6. Maximum Average Output Power Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407(a)(1)(ii)
Test Limit	23.98dBm

6.2. Test Setup



6.3. Test Procedure

1. The Transmitter output (antenna port) was connected to the power meter.
2. Open the EUT and the power meter, and then record the maximum average power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

6.4. Test Data

Test Item	:	Max.output power	Test Mode	:	CH Low ~ CH High
Test Voltage	:	DC 18.3V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	52%RH

ANT A:

Mode	Channel Frequency (MHz)	Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5180	15.13	23.98	PASS
	5200	15.81	23.98	PASS
	5240	15.67	23.98	PASS
802.11n20	5180	14.60	23.98	PASS
	5200	14.73	23.98	PASS
	5240	14.86	23.98	PASS
802.11ac20	5180	14.92	23.98	PASS
	5200	15.08	23.98	PASS
	5240	14.84	23.98	PASS
802.11n40	5190	15.84	23.98	PASS
	5230	15.69	23.98	PASS
802.11ac40	5190	15.55	23.98	PASS
	5230	15.28	23.98	PASS
802.11ac80	5210	15.41	23.98	PASS

ANT B:

Mode	Channel Frequency (MHz)	Power output (dBm)	Correctional Limit (dBm)	Results
802.11a	5180	15.86	23.98	PASS
	5200	15.27	23.98	PASS
	5240	15.77	23.98	PASS
802.11n20	5180	15.21	23.98	PASS
	5200	15.54	23.98	PASS
	5240	15.82	23.98	PASS
802.11ac20	5180	14.85	23.98	PASS
	5200	14.05	23.98	PASS
	5240	14.87	23.98	PASS
802.11n40	5190	16.12	23.98	PASS
	5230	15.90	23.98	PASS
802.11ac40	5190	15.95	23.98	PASS
	5230	15.45	23.98	PASS
802.11ac80	5210	15.26	23.98	PASS

**ANT A+B**


Mode	Channel Frequency (MHz)	Power output (dBm)	Correctional Limit (dBm)	Results
802.11n20	5180	17.93	20.97	PASS
	5200	18.16	20.97	PASS
	5240	18.38	20.97	PASS
802.11ac20	5180	17.90	20.97	PASS
	5200	17.61	20.97	PASS
	5240	17.87	20.97	PASS
802.11n40	5190	18.99	20.97	PASS
	5230	18.81	20.97	PASS
802.11ac40	5190	18.76	20.97	PASS
	5230	18.38	20.97	PASS
802.11ac80	5210	18.35	20.97	PASS

7. Occupy Bandwidth Test

7.1. Test Standard

Test Standard	FCC Part15 C Section 15.407 (a)(5)
---------------	------------------------------------

7.2. Test Setup



7.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
26 dB & 99% bandwidth
RBW = approximately 1% of the emission bandwidth;
Set the VBW > RBW;
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Measure the maximum width of the emission that is 26dB /6dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer.
5. Repeat until all the rest channels are investigated.



7.4. Test Data


Test Item : 99%&26dB BW
Test Voltage : DC 18.3V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24.5℃
Humidity : 52%RH


ANT A:

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5180	21.76	16.834
	5200	21.28	16.800
	5240	21.44	16.805
802.11n20	5180	22.50	18.020
	5200	21.86	17.888
	5240	21.70	17.936
802.11ac20	5180	23.86	17.883
	5200	21.63	17.897
	5240	22.14	17.898
802.11n40	5190	39.86	36.292
	5230	39.52	36.228
802.11ac40	5190	39.37	36.225
	5230	39.92	36.266
802.11ac80	5210	81.17	75.602


26dB & 99% Bandwidth

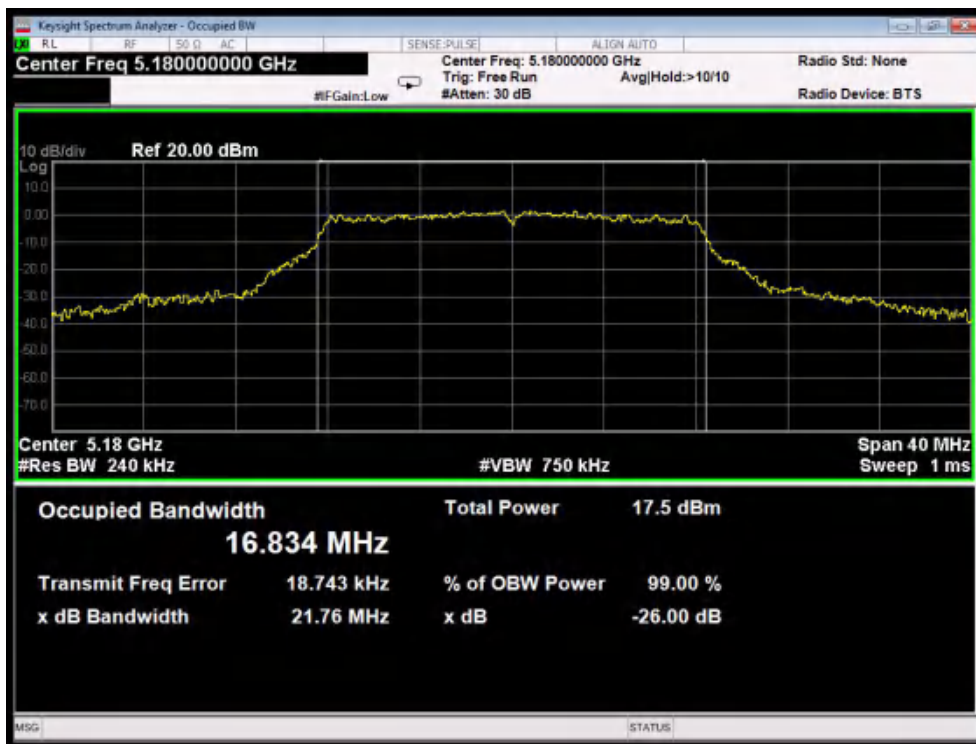


Test Mode: 802.11a--Low

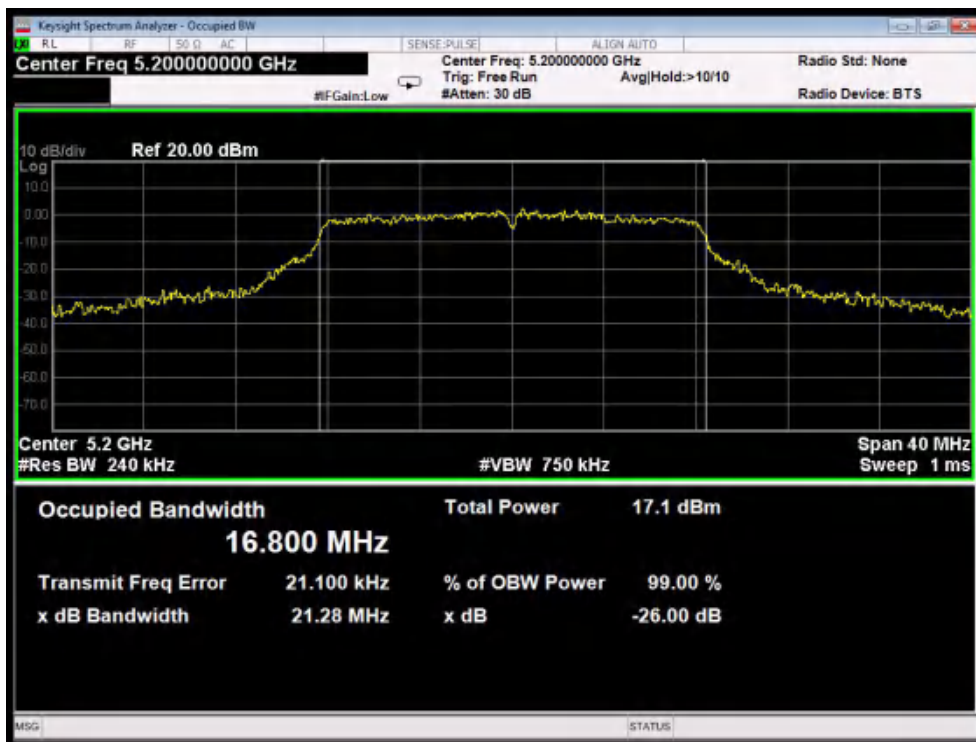


Test Mode: 802.11a---Middle

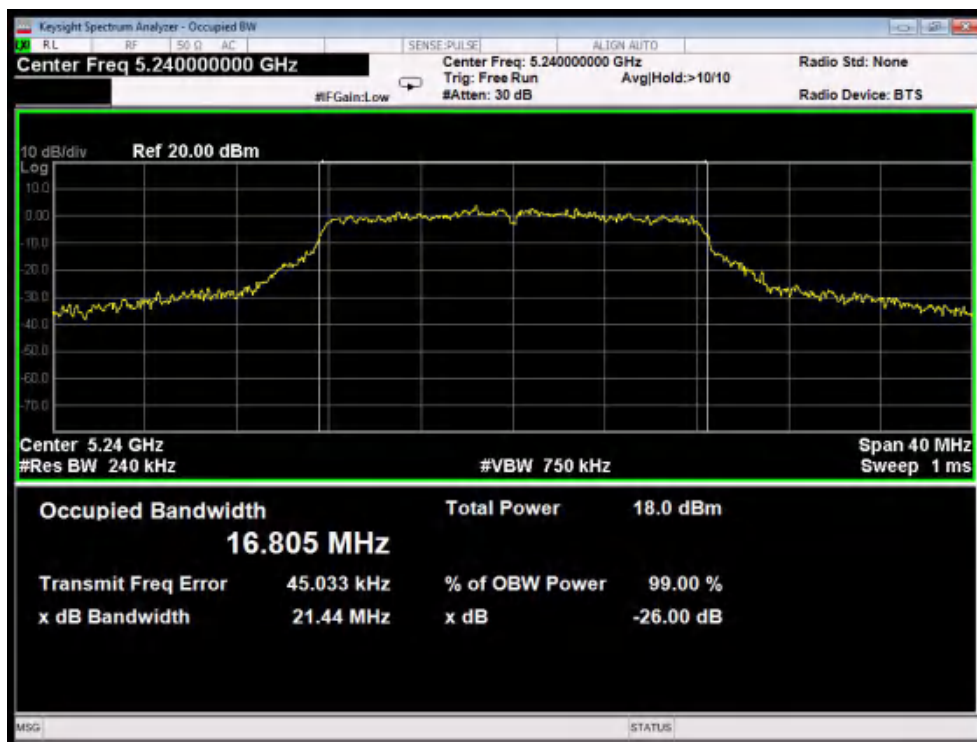


Test Mode: 802.11a---High

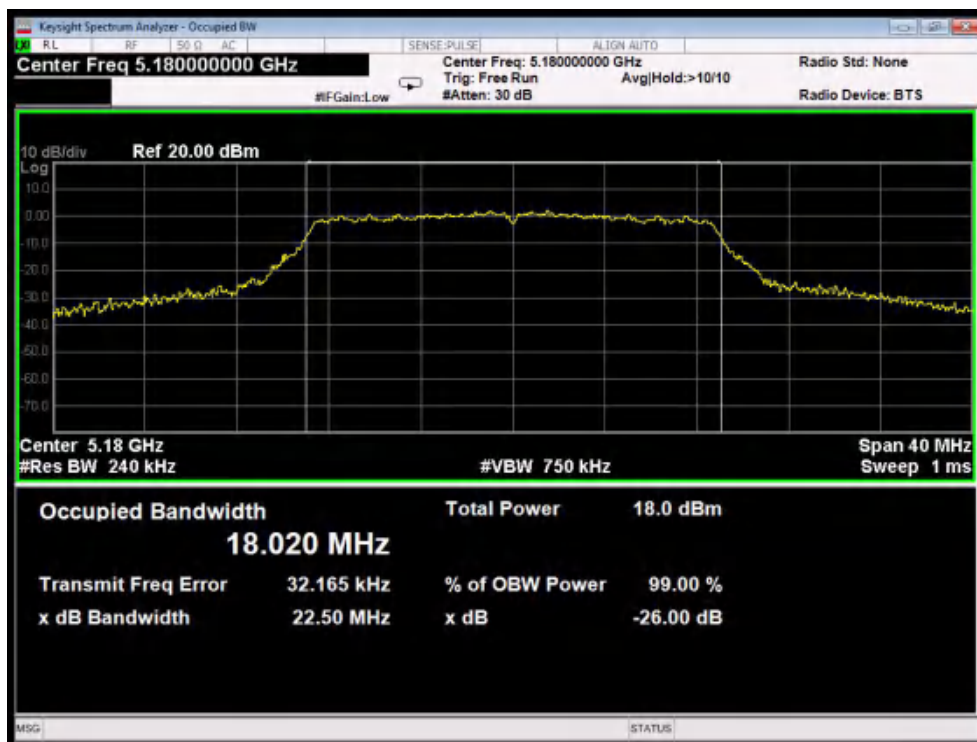


Test Mode: 802.11n20---Low

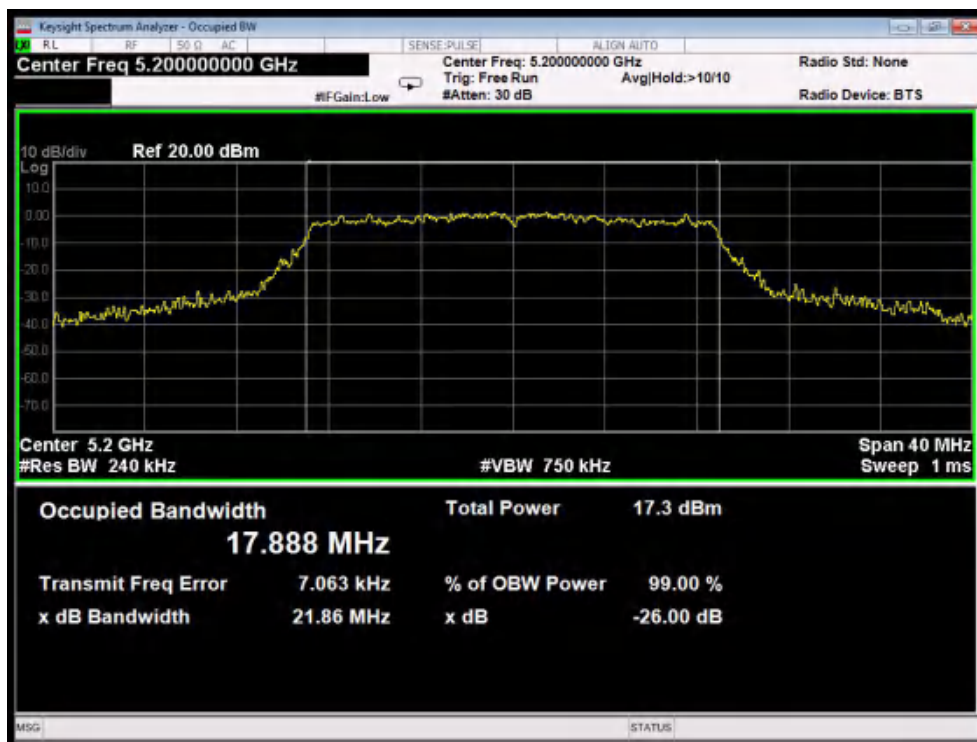


Test Mode: 802.11n20---Middle

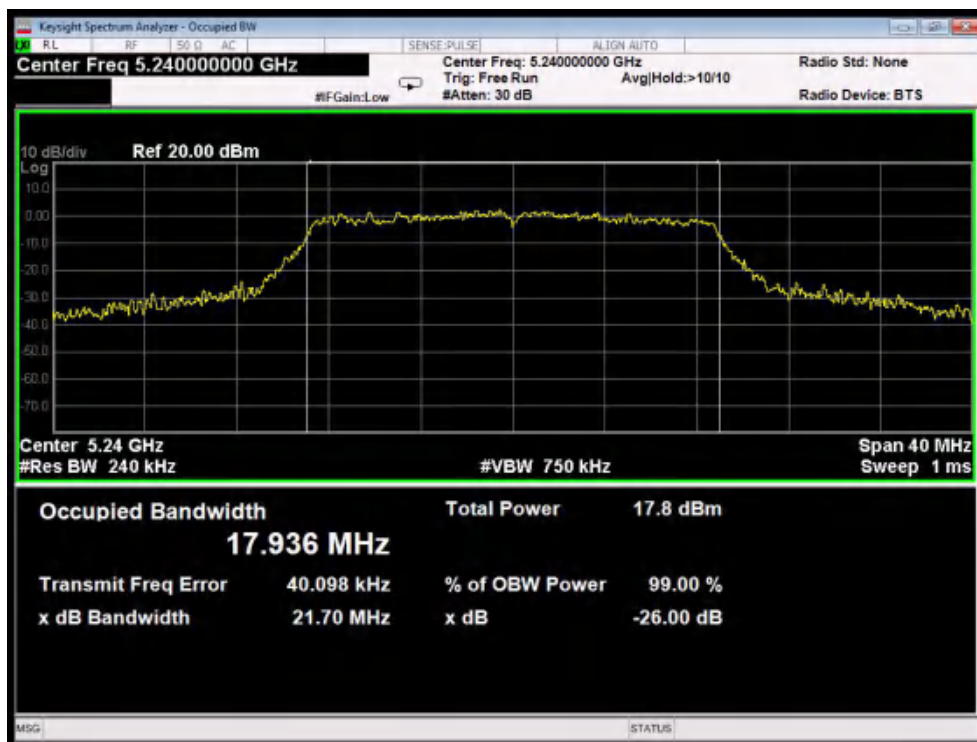


Test Mode: 802.11n20---High

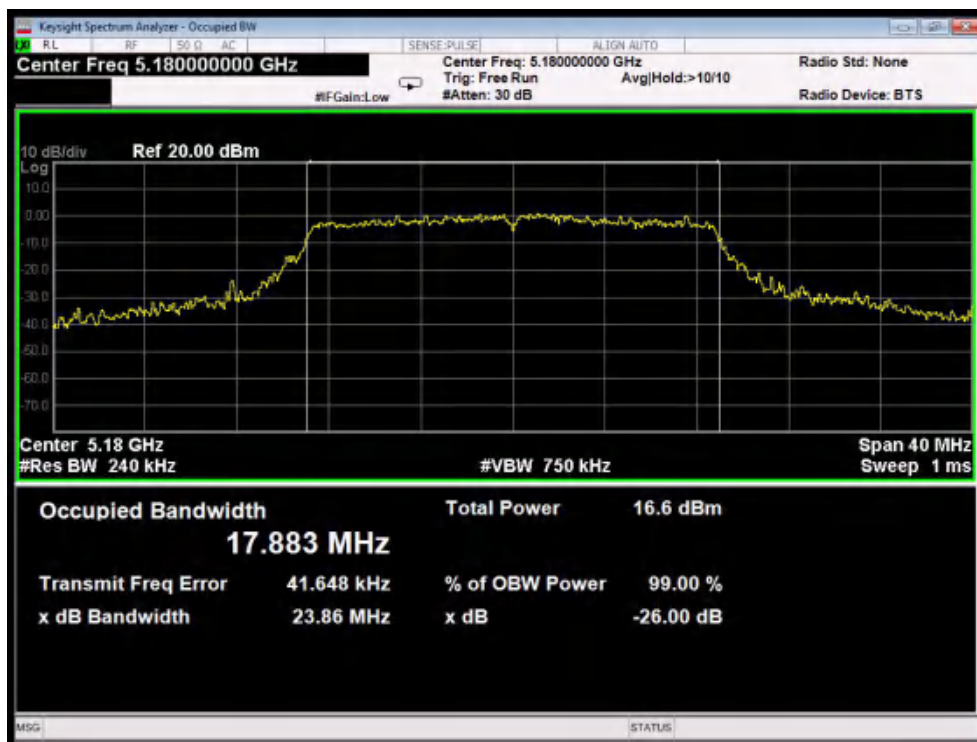


Test Mode: 802.11ac20--Low

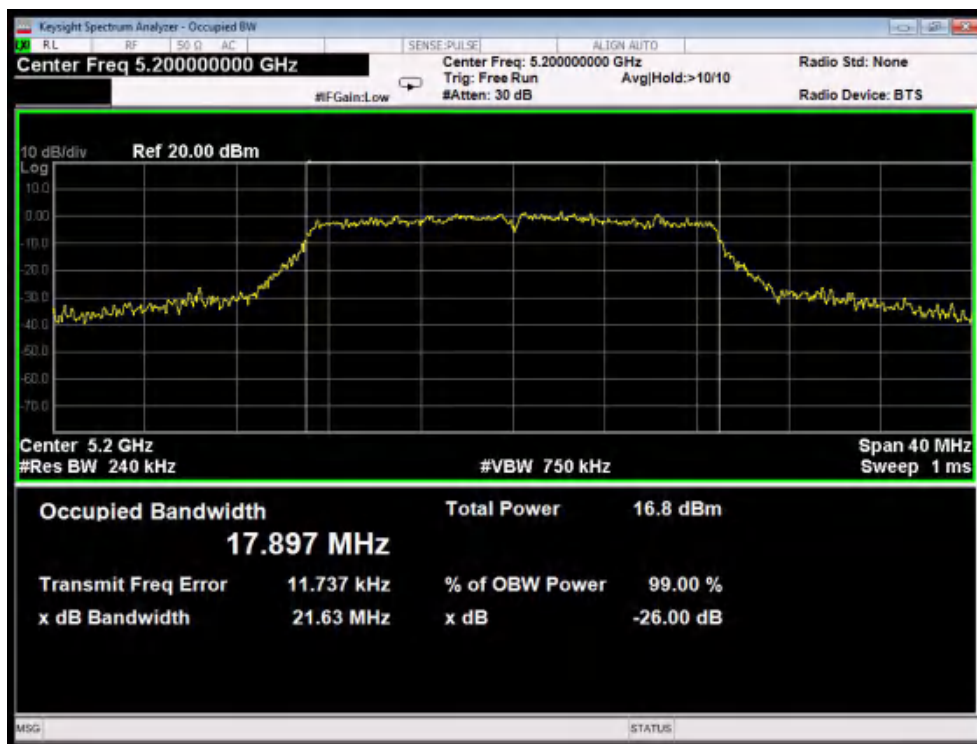


Test Mode: 802.11ac20---Middle

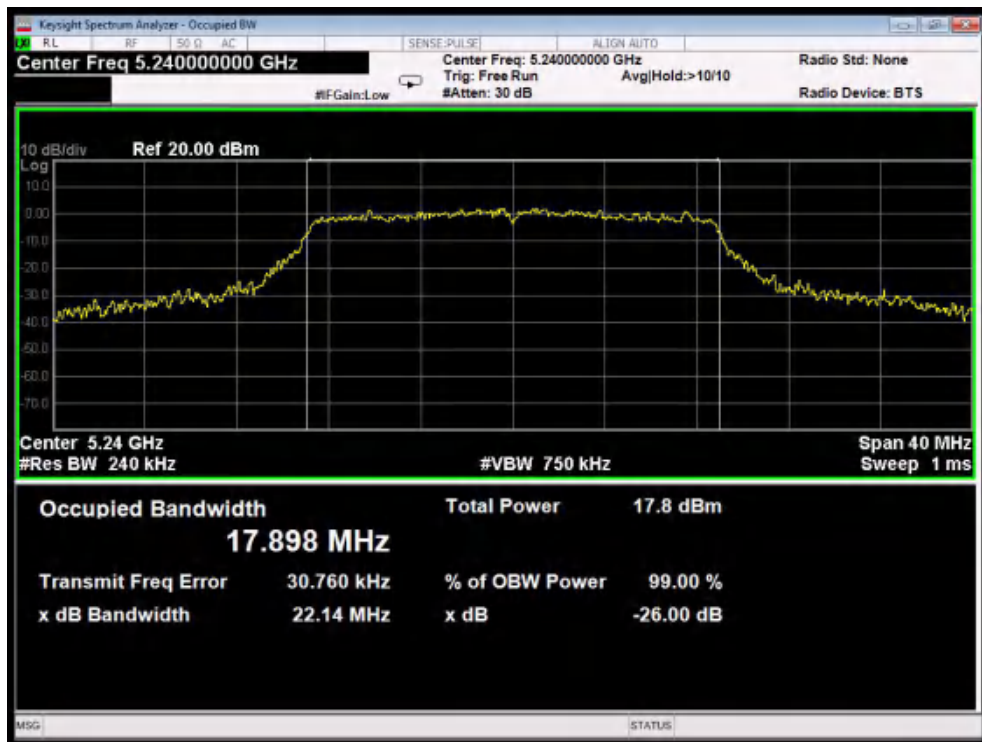


Test Mode: 802.11ac20---High

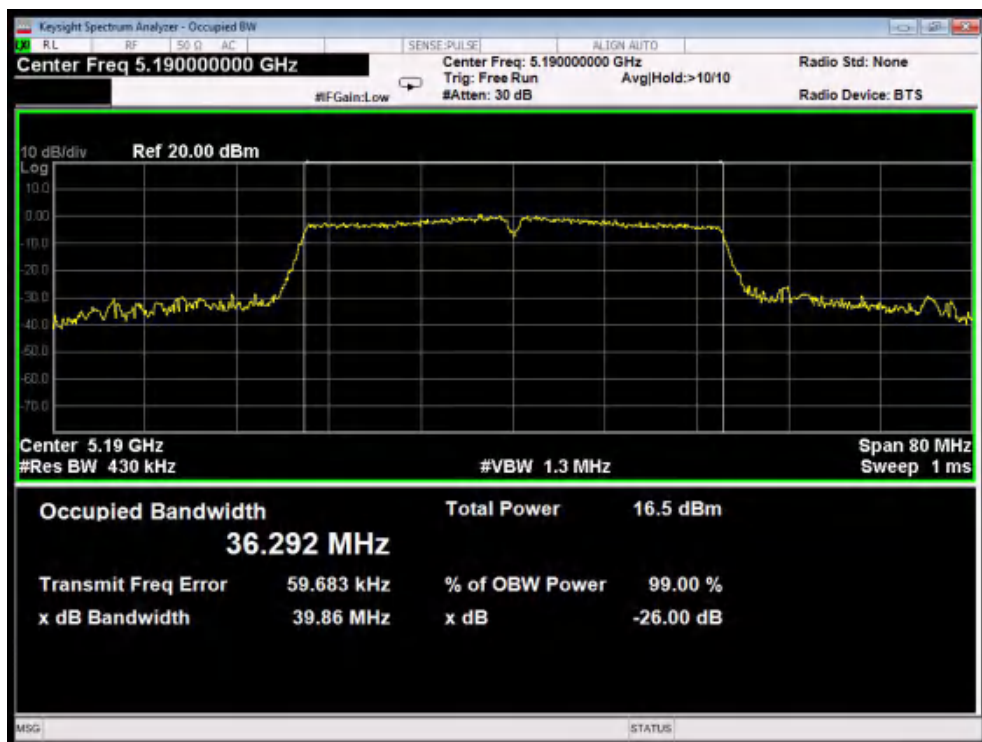


Test Mode: 802.11n40---Low

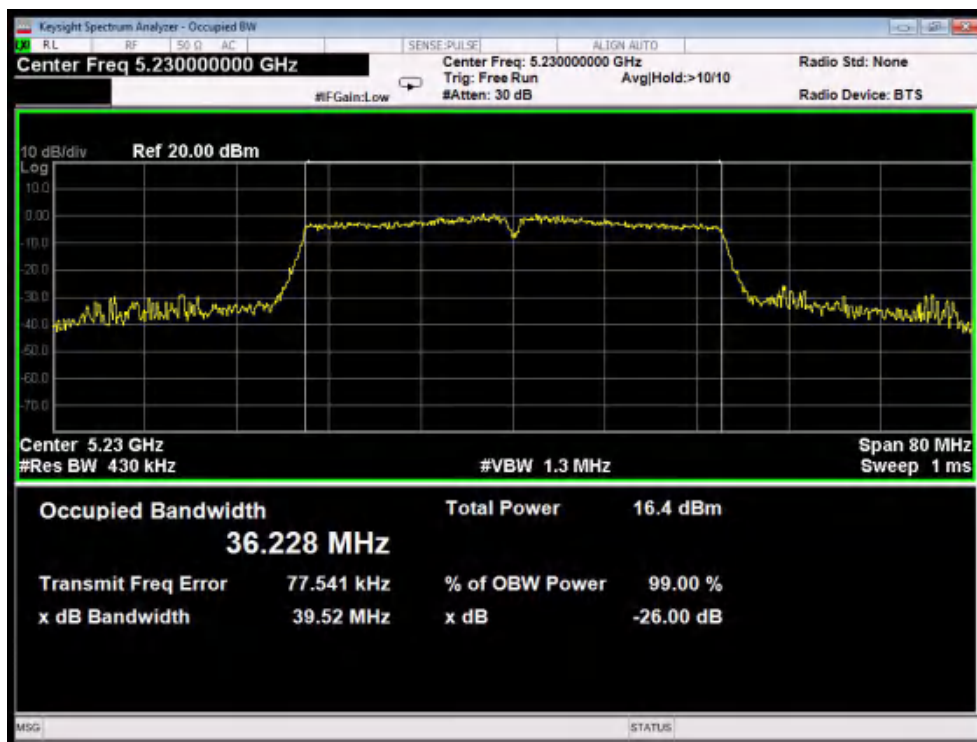


Test Mode: 802.11n40---High

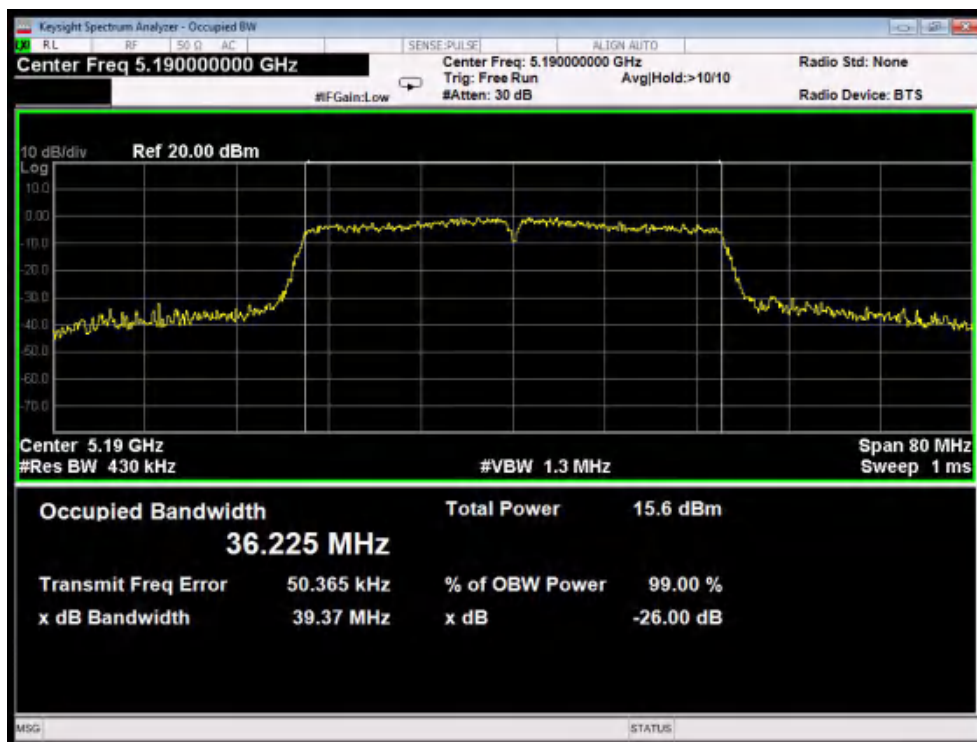

Test Mode: 802.11ac40---Low

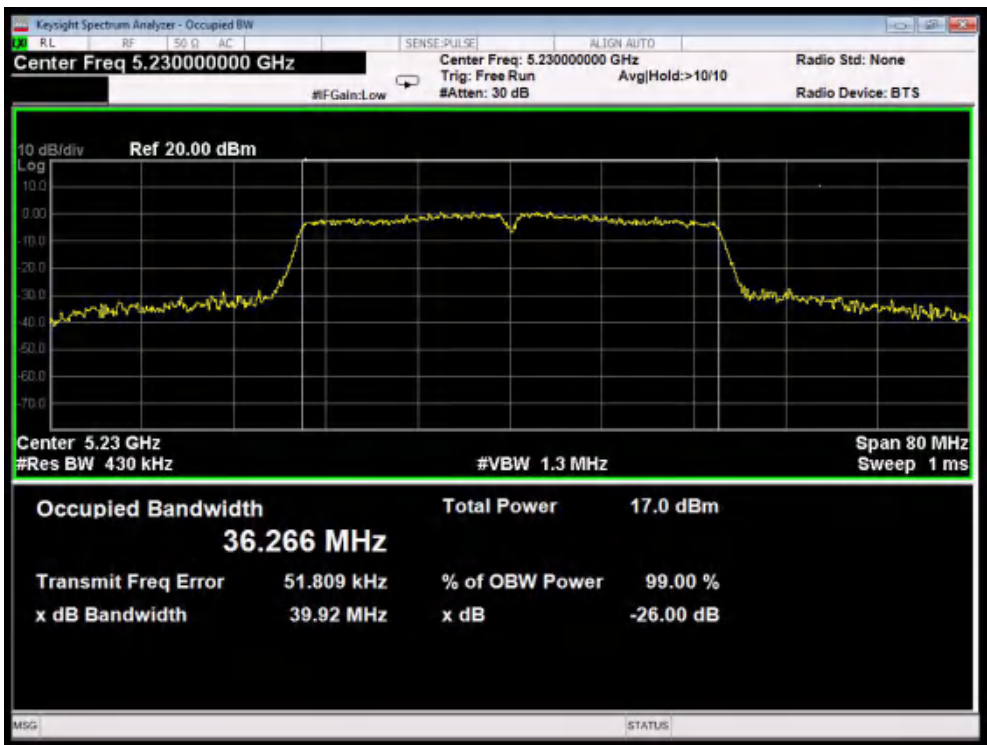

Test Mode: 802.11ac40---High

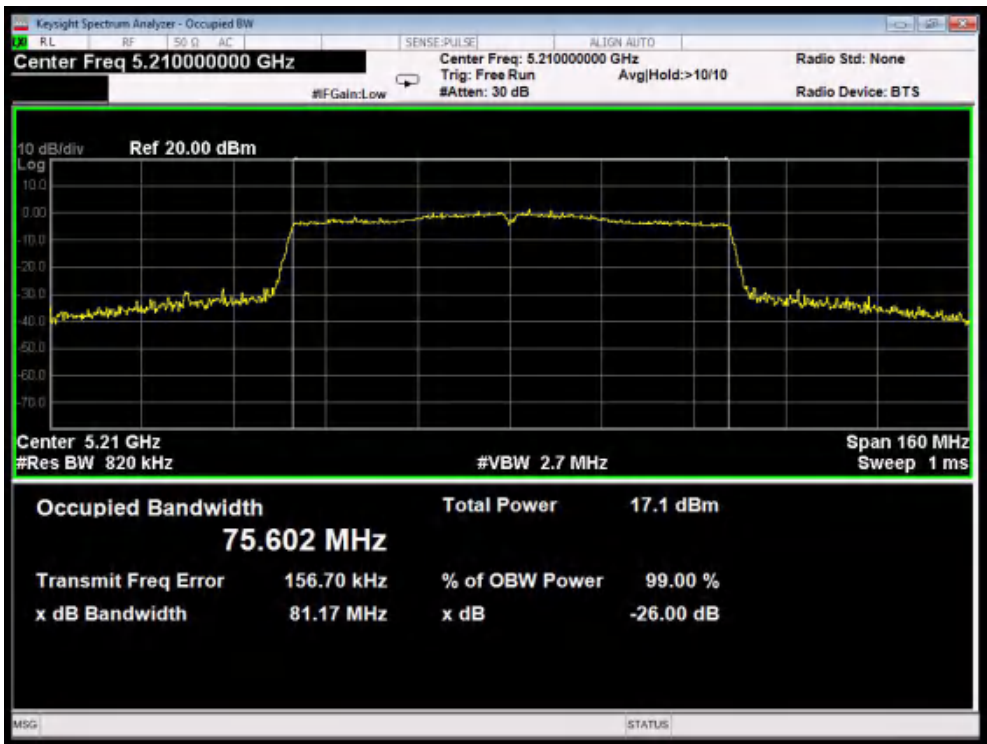


Test Mode: 802.11ac80




ANT B:

Mode	Channel Frequency (MHz)	26dB BW(MHz)	99% Bandwidth (MHz)
802.11a	5180	21.26	16.699
	5200	25.14	16.770
	5240	21.28	16.662
802.11n20	5180	21.31	17.777
	5200	22.44	17.842
	5240	22.96	17.902
802.11ac20	5180	23.26	17.872
	5200	21.77	17.819
	5240	21.90	17.826
802.11n40	5190	73.66	36.635
	5230	69.23	37.190
802.11ac40	5190	49.10	36.921
	5230	69.12	37.383
802.11ac80	5210	104.3	75.789


26dB & 99% Bandwidth

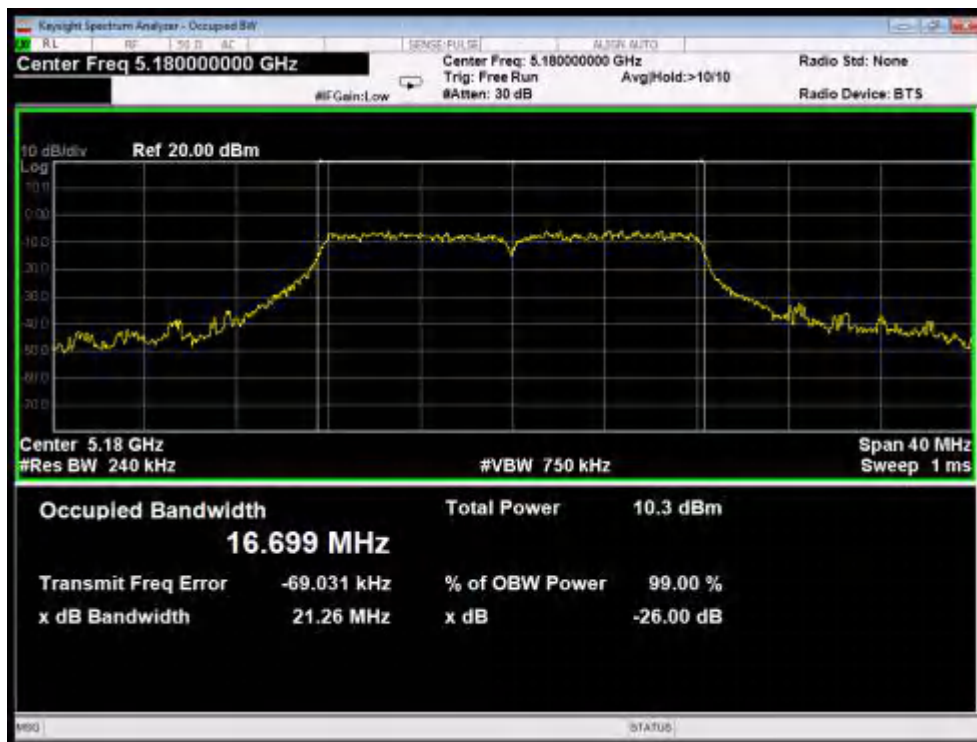


Test Mode: 802.11a--Low

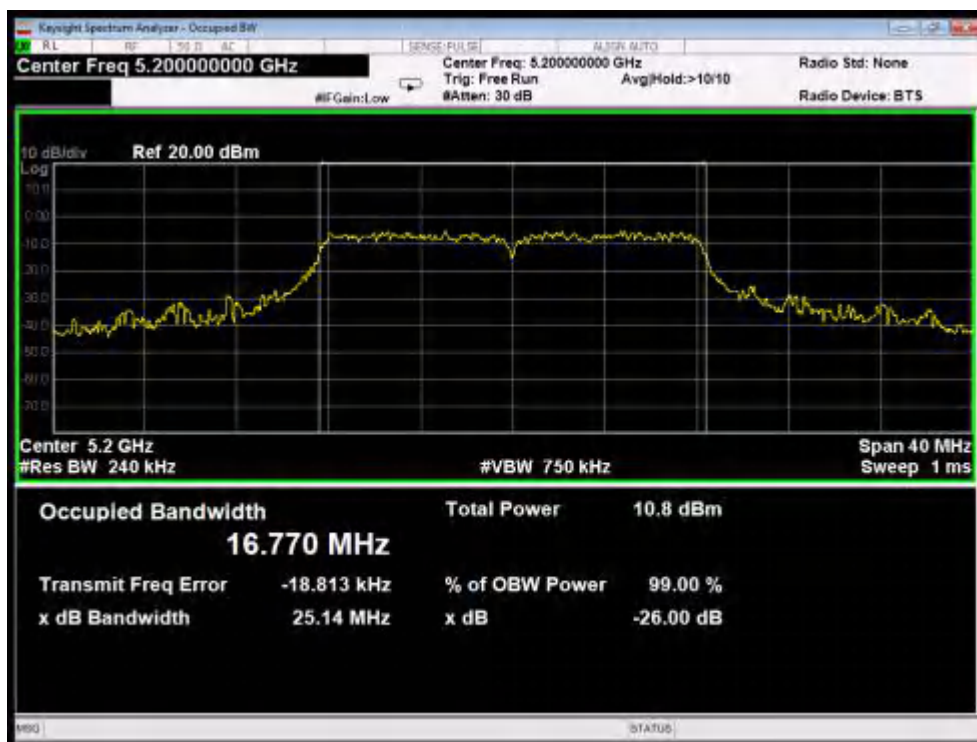


Test Mode: 802.11a---Middle

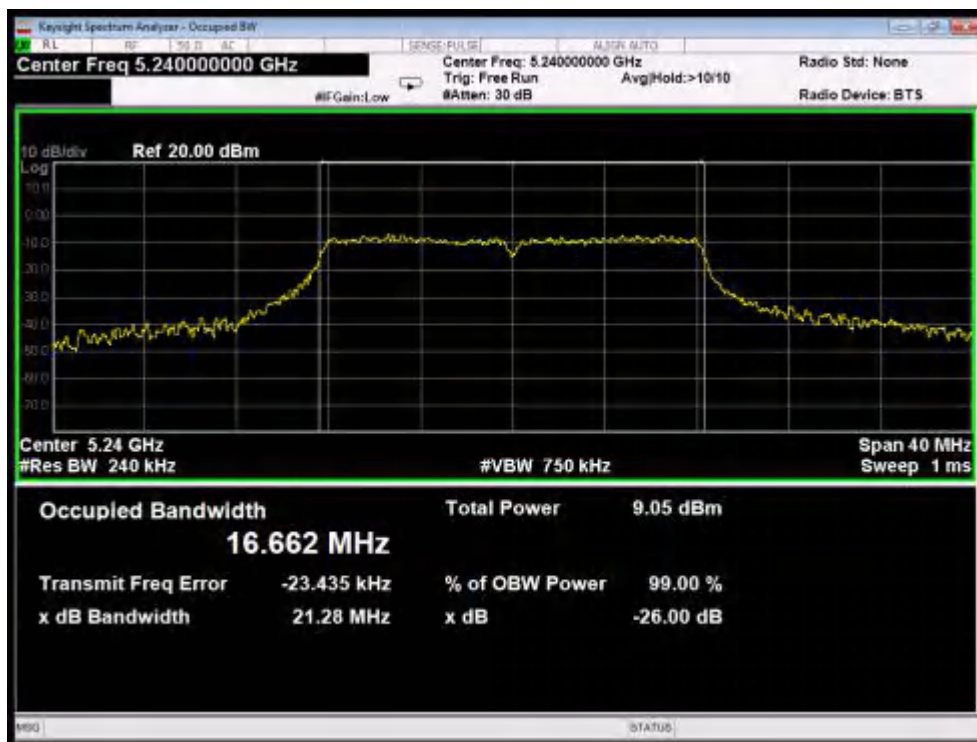


Test Mode: 802.11a---High

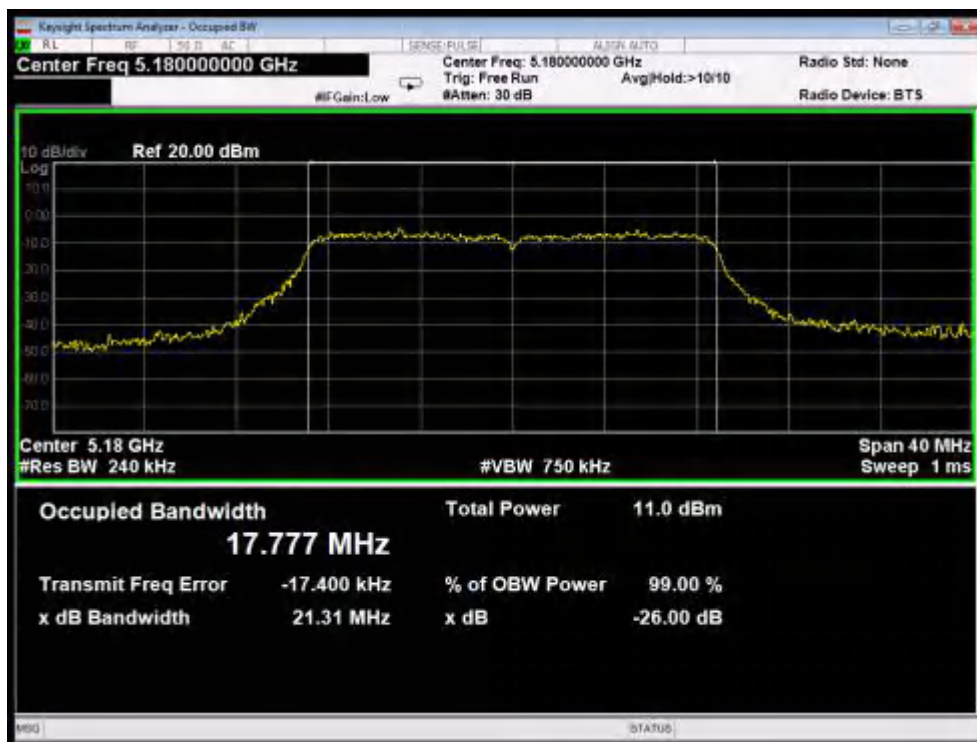


Test Mode: 802.11n20---Low

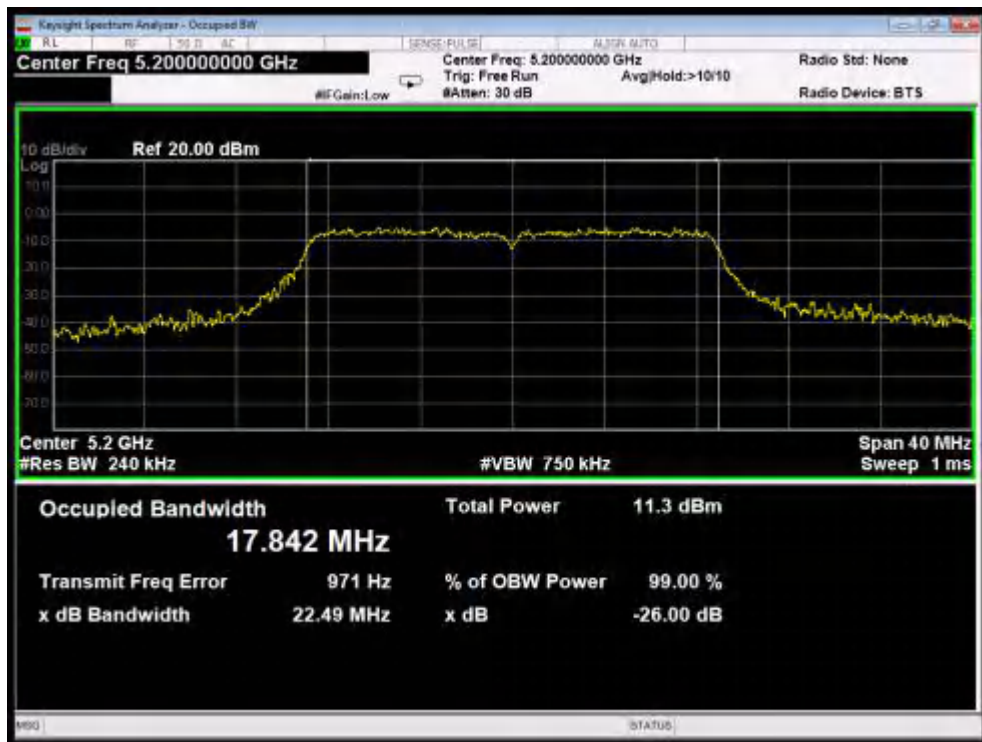


Test Mode: 802.11n20---Middle

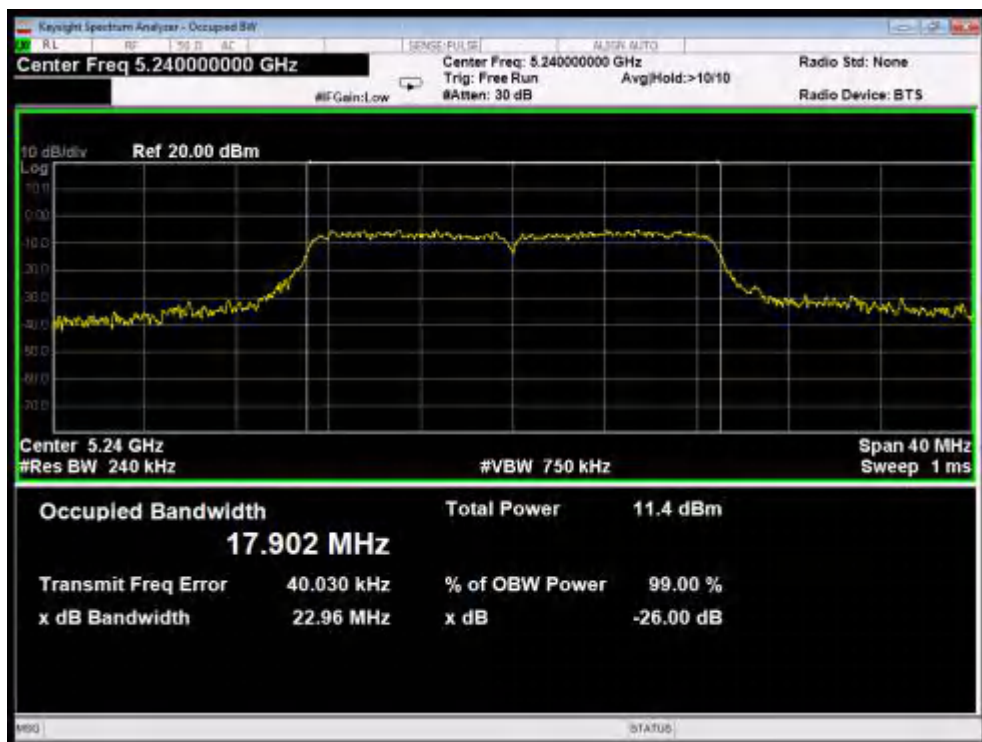


Test Mode: 802.11n20---High

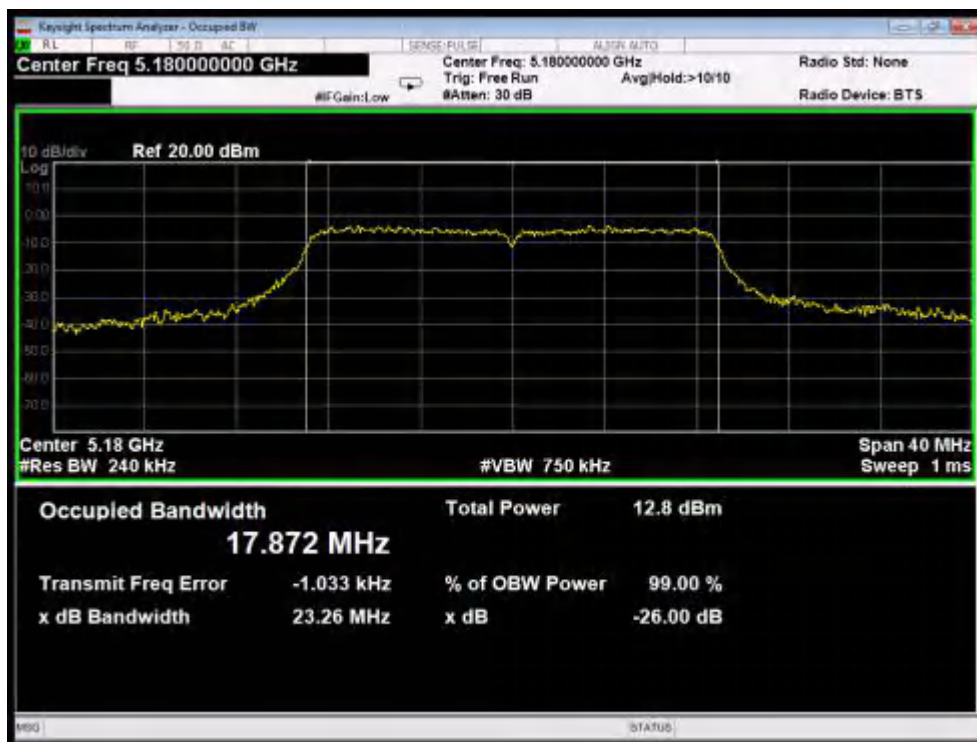


Test Mode: 802.11ac20--Low

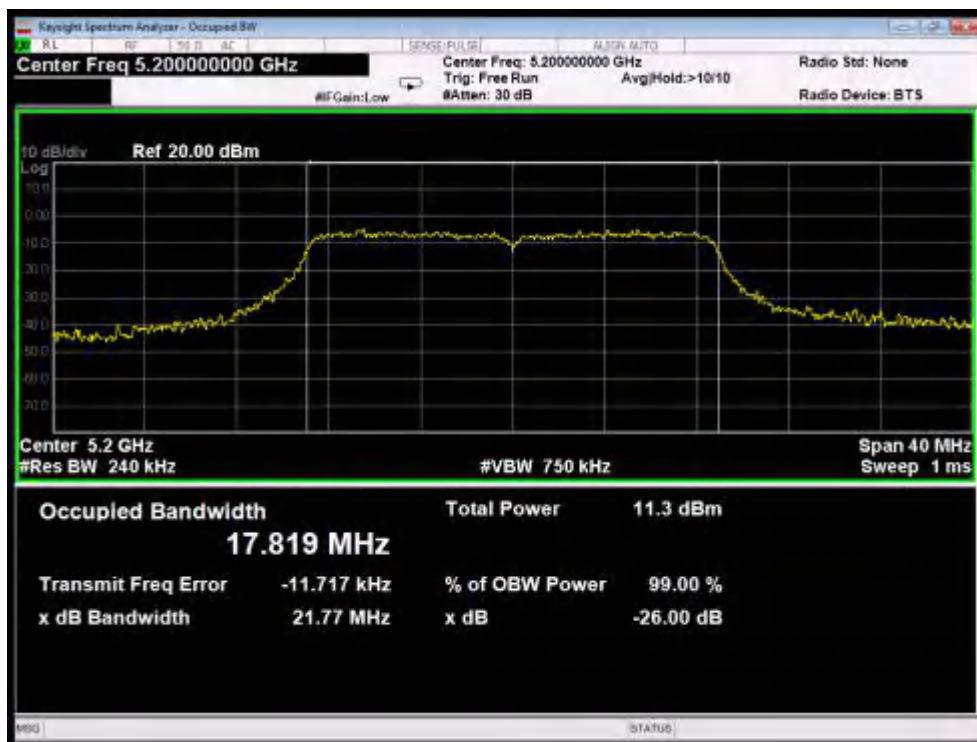


Test Mode: 802.11ac20---Middle

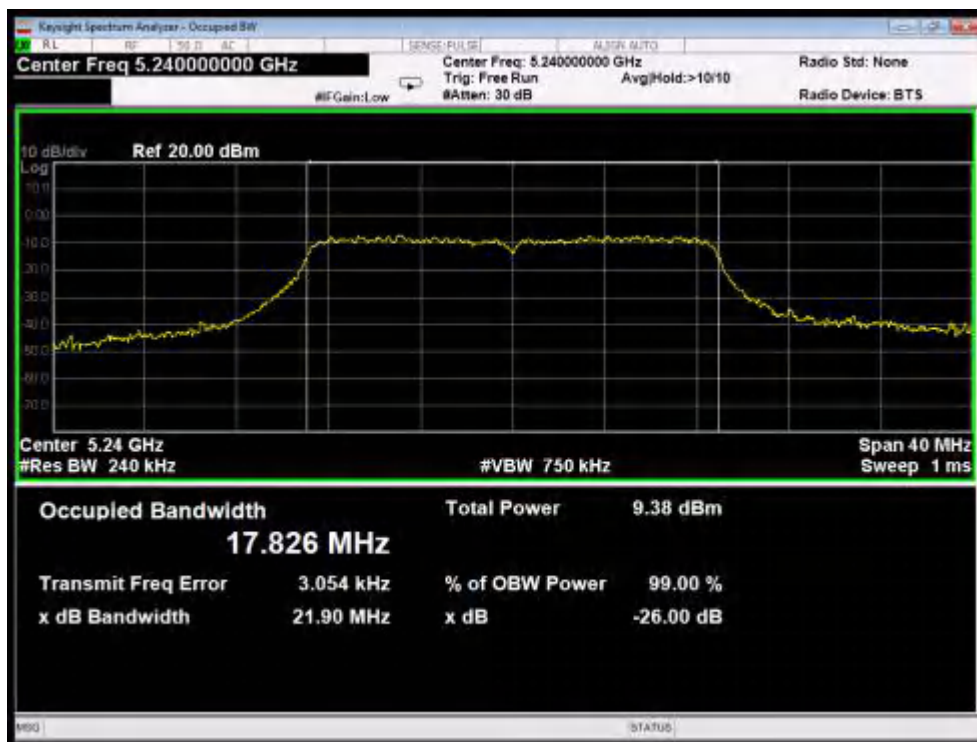


Test Mode: 802.11ac20---High

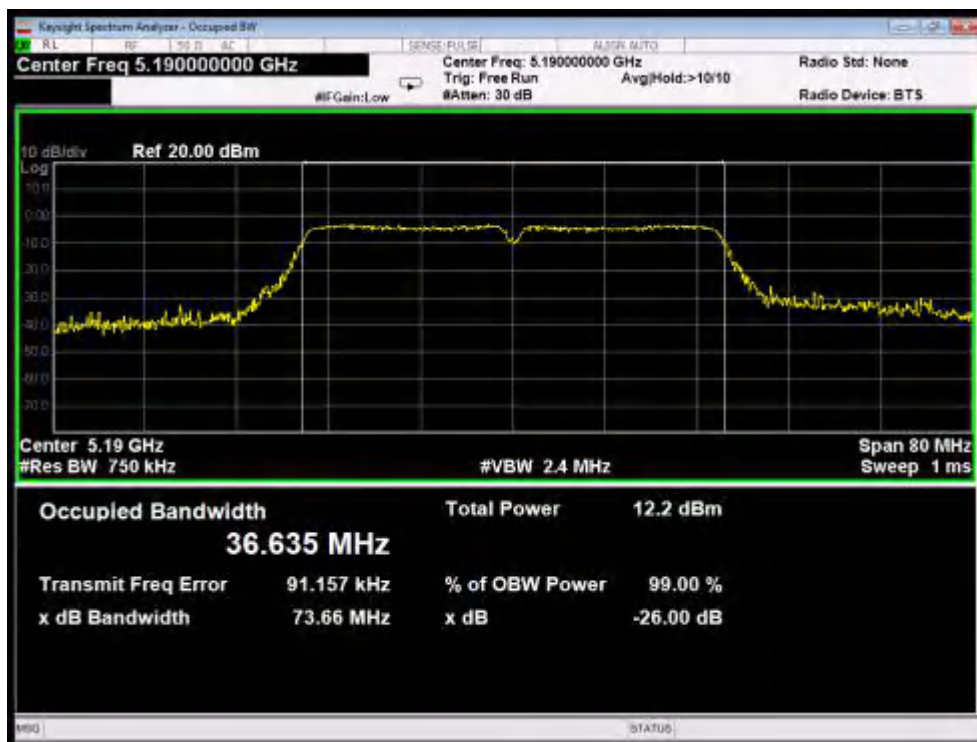


Test Mode: 802.11n40---Low

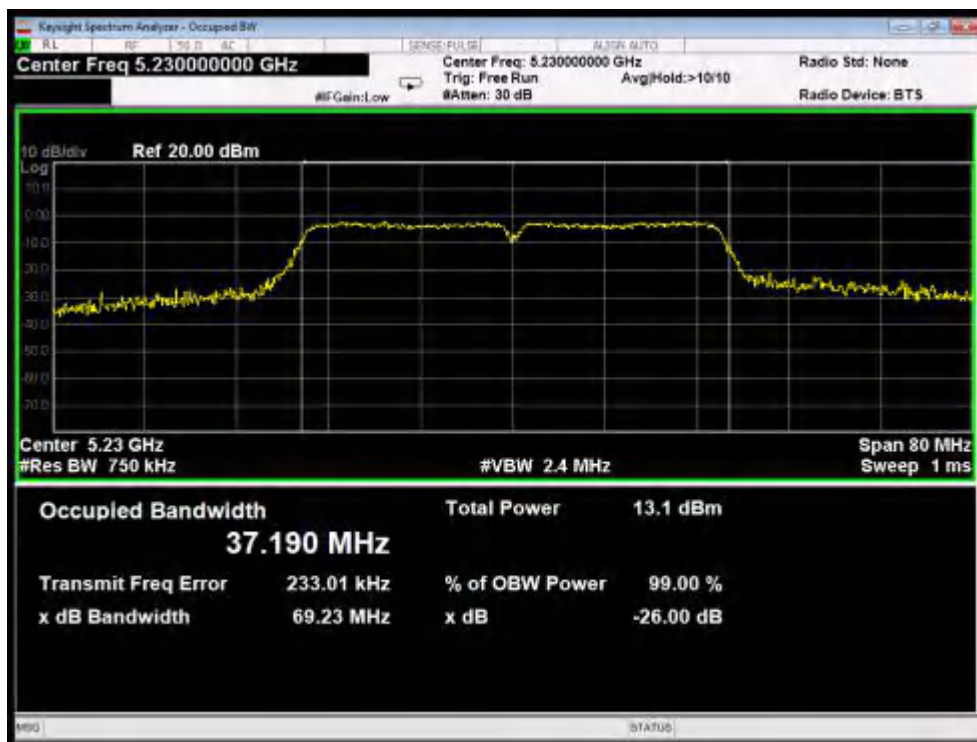


Test Mode: 802.11n40---High

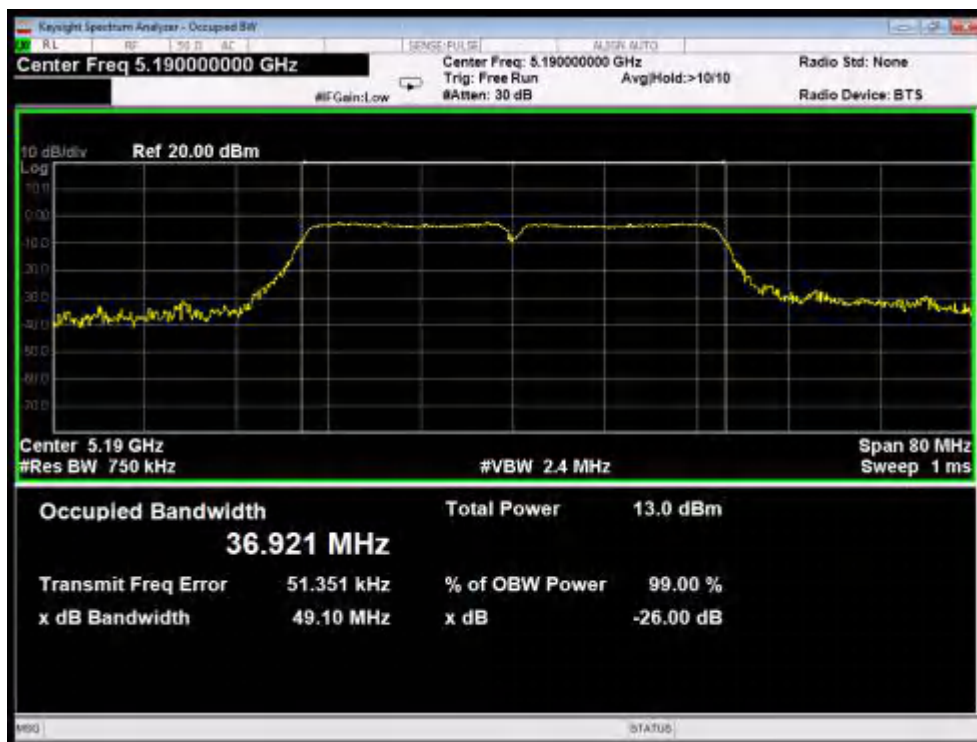

Test Mode: 802.11ac40---Low

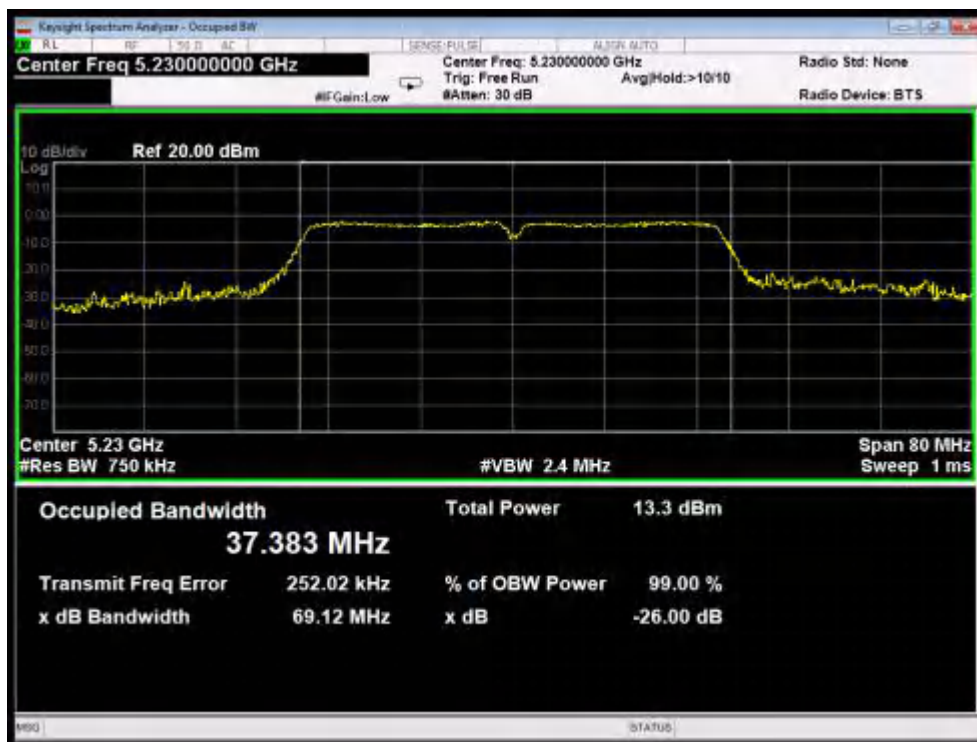

Test Mode: 802.11ac40---High

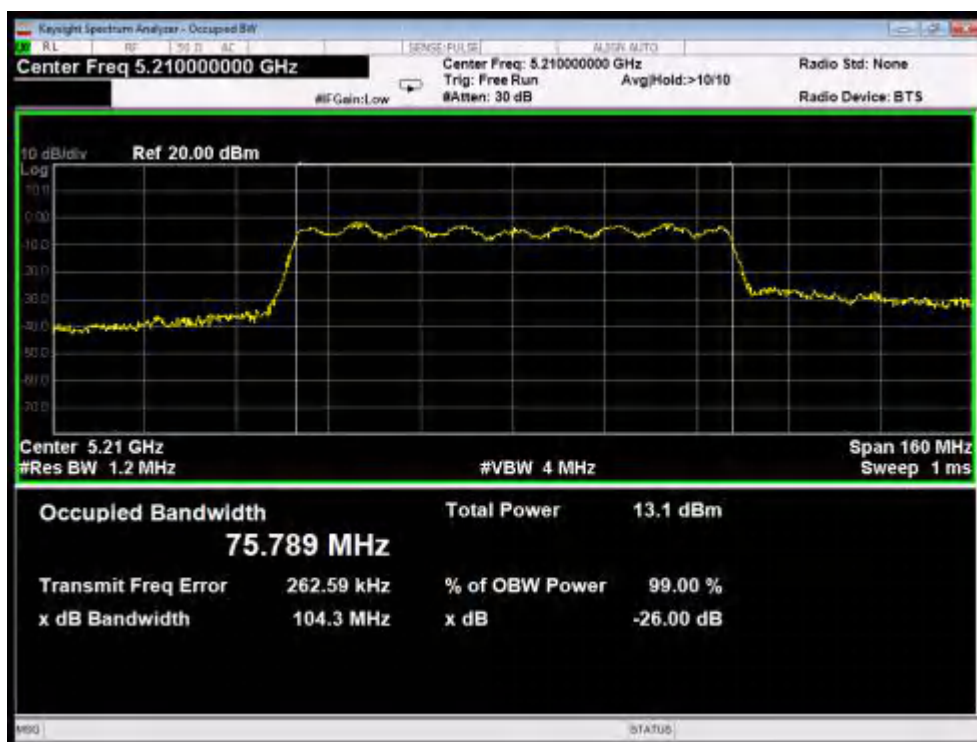


Test Mode: 802.11ac80

8. Power Spectral Density Test

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.407 (a) (1)
Test Limit	11 dBm/MHz

8.2. Test Setup



8.3. Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz).

1. The EUT is directly connected to the spectrum analyzer;
2. Set RBW =1MHz;
3. Set VBW $\geq$ 3 RBW=3MHz;
3. Set the span to encompass the entire emissions bandwidth (EBW) of the signal;
5. Detector=RMS;
6. Sweep time= auto couple;
7. Trace mode=max. hold;



8.4. Test Data

Test Item : Power Spectral Density
Test Voltage : DC 18.3V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24.5℃
Humidity : 52%RH

ANT A:

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11a	5180	1.437	11	PASS
	5200	2.447	11	PASS
	5240	2.593	11	PASS
802.11n20	5180	2.383	11	PASS
	5200	2.506	11	PASS
	5240	3.315	11	PASS
802.11ac20	5180	2.953	11	PASS
	5200	2.410	11	PASS
	5240	4.001	11	PASS
802.11n40	5190	-0.791	11	PASS
	5230	0.094	11	PASS
802.11ac40	5190	0.600	11	PASS
	5230	0.623	11	PASS
802.11ac80	5210	-2.381	11	PASS


ANT B:

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11a	5180	-1.180	11	PASS
	5200	-0.094	11	PASS
	5240	-2.513	11	PASS
802.11n20	5180	-2.134	11	PASS
	5200	-1.510	11	PASS
	5240	-1.927	11	PASS
802.11ac20	5180	-1.060	11	PASS
	5200	-2.039	11	PASS
	5240	-2.055	11	PASS
802.11n40	5190	-2.058	11	PASS
	5230	-3.868	11	PASS
802.11ac40	5190	-4.147	11	PASS
	5230	-4.036	11	PASS
802.11ac80	5210	-5.433	11	PASS


ANT A+B

Test Mode	Channel Frequency (MHz)	Final Power Spectral Density (dBm/MHz)	Correctional Limit (dBm/MHz)	Results
802.11n20	5180	3.70	7.99	PASS
	5200	3.96	7.99	PASS
	5240	4.45	7.99	PASS
802.11ac20	5180	4.40	7.99	PASS
	5200	3.74	7.99	PASS
	5240	4.96	7.99	PASS
802.11n40	5190	1.63	7.99	PASS
	5230	1.56	7.99	PASS
802.11ac40	5190	1.86	7.99	PASS
	5230	1.90	7.99	PASS
802.11ac80	5210	-0.63	7.99	PASS


ANT A

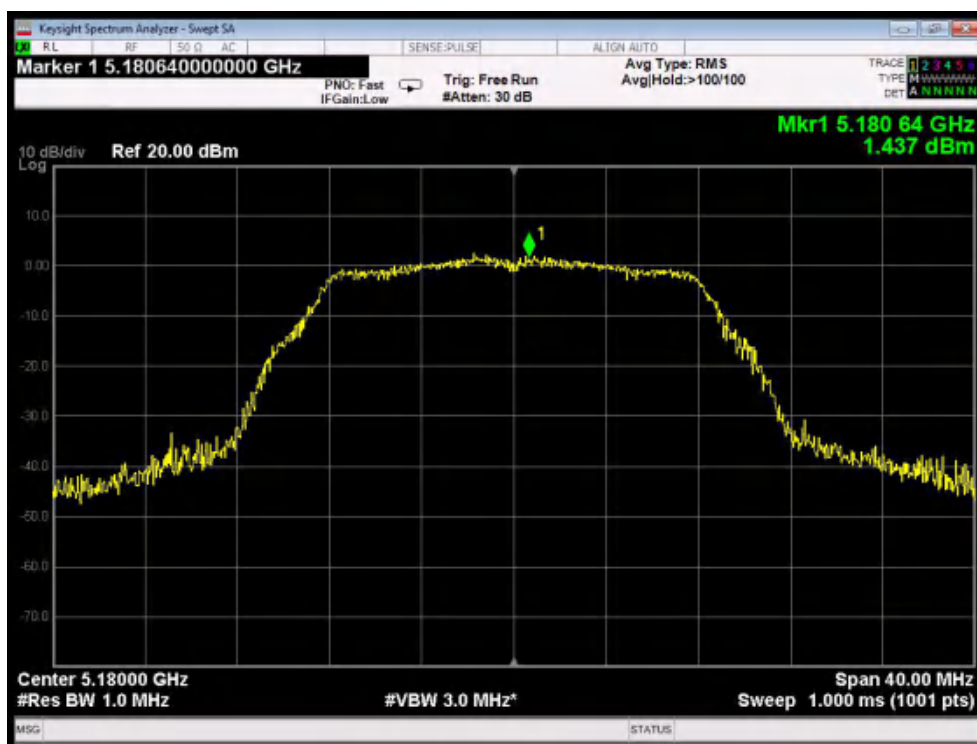


Test Mode: 802.11a--Low

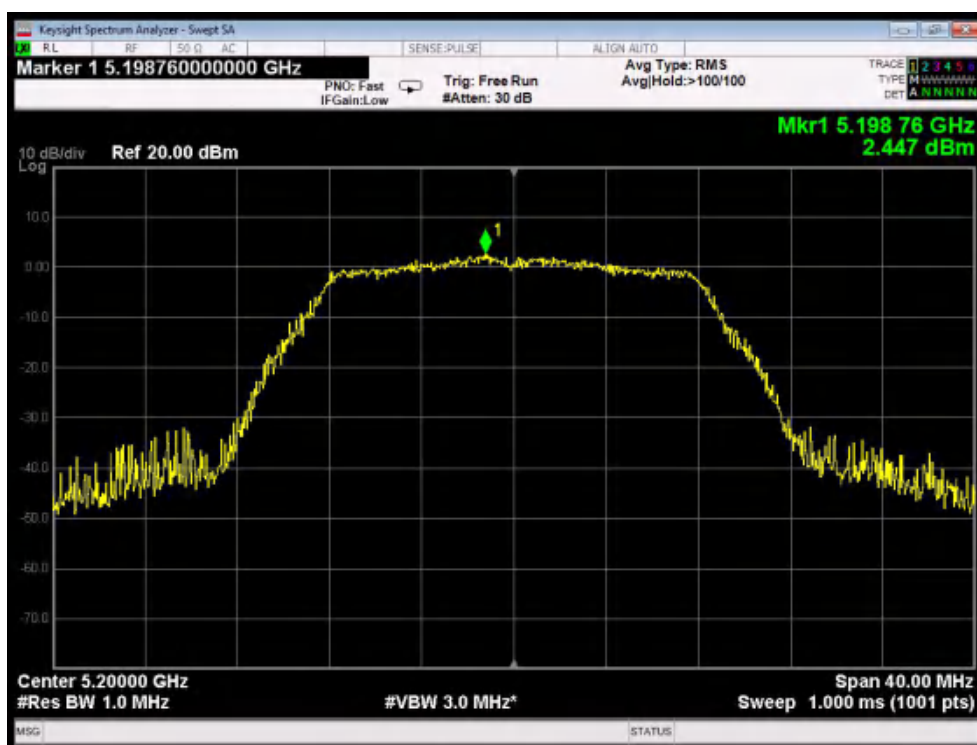


Test Mode: 802.11a---Middle

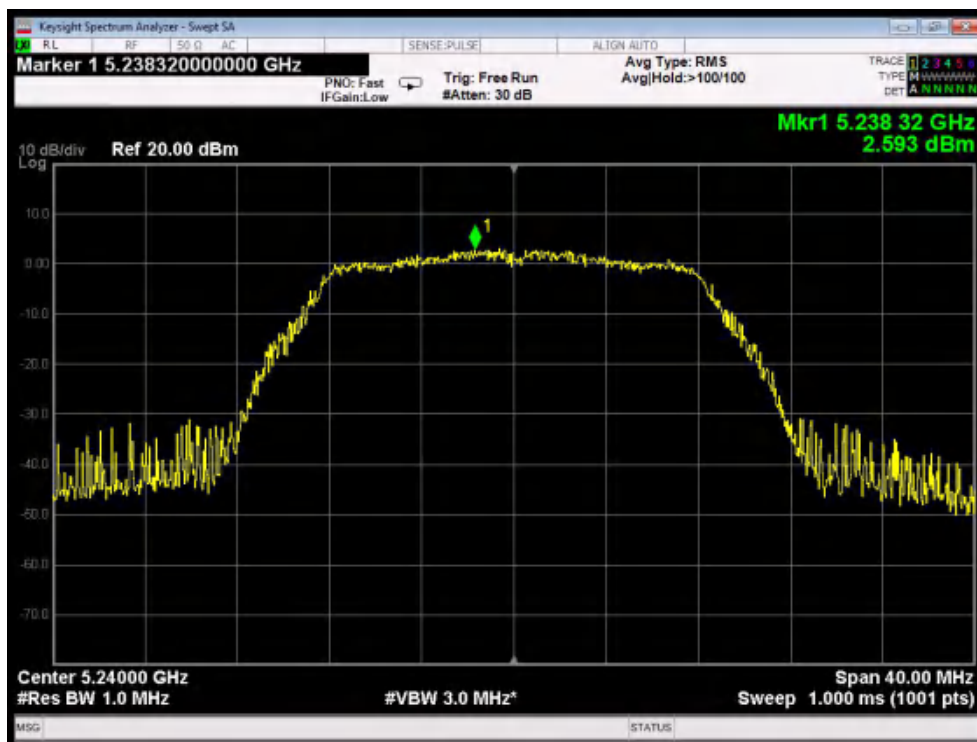


Test Mode: 802.11a---High

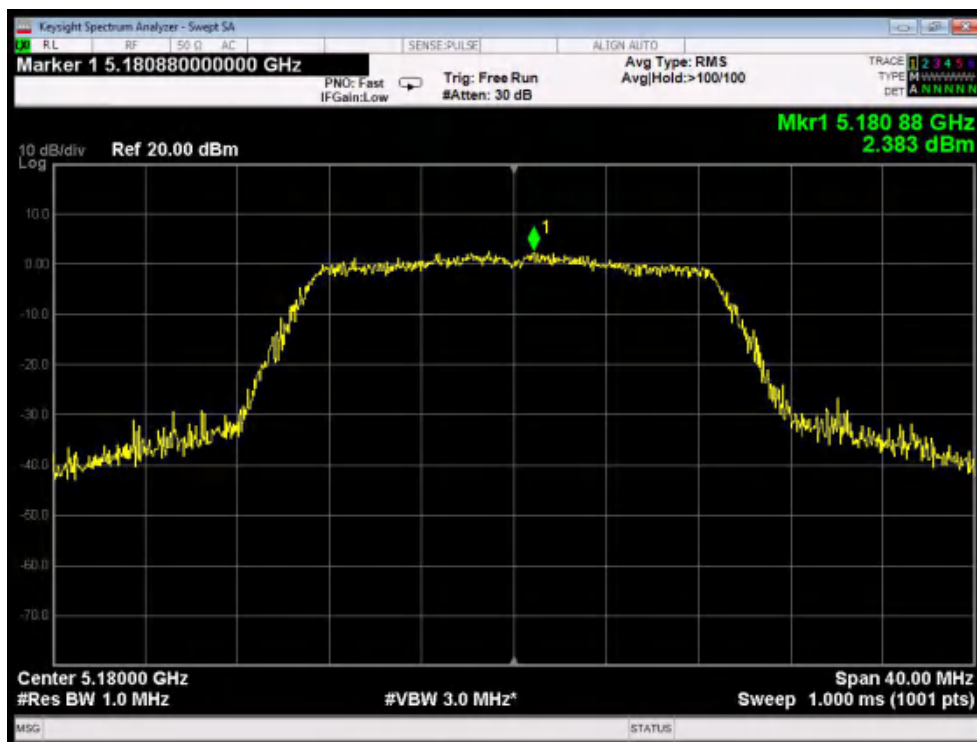


Test Mode: 802.11n20---Low

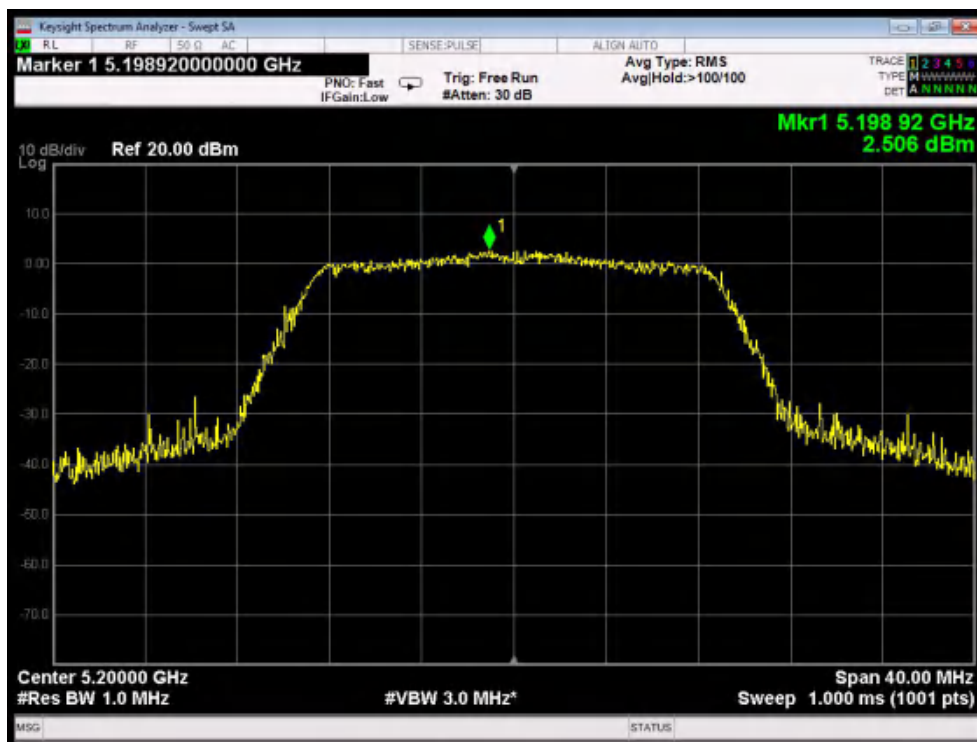


Test Mode: 802.11n20---Middle

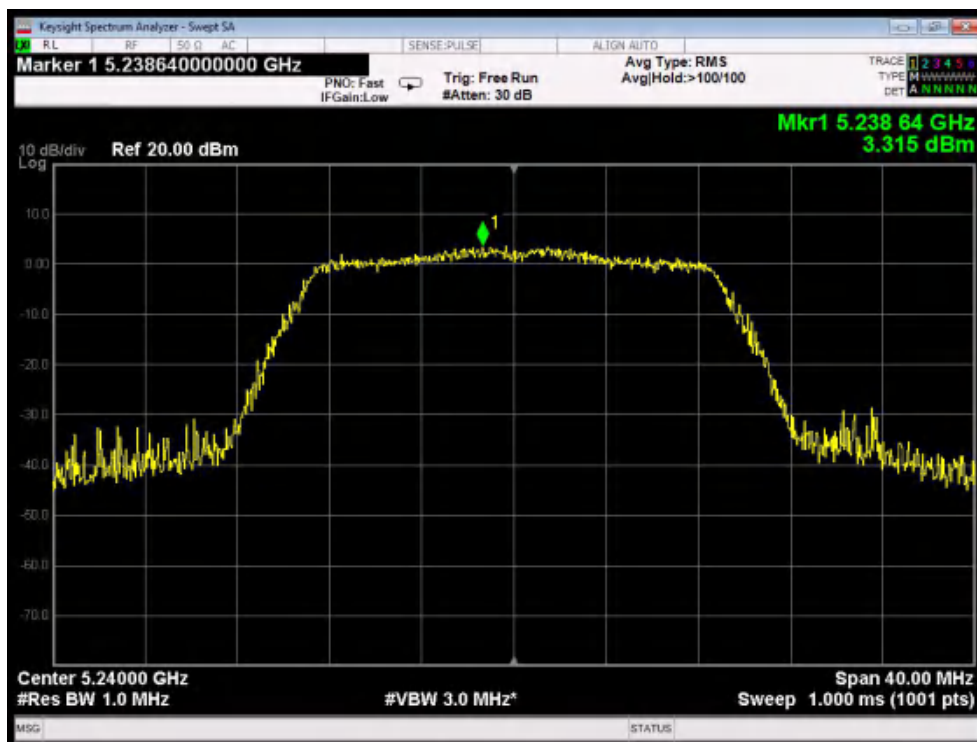


Test Mode: 802.11n20---High

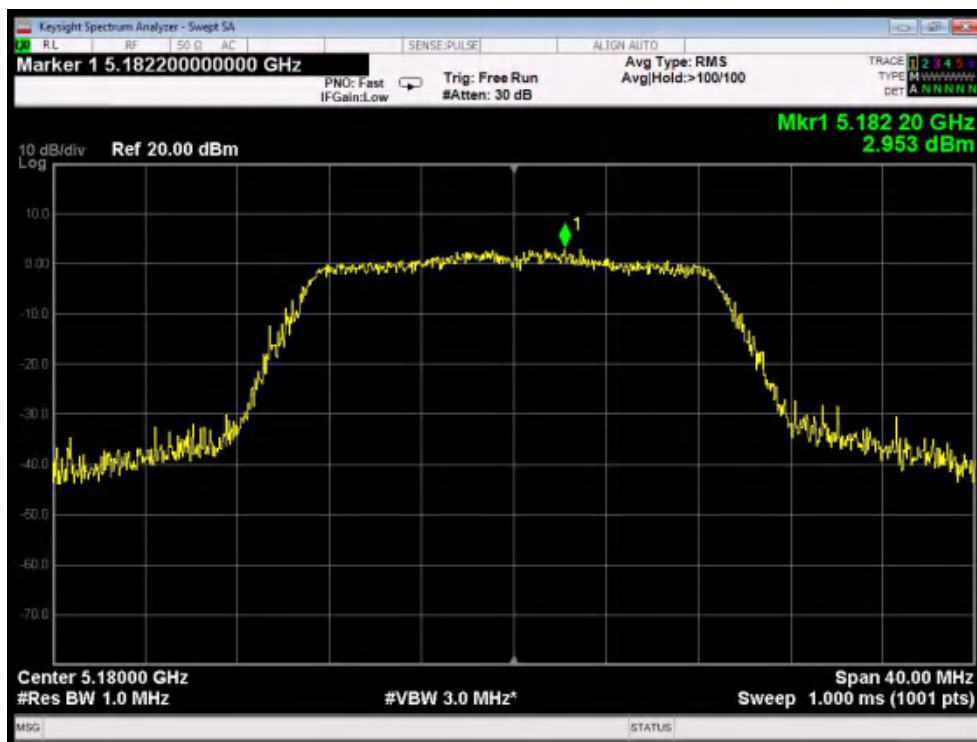


Test Mode: 802.11ac20--Low

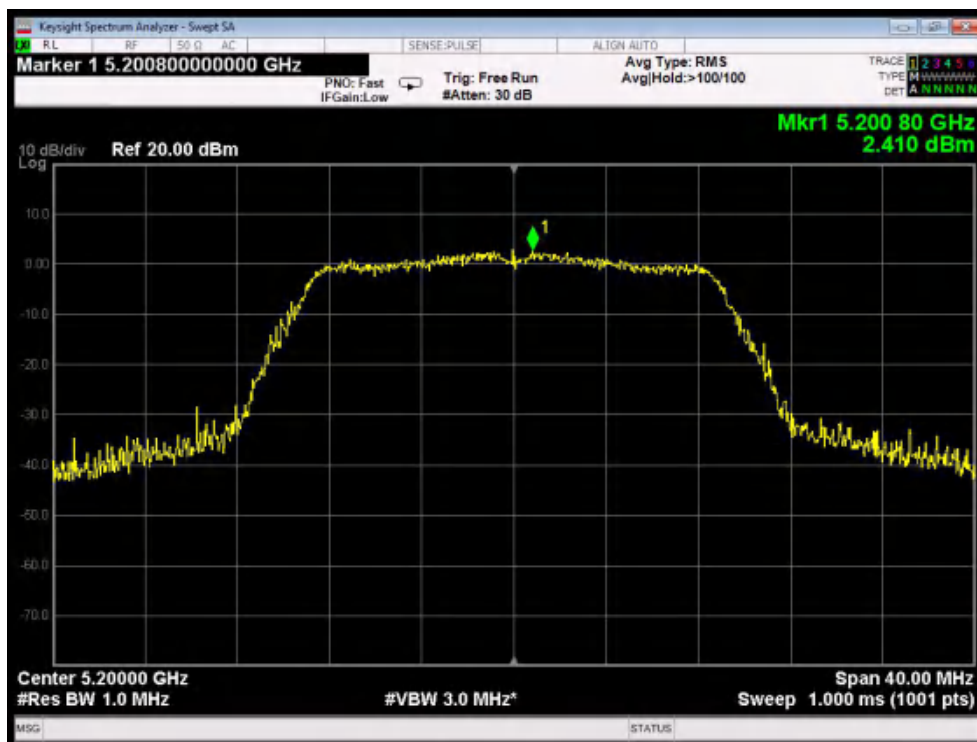


Test Mode: 802.11ac20---Middle

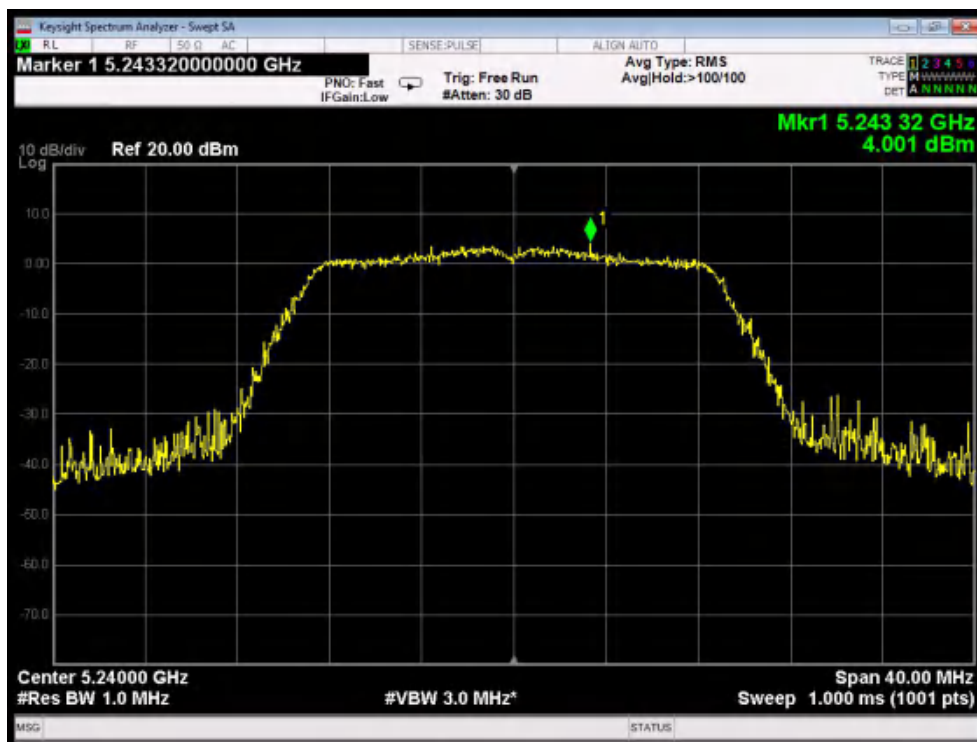


Test Mode: 802.11ac20---High

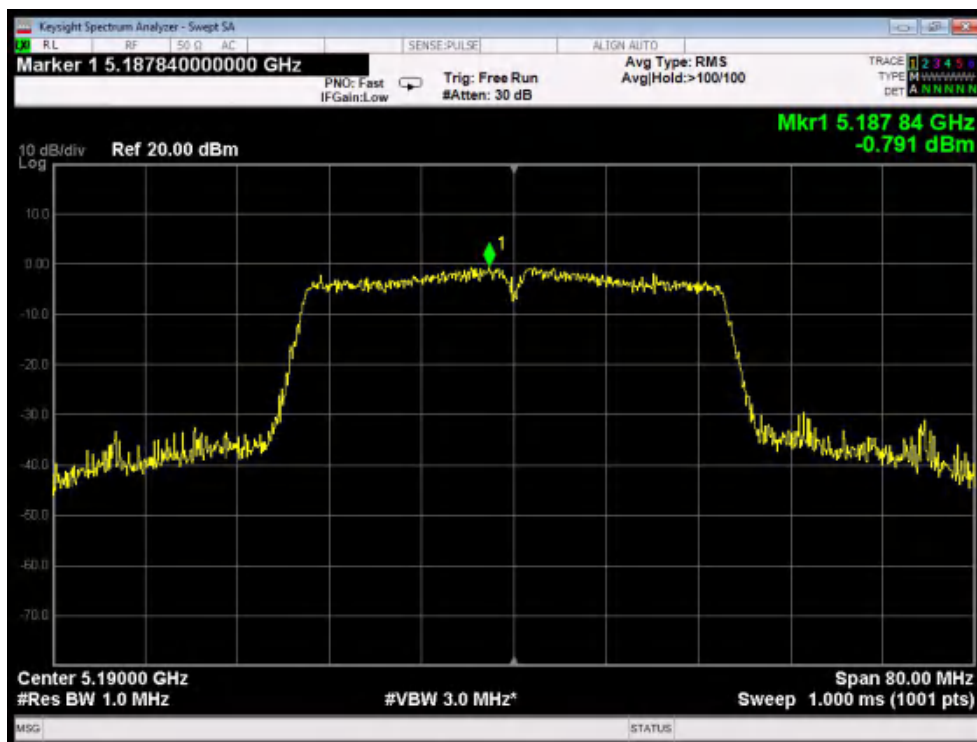


Test Mode: 802.11n40---Low

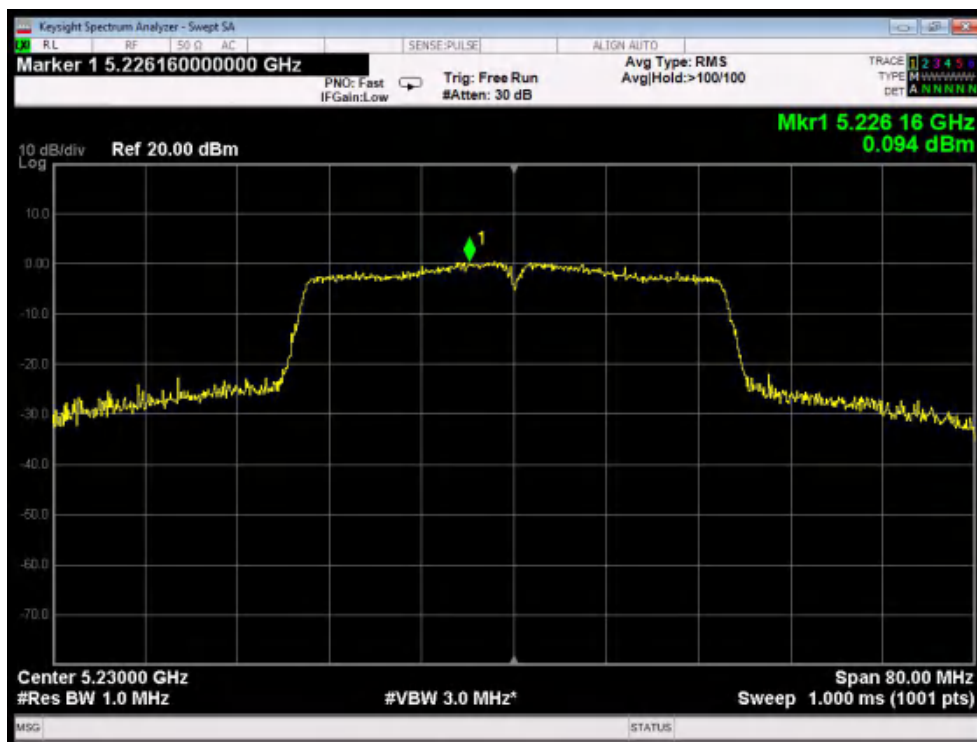


Test Mode: 802.11n40---High

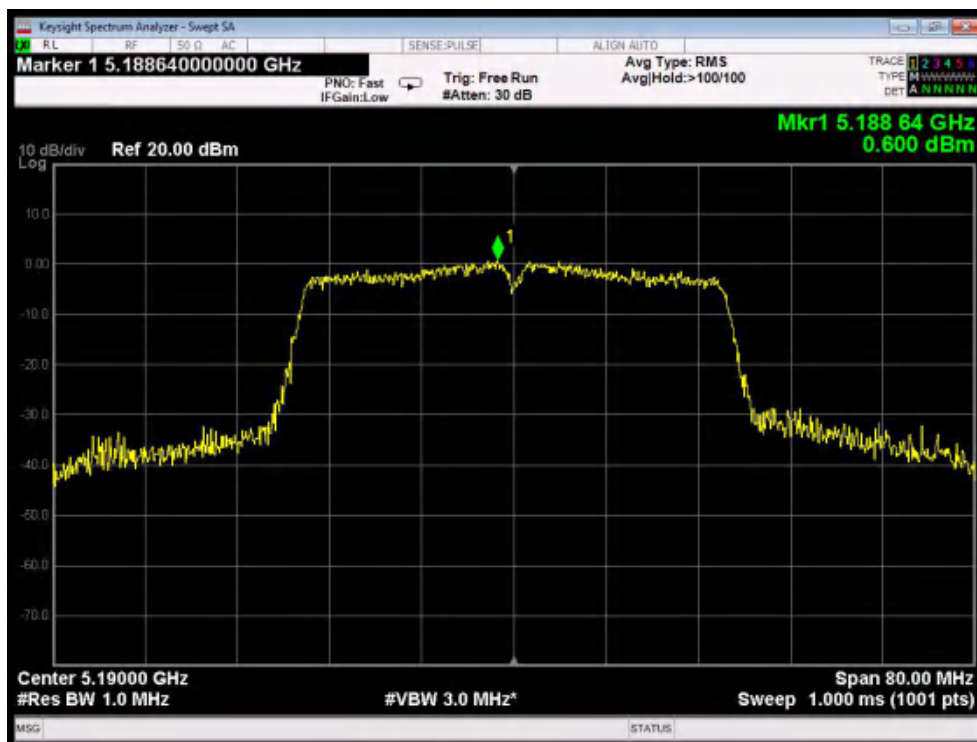

Test Mode: 802.11ac40---Low

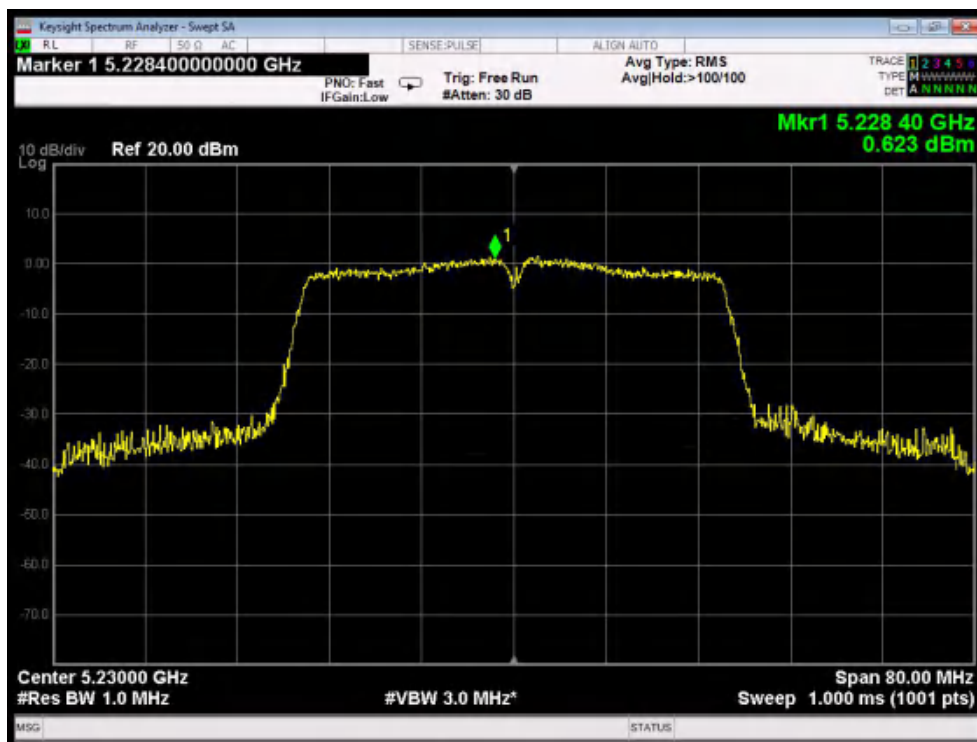


Test Mode: 802.11ac40---High

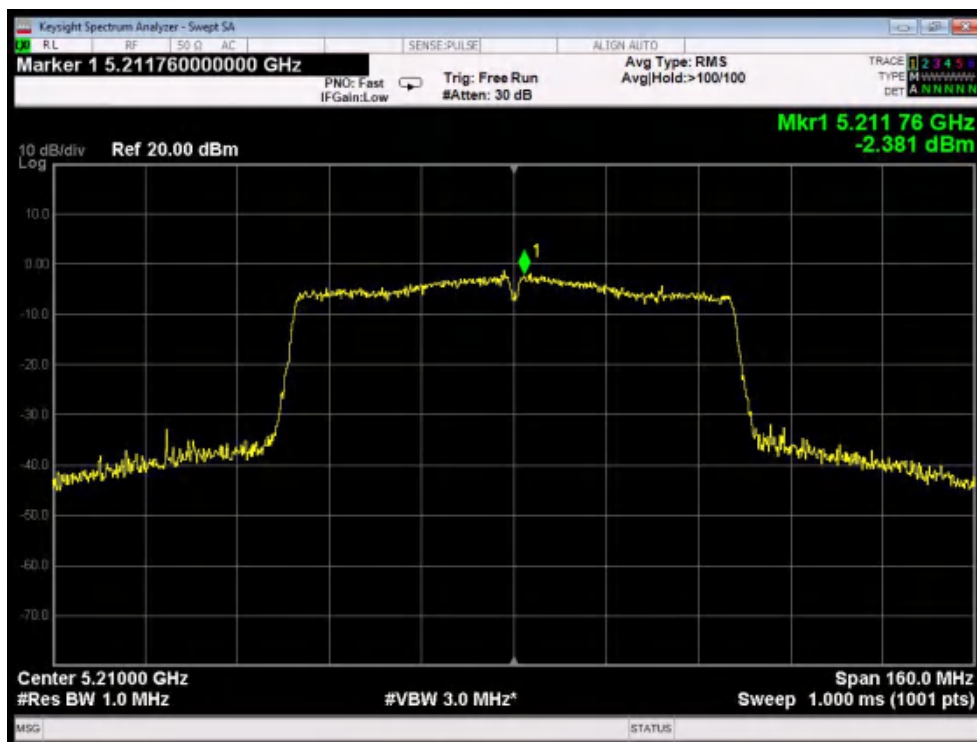


Test Mode: 802.11ac80


ANT B

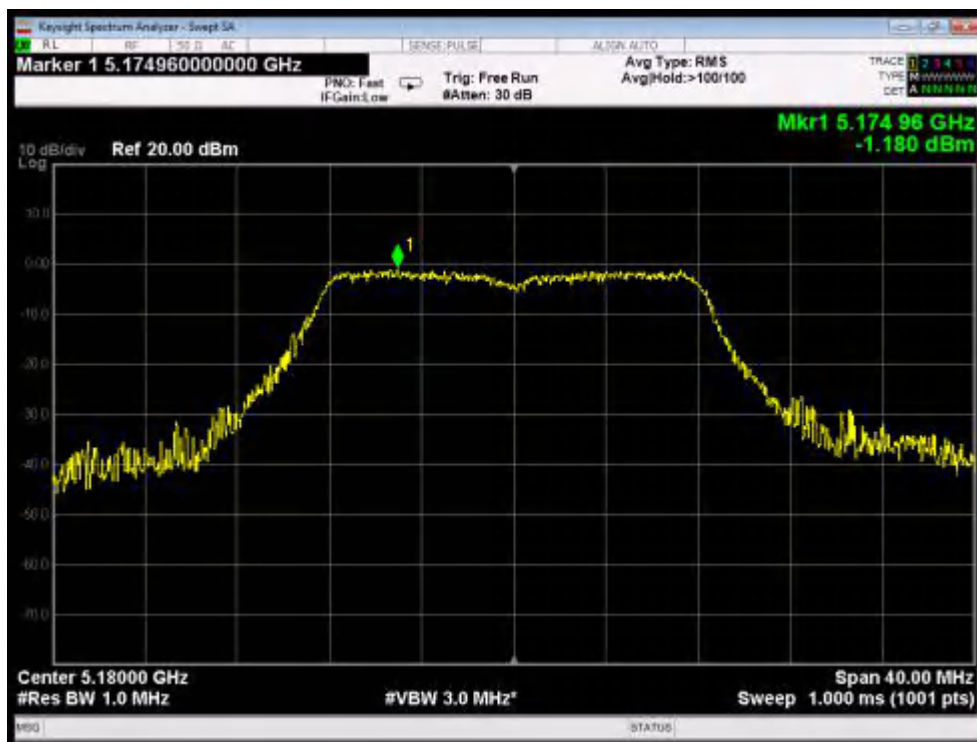


Test Mode: 802.11a--Low

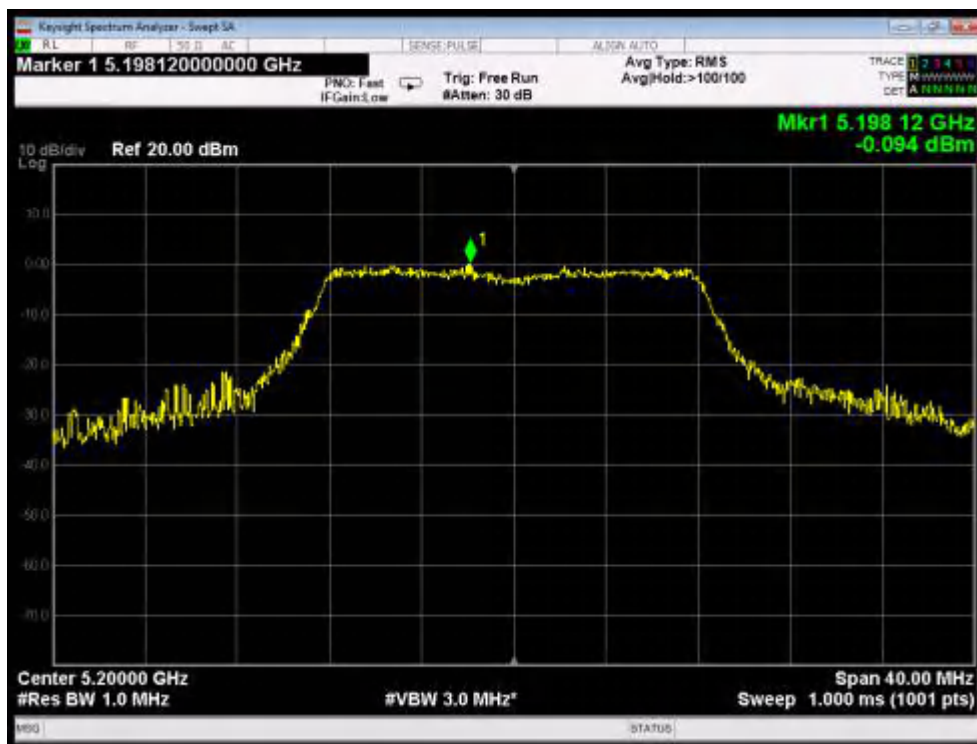


Test Mode: 802.11a---Middle

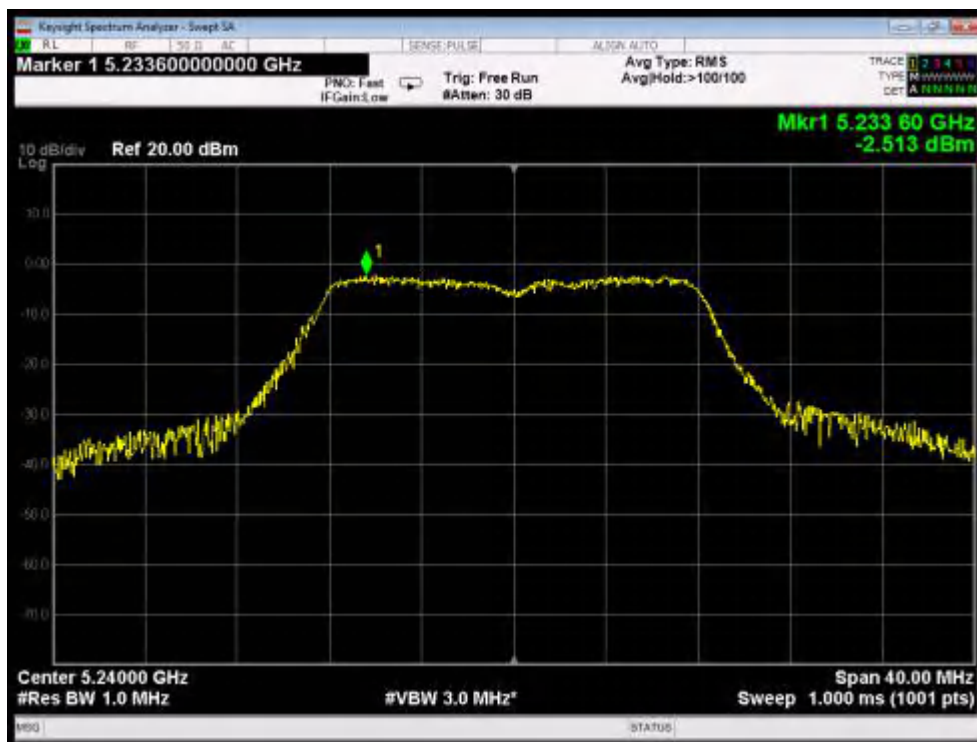


Test Mode: 802.11a---High

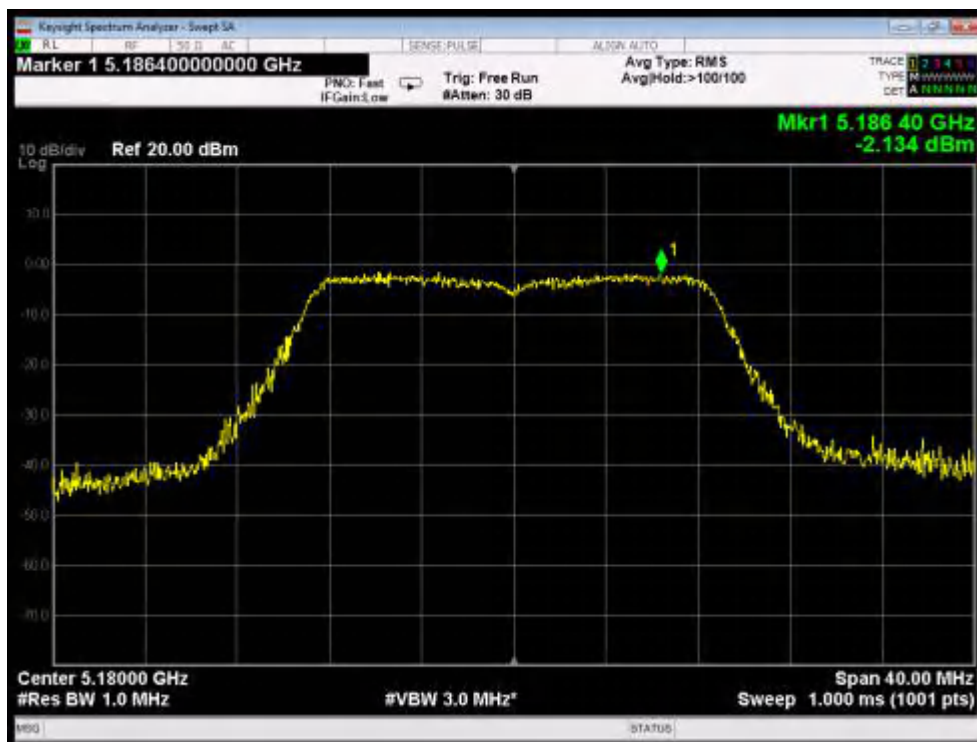


Test Mode: 802.11n20---Low

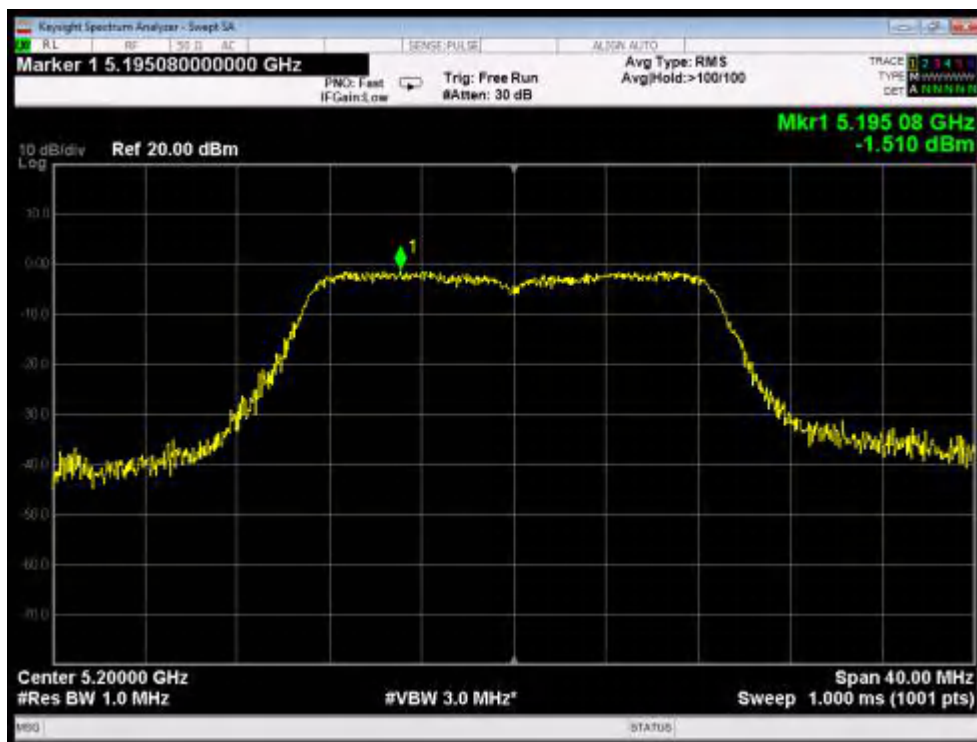


Test Mode: 802.11n20---Middle

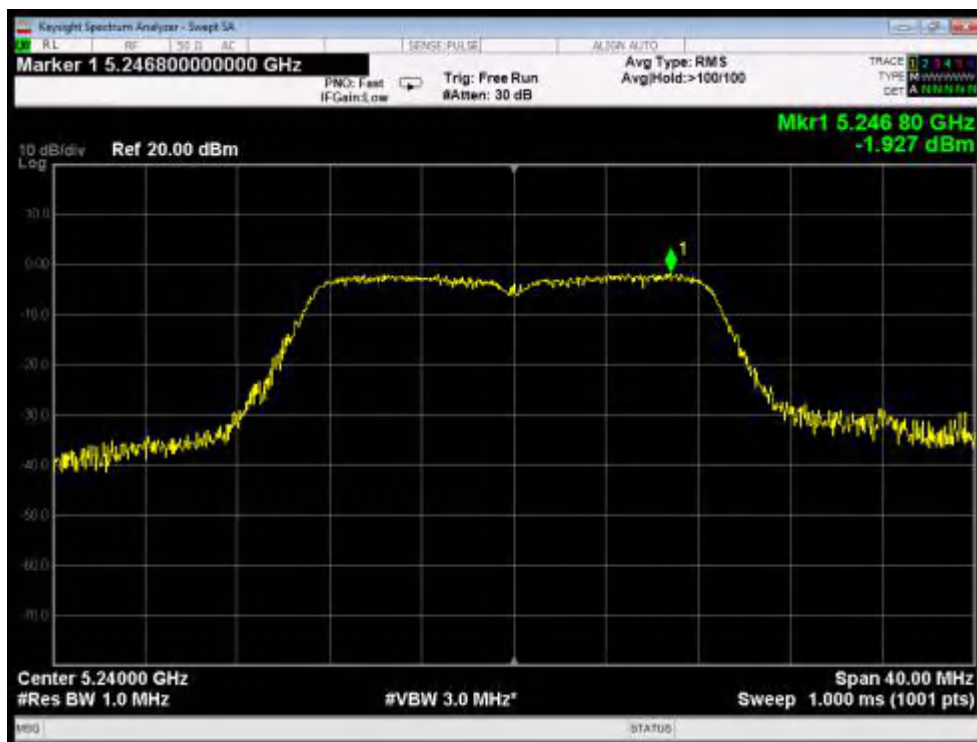


Test Mode: 802.11n20---High

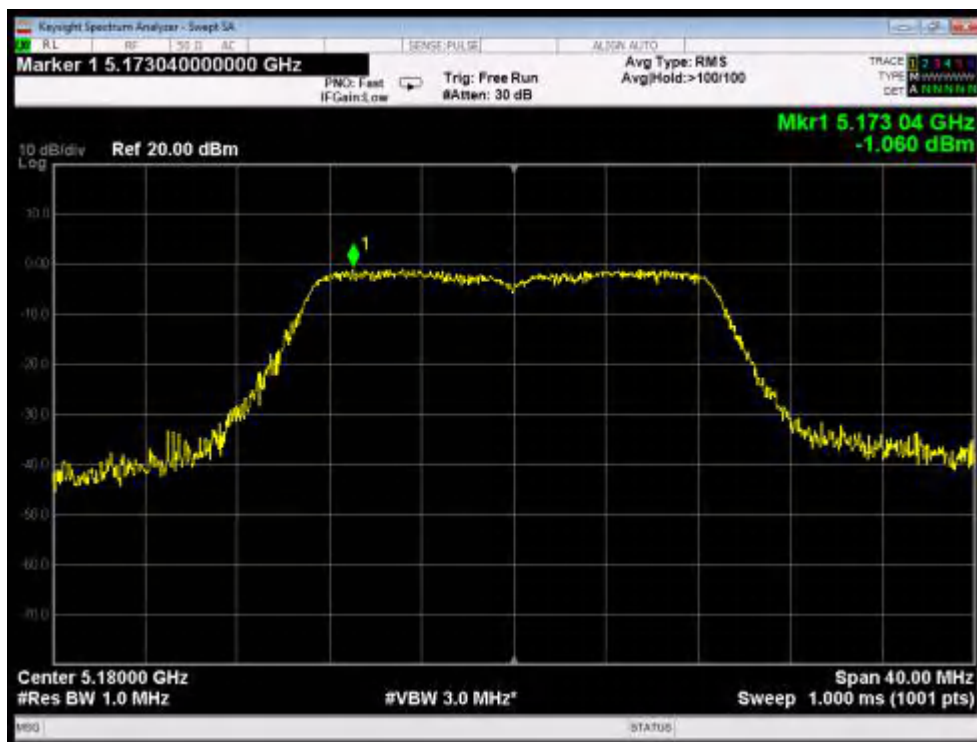


Test Mode: 802.11ac20--Low

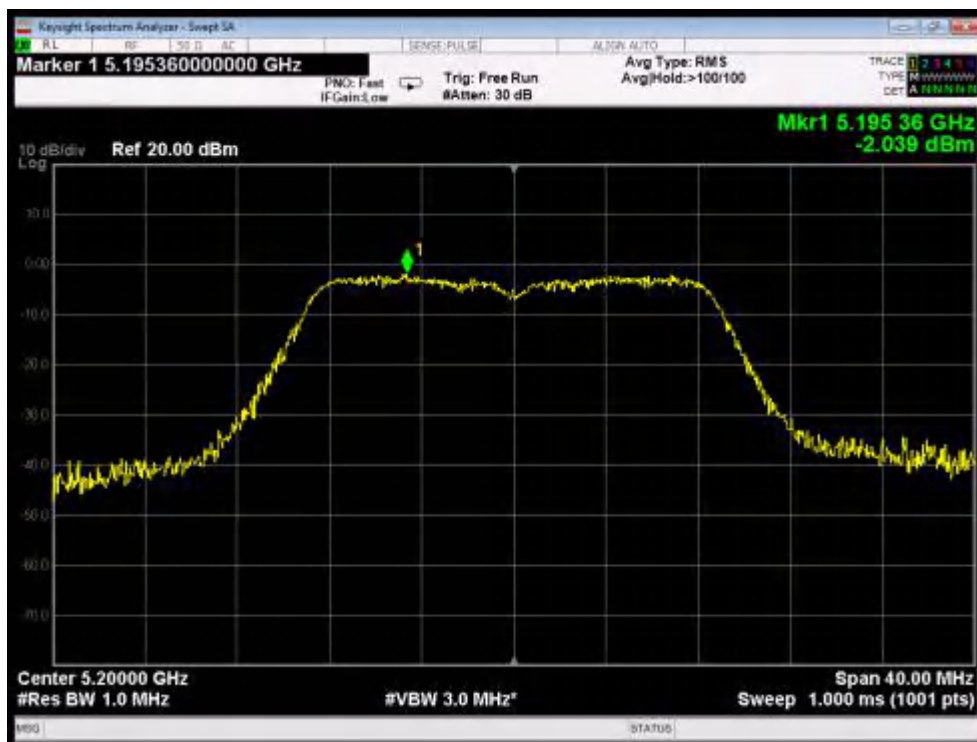


Test Mode: 802.11ac20---Middle

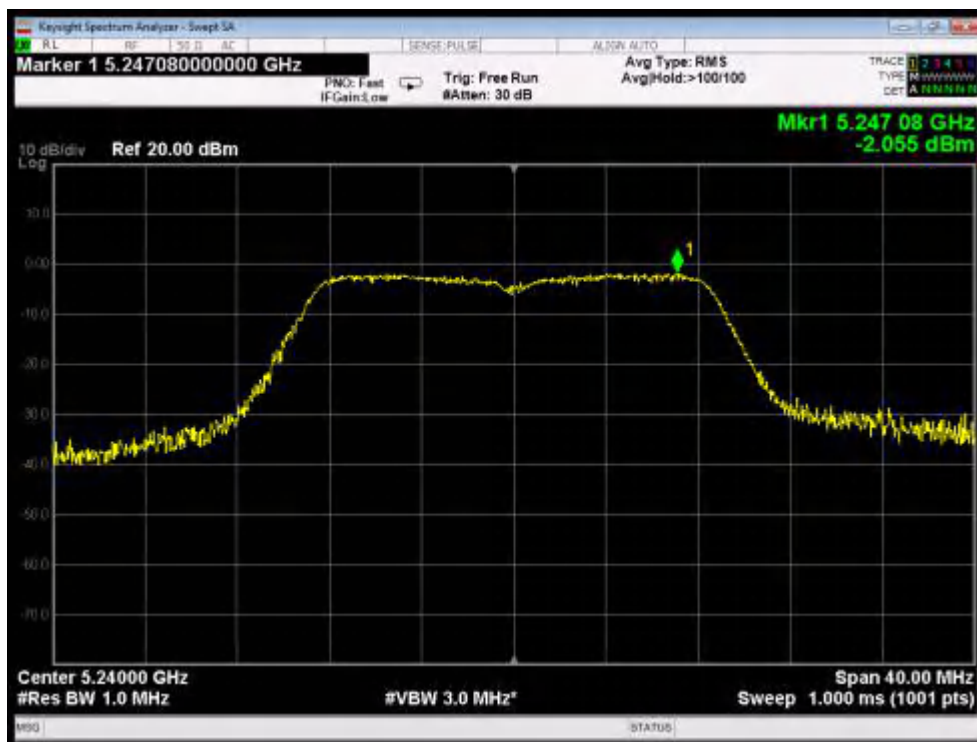


Test Mode: 802.11ac20---High

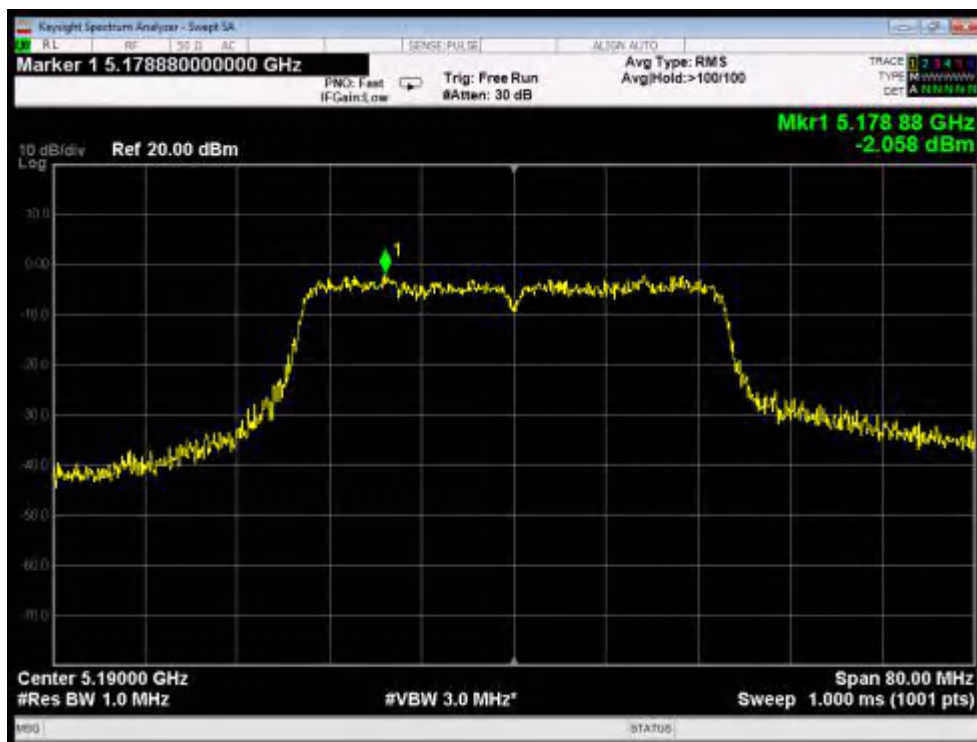


Test Mode: 802.11n40---Low

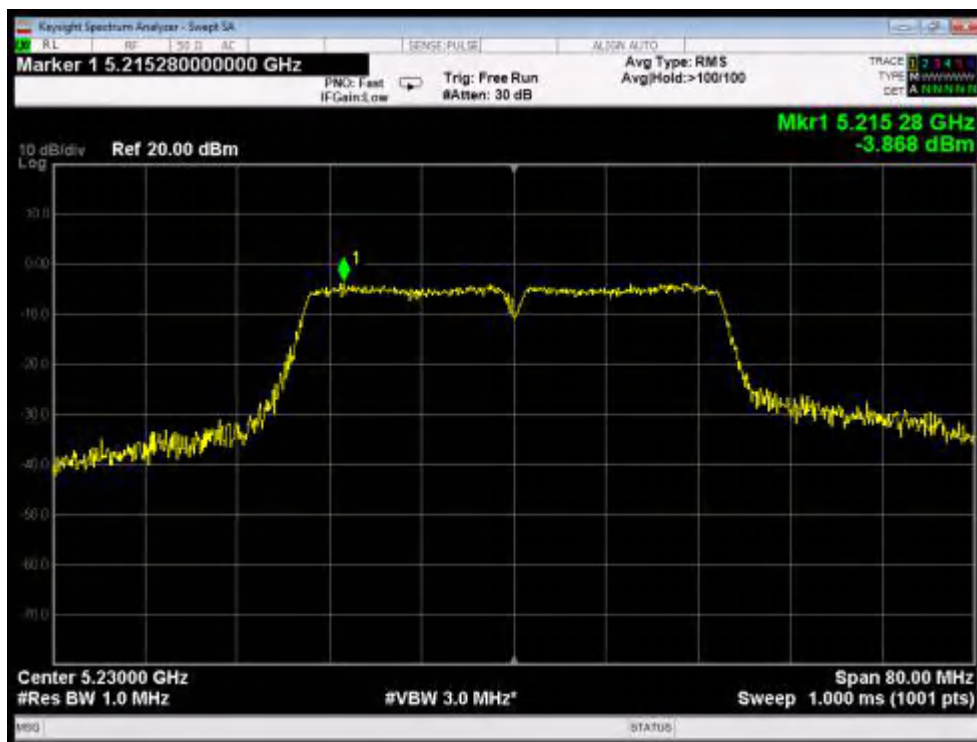


Test Mode: 802.11n40---High

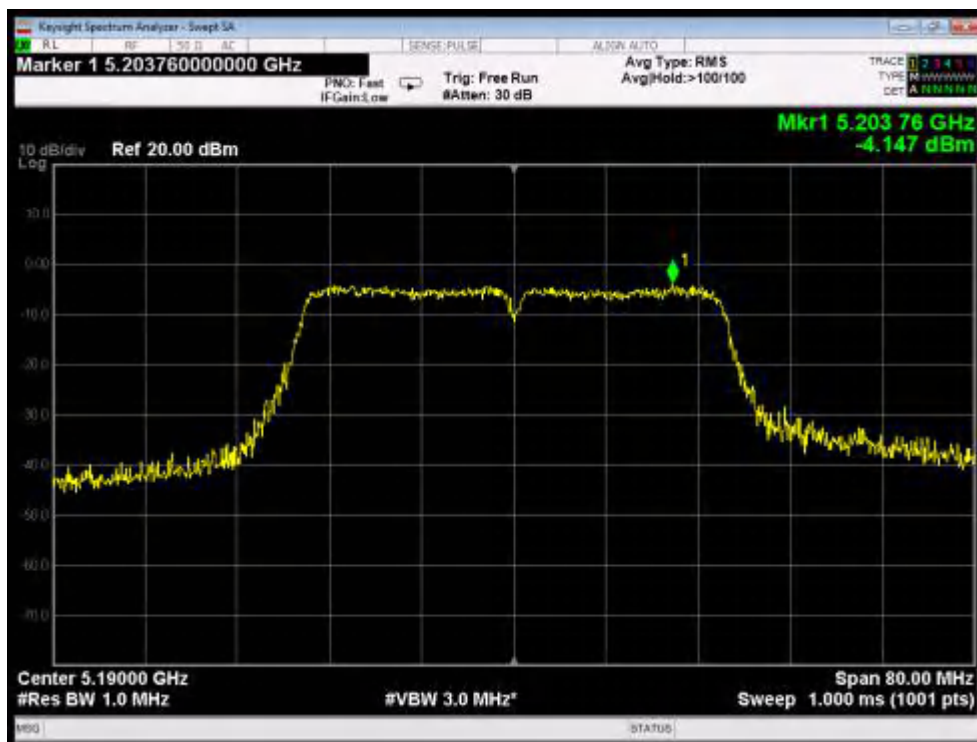

Test Mode: 802.11ac40---Low

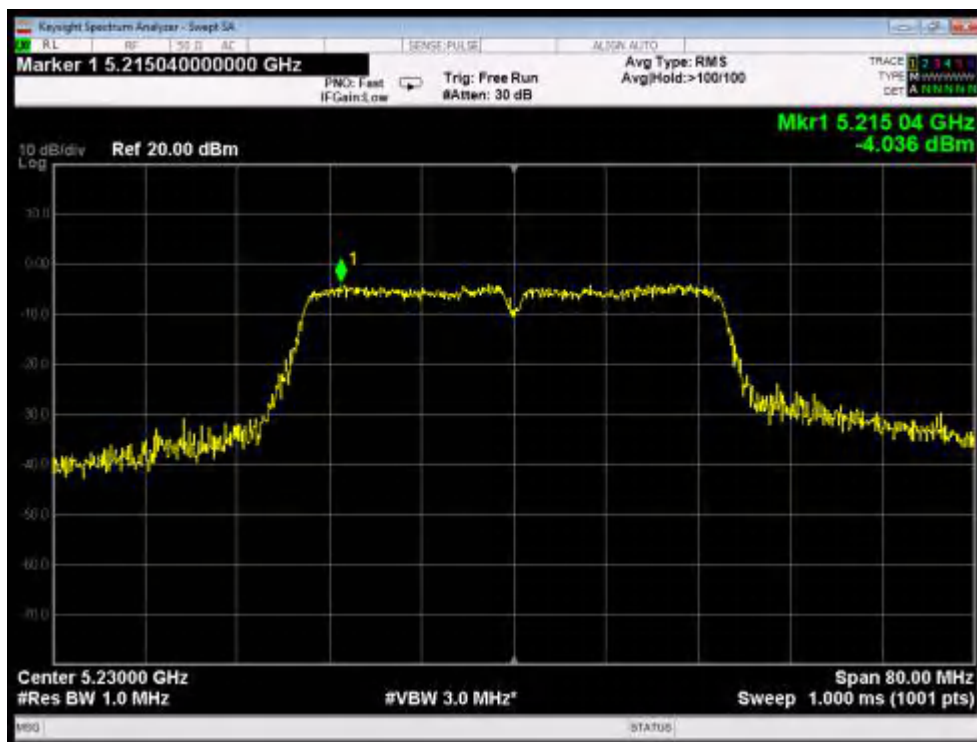

Test Mode: 802.11ac40---High

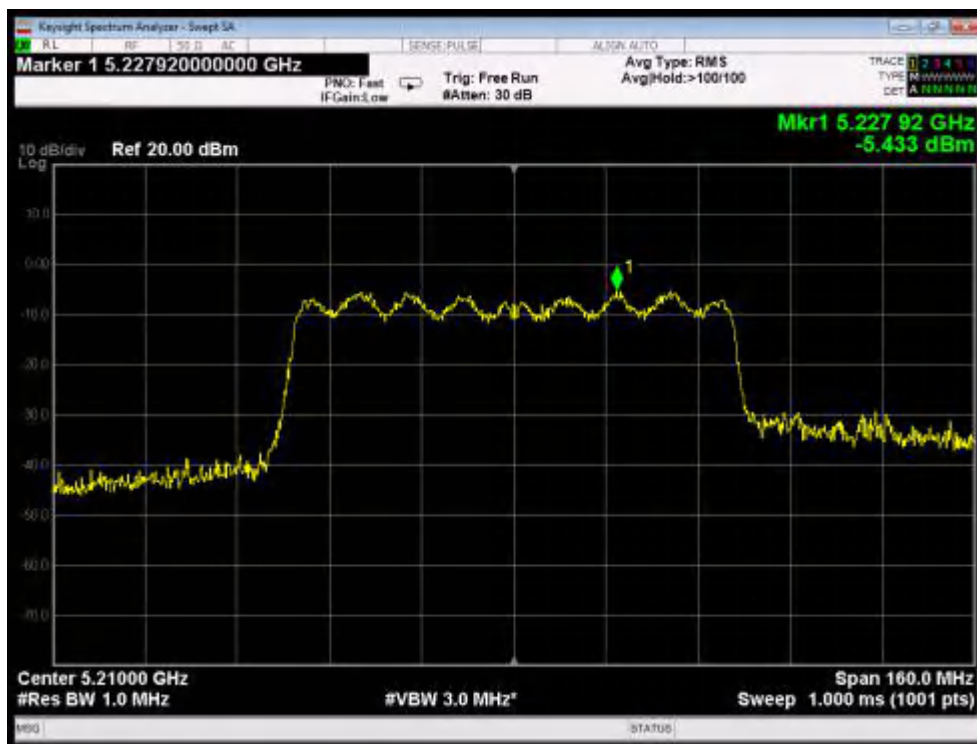

Test Mode: 802.11ac80

9. Antenna Requirement

9.1. Test Standard and Requirement


Test Standard	FCC Part15 Section 15.203 /15.407
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.407 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

9.2. Antenna Connected Construction

The antenna is a columnar antenna which permanently attached, and the best case gain of the antenna is 6 dBi. It complies with the standard requirement.

WIFI Antenna A

WIFI Antenna B

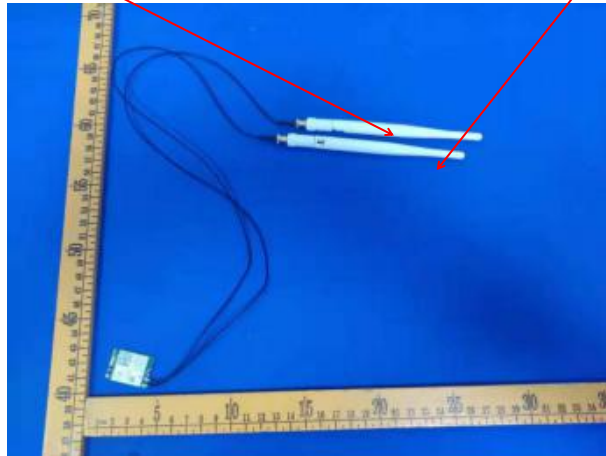



10. APPENDIX I -- PHOTOGRAPH

Reference to the test report PTC20090703102E-FC01

----- End of Report -----