

LS-BT38 Bluetooth Headset


User Manual

Contents:

1. Product Overview	2
2. Basic Operation	3
3. Bluetooth Pairing and Connection	4
4. Connection with Two devices	5
5. LED Indicator	6
6. Charging	6
7. Product Specification	8
8. Attention and Q & A	8

1

1. Product Overview



Package Contents:

- A. Bluetooth Headset LS-BT38 x 1
- B. Charge Base x 1
- C. Micro USB charging cable x 1
- D. User manual x 1



2

2. Basic Operation

Button	Function	Operation
Power On	In off status , Long press 1-3 seconds MFB to power on.	
Power Off	In on status , Long press 5 seconds to power off.	
Enter into Pairing Mode	In off status , Long press 5-8 seconds to enter into pairing mode. Or under unconnected standby mode, double press the MFB to enter into pairing mode.	
Play / Pause	Short press when play music.	
Redial a call	Double press MFB to dial the last call.	
Reconnect	When there is a pairing record, power on and enter into reconnect state or short press MFB to reconnect under pairing mode.	
Voice Dialing	Long press 1 second MFB then release	
Audio Switch	Long press 1 second MFB to switch the audio between phone and Bluetooth headset.	
Answer a call	Short press (when call coming)	
Hang up a call	Short press (during a call)	
Reject a call	Long press 1 second (when call coming)	
Volume +	Short press	
Volume Up	Long press for 1 seconds	
Volume -	Short press	
Volume Down	Long press for 1 seconds	
Next Song	Short press	
Previous Song	Long press for 1 seconds	


3

3. Bluetooth Pairing and Connection

- A. In off status , Long press 5-8 seconds to enter into pairing mode with LED Blue & Red flash alternately.
- B. Search and click to connect "LS-BT38" on your phone Bluetooth lists, LED change to LED Blue flash after connected, now you can play music from phone to headphone.
- C. You can press MFB/ volume+ / volume- on the Bluetooth headset to control the answer/hang up a call and play/pause of the music, next and previous songs, volume up and down.



Pairing: In off status , Long press MFB 5-8 seconds to enter into pairing mode with LED Blue & Red alternately flash.



Connection: Search and click to connect "LS-BT38" on your phone Bluetooth lists

4

4. Connection with Two devices

- A. Follow part 3 to connect with first phone, then turn off the Bluetooth function of first phone.
- B. Double press MFB to pairing mode again with Red & Blue LED flash alternately.
- C. Search and click to connect "LS-BT38" on your second phone Bluetooth lists, LED change to Blue LED low flash after connected.
- D. Turn on Bluetooth function of first phone, click to reconnect "LS-BT38" on Bluetooth lists. Headset connected with two phones now.



Notes :

Music only can be played from one phone under two connections, when you want to play music from another phone, you need to pause or close the music of the previous phone. The same operation during talking status.

5

5. LED Indicator

Mode	LED Indicator
Power on	LED Blue flashes 1 second
Power off	LED Red flashes 1 second
Pairing mode	LED Red & Blue flashes alternately
Unconnected standby mode	LED Blue flashes once every 2 seconds
Connected standby mode	LED Blue flashes once every 5 seconds
Playing Music	LED Blue flashes once every 5 seconds,
Talking	LED Blue flashes once every 5 seconds
Delete paired record	Blue and Red LED flashes once at the same time
Charging	Solid LED Red
Full charged	Solid LED Blue
Low battery	Red LED flash


6. Charging

Please charge the LS-BT38 at once when the Red LED flash. Charging time about 2 hours. Solid LED Red change to Solid LED Blue when full charged.

Charge Connections


Please connect to the LS-BT38 charging port through the Micro USB charging cable, the charger can be used as car charger, travel charger, computer USB, etc.

6

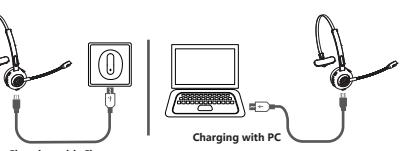

Use of charge Base

Please place the LS-BT38 on the charging base, then connect the charging base to USB charger through the Micro USB port for charging.

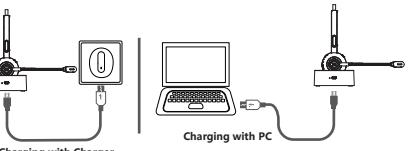

Notes :

1. Pls charge the LS-BT38 at least one time every 2 months when don't use it.

7

7. Product Specification

Bluetooth Version	Bluetooth V5.0
Bluetooth Chipset	CSR 8615
Operation Range	10M
Bluetooth Protocols	HSP HFP A2DP AVRCP
CODEC Code	SBC
Battery Capacity	180mAh/3.7V
Charging Time	2H
Stand-by Time	200H
Working Time	About 17H (50% Volume)
Headset Net Weight	About 51g
Charge Base Net Weight	About 242g
Headset Dimension	163.21*142.27*48.5mm
Charge Base Dimension	79*73*31mm

Notes : *Actual use time will differ from environment and music

8. Attentions and Q & A

A. How to reconnect and operation when failed to reconnect ?

When LS-BT38 connected with your mobile phone successfully at the first time, it will search and reconnect the paired device automatically when power on, If failed, please pair and connect again.

8

B. How to Delete paired records?

In Power on state, long press the volume+ and the volume- button for 5 seconds to clear the pairing record. The indicator Blue and Red LED flashes once at the same time that means the pairing record has been cleared, and the LS-BT38 will not connect back to the connected device. When there are various connection problem, try clearing the pairing record firstly.

C. What's the password for pairing?

Some connection devices require password for pairing, pls try 0000 or 8888 or 1111 or 1234.

D. What devices could charge for the headphone?

Any car charger, power bank, PC etc which meet DC 5V , charging current more than 500mA could be charge for this item.

E. Three-way calling function operation

Call coming during call, short press the MFB to answer the new call and hang up the current call;
Call coming during the call, double press the MFB to answer the new call and keep the current call;
Call with a new call coming, long press the MFB for 1 second rejecting a new call.
When you are on a three-party call, double press the MFB to switch audio between the current call and the keep call.

F. Mute function

Press the "Volume+" and "Volume - " at the same time to mute on/ off.

9

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

10