




SyberSense

XPG01-E-1433-00 Glass break Sensor Manual

XPG01 ID :

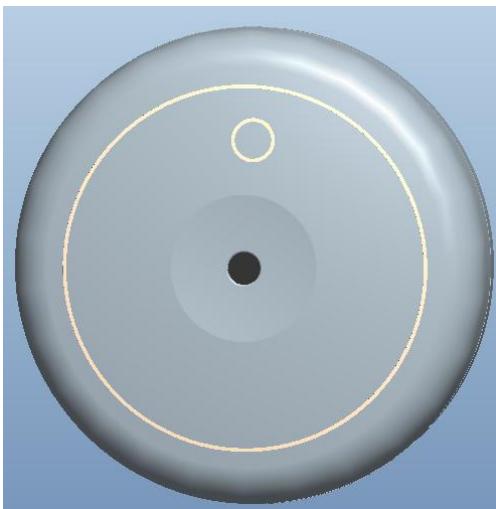

Part number:

Glass break Sensor, White ([XPG01-E-1433-00](#))

Features

- Sensor detects the sound of breaking glass.
- 360° Omni-directional coverage.
- Enrollment Button: Only used for enrolling.
- Strong, reliable RF signal.
- 2-4 year battery life on CR2477H battery.
- Low Battery indication.

Key Instructions

- Mount sensor at least 3.3 ft from desired protected window (Max 25 ft)
- Needs to be in line of sight of window being protected (avoid corners and doors blocking the sensor)

Operation

- Sensor detects glass breaking from framed windows, and sends alarm to control panel
- Supervises: every hour (if activated)

Specifications

Items	Description
Wireless signal range	300 meters (Open Air with XP02)
Transmitter frequency	433.95 MHz Single communication
Compatibility	Sybersense Panel XP02
Encrypted	Yes
Detection Length	Max 7 meters
Transmitted Indications	Broken glass alert Tamper alert Low Battery Heart Beat
Mounting Height	2.1 meter on wall mount
Button	Pairing and test mode
Tamper protection	Back case tamper
Dimensions	Φ65x16.8 (mm)
Operating Temperature	0 °C to 50 °C
Maximum Humidity	85% non-condensing relative humidity
Replacement Battery	2 x CR2477H(1400mAh), 3.0V cell Lithium battery
How to be installed	Wall mount with Screws, 3M sticker.
Nominal Battery Life	2 years
LED (2-color LEDs)	Broken Glass alert and Test mode
Certifications	FCC/IC

FCC compliance

FCC ID: 2AVDCXPG01-E-1433

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV

technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co- located or operating in conjunction with any other antenna or transmitter.