


六折页 正反印刷

SIZE：100*135mm

中文版本


无线鼠标

型号: HPC02 Pro

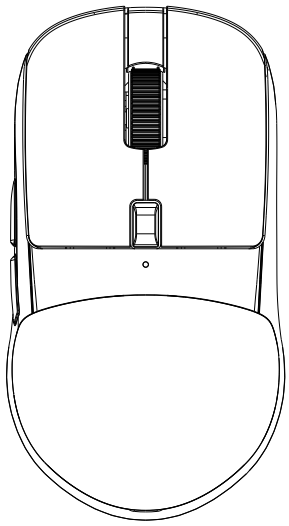

incott

01 /按键功能布局

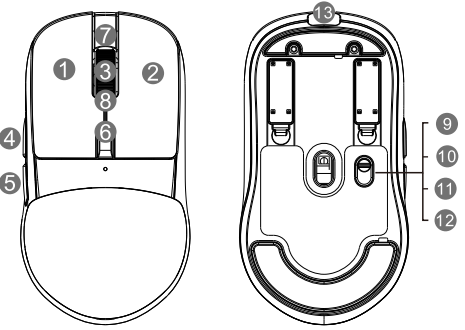

1 左键	9 向下翻页
2 右键	10 关闭电源
3 中键+滚轮	11 配置1(预设回报率500Hz)
4 前进	12 配置2(预设回报率1000Hz)
5 后退	13 配置3(预设回报率125Hz)
6 DPI	14 TYPE-C有线和充电接口
7 向上翻页	前进+中键5秒为RGB灯光开关功能

02 /安装说明

1.取出鼠标和接收器，并将接收器插入电脑USB接口。
2.打开鼠标电源，将鼠标底部开关拨到配置1,2,3任意位置。
3.初次安装需要等待电脑自动检测鼠标安装完成。
4.等待电脑识别完成后即可使用鼠标。
5.通过TYPE-C线材将鼠标和电脑连接可以自动工作在有线模式。
6.需设置更多功能请从官网下载驱动进行设置。

备注:
1.为了防止电脑主机对无线信号造成干扰，建议将接收器通过配送的转接头和TYPE-C线将接收器延伸至桌面。
2.RGB灯光设置模式可以延长鼠标使用时间，RGB灯打开时鼠标耗电量会增加而减少单次充电的使用时间，请自己根据需求设置。

03 /低电压和充电指示


1.当鼠标电量过低时，顶部指示灯红灯闪烁，请将TYPE-C线连接鼠标和电脑进行充电。
2.充电过程中LED灯常亮，充满后红色指示灯熄灭。
备注：当长时间不用鼠标时，建议关闭鼠标电源。

04 /配对

1.出厂时鼠标和接收器都已经做好配对，可以直接使用。
2.如果使用过程中无法连接无线，请通过以下方式尝试重新配对，首先从官网下载对应型号的配对软件，插上接收器，将鼠标电源打开，并打开配对工具后按键盘的回车键，此时同时按住鼠标左键+中键+右键，指示灯光黄色闪烁，将鼠标靠近接收器直到配对程序中显示配对成功为止。


05 /高度调节

1.此款鼠标配备了两种不同高度的后盖为用户提供3种不同的背高组合。
2.后盖采用磁铁方式方便更换不同高度的后盖。
3.更换后盖时对后盖的尾部拆卸位置打开更换。

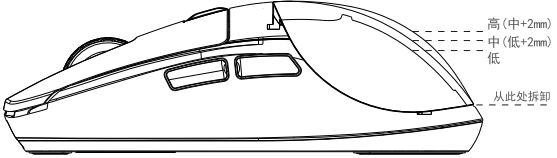


06 / 可换微动

1.此款鼠标左右按键的微动为热插拔设计，方便用户根据需求更换开关和控制手感。
2.热插拔操作步骤如下：
1）、【图一】为热插拔开关系统相连接好的平面示意图
2）按照【图二】所示先用手指往住6或者7位置的卡位，然后往外抬起取出热插拔系统。
3）取出热插拔系统后按照【图三】所示拔出微动开关(示意图上为微动开关)，然后插入需要更换的微动开关，注意新微动开关接触点朝前，更动时微动开关卡入压到位。
4）开关更换完成后按照【图四】所示先将热插拔系统的顶端卡点倾斜插入鼠标底座对应编号8或者9的位置，然后将底座下压完全将热插拔系统卡入鼠标底座，装入时确保连接线4靠往后方放置，不要放置在开关上方导致挡住开关触点造成手感卡顿。
5）非必要请不要将图示中的1、2、4拆分开，只需要对开关3进行更换。

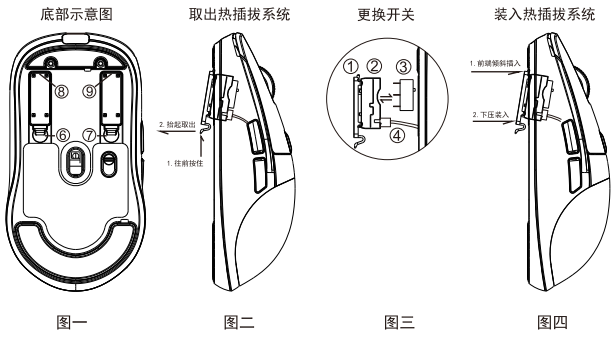

07 / 按键预压调节

1.此款鼠标左右按键的预压力可调节，用户可以根据不同开关和手感需求调节按键预压力的大小。
2.调节方式是通过螺丝刀插入10右键)或者11(左键)位置对内部螺丝的松紧调节来调整按键预压力的大小，逆时针调节螺丝为加大按键预压力(按键手感变硬)，逆时针方向调节螺丝为减小按键预压力(按键手感变软)。

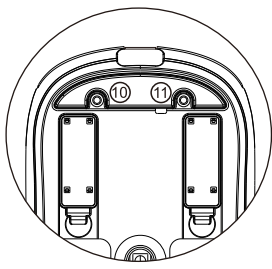

重要提示:
1.出厂时按键预压已经调整到标准状态，非必要请不要随意调节。
2.非出厂调节螺丝到最松状态时请不要继续用大力调，避免调节螺丝打滑，逆时针拧到底后请停止继续调节，由于调节范围小，调节时请尽量用小的力度和慢速调节，建议每调节约1/5圈时做一次按键手感，直到调节到自己最佳的手感和手感状态。
3.由于调节结构为塑胶和螺丝配合，尽量减少调节的次数，避免螺丝打滑。

08 /主要参数

尺寸:	HPC02:120x65x38.3mm/HPC02M:115.5x62.5x36.8mm	
重量:	HPC02:约66g/HPC02M:约63g(低背版本)	
光电传感器:	PAW3395	
最大DPI:	5200DPI	
默认DPI(指示颜色):	400(红色)-800(蓝色)-1600(绿色)-2400(黄色)-3200(青色)-6400(紫色)	
IPS:	850ips	
加速度:	50g(Max)	
回报率:	125-250-500-1000Hz	
接口类型:	USB 2.0	
线材长度:	约1.8米超柔纤维线	
电池类型/容量:	锂离子聚合物电池	
额定:	5V=300mA	

09 /电池注意事项

1.保持电池在干燥的环境中使用。
2.避免电池端子靠近金属物体。
3.避免人为和金属物体/水进入鼠标内部造成电池短路。
4.用电脑USB接口和指定的充电线进行充电。
5.用错误型号电池更换会有爆炸危险，务必按照说明处置用完的电池。

10/关于保修

1.保修内容：整机自购买之日起1年（含）。
2.不属于免费保修义务的情形
1)本产品整机或部分已经超出保修期。
2)未按说明书要求或者使用不当造成的故障或损坏。
3)消耗材料（外壳、连接部件以及其它外观部件等）的自然消耗、磨损及老化。
4)非授权专业人士构成人员安装、修理或拆卸造成的故障或损坏。
5)擅自对火灾等不可归责于原制造者的故障和损坏。
6)使用非私自更改产品标识识别等。
7)其它非产品设计、技术、制造、质量等问题而导致的故障或损坏。

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.


Wireless Mouse

MODEL:HPC02 Pro

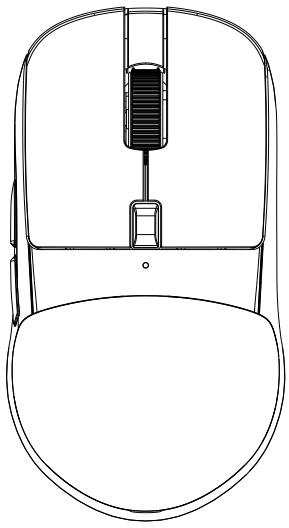

incott

01 /Button function

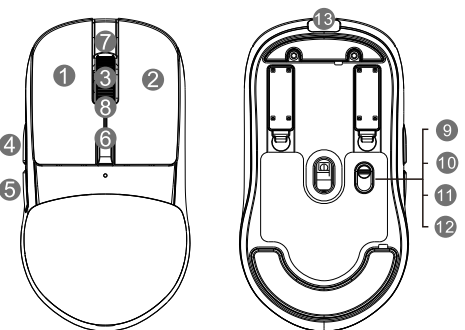

1 Left click	9 Scroll down
2 Right click	10 Power off
3 Wheel/middle click	11 Profile 1(500Hz default)
4 Forward	12 Profile 2(1000Hz default)
5 Backward	13 Profile 3(125Hz default)
6 DPI button	14 Type-c wired and charging port
7 Scroll up	Forward-middle for SS to turn on/off RGB

02 /Installation

1. Take out mouse and receiver, plug receiver into computer through adaptor and type-c cable.
2. Turn on the mouse.
3. It will take several minutes to finish installation for first time using.
4. Plug type-c cable is wired mode and charging.
5. Please download software from official website if you need more function customization.

Notes:
1. Please use extension adaptor and type-c cable to connect your receiver and put the receiver close to your mouse to avoid interference.
2. Turn off RGB can extend your battery life.

03/Charging indication


1.The top indicator LED will blink red when the battery is low.
2.Please charge your mouse by connecting mouse through Type-c cable into computer.
3.The top indicator will turn on in red color during charging and turn off after full charged.
Note: Please turn off your mouse if don't use the mouse for long time.

04/Pairing

1.The mouse and receiver was paired already, so you can use it directly.
2.If the mouse lose connection during using, you can try to re-pair it by pairing tool.
Note: you can download the pairing tool from official website or ask support team to get the pairing tool and pairing instruction.


05/Shape change

1.This mouse has 3 different hump height options by changing or removing 2 different covers.
2.The back cover was fixed by magnet.
3.Remove the back cover from end of the back cover.

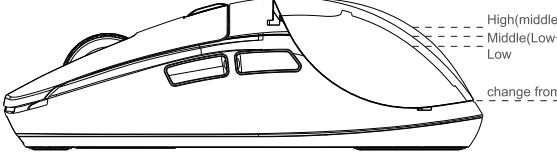


06/Hot-swap instruction

1.This mouse was designed with hot-swap switch system to let user customize switches.
2.Hotswap instruction as below.
1）、【FIG.1】is the hot-swap system location in the bottom of the mouse.
2）、Push the number 6 or 7 and take out the hot-swap system as shown in 【FIG.2】.
3）、Take out the switch(Number 3 part) from hot-swap system and put a new switch into hot-swap system.(Please make sure put the new switch into the hot-swap system in place and switch dot must toward the front) as shown in 【FIG.3】.
4）、After the switch is replaced, insert the front end of the hot-swap system into the bottom cover of the mouse with the corresponding location 8 or 9 and Then press the back end down completely as shown in 【FIG.4】.(Please put the connection wire(Number 4) toward the back to make sure the wire is not on top of the switch).
5）、Please don't disassemble other parts of the hotswap system if unnecessary.(part 1,2 and 4).

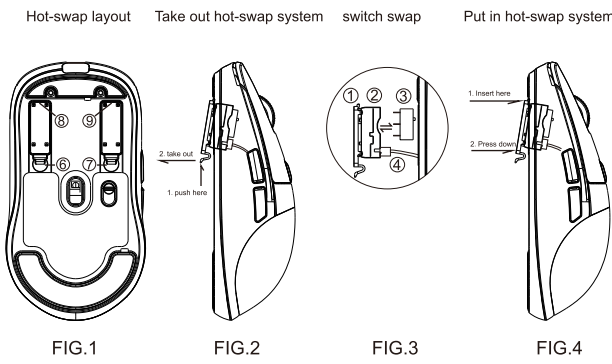

07/Pre-force adjustment

1. This mouse was designed with pre-force adjustable system for professional users to adjust the button click feeling and click force.
2. Pre-force adjustment instruction as below:
1) Use screw driver to adjust the screw inside the hole 10(for right click) and 11(for left click).
2) Adjust the screw clockwise to increase the button pre-force(button click force become lighter). Adjust the screw Counterclockwise to decrease the button pre-force(button click force become heavier).

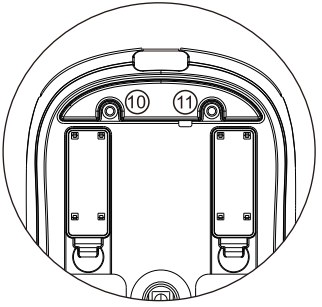

08 /Main spec.

Size:	HPC02 Pro:120x65x38.3mm/HPC02M Pro:115.5x62.5x36.8mm	
Weight:	HPC02Pro:Around 66g/HPC02MPro:Around 63g	
Sensor:	PAW3395	
Max DPI:	3200	
Default DPI:	400(red)-800(blue)-1600(green)-2400(yellow)-3200(cyan)-6400(purple)	
IPS:	850ips	
Acceleration:	50g(Max)	
Polling rate:	125-250-500-1000Hz	
Interface:	USB 2.0	
Battery type:	Li-Ion Polymer Battery	
Rating:	5V=300mA	

09 /CAUTION

1.Keep the battery dry.
2.Avoid touching the battery terminals near metallic object.
3.Do not short-circuits and avoid metallic or water come into mouse to cause battery short.
4.Use computer USB and specified cable to charge the mouse.
5.There is a risk of explosion if the battery is replaced with the wrong model.Please Dispose of used batteries according to the instructions.

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

ENGLISH VERSION